



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
29.04.2020 Bulletin 2020/18

(51) Int Cl.:
F04C 18/16 ^(2006.01) **F04C 28/12** ^(2006.01)
F04C 18/52 ^(2006.01)

(21) Application number: **17914858.0**

(86) International application number:
PCT/JP2017/022698

(22) Date of filing: **20.06.2017**

(87) International publication number:
WO 2018/235164 (27.12.2018 Gazette 2018/52)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Mitsubishi Electric Corporation**
Chiyoda-ku
Tokyo 100-8310 (JP)

(72) Inventor: **ITO, Takeshi**
Tokyo 100-8310 (JP)

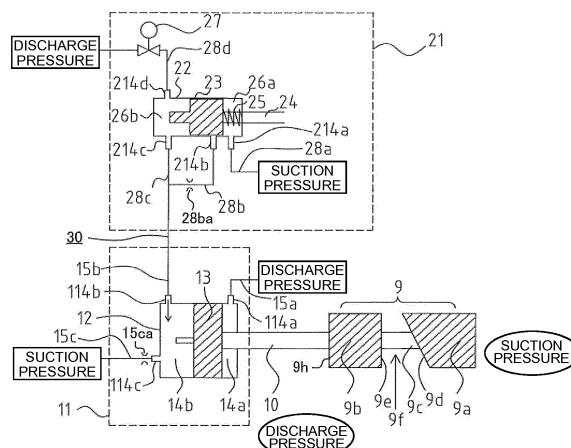
(74) Representative: **Pfenning, Meinig & Partner mbB**
Patent- und Rechtsanwälte
Theresienhöhe 11a
80339 München (DE)

(54) **SCREW COMPRESSOR**

(57) A screw compressor includes a driving device including a Vi piston coupled to a variable Vi valve, and a driving cylinder that houses the Vi piston movably in the driving cylinder; and a pressure-switching mechanism that switches pressure to be introduced into the driving device. The pressure-switching mechanism includes a solenoid valve that switches to open to form a first passage through which the discharge chamber and the one cylinder chamber communicate with each other, or close to block the first passage, the solenoid valve

being configured to open to enable introduction of discharge pressure from a discharge chamber into one cylinder chamber provided in the driving device or close to disable the introduction of discharge pressure from a discharge chamber into one cylinder chamber, a switching cylinder communicating with the first passage extending between the solenoid valve and the one cylinder chamber, a switching piston movably housed in the switching cylinder, and a spring that is compressed with a movement of the switching piston.

FIG. 2



Description

Technical Field

5 **[0001]** The present invention relates to a screw compressor including a variable mechanism whose internal volume ratio is variable.

Background Art

10 **[0002]** A hitherto known screw compressor includes a variable-internal-volume-ratio valve (hereinafter referred to as variable Vi valve) as a slide valve that adjusts the timing of starting discharge and by which internal volume ratio of the screw compressor is variable. In such a screw compressor, the position of the variable Vi valve is adjusted with a driving force applied from a driving device depending on the operating pressure ratio. Herein, the internal volume ratio refers to the ratio between the volume of a compression chamber at the completion of suction and the volume of the compression chamber at the completion of discharge.

15 **[0003]** In general, if the screw compressor is operated at an appropriate compression ratio, appropriate for the internal volume ratio thereof, no inappropriate compression loss occurs. The compression volume is expressed as (discharge pressure)/(suction pressure). However, if the screw compressor is operated at a compression ratio that is lower than the appropriate compression ratio, gas that has been compressed to such a degree as to open a discharge port is overcompressed to a degree higher than discharge pressure, resulting in excessive compression work. Conversely, if the screw compressor is operated at a compression ratio that is higher than the appropriate compression ratio, the discharge port opens before discharge pressure is reached, resulting in an insufficient compression that causes the backflow of the gas. Such situations both cause power loss that leads to a reduction in efficiency. To suppress such a reduction in efficiency due to power loss, the screw compressor needs to be operated at an optimum internal volume ratio.

25 **[0004]** Accordingly, a screw compressor is known whose internal volume ratio is variable by adjusting the position of a variable Vi valve (see Patent Literature 1, for example). According to Patent Literature 1, the position of the variable Vi valve is adjusted between two positions by opening or closing each of two solenoid valves, with no complicated control mechanism for adjusting the position of the variable Vi valve. Specifically, according to Patent Literature 1, a piston is coupled to the variable Vi valve through a rod. Suction pressure or discharge pressure is switchably supplied to each of the forward side and the backward side of the piston by using the two solenoid valves, the sides being defined in the direction of movement of the piston. Since a pressure difference is produced between the forward side and the backward side of the piston, the piston is movable between two different positions. Thus, the position of the variable Vi valve is adjustable between two levels.

35 Citation List

Patent Literature

40 **[0005]** Patent Literature 1: Japanese Patent No. 5881403

Summary of Invention

Technical Problem

45 **[0006]** According to Patent Literature 1, to adjust the position of the variable Vi valve between two levels, two solenoid valves are necessary. To realize adjustment among more levels, more number of solenoid valves are necessary.

[0007] The present invention is to overcome the above problem and provides a screw compressor having a simple configuration with a reduced number of solenoid valves while realizing a multi-level adjustment of internal volume ratio.

50 Solution to Problem

[0008] According to an embodiment of the present invention, there is provided a screw compressor including a casing in which a discharge chamber and a suction chamber are provided; a screw rotor in an outer peripheral surface of which a plurality of grooves forming a compression chamber are provided, the screw rotor being rotatable in the casing; a variable Vi valve movable in an axial direction of the screw rotor and whose stopping position is switched in changing an internal volume ratio that is a ratio between a volume of the compression chamber at completion of suction and a volume of the compression chamber at completion of discharge; a driving device including a Vi piston coupled to the variable Vi valve, and a driving cylinder that houses the Vi piston movably in the driving cylinder; and a pressure-switching

mechanism that switches pressure to be introduced into the driving device. An inside of the driving cylinder is divided by the Vi piston into two cylinder chambers. The driving device controls a position of the variable Vi valve while moving the Vi piston by changing pressure in one of the two cylinder chambers. The pressure-switching mechanism includes a solenoid valve that switches whether to enable or disable introduction of discharge pressure from the discharge chamber into the one cylinder chamber by opening or closing a first passage through which the discharge chamber and the one cylinder chamber communicate with each other; a switching cylinder communicating with the first passage extending between the solenoid valve and the one cylinder chamber; a switching piston movably housed in the switching cylinder; and a spring that is compressed with a movement of the switching piston. An inside of the switching cylinder is divided by the switching piston into a first switching cylinder chamber into which suction pressure is constantly introduced and in which the spring is provided, and a second switching cylinder chamber that communicates with the first passage. A second passage through which the first switching cylinder chamber and the one cylinder chamber communicate with each other is opened or closed depending on a position of the switching piston that receives a spring force exerted by the spring. The pressure in the one cylinder chamber changes when the first passage is opened or closed with opening or closing of the solenoid valve while the second passage is opened or closed with the movement of the switching piston.

Advantageous Effects of Invention

[0009] According to the embodiment of the present invention, the pressure to be supplied to the Vi piston coupled to the variable Vi valve through the rod is changeable with a single solenoid valve. Therefore, a screw compressor in which the internal volume ratio is adjustable among a plurality of levels with a simple configuration can be obtained.

Brief Description of Drawings

[0010]

[Fig. 1] Fig. 1 is a schematic diagram of a screw compressor according to Embodiment 1 of the present invention.

[Fig. 2] Fig. 2 is a schematic diagram illustrating a driving device and a pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention.

[Fig. 3] Fig. 3 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention that operate at a high internal volume ratio.

[Fig. 4] Fig. 4 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention that operate at a low internal volume ratio.

[Fig. 5] Fig. 5 is a schematic diagram illustrating a driving device and a pressure-switching mechanism operate included in a screw compressor according to Embodiment 2 of the present invention that operate at a high internal volume ratio.

[Fig. 6] Fig. 6 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 2 of the present invention that operate at a low internal volume ratio.

[Fig. 7] Fig. 7 is a schematic diagram illustrating a driving device and pressure-switching mechanisms included in a screw compressor according to Embodiment 3 of the present invention.

[Fig. 8] Fig. 8 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a high internal volume ratio.

[Fig. 9] Fig. 9 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a moderate internal volume ratio.

[Fig. 10] Fig. 10 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a low internal volume ratio.

[Fig. 11] Fig. 11 is a schematic diagram illustrating a driving device and pressure-switching mechanisms included in a screw compressor according to Embodiment 4 of the present invention that operate at a high internal volume ratio.

[Fig. 12] Fig. 12 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 4 of the present invention that operate at a moderate internal volume ratio.

[Fig. 13] Fig. 13 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 4 of the present invention that operate at a low internal

volume ratio.

[Fig. 14] Fig. 14 is a schematic diagram of a screw compressor according to Embodiment 5 of the present invention.

[Fig. 15] Fig. 15 is a schematic diagram of a screw compressor according to Embodiment 6 of the present invention.

5 Description of Embodiments

Embodiment 1

[0011] Fig. 1 is a schematic diagram of a screw compressor according to Embodiment 1 of the present invention.

10 **[0012]** A screw compressor 1 according to Embodiment 1 is a single-screw compressor and includes a cylindrical casing 2, a cylindrical screw rotor 5 housed in the casing 2, and a motor 3 that drives the screw rotor 5 to rotate. The motor 3 includes a stator 3a provided in contact with and fixed to the inner wall of the casing 2, and a motor rotor 3b provided on the inner side of the stator 3a. The motor 3 may be of an inverter type in which the rotation speed is controlled by an inverter, or a constant-speed type in which the rotation speed is constant.

15 **[0013]** The screw rotor 5 and the motor rotor 3b are positioned coaxially with each other and are both fixed to a screw shaft 4. The screw rotor 5 has a plurality of helical screw grooves 5a in the outer peripheral surface thereof. The screw rotor 5 is coupled to the motor rotor 3b fixed to the screw shaft 4, thereby being driven to rotate. Spaces in the screw grooves 5a provided in the screw rotor 5 are enclosed by the inner peripheral surface of the casing 2 and a pair of gate rotors (not illustrated) that are in mesh with the screw grooves 5a, thereby forming a compression chamber 6.

20 **[0014]** The inside of the casing 2 is divided by a partition (not illustrated) into a discharge-pressure side and a suction-pressure side. The discharge-pressure side has a discharge chamber 7 and a discharge port 8 provided in the discharge chamber 7. A suction chamber 16 is provided at the suction-pressure side. Discharge pressure is a pressure exerted by refrigerant compressed in the compression chamber 6 and discharged from the compression chamber 6. Suction pressure is a pressure exerted by refrigerant taken into the compression chamber 6. The relationship between discharge pressure and suction pressure is that discharge pressure is greater than suction pressure.

25 **[0015]** A pair of variable V_i valves 9 that are movable in the axial direction of the screw shaft 4 are provided between the inner peripheral surface of the casing 2 and the outer peripheral surface of the screw rotor 5. The variable V_i valves 9 form part of the discharge port 8 and is coupled to a driving device 11 through a rod 10. In Fig. 1, only the driving device 11 coupled to one of the variable V_i valves 9 is illustrated, and another driving device 11 coupled to the other variable V_i valve 9 is not illustrated.

30 **[0016]** The driving device 11 is driven with gas pressure and includes a cylinder 12 and a V_i piston 13 housed in the cylinder 12. The V_i piston 13 is movable in the axial direction in the cylinder 12. The V_i piston 13 is coupled to the variable V_i valve 9 through the rod 10, thereby being movable in the axial direction in the cylinder 12. The V_i piston 13 corresponds to the V_i piston or the first V_i piston according to the present invention.

35 **[0017]** Embodiment 1 includes a pressure-switching mechanism 21 illustrated in Fig. 2 to be referred to below. The pressure-switching mechanism 21 switches the pressure to be introduced into the driving device 11 and has a simpler configuration than a mechanism including two solenoid valves.

40 **[0018]** The screw compressor 1 further includes a controller 50 (see Fig. 1) that opens and closes a solenoid valve 27, to be described below, included in the pressure-switching mechanism 21. The controller 50 may be a piece of hardware such as a circuit device that realizes the function thereof, or a combination of an arithmetic device such as a CPU and a piece of software to be executed thereon.

[0019] Referring to Fig. 2, configurations of the driving device 11 and the pressure-switching mechanism 21 will now be described. Hereinafter, an element "passage" may be provided as a hole in the wall of the casing 2 or the cylinder 12, or as a pipe.

45 **[0020]** Fig. 2 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention. In Fig. 2, the right side of the variable V_i valve 9 is under suction pressure, and the left side of the variable V_i valve 9 is under discharge pressure.

50 **[0021]** First, the variable V_i valve 9 will be described. The variable V_i valve 9 includes a valve body 9a, a guide portion 9b, and a coupling portion 9c. The valve body 9a and the guide portion 9b are coupled to each other through the coupling portion 9c. One end of the rod 10 is coupled to a driving-device-side end 9h of the guide portion 9b. The other end of the rod 10 is coupled to an end face of the V_i piston 13 that is nearer to the variable V_i valve 9. A space between a discharge-port-side end 9d of the valve body 9a and a discharge-port-side end 9e of the guide portion 9b forms a discharge air gap 9f communicating with the discharge port 8.

55 **[0022]** The space in the cylinder 12 of the driving device 11 is divided by the V_i piston 13 into a cylinder chamber 14a on a variable- V_i -valve side (the right side in the drawing) and a cylinder chamber 14b on the other side (the left side in the drawing). The cylinder 12 corresponds to the driving cylinder according to the present invention. The cylinder chamber 14a corresponds to the first cylinder chamber according to the present invention. The cylinder chamber 14b corresponds to the second cylinder chamber according to the present invention.

[0023] The cylinder 12 has a pressure-introducing hole 114a at the cylinder chamber 14a, and another pressure-introducing hole 114b and a pressure-releasing hole 114c at the cylinder chamber 14b. The cylinder chamber 14a communicates with the discharge chamber 7, illustrated in Fig. 1, through the pressure-introducing hole 114a and a passage 15a. Furthermore, discharge pressure is constantly introduced from the discharge chamber 7 into the cylinder chamber 14a.

[0024] The cylinder chamber 14b is connected to the pressure-switching mechanism 21 through the pressure-introducing hole 114b and a passage 15b. The pressure-switching mechanism 21 switches to enable or disable the introduction of discharge pressure into the cylinder chamber 14b. The cylinder chamber 14b communicates with the discharge chamber 7 through the pressure-switching mechanism 21 and a passage 30. The pressure-switching mechanism 21 switches to enable or disable the introduction of discharge pressure from the discharge chamber 7 into the cylinder chamber 14b. The passage 30 includes the passage 15b, a passage 28c, and a passage 28d and corresponds to the first passage according to the present invention.

[0025] The cylinder chamber 14b communicates with the suction chamber 16 through the pressure-releasing hole 114c and a passage 15c. The passage 15c is provided at a halfway position thereof with an expansion mechanism 15ca. The expansion mechanism 15ca is provided for preventing the pressure in the cylinder chamber 14b from being released through the pressure-releasing hole 114c toward the suction-chamber side. Specifically, the expansion mechanism 15ca is, for example, a capillary tube or an orifice. The expansion mechanism 15ca corresponds to the second expansion mechanism according to the present invention.

[0026] The pressure-switching mechanism 21 includes the solenoid valve 27, a cylinder 22, a switching piston 23, a rod 24 coupled to the switching piston 23, and a spring 25 that is compressed with the movement of the switching piston 23. The cylinder 22 houses the switching piston 23 such that the switching piston 23 is movable in the axial direction. The spring 25 is provided around the rod 24 and is positioned in a cylinder chamber 26a to be described below. When the spring 25 has a natural length, the switching piston 23 is positioned as illustrated in Fig. 3 to be referred to below. The switching piston 23 and the rod 24 do not necessarily need to be separate components and may be provided as an integrally molded component. The pressure-switching mechanism 21 corresponds to the first mechanism according to the present invention.

[0027] As described above, the pressure-switching mechanism 21 includes a single solenoid valve and has a simpler configuration than a mechanism including two solenoid valves. Specifically, a solenoid valve not only includes a cylinder, a piston, a rod, a spring, and so forth but also requires a solenoid unit that converts electrical energy for opening and closing the solenoid valve with a magnetic force into a mechanical motion. The solenoid unit includes a coil, a yoke, a sleeve, a core, and a plug nut. The core is formed of a movable iron core of a plunger. The plug nut is formed of a fixed iron core. Hence, the mechanism including two solenoid valves tends to be expensive. In contrast, the pressure-switching mechanism 21 includes a single solenoid valve and other elements, namely, the cylinder 22, the switching piston 23, the rod 24, and the spring 25. Therefore, the pressure-switching mechanism 21 can be made less expensive than the mechanism including two solenoid valves.

[0028] Now, the pressure-switching mechanism 21 will be described in detail.

[0029] The solenoid valve 27 opens to form the passage 28d through which the discharge chamber 7 and the cylinder 22 communicate with each other, and closes to block the passage 28d, and is switched to open to enable the introduction of discharge pressure from the discharge chamber 7 into a cylinder chamber 26b, to be described below, of the cylinder 22, or disable the introduction of discharge pressure from the discharge chamber 7 into the cylinder chamber 26b. The cylinder chamber 26b communicates with the cylinder chamber 14b of the driving device 11 through the passage 28c. Therefore, it can also be said that the solenoid valve 27 switches whether to enable or disable the introduction of discharge pressure from the discharge chamber 7 into the cylinder chamber 14b.

[0030] The inside of the cylinder 22 is divided by the switching piston 23 into the cylinder chamber 26a and the cylinder chamber 26b. The cylinder 22 has a pressure-introducing hole 214a at the cylinder chamber 26a, and a pressure-introducing hole 214d and a pressure-releasing hole 214c at the cylinder chamber 26b. Furthermore, the cylinder 22 has a pressure-releasing hole 214b that is opened or closed depending on the position of the switching piston 23. The cylinder 22 corresponds to the switching cylinder according to the present invention. The cylinder chamber 26a corresponds to the first switching cylinder chamber according to the present invention. The cylinder chamber 26b corresponds to the second switching cylinder chamber according to the present invention.

[0031] The cylinder chamber 26a communicates with the suction chamber 16, illustrated in Fig. 1, through the pressure-introducing hole 214a and a passage 28a, and suction pressure is constantly introduced from the suction chamber 16 into the cylinder chamber 26a. The cylinder chamber 26b communicates with the discharge chamber 7, illustrated in Fig. 1, through the pressure-introducing hole 214d, the passage 28d, and the solenoid valve 27. When the solenoid valve 27 is open, discharge pressure is introduced into the cylinder chamber 26b.

[0032] The pressure-releasing hole 214b communicates with the passage 28c through a passage 28b. An expansion mechanism 28ba is provided at the passage 28b. The expansion mechanism 28ba is provided for preventing the introduction of discharge pressure in the cylinder chamber 14b into the cylinder chamber 26a when the state of the solenoid

valve 27 is switched from open to close. The expansion mechanism 28ba is a component such as an orifice or a capillary tube. The passage 28b corresponds to the second passage according to the present invention. The expansion mechanism 28ba corresponds to the first expansion mechanism according to the present invention.

[0033] Now, an operation of the variable V_i valve 9 will be described, in association with piston motions of the driving device 11 and the pressure-switching mechanism 21. In Embodiment 1, the value of the internal volume ratio (hereinafter referred to as V_i value) is settable between two levels of high and low. The internal volume ratio refers to the ratio between the volume of the compression chamber at the completion of suction and the volume of the compression chamber at the completion of discharge.

(1) Operation with High V_i Value

[0034] Fig. 3 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention that operate at a high internal volume ratio. In Fig. 3 and other drawings to be referred to below, the solid-black solenoid valve indicates that the solenoid valve is in the "closed" state, and the solid-white solenoid valve indicates that the solenoid valve is in the "open" state. Furthermore, the arrow illustrated in each of Fig. 3 and other drawings to be referred to below indicates the direction of movement of the V_i piston.

[0035] When the V_i value is high, the solenoid valve 27 is closed. Accordingly, the driving device 11 causes the variable V_i valve 9 to move leftward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is slowed.

[0036] First, an operation of the pressure-switching mechanism 21 will be described. When the V_i value is high, the solenoid valve 27 is closed. Accordingly, the pressure in the cylinder chamber 26b is made equal to the pressure in the cylinder chamber 14b of the driving device 11 that communicates with the cylinder chamber 26b through the passage 28c. Specifically, immediately after the state of the solenoid valve 27 is switched from being open to being closed, the cylinder chamber 26b and the cylinder chamber 14b are under discharge pressure. However, since the cylinder chamber 14b communicates with the suction chamber 16 through the expansion mechanism 15ca, the pressure in the cylinder chamber 26b and the cylinder chamber 14b becomes closer to suction pressure with time. Furthermore, suction pressure is constantly introduced into the cylinder chamber 26a. Therefore, as the pressure in the cylinder chamber 26b becomes closer to suction pressure, the switching piston 23 is moved toward the cylinder chamber 26b by the spring 25. Consequently, the pressure-releasing hole 214b is opened.

[0037] When the pressure-releasing hole 214b is opened, the cylinder chamber 26a and the cylinder chamber 14b come to communicate with each other through the passage 28b and the passage 15b. Accordingly, the cylinder chamber 14b of the driving device 11 comes to have suction pressure, as with the cylinder chamber 26a. Thus, when the solenoid valve 27 is closed, the pressure-switching mechanism 21 introduces suction pressure into the cylinder chamber 14b.

[0038] Now, operations of the driving device 11 and the variable V_i valve 9 will be described. The cylinder chamber 14a is coupled to the discharge chamber 7. Therefore, discharge pressure is constantly introduced into the cylinder chamber 14a. Hence, there is a pressure difference in the cylinder 14, and the V_i piston 13 therefore tends to move leftward in the drawing.

[0039] Regarding two ends, defined in the moving direction, of the variable V_i valve 9 coupled to the V_i piston 13, a suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out. Consequently, the variable V_i valve 9 tends to move rightward in the drawing because of the difference between the pressures acting on the driving-device-side end 9h and the suction-side end 9g.

[0040] The area of each of the front and rear surfaces of the V_i piston 13, the front and rear directions being defined in the moving direction is greater than the area of the driving-device-side end 9h at which the variable V_i valve 9 receives discharge pressure. Hence, the V_i piston 13 and the variable V_i valve 9 move leftward in the drawing because of the difference between the pressures received by the front and rear surfaces of the V_i piston 13 that are defined in the moving direction. The variable V_i valve 9 stops at a position where the V_i piston 13 comes into contact with the wall of the cylinder chamber 14b. Therefore, the variable V_i valve 9 is accurately positioned for the high V_i value.

(2) Operation with Low V_i Value

[0041] Fig. 4 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 1 of the present invention that operate at a low internal volume ratio.

[0042] When the V_i value is low, the solenoid valve 27 is open. Accordingly, the driving device 11 causes the variable

Vi valve 9 to move rightward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is advanced.

[0043] First, an operation of the pressure-switching mechanism 21 will be described. When the Vi value is low, the solenoid valve 27 is open. Accordingly, the cylinder chamber 26b is under discharge pressure. Furthermore, the cylinder chamber 26a is under suction pressure that is introduced constantly thereinto, whereas the switching piston 23 is under suction pressure and a spring force that act in a direction opposite to the direction of a force applied from the cylinder chamber 26b. Such a relationship among the forces acting on the switching piston 23 causes the switching piston 23 to move toward the cylinder chamber 26a and thus close the pressure-releasing hole 214b.

[0044] Since the pressure-releasing hole 214b is closed, the cylinder chamber 14b of the driving device 11 communicates with the cylinder chamber 26b of the pressure-switching mechanism 21 without communicating with the cylinder chamber 26a, and comes to receive discharge pressure as with the cylinder chamber 26b. Note that the cylinder chamber 14b communicates with the suction chamber 16 through the pressure-releasing hole 114c and the passage 15c. However, since the expansion mechanism 15ca is provided at the passage 15c, the inside of the cylinder chamber 14b is kept under discharge pressure while the solenoid valve 27 is open.

[0045] Thus, when the solenoid valve 27 is open, the pressure-switching mechanism 21 introduces discharge pressure into the cylinder chamber 14b.

[0046] Now, operations of the driving device 11 and the variable Vi valve 9 will be described. The cylinder chamber 14a is coupled to the discharge chamber 7, and discharge pressure is constantly introduced into the cylinder chamber 14a. Hence, there is no pressure difference in the cylinder 14.

[0047] Regarding the variable Vi valve 9 coupled to the Vi piston 13, the suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out.

[0048] Since there is no pressure difference in the cylinder 14, the variable Vi valve 9 moves rightward in the drawing because of the difference between the discharge pressure acting on the driving-device-side end 9h and the suction pressure acting on the suction-side end 9g. The variable Vi valve 9 stops at a position where the suction-side end 9g comes into contact with the wall of the casing 2. Therefore, the variable Vi valve 9 is accurately positioned for the low Vi value.

[0049] As described above, according to Embodiment 1, the position of the variable Vi valve 9 is controlled by changing the pressure in one of the cylinder chamber 14a and the cylinder chamber 14b by opening or closing the single solenoid valve 27. In the above case, the pressure in the cylinder chamber 14b is changed. The change of the pressure in the cylinder chamber 14b is realized as follows. The passage extending from the discharge chamber 7 to the cylinder chamber 14b is allowed to communicate or blocked by opening or closing the solenoid valve 27. Accordingly, the switching piston 23 moves against the spring force exerted by the spring 25 in such a manner as to allow the passage 28b that is under suction pressure to communicate or block the passage 28d. In other words, the pressure in the cylinder chamber 14b can be changed by controlling the movement of the switching piston 23 with a simple mechanism utilizing the difference between the discharge pressure and the suction pressure that act on the switching piston 23 and the spring force exerted by the spring 25. Hence, the pressure in the cylinder chamber 14b can be changed without using two solenoid valves. Consequently, a screw compressor that is inexpensive and has a simple configuration can be obtained.

[0050] Furthermore, compared with the configuration according to Patent Literature 1 in which the internal volume ratio is adjustable between two levels, the number of solenoid valves to be controlled is reduced from two to one. Therefore, the process of controlling the solenoid valve is also simplified.

Embodiment 2

[0051] Embodiment 2 of the present invention is different from Embodiment 1 in that the pressure-switching mechanism 21 is connected to the cylinder chamber 14a instead of the cylinder chamber 14b. More specifically, the pressure-switching mechanism 21 is connected to the pressure-introducing hole 114a, and the pressure-introducing hole 114b is made to communicate with the suction chamber 16.

[0052] Now, an operation of the variable Vi valve 9 according to Embodiment 2 will be described. As with Embodiment 1, the Vi value is settable between two levels of high and low.

(1) Operation with High Vi Value

[0053] Fig. 5 is a schematic diagram illustrating a driving device and a pressure-switching mechanism included in a screw compressor according to Embodiment 2 of the present invention that operate at a high internal volume ratio.

[0054] When the Vi value is high, the driving device 11 causes the variable Vi valve 9 to move leftward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is slowed.

[0055] Specifically, when the Vi value is high, the solenoid valve 27 is open. Accordingly, the inside of the cylinder chamber 14a is under discharge pressure. On the other hand, the cylinder chamber 14b is coupled to the suction chamber 16, and suction pressure is constantly introduced into the cylinder chamber 14b. Hence, there is a pressure difference in the cylinder 12, and the Vi piston 13 therefore tends to move leftward in the drawing.

[0056] Regarding the variable Vi valve 9 coupled to the Vi piston 13, the suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out. Consequently, the variable Vi valve 9 tends to move rightward in the drawing because of the difference between the pressures acting on the driving-device-side end 9h and the suction-side end 9g. However, as described above, since the area of the Vi piston 13 is set greater than the area of the driving-device-side end 9h of the variable Vi valve 9, the Vi piston 13 and the variable Vi valve 9 move leftward in the drawing because of the difference between the pressures applied to the two surfaces of the Vi piston 13. The variable Vi valve 9 stops at a position where the Vi piston 13 comes into contact with the wall of the cylinder chamber 14b. Therefore, the variable Vi valve 9 is accurately positioned for the high Vi value.

(2) Operation with Low Vi Value

[0057] Fig. 6 is a schematic diagram illustrating the driving device and the pressure-switching mechanism included in the screw compressor according to Embodiment 2 of the present invention that operate at a low internal volume ratio.

[0058] When the Vi value is low, the driving device 11 causes the variable Vi valve 9 to move rightward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is advanced.

[0059] Specifically, the solenoid valve 27 is closed. Accordingly, the inside of the cylinder chamber 14a is under suction pressure. On the other hand, the cylinder chamber 14b is coupled to the suction chamber 16, and suction pressure is constantly introduced into the cylinder chamber 14b. Hence, there is no pressure difference in the cylinder 12.

[0060] Regarding the variable Vi valve 9 coupled to the Vi piston 13, the suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out.

[0061] Since there is no pressure difference in the cylinder 14, the variable Vi valve 9 moves rightward in the drawing because of the difference between the discharge pressure acting on the driving-device-side end 9h and the suction pressure acting on the suction-side end 9g. The variable Vi valve 9 stops at a position where the suction-side end 9g comes into contact with the wall of the casing 2. Therefore, the variable Vi valve 9 is accurately positioned for the low Vi value.

[0062] Embodiment 2 is different from Embodiment 1 in that the pressure-switching mechanism 21 is connected to the cylinder chamber 14a instead of the cylinder chamber 14b, and can produce the same advantageous effects as Embodiment 1.

Embodiment 3

[0063] While Embodiment 1 and Embodiment 2 concern a case where the Vi value is variable between two levels of high and low, Embodiment 3 concerns a case where the Vi value is variable among three levels of high, moderate, and low.

[0064] Fig. 7 is a schematic diagram illustrating a driving device and pressure-switching mechanisms included in a screw compressor according to Embodiment 3 of the present invention. Elements that are common to those illustrated in Fig. 2 are denoted by corresponding ones of the reference numerals, and description of such elements is omitted.

[0065] The screw compressor according to Embodiment 3 includes a pressure-switching mechanism 31, in addition to the elements according to Embodiment 1. Furthermore, the cylinder chamber 14b of the driving device 11 is provided with a Vi piston 39, an interlocked piston 40, a coupling portion 41, and a positioning wall 42, in addition to the elements according to Embodiment 1. The cylinder chamber 14b is divided by the Vi piston 39 into two cylinder chambers. Specifically, the cylinder chamber 14b includes a cylinder chamber 14c provided between the Vi piston 39 and the Vi piston 13, and a cylinder chamber 14d provided opposite to the cylinder chamber 14c. The Vi piston 39 corresponds to the second Vi piston according to the present invention.

[0066] In Embodiment 1, the pressure-switching mechanism 21 switches the pressure to be introduced into the cylinder

chamber 14b. In Embodiment 3, the pressure to be introduced into the cylinder chamber 14c included in the cylinder chamber 14b is switched. The cylinder chamber 14a corresponds to the first cylinder chamber according to the present invention. The cylinder chamber 14c corresponds to the second cylinder chamber according to the present invention. The cylinder chamber 14d corresponds to the third cylinder chamber according to the present invention.

[0067] The Vi piston 39 is coupled to the interlocked piston 40 through the coupling portion 41. The positioning wall 42 extending in a direction orthogonal to the direction of movement of the Vi piston 39 is provided between the Vi piston 39 and the interlocked piston 40. The positioning wall 42 has a hole 42a. The coupling portion 41 movably extends through the hole 42a. Therefore, the Vi piston 39 is movable together with the interlocked piston 40 in the cylinder chamber 14b.

[0068] The Vi piston 39 is positioned when the Vi piston 39 is stopped by coming into contact with the positioning wall 42 or when the Vi piston 39 moving away from the positioning wall 42 is stopped because the interlocked piston 40 comes into contact with the positioning wall 42. The Vi piston 13 and the Vi piston 39 are movable independently of each other in the cylinder 12.

[0069] The cylinder 12 has a pressure-introducing hole 114e and a pressure-releasing hole 114f at the cylinder chamber 14d. The cylinder chamber 14d is connected to the pressure-switching mechanism 31 through the pressure-introducing hole 114e and a passage 15d. The pressure-switching mechanism 21 switches to enable or disable the introduction of discharge pressure. The cylinder chamber 14d communicates with the suction chamber 16 through the pressure-releasing hole 114f, a passage 15f, an expansion mechanism 15fa, and the passage 15c. The cylinder chamber 14c communicates with the suction chamber 16 through the pressure-releasing hole 114c, a passage 15e, an expansion mechanism 15ea, and the passage 15c.

[0070] The pressure-switching mechanism 31 has the same configuration as the pressure-switching mechanism 21. If the first figure "2" in each of the reference numerals given to the respective elements of the pressure-switching mechanism 21 is changed to "3", a reference numeral denoting a corresponding one of the elements of the pressure-switching mechanism 31 is obtained. The pressure-switching mechanism 31 switches whether to enable or disable the introduction of discharge pressure into the cylinder chamber 14d.

[0071] Table 1 below summarizes the open/closed states of the solenoid valve 27 and a solenoid valve 37 for Vi values at individual levels of high, moderate, and low in Embodiment 3. The table is to be referred to in the following description of relevant operations.

[Table 1]

	Solenoid valve 27	Solenoid valve 37
High Vi value	Closed	Closed
Moderate Vi value	Closed	Open
Low Vi value	Open	Closed

(1) Operation with High Vi Value

[0072] Fig. 8 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a high internal volume ratio.

[0073] When the Vi value is high, as summarized in Table 1, the solenoid valve 27 is closed, and the solenoid valve 37 is closed. Since the solenoid valve 27 is closed, suction pressure is introduced from the pressure-switching mechanism 21 into the cylinder chamber 14c. Furthermore, since the solenoid valve 37 is closed, suction pressure is introduced into the cylinder chamber 14d. That is, the cylinder chamber 14c and the cylinder chamber 14d are both under suction pressure. That is, the cylinder chamber 14b is under suction pressure. Furthermore, discharge pressure is constantly introduced into the cylinder chamber 14a.

[0074] As described above, with respect to the Vi piston 13 as a partition, discharge pressure is introduced into the cylinder chamber 14a, whereas suction pressure is introduced into the cylinder chamber 14b. Therefore, the operation with a high Vi value according to Embodiment 1 also applies here. Specifically, the variable Vi valve 9 moves leftward as indicated by the arrow illustrated in the drawing. That is, the driving device 11 causes the variable Vi valve 9 to move leftward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is slowed.

(2) Operation with Moderate Vi Value

[0075] Fig. 9 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a moderate internal volume

ratio.

[0076] When the V_i value is moderate, the solenoid valve 27 is closed, whereas the solenoid valve 37 is open. Since the solenoid valve 27 is closed, suction pressure is introduced into the cylinder chamber 14d. Furthermore, since the solenoid valve 37 is open, discharge pressure is introduced into the cylinder chamber 14d. Furthermore, discharge pressure is constantly introduced into the cylinder chamber 14a. Consequently, the cylinder chamber 14a and the cylinder chamber 14d are under discharge pressures of the same level, whereas the cylinder chamber 14c is under suction pressure.

[0077] Note that the cylinder chamber 14d is under suction pressure both in the case of a high V_i value and in a case of a low V_i value to be described below. Therefore, when the V_i value is switched from the high or low level to the moderate level, the pressure in the cylinder chamber 14d changes from suction pressure to discharge pressure because the state of the solenoid valve 37 is switched from closed to open.

[0078] More specifically, when the V_i value is switched from the high level to the moderate level, the pressure in the cylinder chamber 14d in which the V_i piston 39 is positioned as illustrated in Fig. 8 is raised from suction pressure to discharge pressure. Accordingly, the V_i piston 39 moves rightward together with the interlocked piston 40. With the rightward movement of the V_i piston 39, the variable V_i valve 9 is pushed by the interlocked piston 40 to move rightward. Then, when the V_i piston 39 stops moving by coming into contact with the positioning wall 42, the V_i piston 13 and the variable V_i valve 9 stop moving correspondingly and are positioned as illustrated in Fig. 9.

[0079] When the V_i value is switched from the low level to the moderate level, the pressure in the cylinder chamber 14d in which the V_i piston 39 is positioned as illustrated in Fig. 10 to be referred to below is raised from suction pressure to discharge pressure. Meanwhile, since the solenoid valve 27 is closed, the cylinder chamber 14c comes to receive suction pressure. Such a pressure difference between the cylinder chamber 14d and the cylinder chamber 14c causes the V_i piston 39 to move rightward and stop moving by coming into contact with the positioning wall 42.

[0080] When the V_i value is low as to be described below, the cylinder chamber 14a and the cylinder chamber 14c are under discharge pressure. When the V_i value is switched to a moderate level and the solenoid valve 27 is therefore closed, the pressure in the cylinder chamber 14c changes from discharge pressure to suction pressure. Such a pressure difference between the cylinder chamber 14a and the cylinder chamber 14c causes the V_i piston 13 to move leftward from the position illustrated in Fig. 10 and stop moving by coming into contact with the interlocked piston 40. Thus, the V_i piston 13 is positioned as illustrated in Fig. 9.

[0081] As described above, when the V_i value is moderate, the V_i piston 13 is stopped by coming into contact with the interlocked piston 40, with the V_i piston 39 being in contact with the positioning wall 42. In this state, the variable V_i valve 9 is positioned more rightward than in the case of a high V_i value illustrated in Fig. 8. Consequently, the timing of opening the discharge port 8 is advanced from the timing in the case of a high V_i value.

(3) Operation with Low V_i Value

[0082] Fig. 10 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 3 of the present invention that operate at a low internal volume ratio.

[0083] When the V_i value is low, the solenoid valve 27 is open. Therefore, discharge pressure is introduced from the pressure-switching mechanism 21 into the cylinder chamber 14c. Whereas, the solenoid valve 37 is closed. Therefore, suction pressure is introduced into the cylinder chamber 14d. Furthermore, discharge pressure is constantly introduced into the cylinder chamber 14a. Consequently, the cylinder chamber 14a and the cylinder chamber 14c are under discharge pressure, whereas the cylinder chamber 14d is under suction pressure. Hence, there is no pressure difference between the front and rear surfaces of the V_i piston 13 that are defined in the moving direction in the cylinder 12.

[0084] Regarding two ends, defined in the moving direction, of the variable V_i valve 9 coupled to the V_i piston 13, the suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure, as with the case of Embodiment 1. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out. Consequently, the variable V_i valve 9 moves rightward in the drawing because of the difference between the pressures acting on the driving-device-side end 9h and the suction-side end 9g. The variable V_i valve 9 stops at a position where the suction-side end 9g thereof comes into contact with the wall of the casing 2. Therefore, the variable V_i valve 9 is accurately positioned for the low V_i value. Thus, the timing of opening the discharge port 8 is advanced from the timing in the case of a moderate V_i value.

[0085] According to Embodiment 3, the V_i value is controllable among three levels with two pressure-switching mechanisms each including a single solenoid valve. Consequently, a screw compressor that is inexpensive and has a simple configuration can be obtained.

Embodiment 4

[0086] Embodiment 4 of the present invention is different from Embodiment 3 in that the pressure-switching mechanism 21 is connected to the cylinder chamber 14a instead of the cylinder chamber 14c. More specifically, the pressure-switching mechanism 21 is connected to the pressure-introducing hole 114a, and the pressure-introducing hole 114b is made to communicate with the suction chamber 16.

[0087] Now, an operation of the variable Vi valve 9 according to Embodiment 4 will be described. As with the case of Embodiment 3, the Vi value is settable among three levels of high, moderate, and low.

[0088] Table 2 below summarizes the open/closed states of the solenoid valve 27 and the solenoid valve 37 for the Vi values at individual levels of high, moderate, and low in Embodiment 4. The table is to be referred to in the following description of relevant operations.

[Table 2]

	Solenoid valve 27	Solenoid valve 37
High Vi value	Open	Closed
Moderate Vii value	Open	Open
Low Vi value	Closed	Closed

(1) Operation with High Vi Value

[0089] Fig. 11 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 4 of the present invention that operate at a high internal volume ratio.

[0090] When the Vi value is high, the solenoid valve 27 is open, whereas the solenoid valve 37 is closed. Since the solenoid valve 27 is open, discharge pressure is introduced from the pressure-switching mechanism 21 into the cylinder chamber 14a. Furthermore, since the solenoid valve 37 is closed, suction pressure is introduced into the cylinder chamber 14d. Furthermore, pressure is constantly introduced into the cylinder chamber 14c.

[0091] As described above, with respect to the Vi piston 13 as a partition, discharge pressure is introduced into the cylinder chamber 14a, whereas suction pressure is introduced into the cylinder chamber 14b. Therefore, the operation with a high Vi value according to Embodiment 1 also applies here. Specifically, the variable Vi valve 9 moves leftward as indicated by the arrow illustrated in the drawing. That is, the driving device 11 causes the variable Vi valve 9 to move leftward as indicated by the arrow illustrated in the drawing. Thus, the timing of opening the discharge port 8 is slowed.

(2) Operation with Moderate Vi Value

[0092] Fig. 12 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 4 of the present invention that operate at a moderate internal volume ratio.

[0093] When the Vi value is moderate, the solenoid valve 27 is open, and the solenoid valve 37 is open. Since the solenoid valve 27 is open, discharge pressure is introduced into the cylinder chamber 14a. Furthermore, since the solenoid valve 37 is open, discharge pressure is introduced into the cylinder chamber 14d. Furthermore, suction pressure is constantly introduced into the cylinder chamber 14b. Consequently, the cylinder chamber 14a and the cylinder chamber 14d are under discharge pressures of the same level, whereas the cylinder chamber 14c is under suction pressure.

[0094] When the Vi value is switched from the high level to the moderate level, the pressure in the cylinder chamber 14d in which the Vi piston 39 is positioned illustrated in Fig. 11 is raised from suction pressure to discharge pressure. Accordingly, the Vi piston 39 moves rightward together with the interlocked piston 40. With the rightward movement of the Vi piston 39, the variable Vi valve 9 is pushed by the interlocked piston 40 to move rightward. Then, when the Vi piston 39 stops moving by coming into contact with the positioning wall 42, the Vi piston 13 and the variable Vi valve 9 stop moving correspondingly and are positioned as illustrated in Fig. 12.

[0095] When the Vi value is switched from the low level to the moderate level, the pressure in the cylinder chamber 14d in which the Vi piston 39 is positioned as illustrated in Fig. 13 to be referred to below is raised from suction pressure to discharge pressure. Meanwhile, the cylinder chamber 14c is constantly under suction pressure. Such a pressure difference between the cylinder chamber 14d and the cylinder chamber 14c causes the Vi piston 39 to move rightward and stop moving by coming into contact with the positioning wall 42. In addition, when the Vi value is low as to be described below, the cylinder chamber 14a and the cylinder chamber 14c are both under suction pressure. However, when the Vi value is switched to the moderate level, the solenoid valve 27 is closed. Consequently, the pressure in the

cylinder chamber 14a changes from suction pressure to discharge pressure. Such a pressure difference between the cylinder chamber 14a and the cylinder chamber 14c causes the Vi piston 13 to move leftward from the position illustrated in Fig. 13 and stop moving by coming into contact with the interlocked piston 40. Thus, the Vi piston 13 is positioned as illustrated in Fig. 12.

[0096] As described above, when the Vi value is moderate, the Vi piston 13 stops by coming into contact with the interlocked piston 40, with the Vi piston 39 being in contact with the positioning wall 42. In this state, the variable Vi valve 9 is positioned more rightward than in the case of a high Vi value illustrated in Fig. 11. Consequently, the timing of opening the discharge port 8 is advanced from the timing in the case of a high Vi value.

(3) Operation with Low Vi Value

[0097] Fig. 13 is a schematic diagram illustrating the driving device and the pressure-switching mechanisms included in the screw compressor according to Embodiment 4 of the present invention that operate at a low internal volume ratio.

[0098] When the Vi value is low, the solenoid valve 27 is closed. Therefore, suction pressure is introduced from the pressure-switching mechanism 21 into the cylinder chamber 14a. Furthermore, the solenoid valve 37 is closed. Therefore, discharge pressure is introduced into the cylinder chamber 14d. Furthermore, suction pressure is constantly introduced into the cylinder chamber 14c. That is, the cylinder chamber 14a, the cylinder chamber 14c, and the cylinder chamber 14d are under suction pressure. Hence, there is no pressure difference between the front and rear surfaces of the Vi piston 13 that are defined in the moving direction in the cylinder 12.

[0099] Regarding two ends, defined in the moving direction, of the variable Vi valve 9 coupled to the Vi piston 13, the suction-side end 9g of the valve body 9a is under suction pressure, and the driving-device-side end 9h of the guide portion 9b is under discharge pressure, as with the case of Embodiment 1. Furthermore, the discharge-port-side end 9d of the valve body 9a is under discharge pressure obtained immediately after the discharge, and the discharge-port-side end 9e of the guide portion 9b is under discharge pressure that is equal to but acts in the opposite direction to the pressure acting on the discharge-port-side end 9d. Hence, loads applied to the discharge-port-side end 9d and the discharge-port-side end 9e cancel each other out. Consequently, the variable Vi valve 9 moves rightward in the drawing because of the difference between the pressures acting on the driving-device-side end 9h and the suction-side end 9g. The variable Vi valve 9 stops at a position where the suction-side end 9g thereof comes into contact with the wall of the casing 2. Therefore, the variable Vi valve 9 is accurately positioned for the low Vi value. Thus, the timing of opening the discharge port 8 is advanced from the timing in the case of a moderate Vi value.

[0100] Embodiment 4 is different from Embodiment 3 in that the pressure-switching mechanism 21 is connected to the cylinder chamber 14a instead of the cylinder chamber 14c, and can produce the same advantageous effects as Embodiment 3.

Embodiment 5

[0101] Embodiment 5 of the present invention concerns a pressure-switching mechanism having a simpler configuration.

[0102] Fig. 14 is a schematic diagram of a screw compressor according to Embodiment 5 of the present invention.

[0103] A screw compressor 1 according to Embodiment 5 includes a pressure-switching mechanism 21A instead of the pressure-switching mechanism 21 employed in Embodiment 1. The pressure-switching mechanism 21A includes a solenoid valve 27 that switches whether to enable or disable the introduction of discharge pressure from the discharge chamber 7 into the cylinder chamber 14b by opening or closing the passage 30 through which the discharge chamber 7 and the cylinder chamber 14b communicate with each other. In other words, the pressure-switching mechanism 21A is obtained by removing the switching piston 23, the rod 24, and the spring 25 from the pressure-switching mechanism 21 according to Embodiment 1. The pressure-switching mechanism 21A corresponds to the second mechanism according to the present invention.

[0104] When the Vi value is high, the solenoid valve 27 is closed. Accordingly, discharge pressure is not introduced into the cylinder chamber 14b. Moreover, the pressure in the cylinder chamber 14b is released from the pressure-releasing hole 114c and is eventually reduced to suction pressure. Thus, the same pressure state as illustrated in Fig. 3 is established in the cylinder 12, and the same operation as illustrated in Fig. 3 is realized.

[0105] When the Vi value is low, the solenoid valve 27 is open. Accordingly, discharge pressure is introduced into the cylinder chamber 14b. Thus, the same pressure state as illustrated in Fig. 4 is established, and the same operation as illustrated in Fig. 4 is realized.

[0106] According to Embodiment 5 described above, a much simpler configuration is realized by removing the switching piston 23, the rod 24, and the spring 25 from the mechanism according to Embodiment 1. Consequently, a screw compressor that is inexpensive and has a simple configuration can be obtained.

Embodiment 6

[0107] Embodiment 6 of the present invention is obtained by simplifying Embodiment 2 and is also regarded as a combination of Embodiment 2 and Embodiment 5.

[0108] Fig. 15 is a schematic diagram of a screw compressor according to Embodiment 6 of the present invention.

[0109] Embodiment 6 is obtained by applying the pressure-switching mechanism 21 according to Embodiment 2 illustrated in Fig. 7 to the pressure-switching mechanism 21A according to Embodiment 5 illustrated in Fig. 14.

[0110] Such a configuration is much simpler than the configuration according to Embodiment 2. Consequently, a screw compressor that is inexpensive and has a simple configuration can be obtained.

[0111] The mechanism of opening and closing each of the solenoid valves 27 and 37 is the same as in Embodiment 2.

[0112] While Embodiment 6 concerns a configuration in which the pressure-switching mechanism 21 is simplified, a configuration in which the pressure-switching mechanism 31 is simplified or a configuration in which both the pressure-switching mechanism 21 and the pressure-switching mechanism 31 are simplified is also acceptable.

[0113] While Embodiments 1 to 6 each concern a case where one variable Vi valve 9 is provided for one driving device 11, two variable Vi valves 9 may alternatively be provided. That is, the number of variable Vi valves 9 is not limited. Moreover, the pressures to be introduced into the cylinder chambers 14a, 14b, 26a, and 26b are not limited to discharge pressure and suction pressure. For example, intermediate pressure may also be introduced. Intermediate pressure is a pressure that is lower than the discharge pressure but higher than the suction pressure.

[0114] Furthermore, the refrigerant to be used in the screw compressor 1 is not limited to a particular refrigerant and may be, for example, selected from any of those having low GWPs, standing for global warming potentials, with consideration for factors affecting the environment. Examples of the refrigerant having a low GWP include R32, HFO-1123, HFO-1234yf, or a mixed refrigerant containing at least one of the foregoing refrigerants. The refrigerant to be used in the screw compressor 1 may alternatively be a natural refrigerant such as carbon dioxide.

Reference Signs List

[0115] 1 screw compressor 2 casing 3 motor 3a stator 3b motor rotor 4 screw shaft 5 screw rotor 5a screw groove 6 compression chamber 7 discharge chamber 8 discharge port 9 variable Vi valve 9a valve body 9b guide portion 9c coupling portion 9d discharge-port-side end 9e discharge-port-side end 9f discharge air gap 9g suction-side end 9h driving-device-side end 10 rod 11 driving device 12 cylinder 13 Vi piston 14 cylinder 14a cylinder chamber 14b cylinder chamber 14c cylinder chamber 14d cylinder chamber 15a passage 15b passage 15c passage 15ca expansion mechanism 15d passage 15f passage 15fa expansion mechanism 15e passage 15ea expansion mechanism 16 suction chamber 21 pressure-switching mechanism 21A pressure-switching mechanism 22 cylinder 23 switching piston 24 rod 25 spring 26a cylinder chamber 26b cylinder chamber 27 solenoid valve 28 passage 28a passage 28b passage 28ba expansion mechanism 28c passage 28d passage 30 passage 31 pressure-switching mechanism 37 solenoid valve 39 Vi piston 40 interlocked piston 41 coupling portion 42 positioning wall 42a hole 50 controller 114a pressure-introducing hole 114b pressure-introducing hole 114c pressure-releasing hole 114e pressure-introducing hole 114f pressure-releasing hole 214a pressure-introducing hole 214b pressure-releasing hole 214c pressure-releasing hole 214d pressure-introducing hole

Claims

1. A screw compressor comprising:

a casing in which a discharge chamber and a suction chamber are provided;
 a screw rotor, on an outer peripheral surface of which a plurality of grooves forming a compression chamber are provided, the screw rotor being rotatable in the casing;
 a variable Vi valve movable in an axial direction of the screw rotor and whose stopping position is shifted to change an internal volume ratio that is a ratio between a volume of the compression chamber at completion of suction and a volume of the compression chamber at completion of discharge;
 a driving device including a Vi piston coupled to the variable Vi valve, and a driving cylinder that houses the Vi piston movably in the driving cylinder; and
 a pressure-switching mechanism that switches pressure to be introduced into the driving device,
 wherein an inside of the driving cylinder is divided by the Vi piston into two cylinder chambers,
 wherein the driving device moves the Vi piston by changing pressure in one of the two cylinder chambers to control a position of the variable Vi valve,
 wherein the pressure-switching mechanism includes a solenoid valve configured to open to form a first passage

through which the discharge chamber and the one cylinder chamber communicate with each other, and close to block the first passage, the solenoid valve being switched to open to enable introduction of discharge pressure from the discharge chamber into the one cylinder chamber or close to disable introduction of discharge pressure from the discharge chamber into the one cylinder chamber; a switching cylinder communicating with the first passage extending between the solenoid valve and the one cylinder chamber; a switching piston movably housed in the switching cylinder; and a spring that is compressed with a movement of the switching piston, wherein an inside of the switching cylinder is divided by the switching piston into a first switching cylinder chamber into which suction pressure is constantly introduced and in which the spring is provided, and a second switching cylinder chamber that communicates with the first passage, wherein a second passage through which the first switching cylinder chamber and the one cylinder chamber communicate with each other is opened or closed depending on a position of the switching piston that receives a spring force exerted by the spring, and wherein the pressure in the one cylinder chamber changes when the first passage is opened or closed with opening or closing of the solenoid valve while the second passage is opened or closed with the movement of the switching piston.

2. The screw compressor of claim 1, wherein the second passage is provided with a first expansion mechanism.

3. A screw compressor comprising:

a casing in which a discharge chamber and a suction chamber are provided;
 a screw rotor, on an outer peripheral surface of which a plurality of grooves forming a compression chamber are provided, the screw rotor being rotatable in the casing;
 a variable V_i valve movable in an axial direction of the screw rotor and whose stopping position is shifted to change an internal volume ratio that is a ratio between a volume of the compression chamber at completion of suction and a volume of the compression chamber at completion of discharge;
 a driving device including a V_i piston coupled to the variable V_i valve, and a driving cylinder that houses the V_i piston movably in the driving cylinder; and
 a pressure-switching mechanism that switches pressure to be introduced into the driving device, wherein an inside of the driving cylinder is divided by the V_i piston into two cylinder chambers, wherein the driving device moves the V_i piston by changing pressure in one of the two cylinder chambers to control a position of the variable V_i valve, and wherein the pressure-switching mechanism includes a solenoid valve configured to open to form a first passage through which the discharge chamber and the one cylinder chamber communicate with each other, and close to block the first passage, the solenoid valve being switched to open to enable introduction of discharge pressure from the discharge chamber into the one cylinder chamber or close to disable introduction of discharge pressure from the discharge chamber into the one cylinder chamber, and wherein the pressure in the one cylinder chamber changes with opening or closing of the solenoid valve.

4. The screw compressor of any one of claims 1 to 3, wherein the two cylinder chambers are a first cylinder chamber and a second cylinder chamber in order of arrangement from a side nearer to the variable V_i valve, wherein discharge pressure is constantly introduced into the first cylinder chamber, and wherein the second cylinder chamber corresponds to the one cylinder chamber and communicates with the suction chamber through a second expansion mechanism, and the pressure in the second cylinder chamber is switched between discharge pressure and suction pressure depending on whether the solenoid valve is opened or closed.

5. The screw compressor of any one of claims 1 to 3, wherein the two cylinder chambers are a first cylinder chamber and a second cylinder chamber in order of arrangement from a side nearer to the variable V_i valve, wherein the first cylinder chamber corresponds to the one cylinder chamber and communicates with the suction chamber through a second expansion mechanism, and the pressure in the first cylinder chamber is switched between discharge pressure and suction pressure depending on whether the solenoid valve is opened or closed, and wherein suction pressure is constantly introduced into the second cylinder chamber.

6. A screw compressor comprising:

a casing in which a discharge chamber and a suction chamber are provided;

a screw rotor, on an outer peripheral surface of which a plurality of grooves forming a compression chamber are provided, the screw rotor being rotatable in the casing;
 a variable Vi valve movable in an axial direction of the screw rotor and whose stopping position is shifted to change an internal volume ratio that is a ratio between a volume of the compression chamber at completion of suction and a volume of the compression chamber at completion of discharge;
 a driving device including a first Vi piston coupled to the variable Vi valve, and a driving cylinder that houses the first Vi piston movably in the driving cylinder; and
 two pressure-switching mechanisms that each switch pressure to be introduced into the driving device, wherein the driving device includes

a second Vi piston that operates independently of the first Vi piston;
 an interlocked piston provided between the first Vi piston and the second Vi piston and coupled to the second Vi piston through a coupling portion; and
 a positioning wall provided between the second Vi piston and the interlocked piston and having a hole through which the coupling portion movably extends,

wherein an inside of the driving cylinder is divided by the first Vi piston and the second Vi piston into three cylinder chambers,

wherein the driving device controls

a position of the variable Vi valve to move the second Vi piston between a position where the second Vi piston comes into contact with the positioning wall and a position where the second Vi piston is out of contact with the positioning wall by changing pressure in at least one of the three cylinder chambers, and while controlling the first Vi piston to move together with the second Vi piston or independently of the second Vi piston;

wherein each of the two pressure-switching mechanisms is provided for corresponding one of two of the three cylinder chambers;

wherein the two pressure-switching mechanisms are first mechanisms or second mechanisms, or one of the two pressure-switching mechanisms is the first mechanism while an other is the second mechanism,

wherein the first mechanism includes

a solenoid valve configured to open to form a first passage through which the discharge chamber and the one cylinder chamber communicate with each other, and close to block the first passage, the solenoid valve being switched to open to enable introduction of discharge pressure from the discharge chamber into the one cylinder chamber or close to disable introduction of discharge pressure from the discharge chamber into the one cylinder chamber; a switching cylinder communicating with the first passage extending between the solenoid valve and the one cylinder chamber; a switching piston movably housed in the switching cylinder; and a spring that is compressed with a movement of the switching piston,

wherein an inside of the switching cylinder is divided by the switching piston into a first switching cylinder chamber into which suction pressure is constantly introduced and in which the spring is provided, and a second switching cylinder chamber that communicates with the first passage,

wherein a second passage through which the first switching cylinder chamber and the one cylinder chamber communicate with each other is allowed to communicate or not communicate depending on a position of the switching piston that receives a spring force exerted by the spring,

wherein the pressure in the one cylinder chamber changes when the first passage is opened or closed with opening or closing of the solenoid valve while the second passage is opened or closed with the movement of the switching piston, and

wherein the second mechanism includes

a solenoid valve configured to open to form the first passage, and close to block the first passage, the solenoid valve being switched to open to enable introduction of discharge pressure from the discharge chamber into the one cylinder chamber or close to disable introduction of discharge pressure from the discharge chamber into the one cylinder chamber, and the pressure in the one cylinder chamber changes with opening or closing of the solenoid valve.

7. The screw compressor of claim 6,

wherein the three cylinder chambers are a first cylinder chamber, a second cylinder chamber, and a third cylinder chamber in order of arrangement from a side nearer to the variable Vi valve,

wherein discharge pressure is constantly introduced into the first cylinder chamber, and

wherein the second cylinder chamber and the third cylinder chamber correspond to the two cylinder chambers, respectively, and each communicate with the suction chamber through an expansion mechanism; and pressure in each of the second cylinder chamber and the third cylinder chamber is switched between discharge pressure and

suction pressure depending on whether the solenoid valves are opened or closed individually.

8. The screw compressor of claim 6,
wherein the three cylinder chambers are a first cylinder chamber, a second cylinder chamber, and a third cylinder
chamber in order of arrangement from a side nearer to the variable V_i valve,
wherein the first cylinder chamber and the third cylinder chamber correspond to the two cylinder chambers, respec-
tively, and each communicate with the suction chamber through an expansion mechanism; and pressure in each
of the first cylinder chamber and the third cylinder chamber is switched between discharge pressure and suction
pressure depending on whether the solenoid valves are opened or closed individually, and
wherein suction pressure is constantly introduced into the second cylinder chamber.

FIG. 1

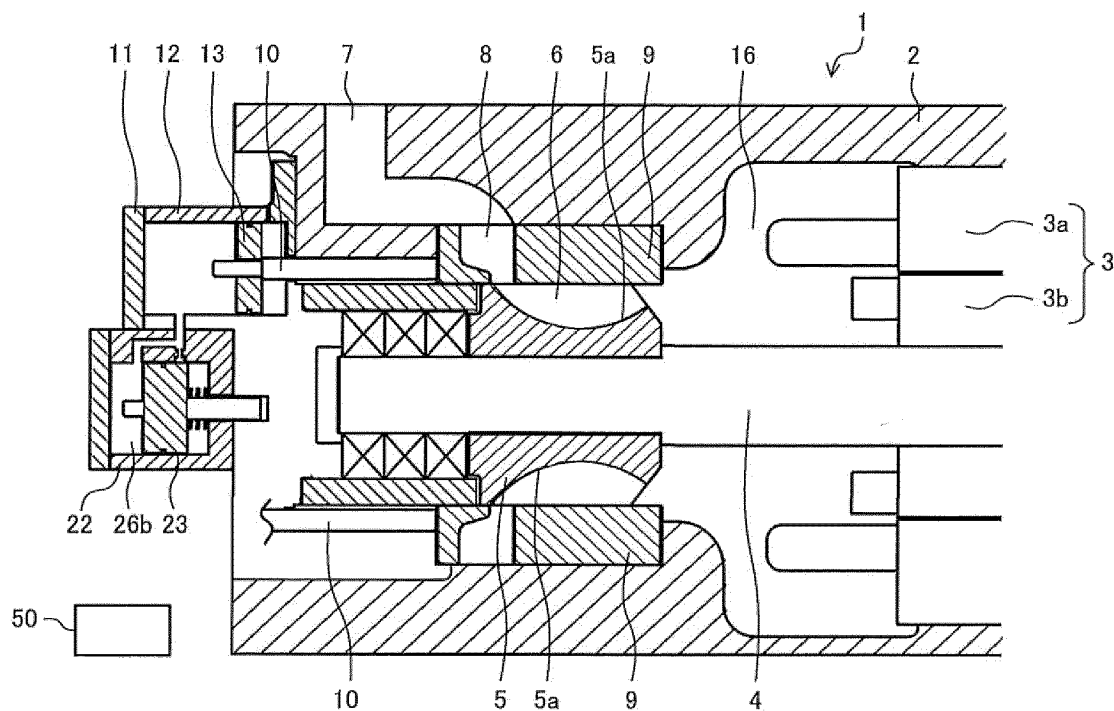


FIG. 2

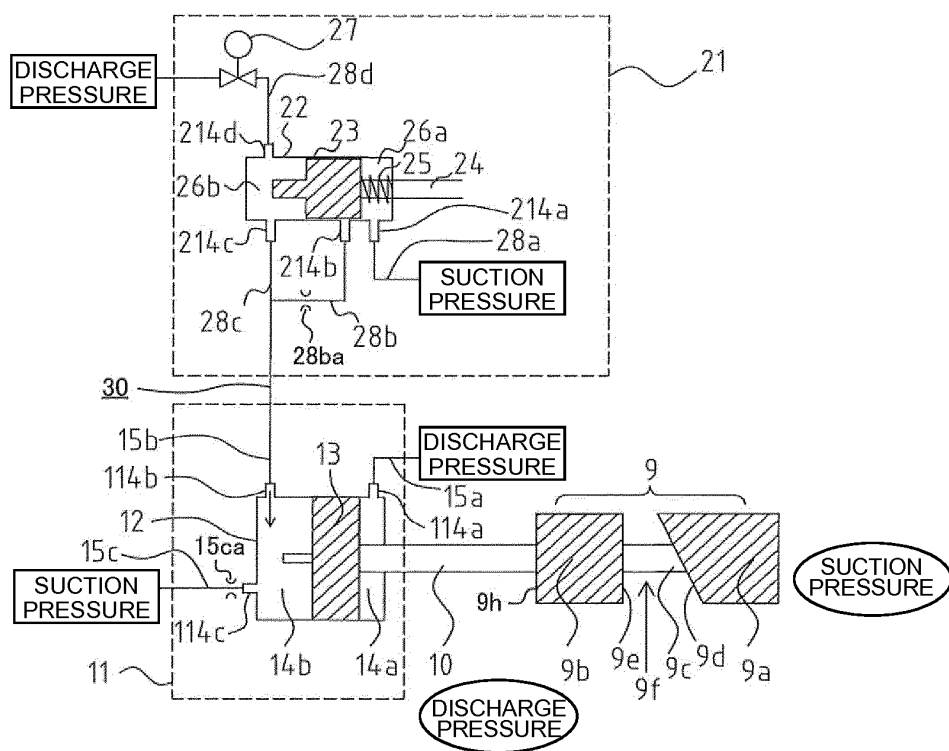


FIG. 3

<WHEN VI VALUE IS HIGH>

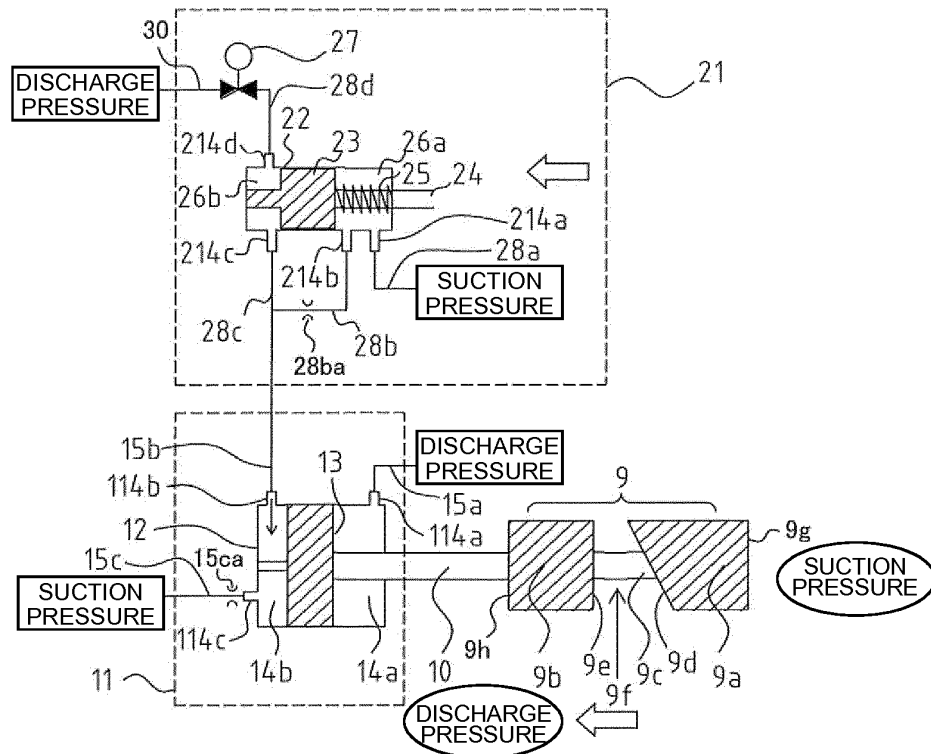


FIG. 4

<WHEN VI VALUE IS LOW>

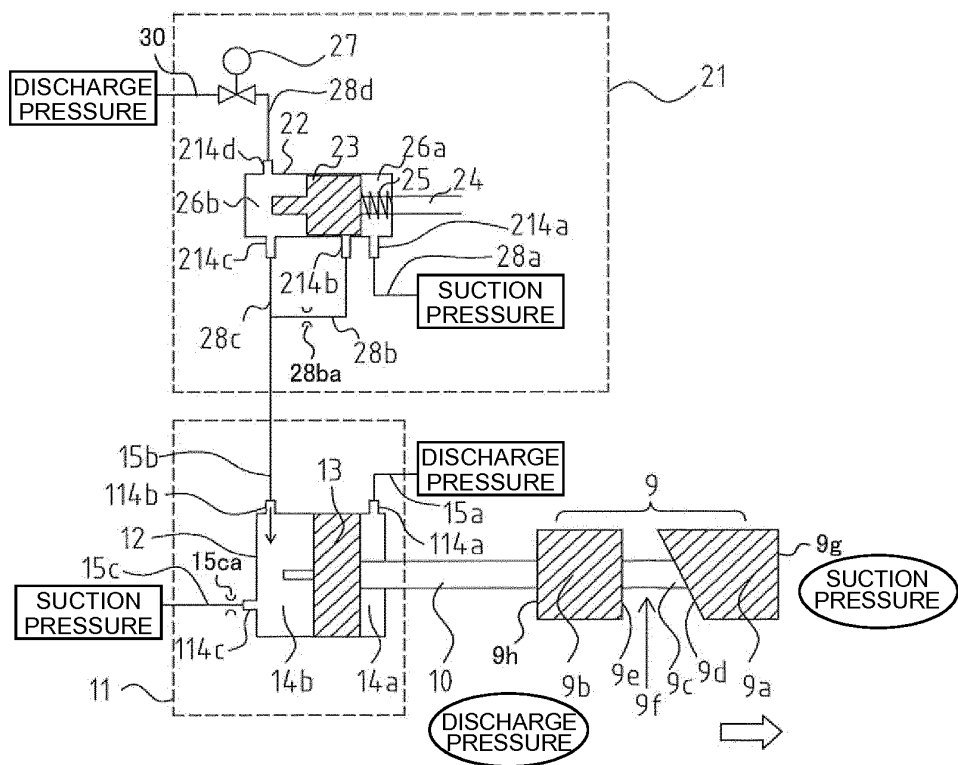


FIG. 5

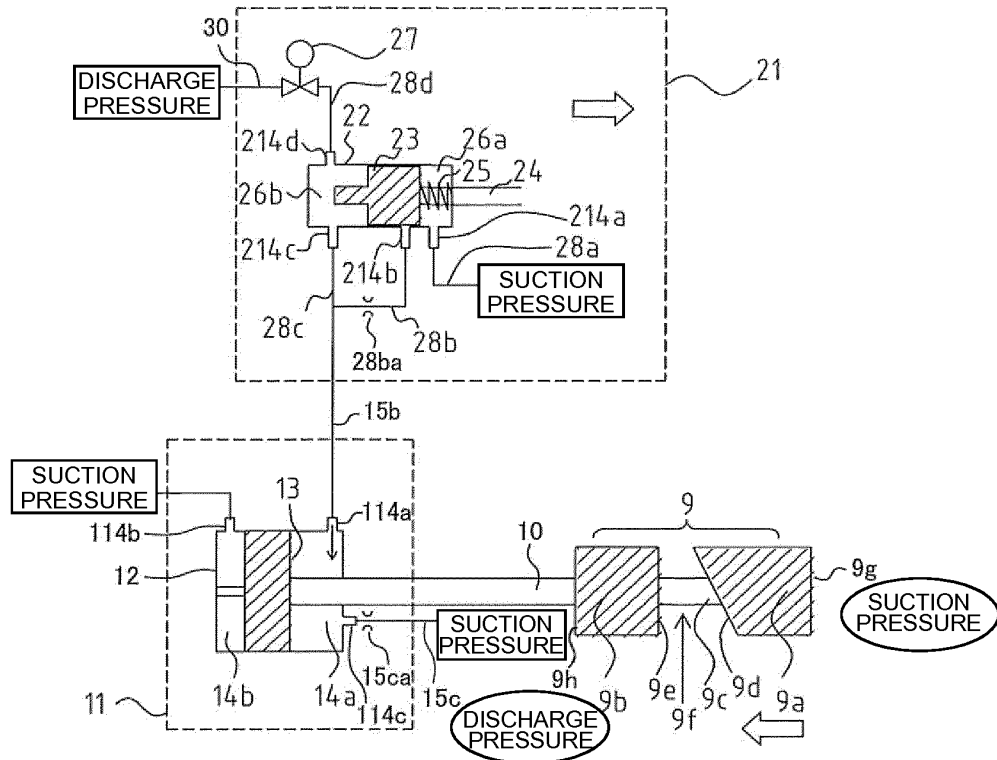
<WHEN V_i VALUE IS HIGH>

FIG. 6

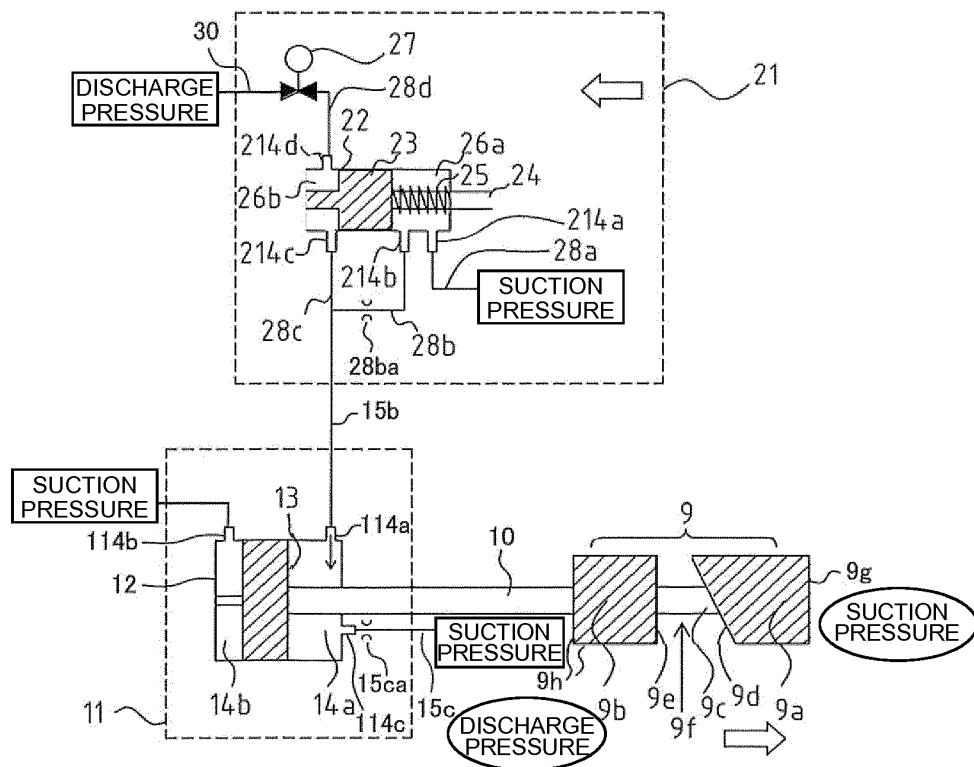
<WHEN V_i VALUE IS LOW>

FIG. 7

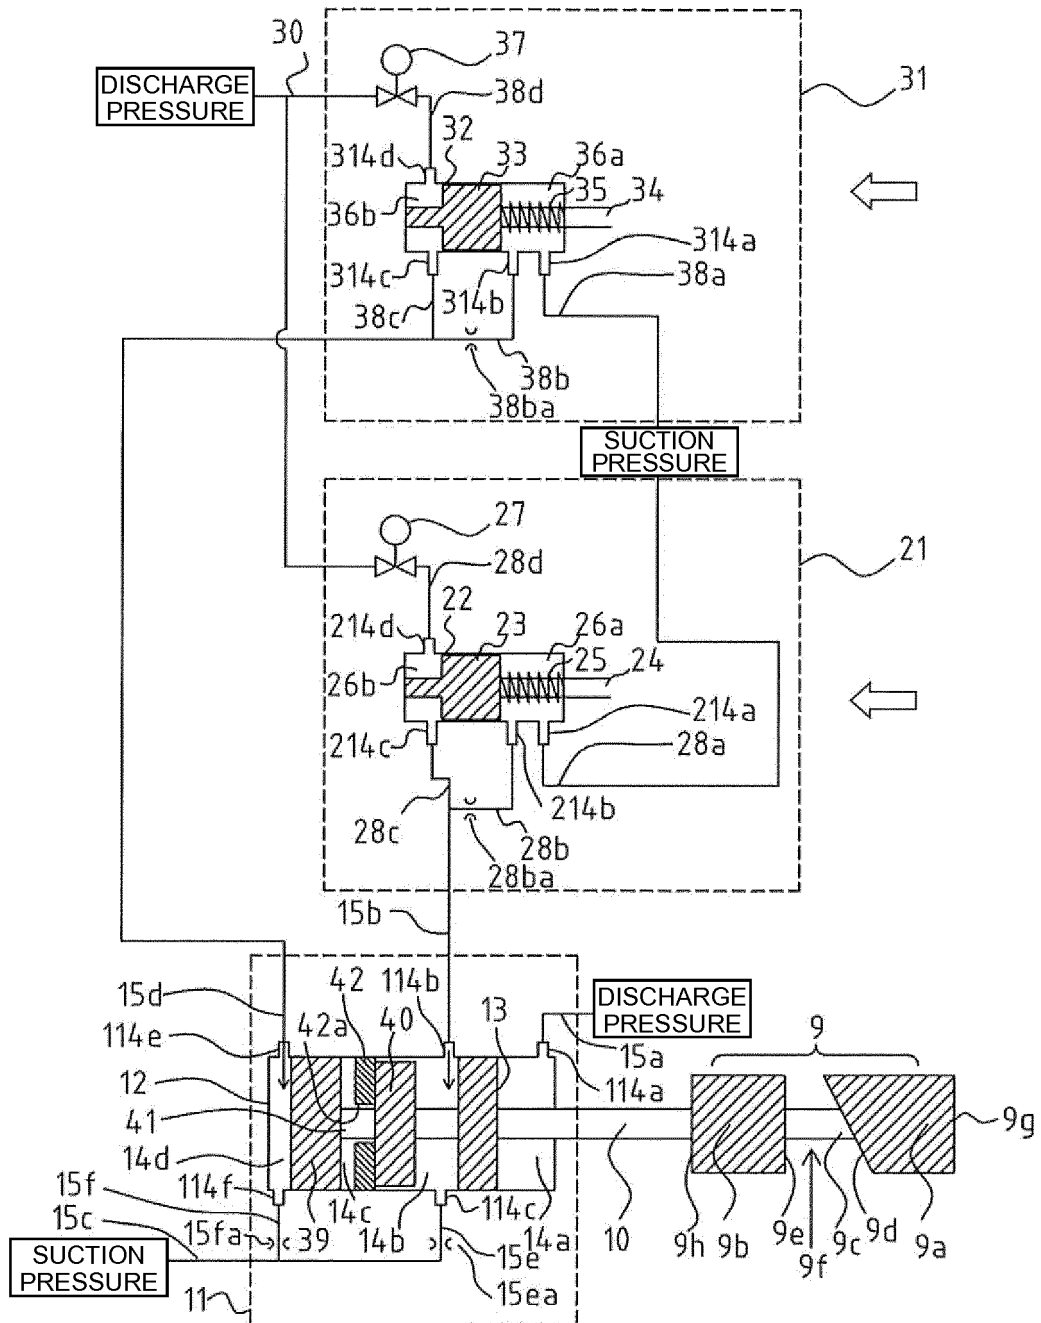


FIG. 8

<WHEN V_i VALUE IS HIGH>

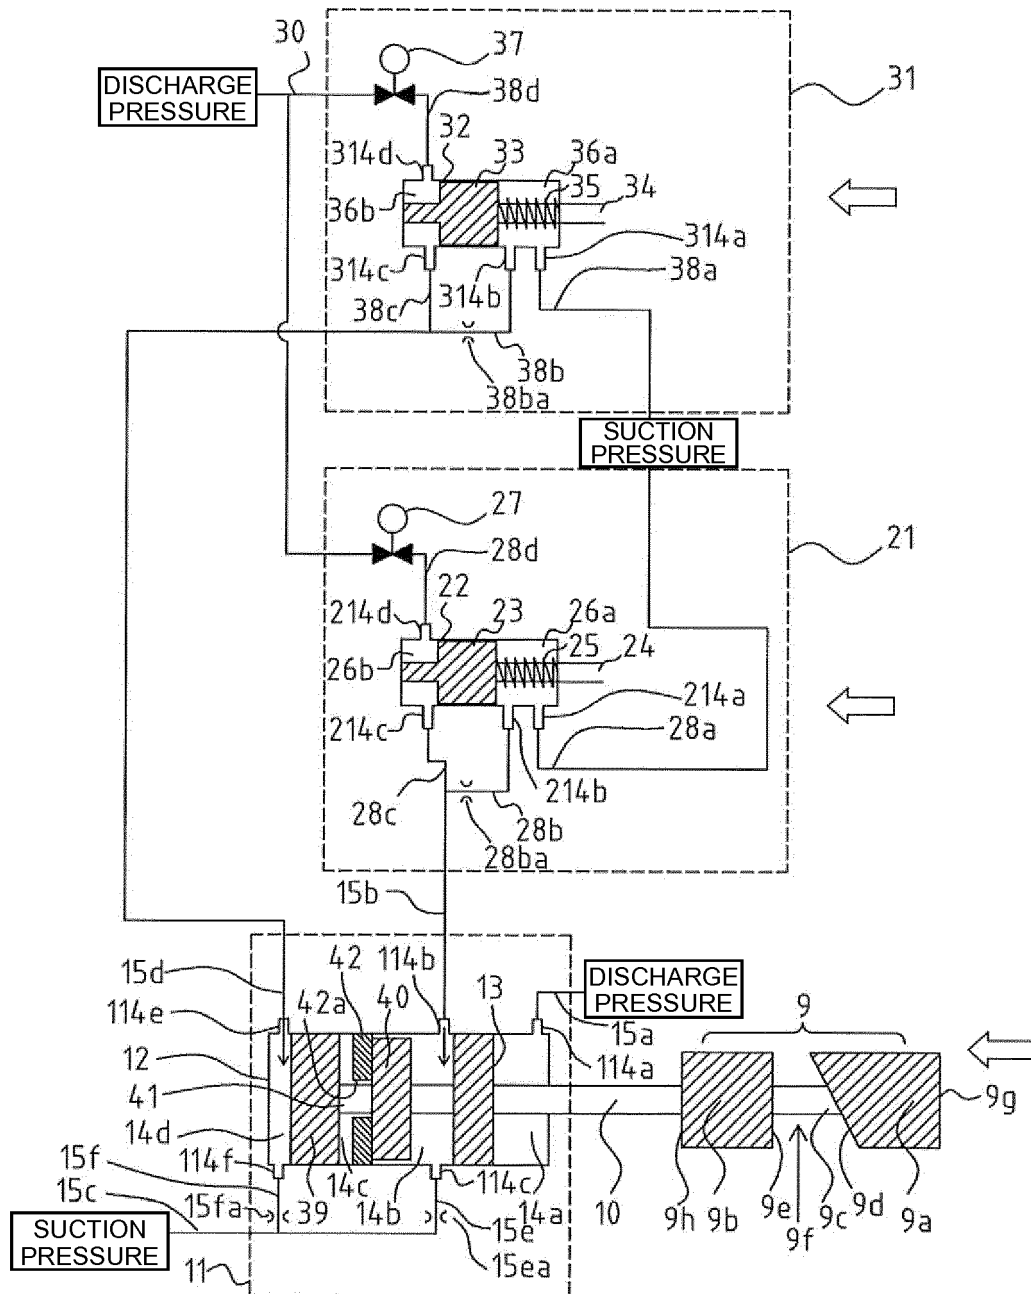


FIG. 9

<WHEN V_i VALUE IS MODERATE>

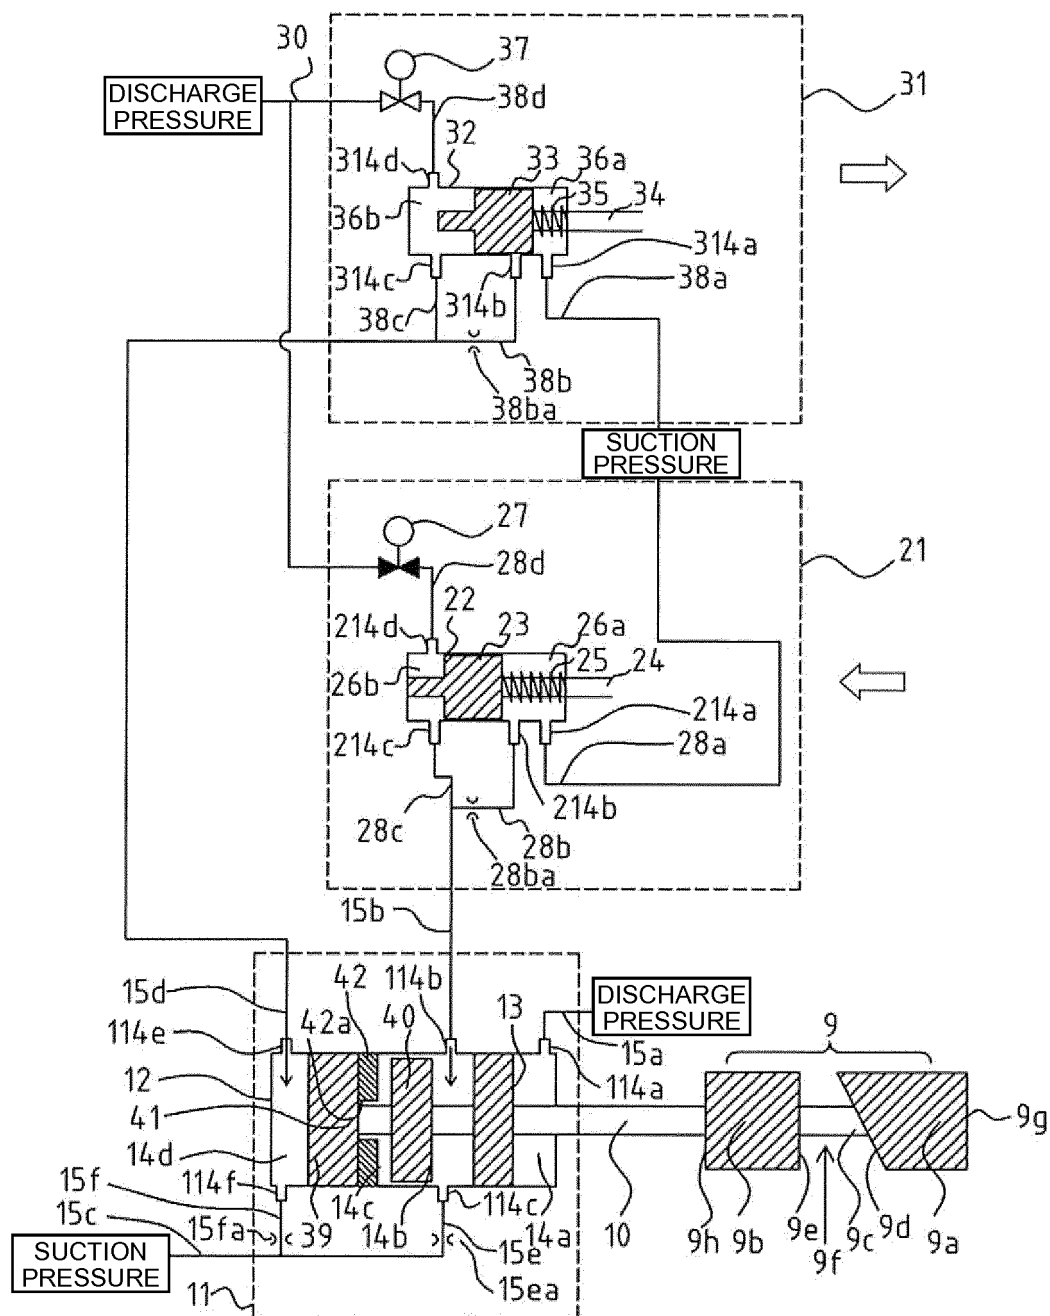


FIG. 10

<WHEN V_i VALUE IS LOW>

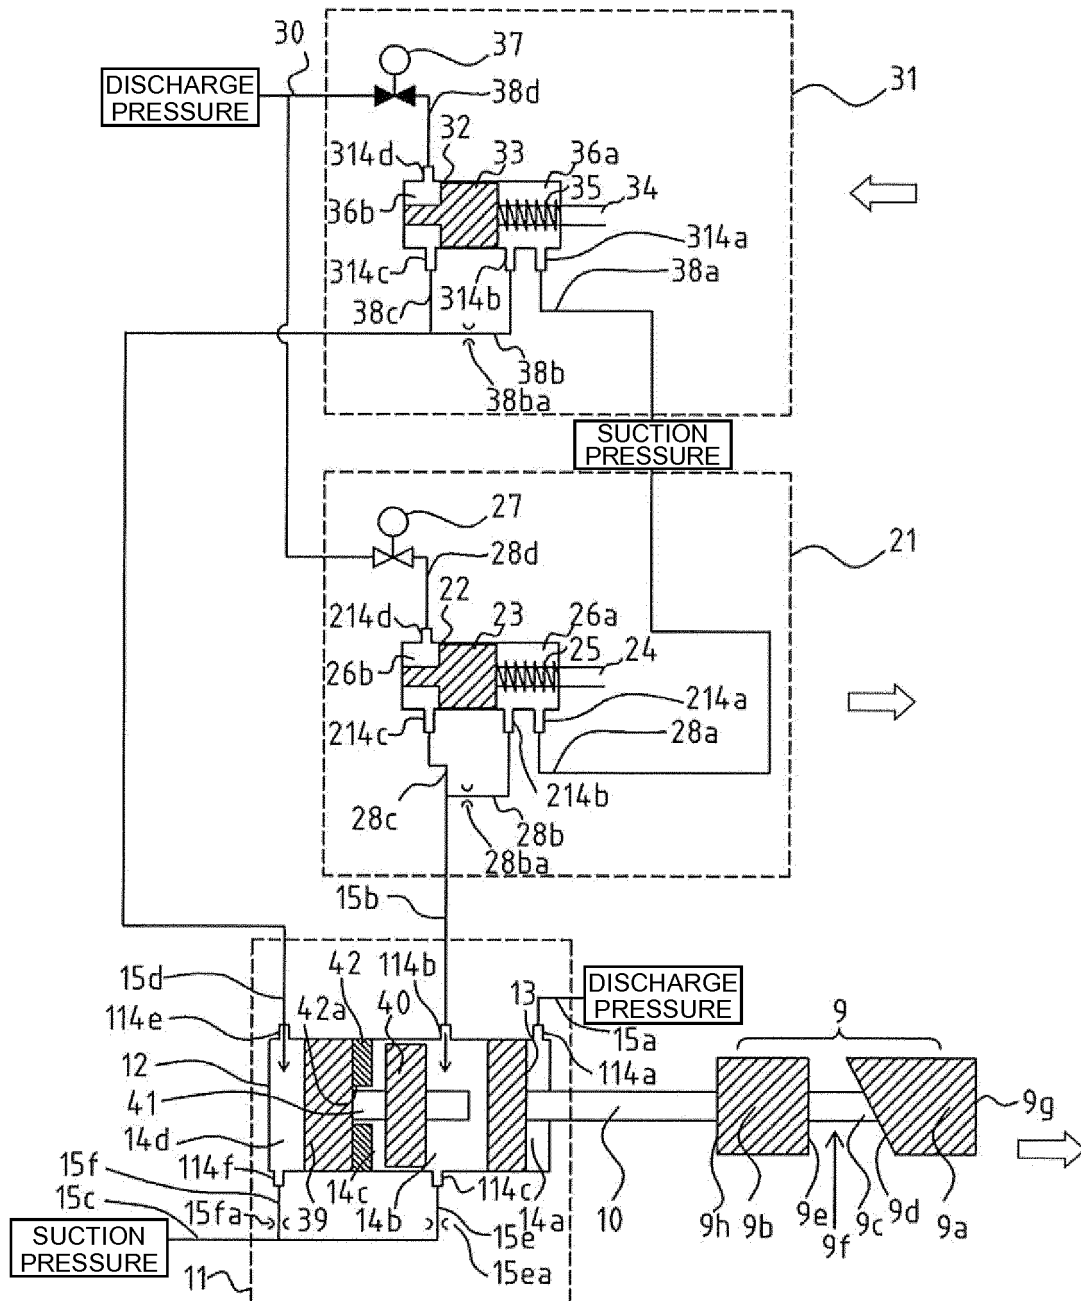


FIG. 11

<WHEN V_i VALUE IS HIGH>

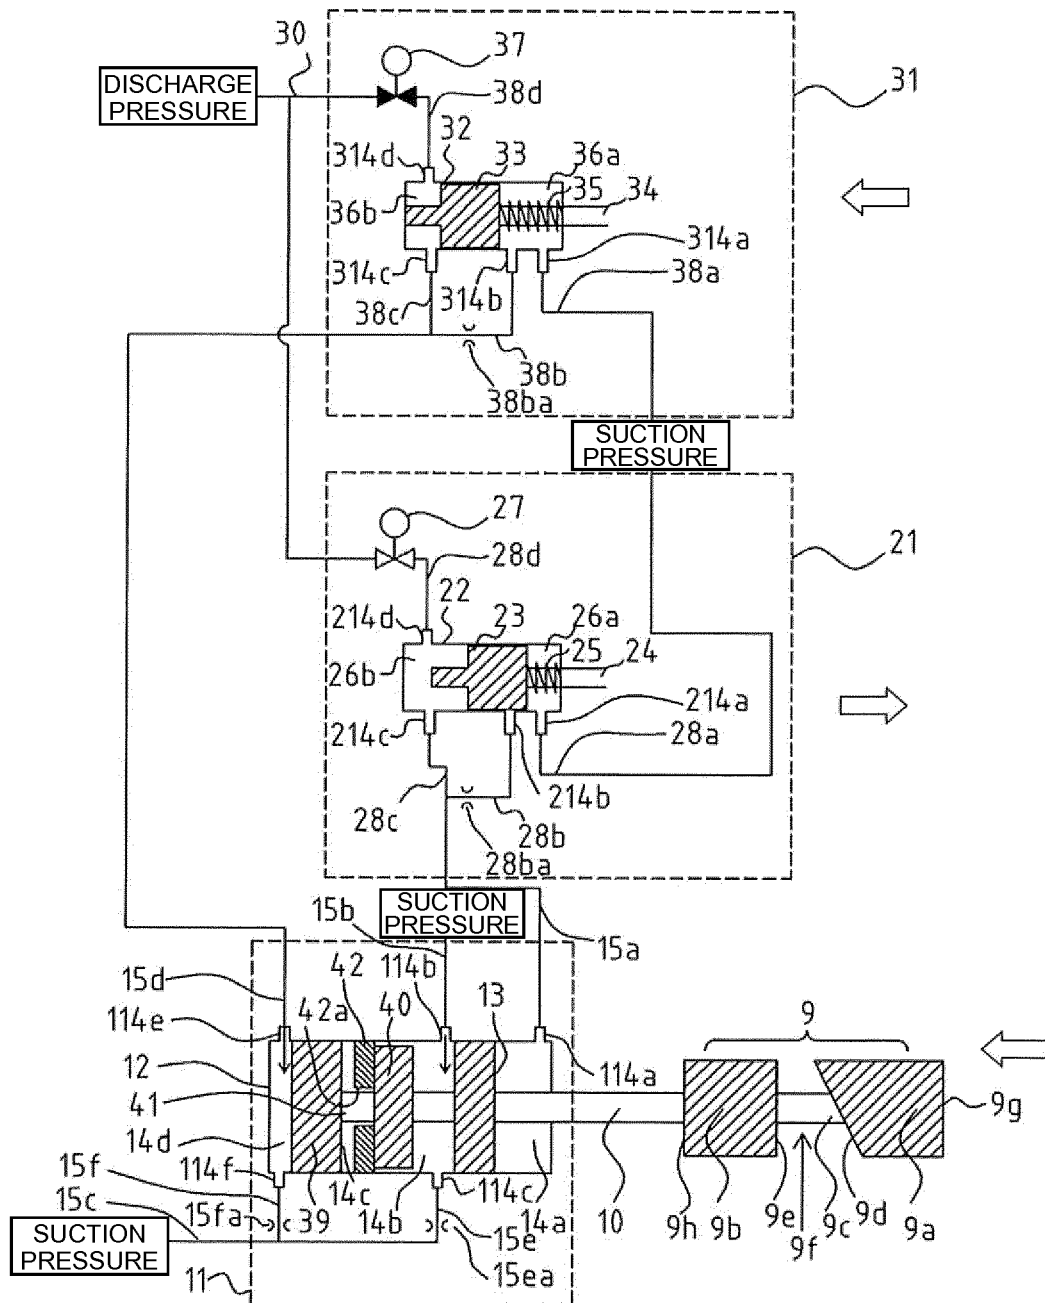


FIG. 12

<WHEN V_i VALUE IS MODERATE>

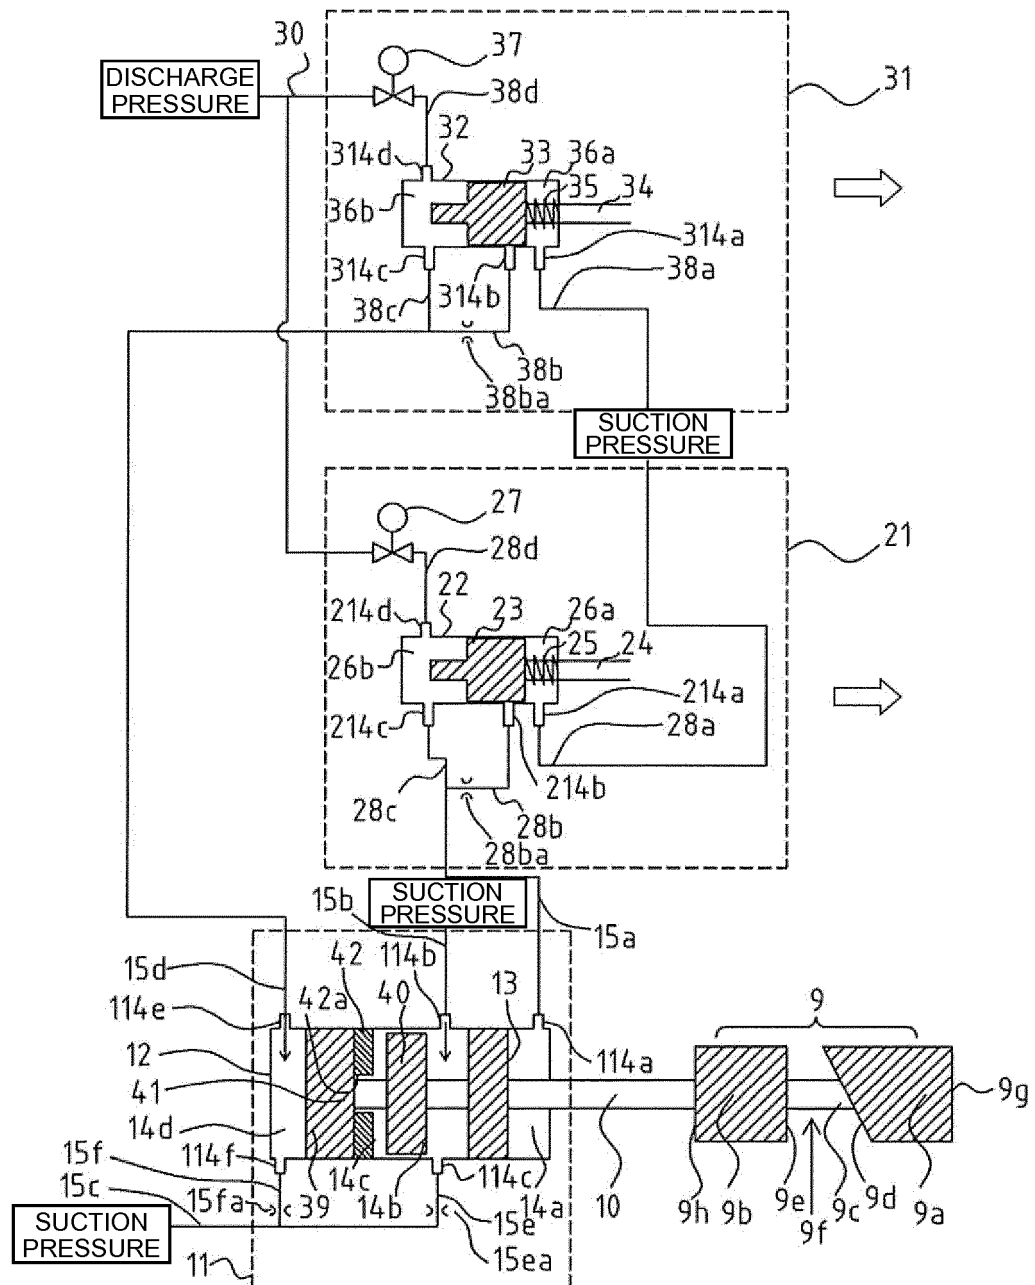


FIG. 13

<WHEN V_i VALUE IS LOW>

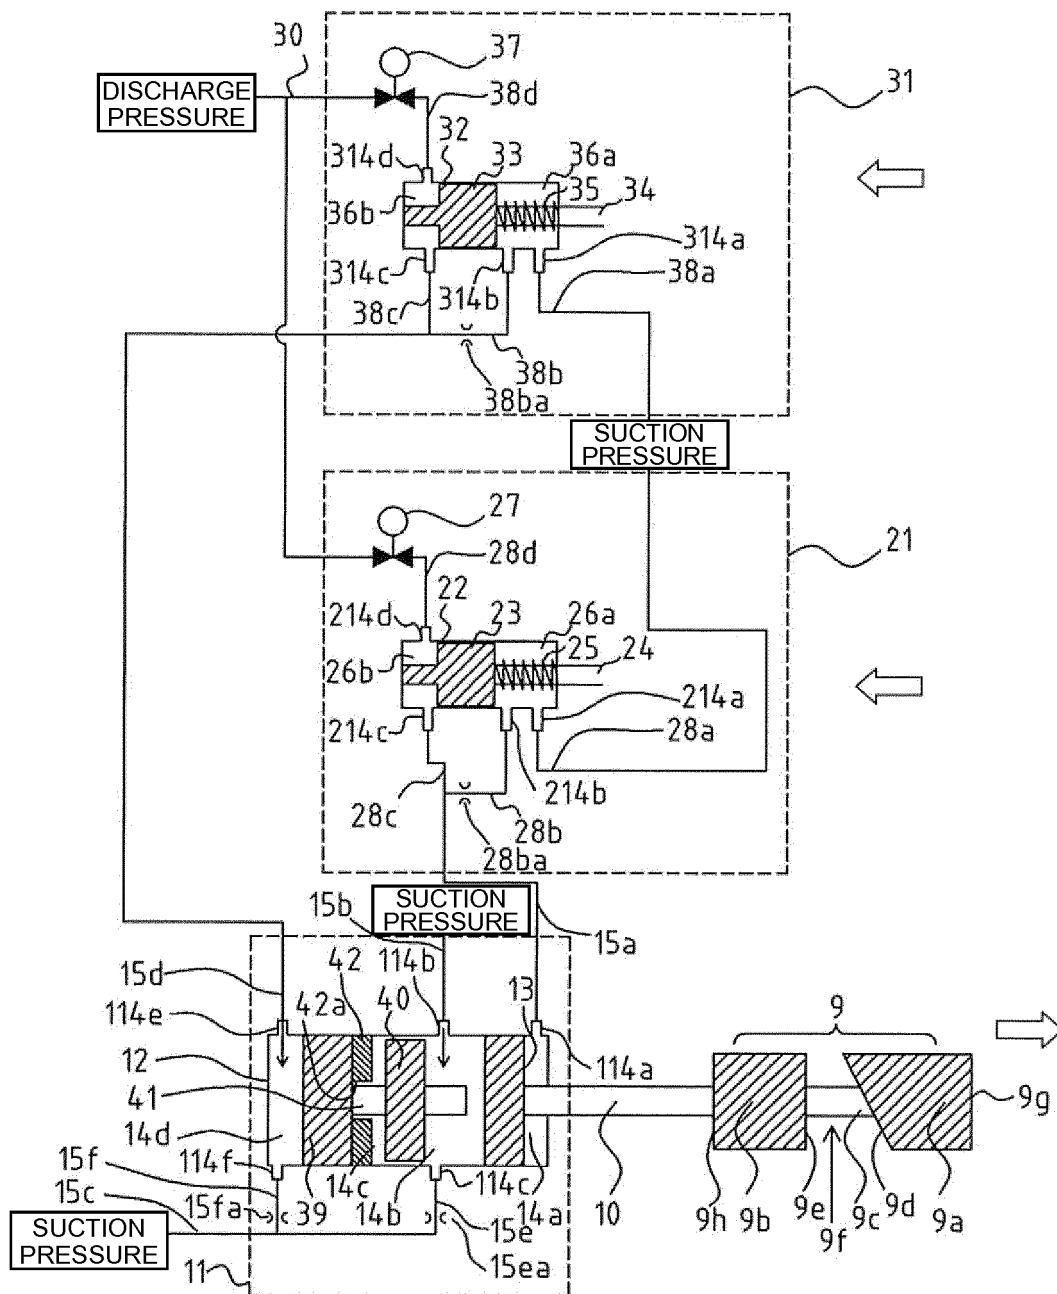


FIG. 14

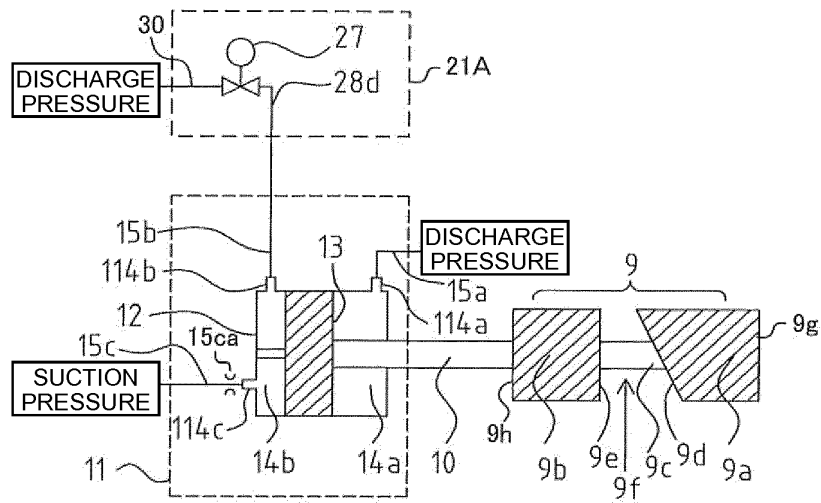
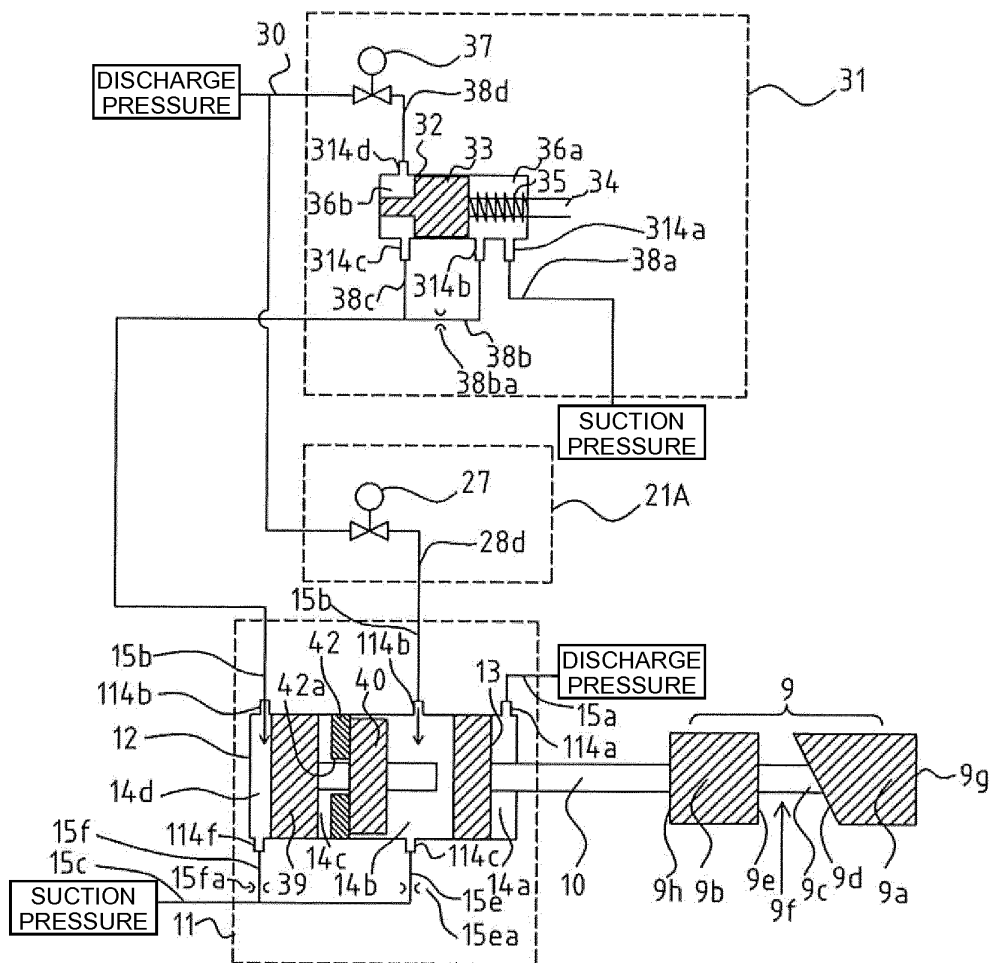


FIG. 15



INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2017/022698

A. CLASSIFICATION OF SUBJECT MATTER

F04C18/16(2006.01)i, F04C28/12(2006.01)i, F04C18/52(2006.01)n

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F04C18/16, F04C28/12, F04C18/52

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2017

Kokai Jitsuyo Shinan Koho 1971-2017 Toroku Jitsuyo Shinan Koho 1994-2017

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	JP 2013-124600 A (Mitsubishi Electric Corp.), 24 June 2013 (24.06.2013), paragraphs [0011] to [0025]; fig. 1 to 6 (Family: none)	3 4-5 1-2, 6-8
X Y A	JP 2014-206098 A (Mitsubishi Electric Corp.), 30 October 2014 (30.10.2014), paragraphs [0011] to [0083]; fig. 1 to 8 (Family: none)	6 7-8 1-5

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
19 July 2017 (19.07.17)Date of mailing of the international search report
01 August 2017 (01.08.17)Name and mailing address of the ISA/
Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2017/022698

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2011-111984 A (Sanden Corp.), 09 June 2011 (09.06.2011), paragraphs [0014] to [0021], [0025]; fig. 1 to 3 & US 2012/0237371 A1 paragraphs [0028] to [0045], [0059]; fig. 1 to 3 & WO 2011/064976 A1 & CN 102667153 A	4-5, 7-8

Form PCT/ISA/210 (continuation of second sheet) (January 2015)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 5881403 B [0005]