

(19)



(11)

EP 3 644 451 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.08.2020 Bulletin 2020/33

(51) Int Cl.:
H01R 13/627 ^(2006.01) **H01R 13/633** ^(2006.01)
H01R 9/24 ^(2006.01)

(21) Application number: **18202199.8**

(22) Date of filing: **24.10.2018**

(54) CONNECTOR MODULE WITH LATCH STRUCTURE

VERBINDERMODUL MIT VERRIEGELUNGSSTRUKTUR

MODULE CONNECTEUR AVEC STRUCTURE DE VERROU

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
29.04.2020 Bulletin 2020/18

(73) Proprietors:
• **Dinkle Enterprise Co., Ltd.**
New Taipei City 24890 (TW)
• **Dinkle Electric Machinery (China) Co., Ltd.**
Kunshan Jiangsu 215343 (CN)

(72) Inventor: **WU, Shang-Tsai**
24890 New Taipei City (TW)

(74) Representative: **2K Patentanwälte Blasberg
Kewitz & Reichel
Partnerschaft mbB
Schumannstrasse 27
60325 Frankfurt am Main (DE)**

(56) References cited:
WO-A1-2004/114466 DE-A1- 10 331 441
DE-A1-102013 111 577 US-A1- 2013 341 083

EP 3 644 451 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention is related to the technology of a connector module, in particular, to a connector module with a latch structure.

Description of Related Art

[0002] For a known traditional connector module, it mainly comprises a base and a plurality of terminal holes arranged inside the base. Each of the terminal holes is provided for each conductive terminal of another connector for insertion therein respectively in order to be used for signal or power transmission.

[0003] In case where there is an error in the signal or power transmission in the aforementioned connector, such as: an error occurs in one of the terminal hole such that there is a need for repair, typically, it is necessary to submit the entire connector module for inspection and repair. In addition, if any one of the conductive terminals in the aforementioned connector is damaged, then the entire connector needs to be discarded. This is not only a waste of material and may cause environmental pollution, which is also one of the main causes that the cost of such device remains high.

[0004] Furthermore, in another known connector module, the terminal holes are arranged on a terminal block, and the terminal block is fastened onto the base via the use of screws such that detachable mechanism can be achieved. However, despite that the terminal block can be removed from the base in order to perform repair or discard a portion of the parts thereof, during the removal of the terminal block, it is still necessary to use hand tool to unfasten the screws one by one such that the terminal block can be removed. This can be tedious and inconvenient to inspection and repair operation of the device.

[0005] DE 10331441 teaches a contact insert for connecting the conductor of a multi-core cable to an electronic appliance, has a contact carrier with several contact elements in which in the contact carrier are provided several borings for receiving the contact elements. The contact carrier has a recess, especially a slot, in to which a movably arranged latching element can lock, such that the contact insert can be fixed in the housing.

[0006] US 2013/0341083 teaches an electronic device housing having a plug contact unit with contacts for making electrical contact with a connector which can be plug-mounted onto an associated plug contact unit is described. The plug contact unit has an ejector unit mounted to pivot about an axis and which has at least one ejector arm positionable in an intermediate space, which is provided in the plugged state of a plug connector on a plug contact unit, between the connector and the plug contact unit. The ejector unit has a strip extending along the axis

and has a protruding cross section. The electronic device housing has a latching groove for pivotably mounting in each case one associated ejector unit, wherein the latching groove surrounds and pivotably mounts the associated strip over a circumference of more than 180°, the latching groove and the strip extending along the width of the ejector unit.

[0007] In view of above, the inventor seeks to overcome the aforementioned drawbacks associated with the currently existing technology after years of research and development along with the utilization of academic theories, which is also the objective of the development of the present invention.

15 SUMMARY OF THE INVENTION

[0008] An objective of the present invention is to provide a connector module with a latch structure, which requires no additional use of tools during the removal of the terminal block such that the convenience of use of the device is improved.

[0009] To achieve the aforementioned objective, the present invention provides a connector module with a latch structure, comprising a base, a terminal block and a pair of latch structures according to claim 1. The base comprises a housing. The housing includes an accommodating space arranged therein, and the accommodating space includes two sides arranged with a positioning member thereon respectively. The terminal block is inserted into the accommodating space correspondingly. The terminal block comprises an insertion main body and a plurality of conductive terminals arranged on the insertion main body. Each one of the latch structures is respectively arranged between the housing and the insertion main body, and each one of the latch structures comprises a latch portion formed on the insertion main body and a locking member rotatably connected to the housing and formed on one side of the positioning member. The locking member includes a locking portion configured to lock onto the latch portion correspondingly and at least one locking slot provided for the positioning member to be positioned thereon. An inner side of the positioning member of the housing includes a pivotal attachment axle extended therefrom, the locking member further comprises a circular ring. The locking member is rotatably attached onto the pivotal attachment axle via the circular ring. The locking portion is configured to extend from a perimeter of the circular ring along a tangent line thereof and toward an upward direction. The locking member further comprises a circular ring. The locking slot further comprises a first locking slot and a second locking slot formed at the circular ring. The positioning member includes an insertion shaft formed thereon. The insertion shaft is configured to be operably inserted into one of the first locking slot and the second locking slot correspondingly for positioning thereon.

[0010] The present invention further achieves the following the technical effects. It allows the terminal block

to be removed from the base via the pull handles directly such that the repair or electrical connection operation is facilitated. After the terminal block is removed from the base, the insertion shaft is secured inside the first locking slot for positioning; therefore, each locking member is under an inverted opening state, facilitating the terminal block to be inserted therein successfully during the next time of assembly.

BRIEF DESCRIPTION OF DRAWING

[0011]

FIG. 1 is a perspective exploded view of the connector module of the present invention;
 FIG. 2 is a perspective exploded view of the housing and the locking member of the present invention;
 FIG. 3 is a perspective exploded view of the insertion main body and the pull handle of the present invention;
 FIG. 4 is an assembly cross sectional view of the connector module of the present invention;
 FIG. 5 is a partially enlarged view of FIG. 4;
 FIG. 6 is a cross sectional view (1) showing a state of use of the connector module of the present invention;
 FIG. 7 is a cross sectional view (2) showing another state of use of the connector module of the present invention; and
 FIG. 8 is a cross sectional view (3) showing still another state of use of the connector module of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0012] The following provides a detailed technical content of the present invention along with the accompanied drawings. However, the accompanied drawings are provided for reference and illustrative purpose only such that they shall not be used to limit the scope of the present invention.

[0013] As shown in FIG. 1 to FIG. 5, the present invention provides a connector module with a latch structure, which mainly comprises a base 10, a terminal block 20 and a pair of latch structures 30.

[0014] The base 10 comprises a housing 11 and other electronic parts (not shown in the drawings) arranged inside the housing 11. In an exemplary embodiment, the housing 11 can be made of an insulative material, and it is generally of a rectangular shape; however, the present invention is not limited to such shape only. The housing 11 mainly comprises a lower housing plate 111 and an upper housing plate 112 assembled with the lower housing plate 111 correspondingly. In addition, an accommodating space A is formed between the upper housing plate 112 and the lower housing plate 111.

[0015] The two sides of the accommodating space A of the lower housing plate 111 include a positioning mem-

ber 113 formed thereon respectively. In an exemplary embodiment, the positioning member 113 is a shaft member. The positioning member 113 includes an insertion shaft 114 formed on one side toward the accommodating space A. In an exemplary embodiment, the insertion shaft 114 has a cross sectional profile of a generally triangular shape. In addition, the inner side of the positioning member 113 at the lower housing plate 111 includes a pivotal attachment axle 115 extended therefrom. Furthermore, the surrounding of the lower housing plate 111 includes a hollow column 116 formed thereon respectively. The surrounding of the upper housing plate 112 includes a protruding column 117 formed thereon and configured to be inserted into each one of the hollow columns 116 correspondingly.

[0016] The terminal block 20 is inserted into the aforementioned accommodating space A correspondingly, and it mainly comprises an insertion main body 21 and a plurality of conductive terminals 22 arranged on top of the insertion main body 21.

[0017] Furthermore, the terminal block 20 further comprises a pair of pull handle 23. Each pull handle 23 can be moveably attached onto the two corresponding sides of the insertion main body 21. Each side of the insertion main body 21 includes a sliding slot 211 formed thereon respectively. The top end location of the sliding slot 211 includes a retaining plate 212 formed thereon in order to limit the range of movement of the pull handle 23.

[0018] Each pull handle 23 mainly comprises a grip 231, two linear rods 232 and two sliding shafts 233. Each linear rod 232 extends downward from the grip 231, and each sliding shaft 233 is respectively formed at an outer side of each linear rod 232. Furthermore, a bottom portion area of each linear rod 232 includes a lifting section 234 formed thereon. The lifting section 234 includes a first slanted surface 234 formed at an area connecting to the linear rod 232. The sliding shaft 233 is slidably attached to the aforementioned sliding slot 211, and the top end of the sliding shaft 233 includes a stopping surface 236 for abutting against the aforementioned retaining plate 212 correspondingly.

[0019] Each latch structure 30 is arranged between the housing 11 and the insertion main body 21. Each latch structure 30 mainly comprises a latch portion 31 and a locking member 32. The latch portion 31 is formed at one side of the insertion main body 21 and is formed between the linear rods 232. In an exemplary embodiment, the latch portion 31 is a buckle; however, the present invention is not limited to such configuration only. The locking member 32 is rotatably attached onto the pivotal attachment axle 115 of the housing 11 and is formed at one side of the positioning member 113.

[0020] Furthermore, the locking member 32 is generally of an L shape, and it mainly comprises a circular ring 321, a locking portion 322 extended from a perimeter of the circular ring 321 along a tangent line thereof and toward an upward direction as well as an L-shape arm 323 extended from the central axis of the circular ring 321

and toward a downward direction. In an exemplary embodiment, the locking portion 322 is a locking hook; however, the present invention is not limited to such configuration only. The locking portion 322 is locked onto the aforementioned latch portion 31 correspondingly.

[0021] Moreover, a perimeter of the circular ring 321 includes a first locking slot 324 and a second locking slot 325 formed thereon and configured to allow the aforementioned positioning member 113 to be positioned selectively. In addition, a second slanted surface 326 is formed between the locking portion 322 and the circular ring 321. The second slanted surface 326 is configured to move operably corresponding to the first slanted surface 235 of the aforementioned lifting section 234.

[0022] As shown in FIG. 6 to FIG. 8, during the detachment, the pull handles 23 are lifted upward, and at this time, the sliding shafts 233 move along the sliding slots 211. When the first slanted surface 235 is lifted upward to the position in contact with the second slanted surface 326, the insertion shaft 114 is still inserted inside the second locking slot 325 for positioning (as shown in FIG. 6). Next, when the pull handle 23 is lifted upward, as the first slanted surface 235 pushes the second slanted surface 326, the locking member 32 at the right side is able to rotate in a clockwise direction with the pivotal attachment axle 115 as a rotating center, and the locking member 32 on the left side is able to rotate in a counterclockwise direction with the pivotal attachment axle 115 as a rotating center. At this time, each locking portion 322 is disengaged from each latch portion 31 respectively without locking, and the rotation of the locking member 32 is able to allow the insertion shaft 114 to change to being inserted into the first locking slot 324 for positioning thereon (as shown in FIG. 7). Finally, when the pull handles 23 are lifted upward continuously, the stopping surface 236 of each sliding shaft 233 is able to abut against the retaining plate 212 (as shown in FIG. 8); consequently, the insertion main body 21 can be removed along with the pull handles 23. As a result, under the condition where no additional hand tool is used, the terminal block 20 can be removed from the base 10 easily, and the convenience and practicality of the use of the present invention are improved.

[0023] Moreover, after the terminal block 20 is removed from the base 10, the insertion shaft 114 is inserted into the first locking slot 324 for positioning; consequently, it is able to allow the locking members 32 to be under an inverted opening state such that it is able to facilitate the successful insertion of the terminal block 20 onto the base 10 during the next time of assembly thereof.

Claims

1. A connector module with a latch structure, comprising:

a base (10) comprising a housing (11); the hous-

ing (11) having an accommodating space (A) arranged therein, and the accommodating space (A) having two sides arranged with a positioning member (113) thereon respectively; a terminal block (20) inserted into the accommodating space (A) correspondingly; the terminal block (20) comprising an insertion main body (21) and a plurality of conductive terminals (22) arranged on the insertion main body (21); and a pair of latch structures (30) respectively arranged between the housing (11) and the insertion main body (21); each one of the latch structures (30) comprising a latch portion (31) formed on the insertion main body (21) and a locking member (32) rotatably connected to the housing (11) and formed on one side of the positioning member (113); the locking member (32) having a locking portion (322) configured to lock onto the latch portion (31) correspondingly and at least one locking slot (324) provided for the positioning member (113) to be positioned thereon;

characterised in that an inner side of the positioning member (113) of the housing (11) includes a pivotal attachment axle (115) extended therefrom, the locking member (32) further comprises a circular ring (321), the locking member (32) is rotatably attached onto the pivotal attachment axle (115) via the circular ring (321), the locking portion (322) is configured to extend from a perimeter of the circular ring (321) along a tangent line thereof and toward an upward direction, the locking slot further comprises a first locking slot (324) and a second locking slot (325) formed at the circular ring (321), the positioning member (113) includes an insertion shaft (114) formed thereon, and the insertion shaft (114) is configured to be operably inserted into one of the first locking slot (324) and the second locking slot (325) correspondingly for positioning thereon, wherein the terminal block (20) further comprises a pair of pull handles (23), and the pull handles (23) are configured to moveably attach onto two corresponding sides of the insertion main body (21) respectively.

2. The connector module with a latch structure according to Claim 1, wherein the insertion shaft (114) has a cross sectional profile of a triangular shape.
3. The connector module with a latch structure according to Claim 1, wherein the locking member (32) further comprises an L-shape arm (323) extended from a central axis of the circular ring (321) and toward a downward direction.
4. The connector module with a latch structure according to Claim 1, wherein the insertion main body (21)

includes a sliding slot (211) formed on one side thereof; the pull handle (23) comprises a pair of sliding shafts (233), and each one of the sliding shafts (233) is slidably connected to the sliding slot (211) correspondingly.

5. The connector module with a latch structure according to Claim 4, wherein the insertion main body (21) at a top end of the sliding slot (211) includes a retaining plate (212), and a top end of each one of the sliding shafts (233) include a stopping surface (236) for abutting against the retaining plate (212) correspondingly.

6. The connector module with a latch structure according to Claim 4, wherein the pull handle (23) further comprises a grip (231) and two linear rods (232); each one of the linear rods (232) extends downward from the grip (231), and each one of the sliding shafts (233) is formed at an outer side of the each one of the linear rods (232).

7. The connector module with a latch structure according to Claim 6, wherein a bottom portion of each one of the linear rods (232) includes a lifting section (234) formed thereon respectively; the lifting section (234) includes a first slanted surface (235) formed at an area connecting to the linear rod (232); the locking member (32) further comprises a circular ring (321); a second slanted surface (326) is formed between the locking portion (322) and the circular ring (321); the second slanted surface (326) is configured to move operably corresponding to the first slanted surface (235).

Patentansprüche

1. Ein Verbindungsmodul mit einer Verriegelungsstruktur, bestehend aus einer Basis (10), umfassend ein Gehäuse (11); wobei das Gehäuse (11) einen darin angeordneten Aufnahmeraum (A) aufweist und der Aufnahmeraum (A) zwei Seiten aufweist, die jeweils mit einem Positionierungselement (113) darauf angeordnet sind; einen Anschlussblock (20), der entsprechend in den Aufnahmeraum (A) eingeführt wird; wobei der Anschlussblock (20) einen Einführungshauptkörper (21) und eine Vielzahl von leitenden Anschlüssen (22) aufweist, die auf dem Einführungshauptkörper (21) angeordnet sind; und ein Paar Verriegelungsstrukturen (30), die jeweils zwischen dem Gehäuse (11) und dem Einführungshauptkörper (21) angeordnet sind; wobei jede der Verriegelungsstrukturen (30) einen Verriegelungsabschnitt (31), der an dem Einführungshauptkörper (21) ausgebildet ist, und ein Verriegelungselement (32) aufweist, das drehbar mit dem Gehäuse (11)

verbunden und auf einer Seite des Positionierungselements (113) ausgebildet ist; wobei das Verriegelungselement (32) einen Verriegelungsabschnitt (322) aufweist, der so konfiguriert ist, dass er entsprechend auf dem Verriegelungsabschnitt (31) verriegelt wird, und mindestens einen Verriegelungsschlitz (324), der für das Positionierungselement (113) vorgesehen ist, um darauf positioniert zu werden; **dadurch gekennzeichnet, dass** eine Innenseite des Positionierungselements (113) des Gehäuses (11) eine sich davon erstreckende schwenkbare Befestigungsachse (115) umfasst, das Verriegelungselement (32) ferner einen kreisförmigen Ring (321) umfasst, das Verriegelungselement (32) über den kreisförmigen Ring (321) drehbar an der schwenkbaren Befestigungsachse (115) befestigt ist, der Verriegelungsabschnitt (322) so konfiguriert ist, dass er sich von einem Umfang des kreisförmigen Rings (321) entlang einer Tangente davon und in Richtung einer Aufwärtsrichtung erstreckt, der Verriegelungsschlitz ferner einen ersten Verriegelungsschlitz (324) und einen zweiten Verriegelungsschlitz (325) umfasst, die an dem kreisförmigen Ring (321) ausgebildet sind, das Positionierungselement (113) einen daran ausgebildeten Einführungsschacht (114) umfasst und der Einführungsschacht (114) so konfiguriert ist, dass er betriebsfähig in einen von dem ersten Verriegelungsschlitz (324) und dem zweiten Verriegelungsschlitz (325) entsprechend zur Positionierung daran eingeführt werden kann, wobei der Anschlussblock (20) ferner ein Paar Zuggriffe (23) umfasst und die Zuggriffe (23) so konfiguriert sind, dass sie jeweils beweglich an zwei entsprechenden Seiten des Einführungshauptkörpers (21) angebracht werden können.

2. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 1, wobei der Einführungsschacht (114) ein dreieckförmiges Querschnittsprofil aufweist.
3. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 1, wobei das Verriegelungselement (32) ferner einen L-förmigen Arm (323) aufweist, der sich von einer Mittelachse des kreisförmigen Rings (321) und in Richtung nach unten erstreckt.
4. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 1, wobei der Einführungshauptkörper (21) einen auf einer Seite desselben ausgebildeten Gleitschlitz (211) aufweist; der Zuggriff (23) ein Paar Gleitschäfte (233) aufweist und jeder der Gleitschäfte (233) entsprechend verschiebbar mit dem Gleitschlitz (211) verbunden ist.
5. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 4, wobei der Einführungshauptkörper (21) an einem oberen Ende des Gleitschlitzes

(211) une Halteplatte (212) aufweist und ein oberes Ende jedes der Gleitschäfte (233) eine Anschlagfläche (236) zur entsprechenden Anlage an der Halteplatte (212) aufweist.

6. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 4, wobei der Zuggriff (23) ferner einen Griff (231) und zwei lineare Stangen (232) umfasst; jede der linearen Stangen (232) erstreckt sich von dem Griff (231) nach unten, und jeder der Gleitschäfte (233) ist an einer Außenseite jeder der linearen Stangen (232) ausgebildet.
7. Verbindermodule mit einer Verriegelungsstruktur nach Anspruch 6, wobei ein unterer Abschnitt jeder der linearen Stangen (232) jeweils einen daran ausgebildeten Hebeabschnitt (234) aufweist; der Hebeabschnitt (234) eine erste schräge Fläche (235) aufweist, die in einem Bereich ausgebildet ist, der mit der linearen Stange (232) verbunden ist; das Verriegelungselement (32) ferner einen kreisförmigen Ring (321) umfasst; eine zweite schräge Fläche (326) zwischen dem Verriegelungsabschnitt (322) und dem kreisförmigen Ring (321) ausgebildet ist; die zweite schräge Fläche (326) so konfiguriert ist, dass sie sich betriebsmäßig entsprechend der ersten schrägen Fläche (235) bewegt.

Revendications

1. Un module de connecteur avec une structure de verrouillage, comprenant:


une base (10) comprenant un boîtier (11); le boîtier (11) ayant un espace de logement (A) disposé en son sein, et l'espace de logement (A) ayant deux côtés disposés respectivement avec un élément de positionnement (113); un bornier (20) inséré dans l'espace de logement (A) de manière correspondante; le bornier (20) comprenant un corps principal d'insertion (21) et une pluralité de bornes conductrices (22) disposées sur le corps principal d'insertion (21); et une paire de structures de verrouillage (30) respectivement disposées entre le boîtier (11) et le corps principal d'insertion (21); chacune des structures de verrouillage (30) comprenant une partie de verrouillage (31) formée sur le corps principal d'insertion (21) et un élément de verrouillage (32) relié de manière rotative au boîtier (11) et formé sur un côté de l'élément de positionnement (113); l'élément de verrouillage (32) ayant une partie de verrouillage (322) configurée pour se verrouiller sur la partie de verrouillage (31) en conséquence et au moins une fente de verrouillage (324) prévue pour l'élément de

positionnement (113) devant s'y positionner ; **caractérisé en ce que** un côté intérieur de l'élément de positionnement (113) du boîtier (11) comporte un axe de fixation pivotant (115) s'étendant depuis celui-ci; l'élément de verrouillage (32) comprenant en outre une bague circulaire (321), l'élément de verrouillage (32) étant fixé en rotation sur l'axe de fixation pivotant (115) via la bague circulaire (321), la partie de verrouillage (322) étant configurée pour s'étendre depuis un périmètre de la bague circulaire (321) le long d'une ligne tangente de celle-ci et vers une direction ascendante, la fente de verrouillage comprenant en outre une première fente de verrouillage (324) et une seconde fente de verrouillage (325) formées au niveau de la bague circulaire (321), l'élément de positionnement (113) comprenant un arbre d'insertion (114) formé sur celui-ci, et l'arbre d'insertion (114) est configuré pour être inséré de manière fonctionnelle à l'intérieur d'une fente parmi la première fente de verrouillage (324) et la seconde fente de verrouillage (325) en correspondance pour un positionnement, dans lequel le bornier (20) comprend en outre une paire de poignées de traction (23), et les poignées de traction (23) sont configurées pour fixer de manière mobile sur deux côtés correspondants le corps principal d'insertion (21) respectivement.

2. Le module de connecteur avec une structure de verrouillage selon la revendication 1, dans lequel l'arbre d'insertion (114) a un profil de section transversal d'une forme triangulaire.
3. Le module de connecteur avec une structure de verrouillage selon la revendication 1, dans lequel l'élément de verrouillage (32) comprend en outre un bras en forme de L (323) s'étendant depuis un axe central de la bague circulaire (321) et vers une direction descendante.
4. Le module de connecteur avec une structure de verrouillage selon la revendication 1, dans lequel le corps principal d'insertion (21) comprend une fente coulissante (211) formée sur un de ses côtés; la poignée de traction (23) comprend une paire d'arbres coulissants (233), et chacun des arbres coulissants (233) est relié de manière coulissante à la fente coulissante (211) de manière correspondante.
5. Le module de connecteur avec une structure de verrouillage selon la revendication 4, dans lequel le corps principal d'insertion (21) à une extrémité supérieure de la fente coulissante (211) comprend une plaque de retenue (212) et une extrémité supérieure de chacun des arbres coulissants (233) comprennent une surface d'arrêt (236) pour buter contre la

plaque de retenue (212) en conséquence.

6. Le module de connecteur avec une structure de verrouillage selon la revendication 4, dans lequel la poignée de traction (23) comprend en outre une poignée (231) et deux tiges linéaires (232); chacune des tiges linéaires (232) s'étend vers le bas depuis la poignée (231), et chacun des arbres coulissants (233) est formé sur un côté extérieur de chacune des tiges linéaires (232). 5 10
7. Le module de connecteur avec une structure de verrouillage selon la revendication 6, dans lequel une partie inférieure de chacune des tiges linéaires (232) comprend une section de levage (234) formée sur celle-ci respectivement; la section de levage (234) comprend une première surface inclinée (235) formée dans une zone reliée à la tige linéaire (232); l'élément de verrouillage (32) comprend en outre une bague circulaire (321); une seconde surface inclinée (326) étant formée entre la partie de verrouillage (322) et la bague circulaire (321); la seconde surface inclinée (326) étant configurée pour se déplacer fonctionnellement en correspondance avec la première surface inclinée (235). 15 20 25
- 30
- 35
- 40
- 45
- 50
- 55

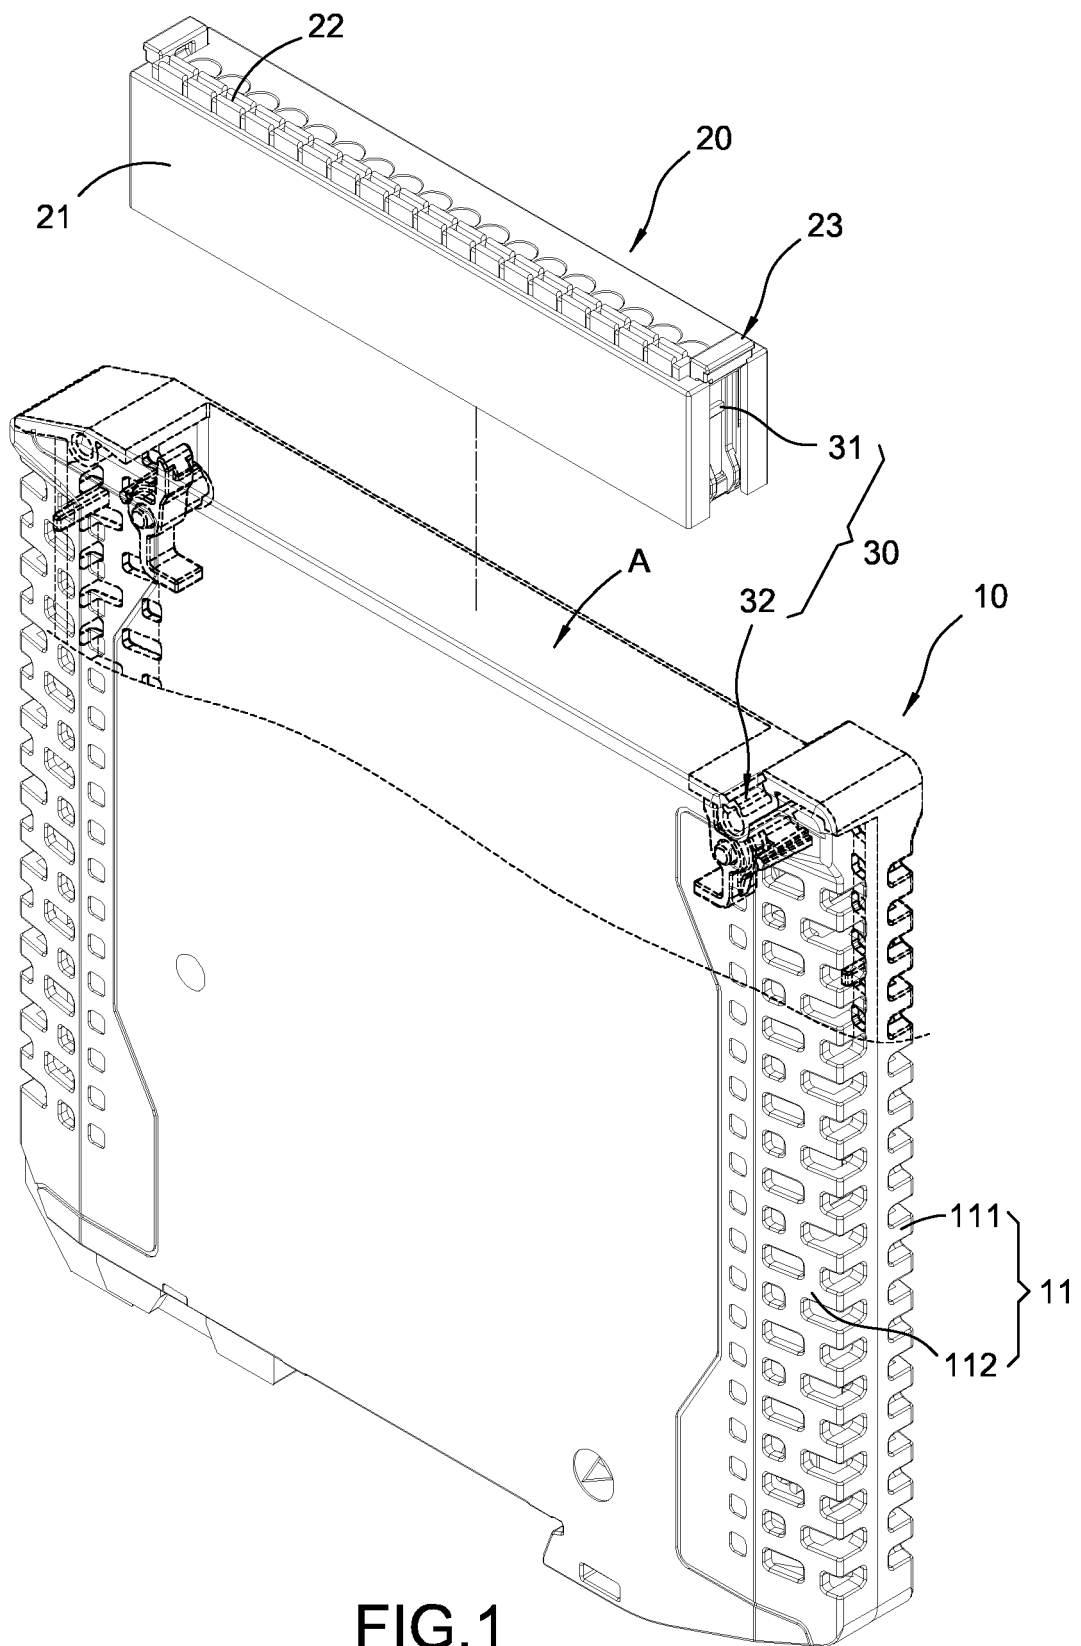

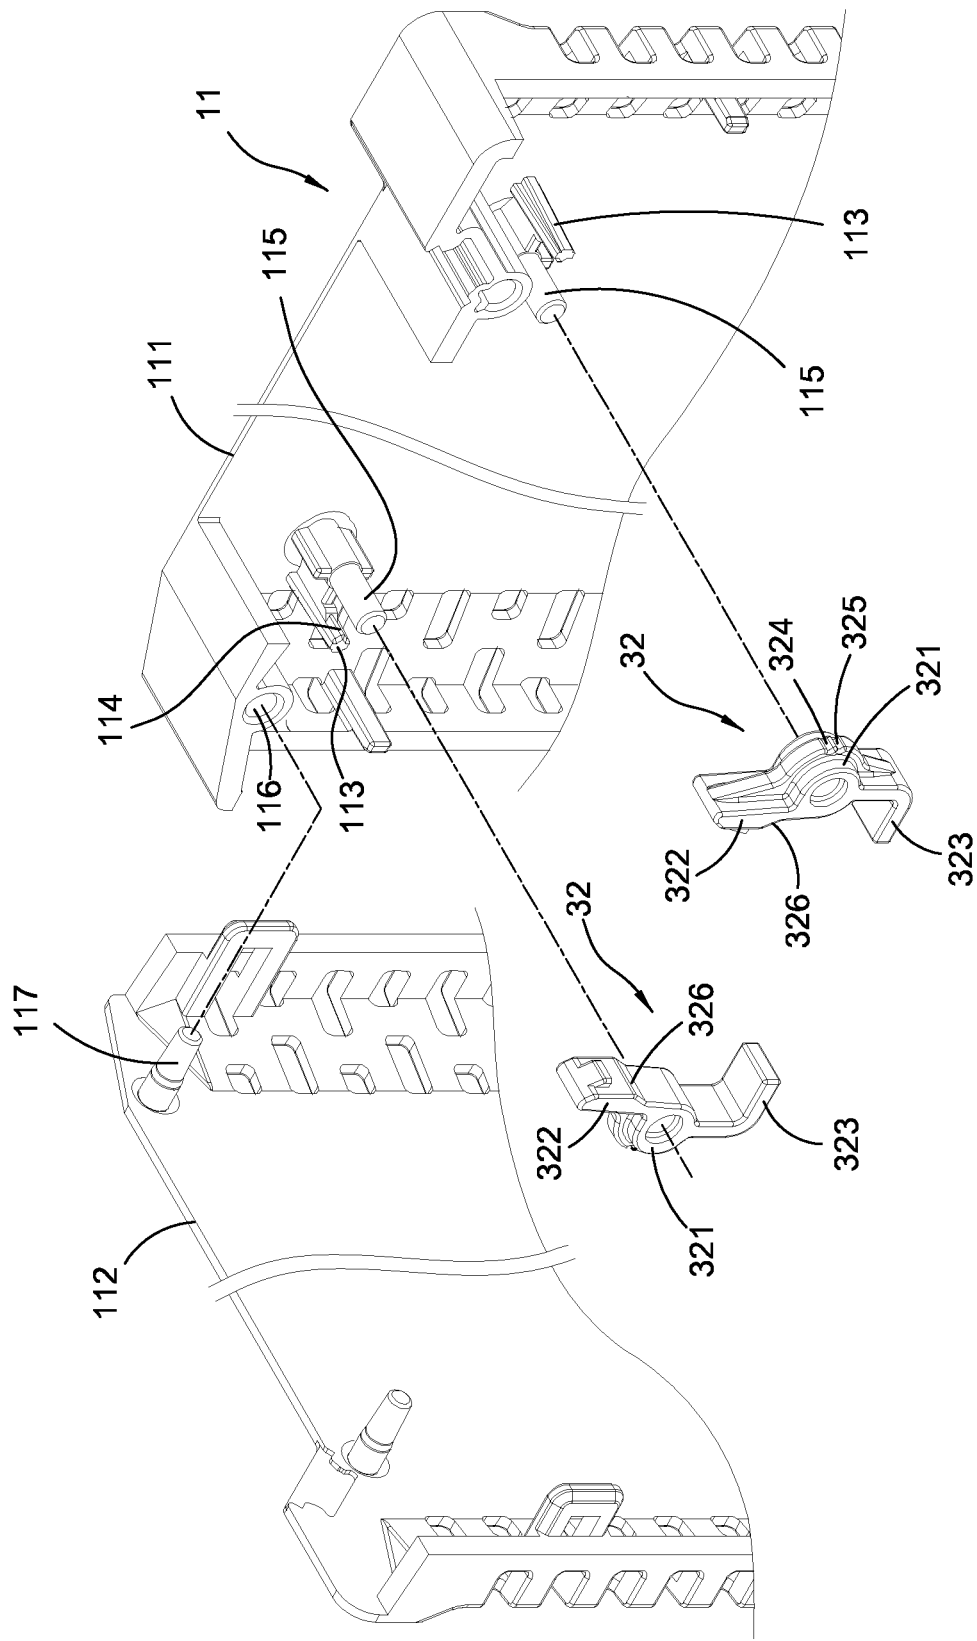


FIG.2

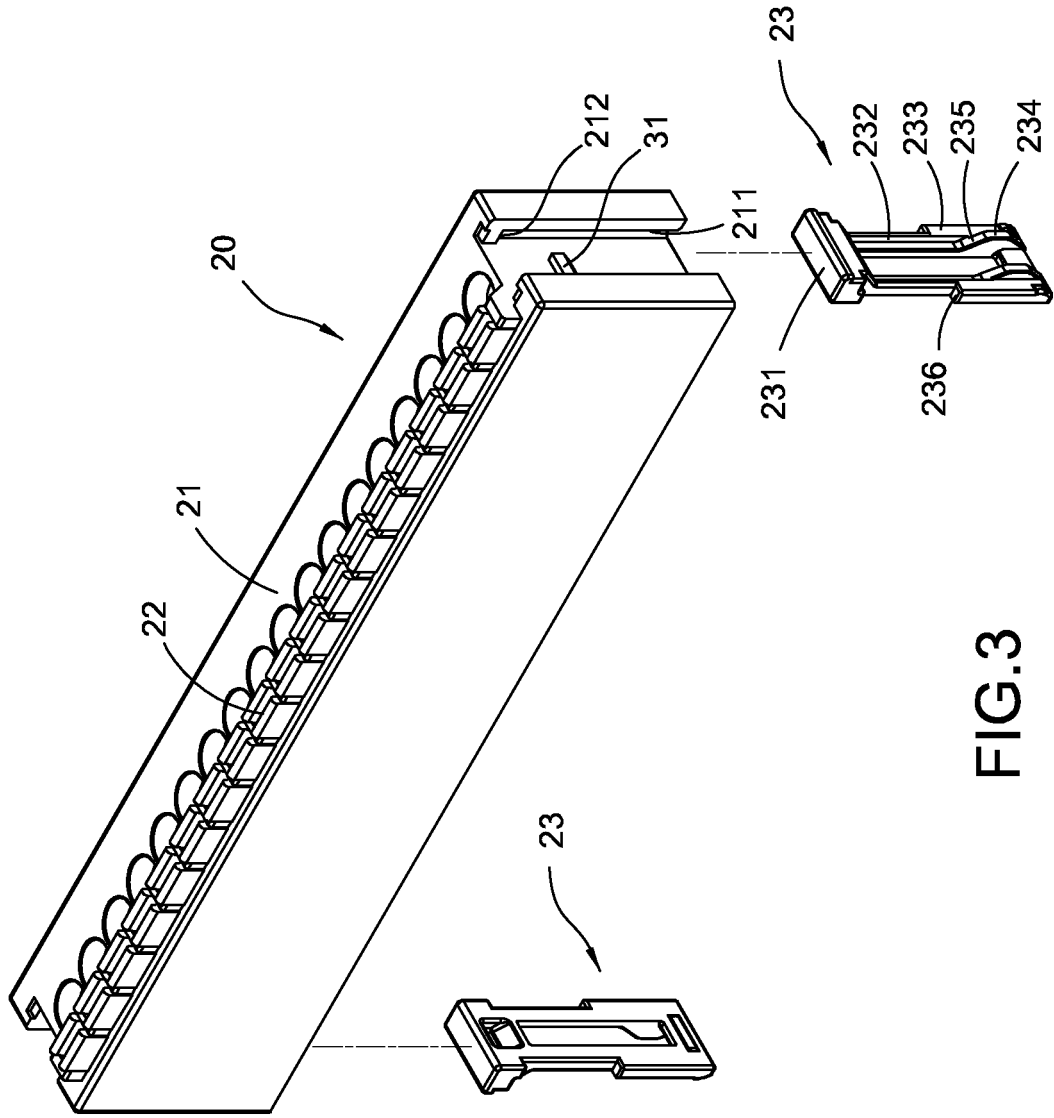


FIG.3

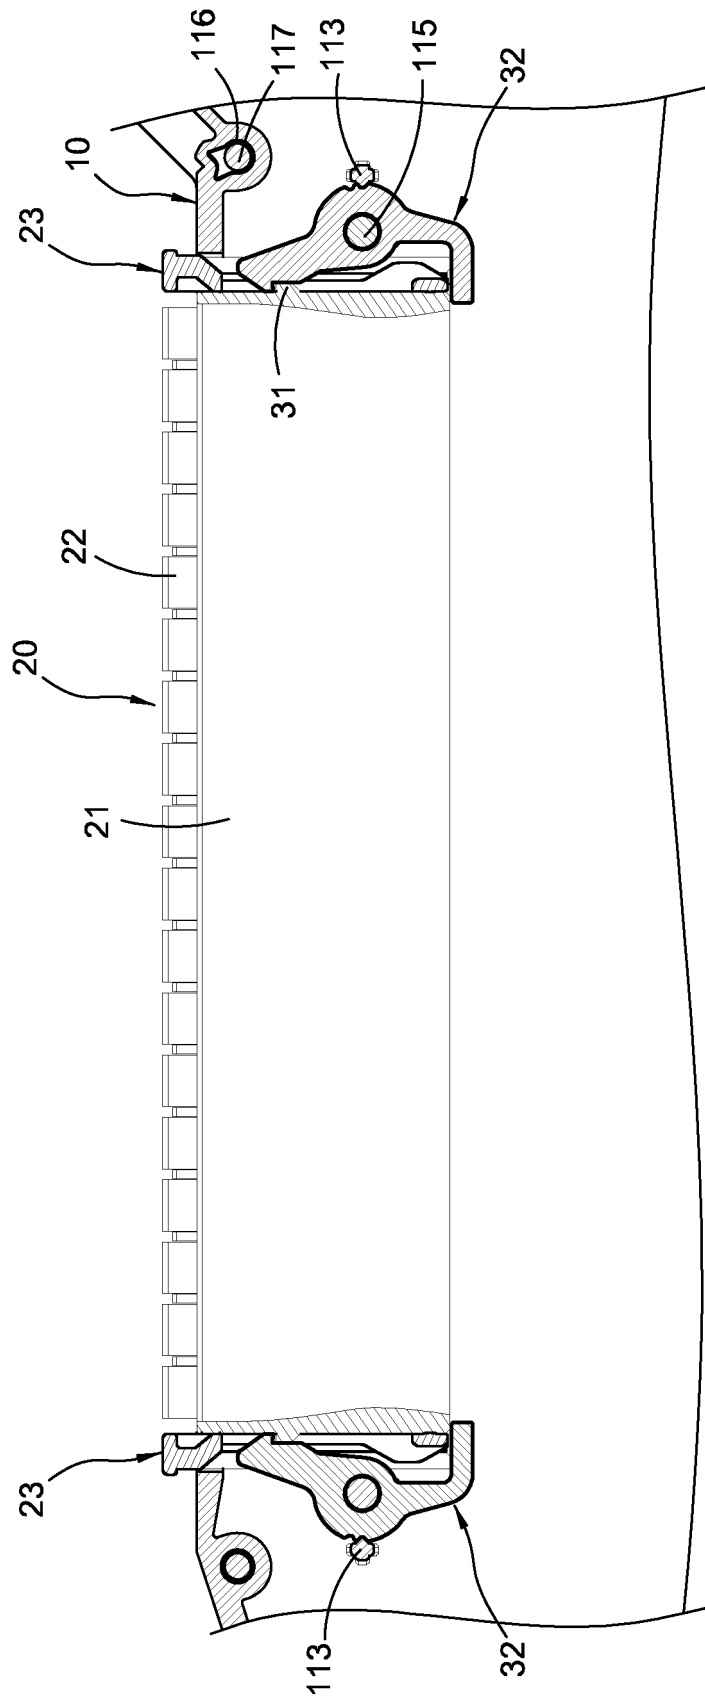


FIG.4

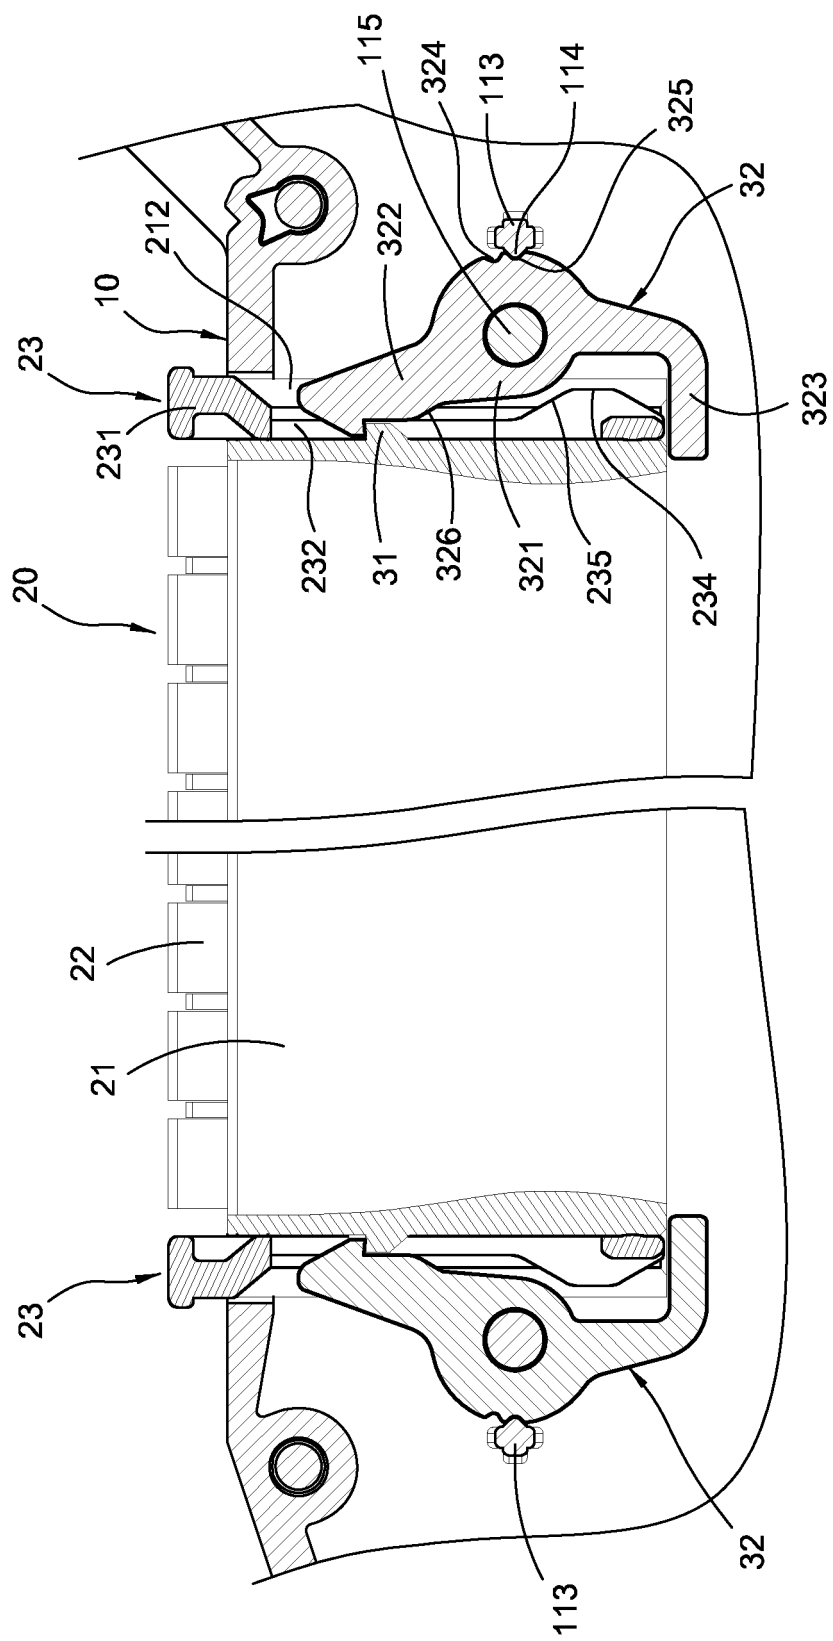
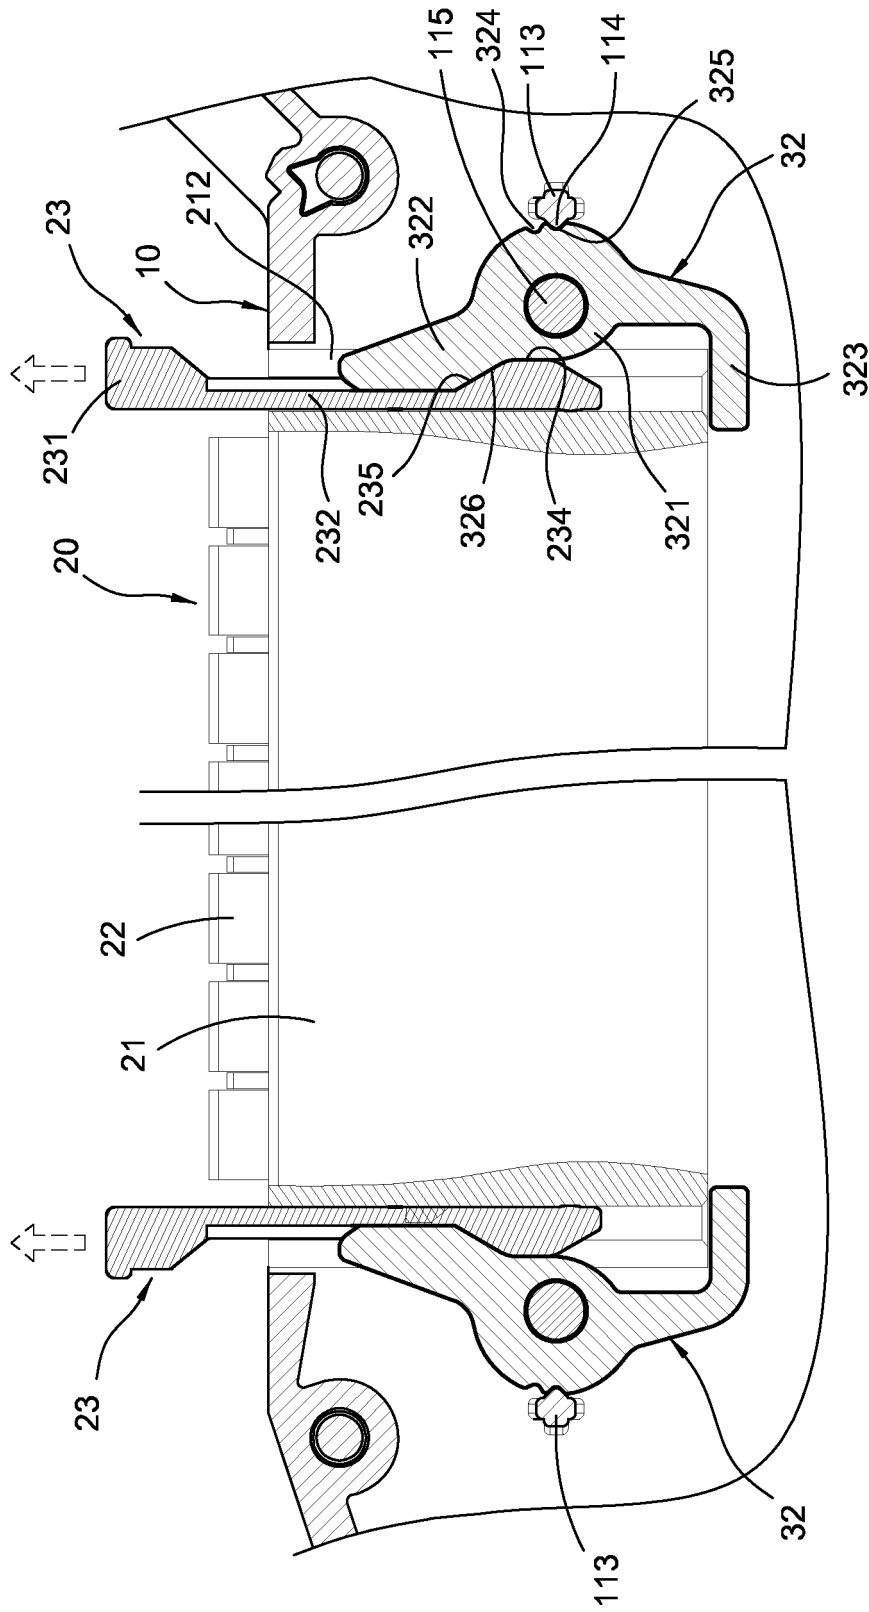


FIG.5



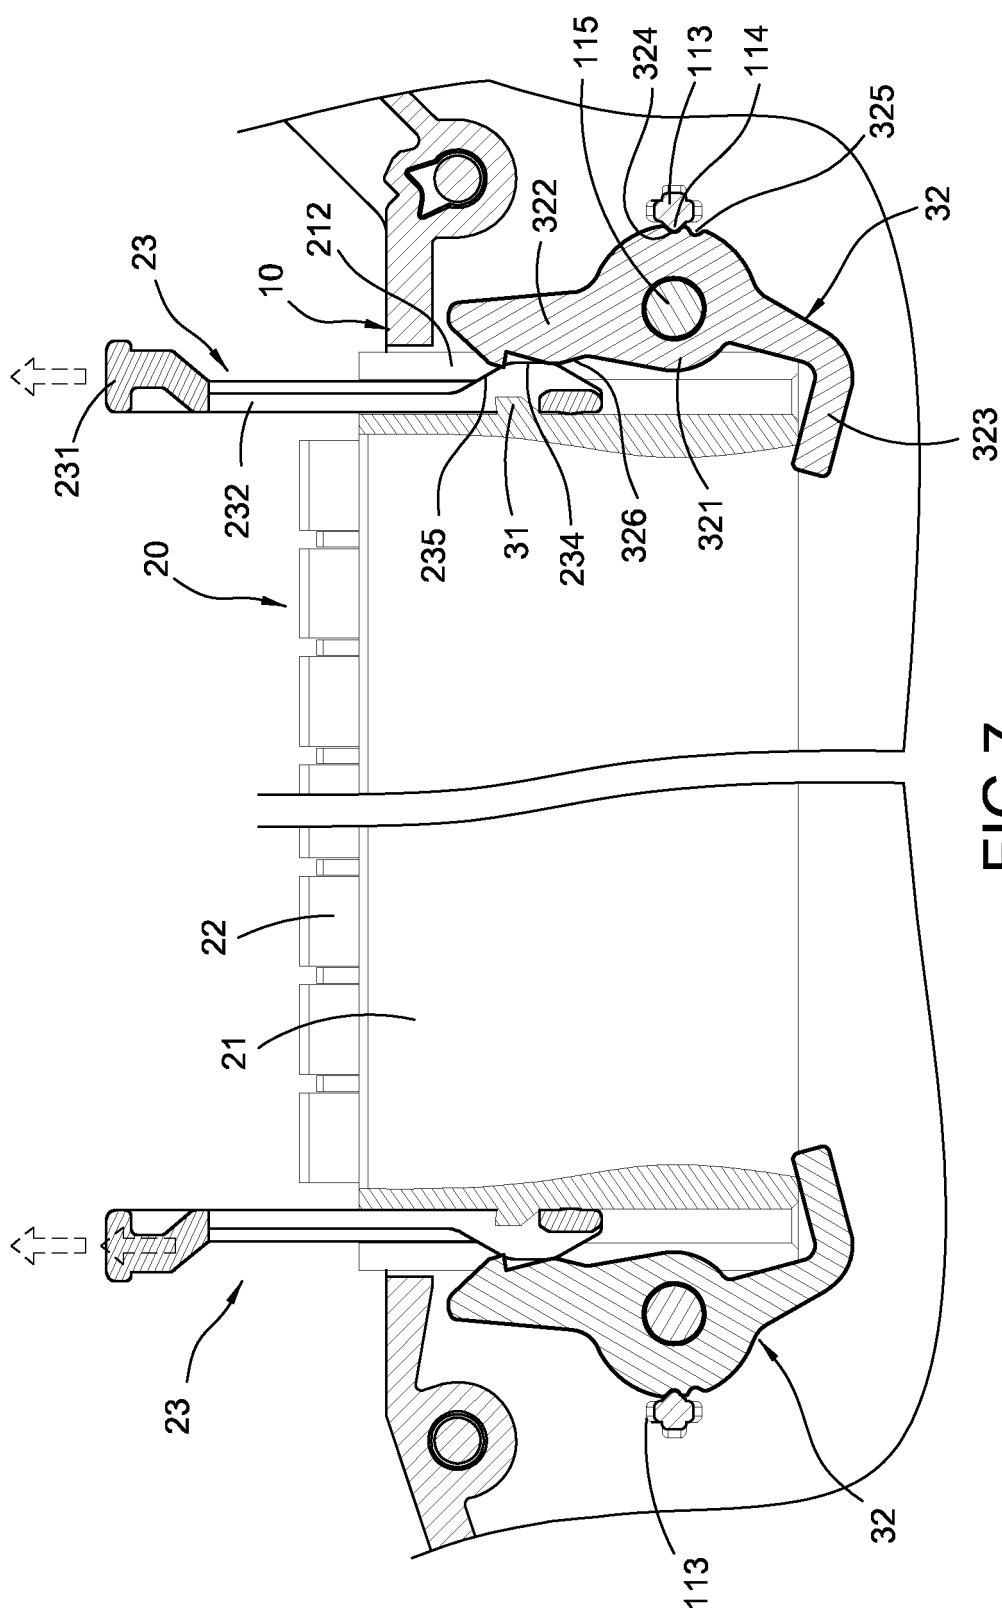


FIG. 7

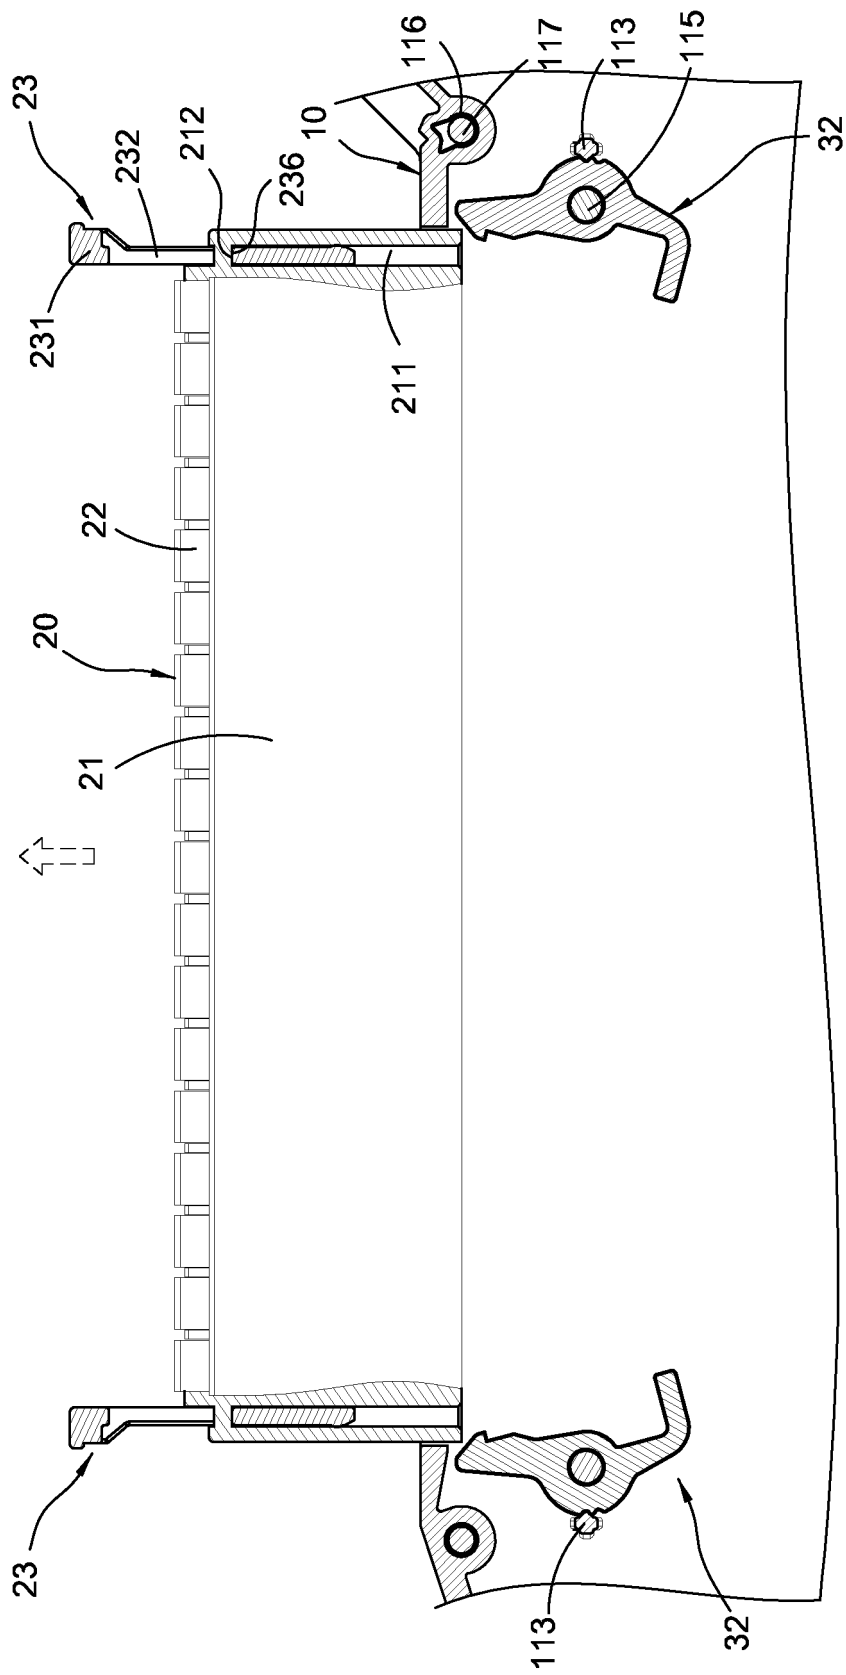


FIG. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 10331441 [0005]
- US 20130341083 A [0006]