

(19)



(11)

EP 3 653 981 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
28.09.2022 Bulletin 2022/39

(51) International Patent Classification (IPC):
F28D 7/16 ^(2006.01) **F28F 1/02** ^(2006.01)
F28F 1/42 ^(2006.01)

(21) Application number: **19207747.7**

(52) Cooperative Patent Classification (CPC):
F28D 7/1684; F28F 1/025; F28F 1/426;
F28F 2001/027; F28F 2255/08

(22) Date of filing: **07.11.2019**

(54) **C-SHAPED HEAT EXCHANGER TUBE AND NESTED BUNDLE OF C-SHAPED HEAT EXCHANGER TUBES**

C-FÖRMIGES WÄRMETAUSCHERROHR UND VERSCHACHTELTES BÜNDEL VON C-FÖRMIGEN WÄRMETAUSCHERROHREN

TUBE D'ÉCHANGEUR THERMIQUE EN FORME DE C ET FAISCEAU IMBRIQUÉ DE TUBES D'ÉCHANGEUR THERMIQUE EN FORME DE C

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **FERGUSON, Mark**
Keller, TX 76248 (US)

(30) Priority: **16.11.2018 US 201816193191**

(74) Representative: **Mewburn Ellis LLP**
Aurora Building
Counterslip
Bristol BS1 6BX (GB)

(43) Date of publication of application:
20.05.2020 Bulletin 2020/21

(56) References cited:
EP-A1- 2 226 602 **WO-A1-2007/122685**
WO-A1-2014/099250 **DE-U1-212016 000 184**

(73) Proprietor: **PVI Industries, LLC**
Fort Worth TX 76111 (US)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 653 981 B1

Description

FIELD OF THE APPLICATION

[0001] The application relates to heat exchanger tubes, particularly to heat exchanger tubes for hot water heaters.

BACKGROUND

[0002] Heat exchanger tubes are used for heat transfer from a first fluid or gas to a second fluid or gas. Use of heat exchanger tubes allows the first gas or fluid to be isolated from the second gas or fluid. For example, a gas fired hot water heater typically passes heated gas from a gas fired burner through heat exchanger tubes to heat water passed over the outside of the tubes. The heat exchanger tubes are typically fixed in a pattern by a tube sheet with a pattern of holes, each of the holes accepting one end of each of the heat exchanger tubes. Document WO 2014/099250 A1 discloses a heat exchanger tube of the state of the art according to the preamble of claim 1.

[0003] Document EP 2 226 602 A1 discloses a heat exchanger tube of the state of the art comprising bosses.

SUMMARY

[0004] The present invention relates to a heat exchanger tube according to claim 1.

[0005] In one embodiment, the different cross-section includes a circular cross-section.

[0006] In another embodiment, the heat exchanger tube further includes a transition portion between the C-shape cross-section of the central tube portion and the circular cross-section.

[0007] In yet another embodiment, the series of periodic boss patterns create a plurality of microchannels which cause a laminar flow.

[0008] In yet another embodiment, the heat exchanger tube is a hot water heater heat exchanger tube.

[0009] According to another aspect, a heat exchanger tube assembly includes a pair of tube sheets. A plurality of C-shaped heat exchanger tubes is disposed between the pair of tube sheets. Each C-shaped heat exchanger tube includes a central tube portion having a C-shape cross-section, and a pair of tube ends including the C-shape cross-section or a different cross-section. Each tube end of each tube is mechanically coupled to a tube sheet.

[0010] In one embodiment, the pair of tube sheets include a plurality of circular holes to accept and mechanically couple to a round tube end cross section.

[0011] In another embodiment, the pair of tube sheets include a plurality of C-shaped openings to accept and mechanically couple to a C-shaped tube end cross section.

[0012] In yet another embodiment, the pair of tube sheets include a plurality of openings to accept and me-

chanically couple to a tube end cross section in a tube end pass-through configuration.

[0013] In yet another embodiment, the pair of tube sheets include a C-shaped opening nested pattern wherein at least one end of the C-shaped openings is nested into a concave part of another C-shaped opening.

[0014] In yet another embodiment, the heat exchanger tube assembly is a hot water heater heat exchanger tube assembly.

[0015] The present invention also relates to a method for manufacturing a C-shape heat exchanger tube according to claim 9.

[0016] In one embodiment, the step of striking includes striking the cylindrical shaped tube on one side to produce the C-shaped heat exchanger tube for a heat hot water heater.

[0017] In another embodiment, the step of striking includes striking the cylindrical shaped tube on one side to produce the C-shaped heat exchanger tube with a periodic boss pattern.

[0018] In yet another embodiment, the step of striking includes striking the cylindrical shaped tube on one side to produce the C-shaped heat exchanger tube with a periodic boss pattern of alternating side pinches and middle pinches.

[0019] The foregoing and other aspects, features, and advantages of the application will become more apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The features of the application can be better understood with reference to the drawings described below, and the claims. The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles described herein. In the drawings, like numerals are used to indicate like parts throughout the various views.

FIG. 1 shows a drawing of a plurality of C-shaped heat exchanger tubes according to the Application; FIG. 2 shows a closeup view of the heat exchanger assembly of FIG. 1;

FIG. 3A is a drawing showing an exemplary periodic section of a C-shaped heat exchanger tube with cross-sections D-D to F-F;

FIG. 3B is a drawing showing a F-F cross-section of the left side of the periodic section of FIG. 3A;

FIG. 3C is a drawing showing a D-D cross-section of the left side of the periodic section of FIG. 3A;

FIG. 3D is a drawing which shows another C-shaped cross-section F-F;

FIG. 4 is a drawing which shows a perspective lengthwise view of a portion of an exemplary C-shaped heat exchanger tube with a periodic boss pattern;

FIG. 5 is a display from a computer simulation showing a gas flow through the boss patterns of a C-

shaped heat exchanger tube;

FIG. 6 is a drawing showing detail of an exemplary transition section from a circular cross-section at a C-shaped heat exchanger tube end to the periodic sections of FIG. 3A and FIG. 4;

FIG. 7A shows a drawing of a perspective view of a tube sheet with nested C-shaped ends;

FIG. 7B shows two different C-shaped heat exchanger tubes nested into another C-shaped heat exchanger tube; and

FIG. 8A is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section A-A;

FIG. 8B is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section B-B;

FIG. 8C is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section C-C;

FIG. 8D is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section D-D;

FIG. 8E is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section E-E;

FIG. 8F is a drawing showing an exemplary boss patterned C-shaped heat exchanger tube cross-section F-F;

FIG. 8G is a drawing showing exemplary periodic sections of a C-shaped heat exchanger tube end in detail;

FIG. 9A is a drawing showing a section view of an exemplary heat exchanger with C-shaped heat exchanger tubes; and

FIG. 9B is a drawing showing a section view of another exemplary heat exchanger with C-shaped heat exchanger tubes.

DETAILED DESCRIPTION

[0021] As described hereinabove, heat exchanger tubes are used for heat transfer from a first fluid or gas to a second fluid or gas. Use of heat exchanger tubes allows the first gas or fluid to be isolated from the second gas or fluid. For example, a gas fired hot water heater typically passes heated gas from a gas fired burner through heat exchanger tubes to heat water passed over the outside of the tubes. The heat exchanger tubes are typically fixed in a pattern by a tube sheet with a pattern of holes, each of the holes accepting one end of each of the heat exchanger tubes.

[0022] Heat exchangers can be made with bundles of unformed cut lengths of raw stock cylindrical tubes. Enhanced heat exchanger tubes can be further formed, such as by any suitable metal forming process, to cause the flow of the gas or fluid within each tube to be modified so as to improve the heat transfer across the tube wall between the first fluid or gas and a second fluid or gas.

[0023] Typically, in a gas fired water heater, the heated gas is passed within and through each of the heat exchanger tubes to heat water which passes around the outside of each of the heat exchanger tubes as it passes through a heat exchanger assembly canister. Alternatively, the water can also be passed through the tubes, where the heated gas is passed outside of the tubes in a heat exchanger canister. Also, for the new structures and process described in this Application, it is unimportant if the first gas or fluid is flowing in the same direction or an opposite direction from the second gas or fluid (counter flow). Those skilled in the art will recognize such structures as a shell-and-tube type heat exchanger. Shell-and-tube heat exchangers can be used for counter flow applications.

[0024] One problem of heat exchanger tubes is related to manufacturing the tubes. There is a need for a material and process to improve the efficiency of manufacture as well as to lower the cost of manufacturing heat exchanger tubes. Another problem is that, especially depending on composition and temperature, potable water can be highly corrosive.

[0025] As noted hereinabove, raw stock cylindrical tubes can be further formed, such as, for example, with dimples or shapes to convert the cylindrical tube into an "enhanced tube" with improved heat transfer characteristics. Cylindrical heat exchanger tubes are typically formed or pressed on two, three, or four sides. Each press requires another strike of a forming tool. While very hard steel is advantageous for both heat transfer properties as well as for the most robust long lasting heat transfer tubes, such very hard steel materials have proven to be too hard to practically work for the formation of multiple strike enhanced features with conventional production tooling. Therefore, there is a need for an efficient production method for the manufacture of enhanced heat transfer tubes from stock cylindrical sections of relatively hard steel materials.

[0026] Another problem is to limit deformation of the heat exchanger tube during manufacture so that metal forming of a stock tube does not cause the formed heat exchanger tube to have a diameter larger than the raw stock tube from which it was formed. For example, in formed heat exchanger tubes of the prior art, such as dimpled heat exchanger tubes, especially those formed by multiple strikes, typically some parts of the formed tubes have a maximum radius in non-round circumferential places along the length of the tube (in cross section, post formed) which exceeds the original diameter of the raw stock tube cylindrical end face cross section diameter.

[0027] There is also a need for heat exchanger tubes which can be stacked or nested, such as by tube sheet patterns, in an efficient manner where there can be more dense heat exchangers with more heat exchanger tubes per unit area of a tube sheet.

[0028] It was realized that long sought after hardened enhanced heat transfer tubes can be manufactured with

relatively complex boss (emboss) patterns from relatively hard steel alloys by use of a single strike, single die method. Exemplary hard steel alloys include LDX 2205 and LDX 2101 steel. Exemplary hard steel materials LDX 2205 and LDX 2101 are available from Outokumpu company, of Helsinki, Finland. Allegheny Ludlum of Vandergrift, PA is another supplier. Suitable types of tube stock including LDX tube stock, are well-known and commercially available from other sources, as is particularly the case for the more common 2205 types. Alternately, any suitable raw material can be obtained and processed to the desired high strength type steel alloy.

[0029] Moreover, it was realized that were the relatively complex boss patterns are formed into a C-shaped enhanced heat transfer tube, the post boss radius can be contained by the die during single strike metal forming, so as to substantially not exceed the radius of the pre-formed cylindrical blank sections.

[0030] As described hereinabove, depending on composition and temperature, potable water can be highly corrosive. It was also realized that by use of relatively hard steel alloys, the corrosion-resistance and strength of both the heat exchanger tubes can be significantly improved for an assembled heat exchanger assembly (typically a pressurized vessel) which is more robust in strength and resistance to corrosion.

[0031] Also, by creating a patterned boss structure along the C-shaped heat exchanger tube, a more efficient heat transfer can be achieved. It was realized that such boss patterns can be made quickly and efficiently by a single strike die manufacturing method. Also, in contrast with the more complicated multiple side strike enhanced heat exchanger tubes of the prior art, the maximum radius of the formed tube can be more easily constrained to about the same radius of the pre-formed stock cylindrical tube.

[0032] The new C-shaped heat exchanger tube according to the Application, can be manufactured relatively quickly and easy as compared to enhanced heat exchanger tubes of the prior art. Because of the application of the single strike and die method of the Application, enhanced C-shaped heat exchanger tubes can now be formed from tube stock made from very hard metals. The diameter of the tube after forming substantially does not exceed the original diameter of the tube, which makes for easier and faster assembly of C-shaped heat exchanger tubes into tube sheets and a canister of a heat exchanger assembly. For example, typically each formed tube end passes through each hole of the tube sheet. Such pass-through construction has substantial benefits as more efficient for both of ease of assembly and post-assembled interlocked tube and tube sheet, providing an improved reliability and strength of the mechanical coupling.

[0033] Also, the relatively compact size of the C-shaped heat exchanger tubes allows for denser heat exchanger designs, which will reduce cost and result in smaller overall products. Further, as described in more

detail herein below, in some embodiments, the tube shape cross section at each end can also be C-shaped to allow for the nesting of tubes which could potentially double the tube density.

[0034] FIG. 1 shows a drawing of a plurality of C-shaped heat exchanger tubes 100 according to the Application assembled into tube sheets 120 for a heat exchanger assembly 110 (heat exchanger canister not shown in FIG. 1). The boss patterns of the new C-shaped heat exchanger tubes 100 visible in FIG. 1, are described in more detail hereinbelow. Those skilled in the art will appreciate that "C-shaped" includes any about C-shaped structure. One indication of a suitable C-shape is that a round or tubular tube stock can be struck from only one side to form the shape by a single embossing operation that pushes in on one side of the tube stock. Also, as described in more detail hereinbelow, periodic sections of a C-shaped heat exchanger tube according to the Application can include, for example, straight lines, V sections, and curves within the about C-shape along the long longitudinal axis of the formed or embossed tube.

[0035] FIG. 2 shows a closeup view of the heat exchanger assembly 110 of FIG. 1. In this exemplary embodiment, the ends of each tube are cylindrical and fit into each corresponding circular hole of the tube sheet 120.

[0036] C-shaped heat exchanger tubes with alternating flow patterns: C-shaped heat exchanger tubes, such as the exemplary C-shaped heat exchanger tubes of FIG. 1 and FIG. 2, can include a series of periodic features, such as pinched areas made by strike or press embossing. FIG. 3A shows a periodic section of the boss patterns of the new C-shaped heat exchanger tubes 100. The various shapes of the cross-sections of the C-shaped heat exchanger tubes with alternating flow patterns are labeled for convenience by letters, such as for example, "D-D" and "F-F". As is now described in more detail, FIG. 3A shows a periodic section of cross-sections D-D to F-F. FIG. 3B is a drawing showing a F-F cross-section of the left side of the periodic section of FIG. 3A. FIG. 3C is a drawing showing a D-D cross-section of the left side of the periodic section of FIG. 3A.

[0037] When describing the oscillating flow patterns of the periodic sections of the new C-shaped heat exchanger tubes 100, reference is made to the "sides" and to the "middle" of the generally C-shaped cross-sections. FIG. 3D is a drawing which shows another C-shaped cross-section F-F 390 labeled to show the interior side flow areas 393, and the middle flow areas 395. There is not so much a clear delineation between the interior side flow areas 393 and the middle flow areas 395 as much as an alternating flow between the side flow areas 393 and the middle flow areas 395 as gas or fluid flows through each of the periodic sections (FIG. 3A) of the new C-shaped heat exchanger tubes 100.

[0038] FIG. 4 is a drawing which shows a perspective lengthwise view of a portion of an exemplary C-shaped heat exchanger tube 100 with a periodic boss pattern.

The gas or fluid flowing within the tube, e.g. from the bottom of the page to the top of the page (direction of flow is unimportant), is restricted by the side boss 153 (i.e. pinched) and the flow is forced towards the middle. Then at boss 163, the gas or fluid flowing within the tube is restricted in the middle and forced to flow more in the less restricted side portions 151. Again, at the side boss 153, the gas or fluid flowing within the tube is forced by the side boss 153 into the less restricted middle sections 161. Another benefit of such flow through the new periodic boss pattern is a significant improvement in heat transfer without significantly increasing pressure drop.

[0039] FIG. 5 is a display from a computer simulation showing a gas flow through the boss patterns of a C-shaped heat exchanger tube 100 as was described with respect to FIG. 3A and FIG. 4. SOLIDWORKS Flow Simulation was used to create the simulation of FIG. 5. The SOLIDWORKS Flow Simulation program is available from Dassault Systèmes of Waltham, MA. Fluid flow through each of the C-shaped tubes can be seen to laminarize in certain regions of the tube. To our best current understanding, as supported by the simulations, we believe that "microchannels", areas defined as having a hydraulic diameter as $<1\text{mm}$, have been formed, that result in a laminar flow with high heat transfer.

[0040] In the embodiment of FIG. 1 and FIG. 2, each C-shaped heat exchanger tube 100 terminates into a corresponding hole in a tube sheet 120 on either end of the tube, with a circular cross-section. FIG. 6 is a drawing showing more detail of one exemplary transition section 173 from the circular cross-section at the tube end to the periodic sections of FIG. 3A and FIG. 4. In other embodiments there can be any suitable shape where each of the tubes terminates into a tube sheet. Moreover, there can be any combination of suitable shapes.

[0041] C-shaped ends, C-shaped holes in tube sheets: In another embodiment, it was realized that if the ends were cut or formed into C-shapes, a denser nested mounting technique can be used at the tube sheets. FIG. 7A shows a drawing of a perspective view of a tube sheet mock-up of nested C-shaped ends. There is no significance to the square shape of the tube sheet portion shown in the mock-up tube sheet 721. Typically tube sheets are round so as to fit in cylindrical shaped heat exchanger canisters. However, any suitable square, rectangular, round, elliptical, polygonal, etc. shaped tube sheet can be used in any suitable shaped heat exchanger canister, with any combination thereof. In the exemplary embodiment of FIG. 7A, what is different is that instead of the C-shaped heat exchanger tubes 100 end face circular cross section (e.g. FIG. 6, tube end 171), the tube ends now have a C-shaped cross-section 751. As shown in FIG. 7A, the C-shapes can be nested, such as where the tops and bottoms of the C-shapes of tube ends, nest within concave parts of other tube ends.

[0042] FIG. 7B shows how two different C-shaped heat exchanger tubes can be nested into another C-shaped heat exchanger tube. One C-shape tube end "a" of a first

tube and one C-shaped tube end "b" of a second tube can both fit within a concave opening of the C-shape of a third tube. In a cross-section view (e.g. in a tube sheet plane), two C-shape tube ends of two different tubes can fit into the C-shape concave opening of yet another tube. In a circular tube pattern (e.g. C-shape tube ends distributed in about circular patterns in the plane of a tube sheet), each C-shape concave opening can be filled with two C-shape tube ends. In other tube sheet patterns, there can be any suitable number of C-shape concave openings left open, or with only one C-shape tube end disposed within. Any suitable arrangement of two C-shape tube ends of two different tubes in the C-shape concave opening of yet another tube, one C-shape tube end of a different tube in the C-shape concave opening of another tube, an empty C-shape concave opening, and/or any combination thereof can be used.

[0043] In the exemplary mock-up installation of FIG. 7A, the C-shaped holes 725 are defined by walls 723 cut into the tube sheet 721. Here, the end face of each of the corresponding C-shaped heat exchanger tubes 100 has a corresponding C-shaped cross-section 751. While the C-shaped cross-section 751 can be achieved by cutting a tube of the type used in FIG. 1, at the appropriate lengthwise position of such a C-shape (as was done for R&D purposes), more practically, a different die can be used so that the desired tube is achieved by the single strike method with a so patterned die in one step.

[0044] It can now be better appreciated that a heat-exchanger tube has been realized with a generally C-shaped cross-section along the length, where the initially round cross-section (pre-strike, raw stock) is only indented from one side. Also, it was realized that a bundle of tubes with C-shaped end face cross-sections (e.g. fire tubes for a gas fired water heater) can be meshed for a more compact bundle, in comparison to round cross-section. The bundle of tubes with C-shaped end face cross-sections can extend into corresponding C-shaped holes of tube sheets to form a heat exchanger insert. The heat exchanger insert can be installed into any suitable heat exchanger canister.

[0045] EXAMPLE - FIG. 8A - FIG. 8G shows drawings of an exemplary C-shaped heat exchanger tube with round end face cross-sections similar to the C-shaped heat exchanger tubes 100 of FIG. 1.

[0046] FIG. 8G is a drawing showing exemplary periodic sections of a C-shaped heat exchanger tube end in detail. The exemplary C-shaped heat exchanger tube of FIG. 8G includes about circular tube ends which transition on either side to a C-shaped periodic boss pattern of alternating side boss pinches and middle boss pinches. The small open rectangular area in the middle of FIG. 8G is understood to designate that any suitable length of a C-shaped heat exchanger tube can be used. FIG. 8A is a drawing showing a cross-section A-A. FIG. 8B is a drawing showing a cross-section B-B. FIG. 8C is a drawing showing a cross-section C-C. The cross-sections of FIG. 8A - FIG. 8C are exemplary of transition

sections from cylindrical end faces to the periodic sections of the C-shaped heat exchanger tubes which cause the alternating flow pattern (similar to the transition section shown in FIG. 6).

[0047] FIG. 8D is a drawing showing a cross-section D-D. FIG. 8E is a drawing showing a cross-section E-E. FIG. 8F is a drawing showing a cross-section F-F. The cross-sections of FIG. 8D - FIG. 8F show exemplary periodic sections of the C-shaped heat exchanger tubes.

[0048] Suitable tube stock - Any suitable tube which can be formed into a C-shape tube for a heat exchanger can be used. Typically, such tubes are formed from cylindrical stock steel tubes. Any suitable wall thickness can be used. Typically, stock cylindrical wall thicknesses (prior to forming) range from about 0.635mm (0.025 inches) to about 1.905 mm (0.075 inches). As described hereinabove, the new shapes and methods are particularly suited for use with relatively hard steel stock tubes, such as, for example, LDX 2205 and LDX 2101. The typical range of desirable tube stock steel harness is from about 260 to 290 (HB).

[0049] In summary, a heat exchanger tube 100 includes a central tube portion (e.g. FIG. 3A, FIG. 4) having a C-shape cross-section (e.g. the exemplary C-shaped heat exchanger tube of FIG. 1). A pair of tube ends includes the C-shape cross-section (e.g. FIG. 6, FIG. 8G) or a different cross-section (e.g. the C-shaped ends of FIG. 7A). The heat exchanger tube can include a transition portion (e.g. FIG. 6, FIG. 8G, FIG. 8A, FIG. 8B, FIG. 8C) between the C-shape cross-section of the central tube portion and the circular cross-section.

[0050] Exemplary heat exchangers: As described hereinabove, a plurality of heat exchanger tubes such as mounted in tube sheets, provide a heat exchanger tube assembly. Typically, the heat exchanger tube assembly is mounted within a heat exchanger body, such as a heat exchanger canister. FIG. 9A is a drawing showing a section view of an exemplary heat exchanger having a heat exchanger tube assembly with the new C-shaped heat exchanger tubes of the Application. FIG. 9B is a drawing showing a section view of another exemplary heat exchanger having a heat exchanger tube assembly with the new C-shaped heat exchanger tubes of the Application. In both cases, the hot water exits the heat exchanger at the top of the heat exchanger canister.

[0051] Data and simulations described hereinabove can be supplied on a computer readable non-transitory storage medium. A computer readable non-transitory storage medium as non-transitory data storage includes any data stored on any suitable media in a non-fleeting manner. Such data storage includes any suitable computer readable non-transitory storage medium, including, but not limited to hard drives, non-volatile RAM, SSD devices, CDs, DVDs, etc.

[0052] It will be appreciated that variants of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen

or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

Claims

1. A heat exchanger tube (100) comprising:
 - a central tube portion having a C-shape cross-section (390); and
 - a pair of tube ends (171) comprising said C-shape cross-section (390) or a different cross-section;
 - characterised in that** said central tube portion comprises a series of periodic boss patterns, wherein said series of periodic boss patterns comprise an alternating series of side boss pinching (153) and middle boss pinching (163) and cause an alternating flow pattern of a gas or fluid flowing through said heat exchanger tube (100) alternately between both sides and a middle of said C-shape cross-section (390).
2. The heat exchanger tube of claim 1, wherein said different cross-section comprises a circular cross-section.
3. The heat exchanger tube of claim 2, further comprising a transition portion (173) between said C-shape cross-section (390) of said central tube portion and said circular cross-section.
4. The heat exchanger tube of any one of claims 1 to 3, wherein said series of periodic boss patterns create a plurality of microchannels which cause a laminar flow.
5. The heat exchanger tube of any one of claims 1 to 4, wherein said heat exchanger tube (100) comprises a hot water heater heat exchanger tube.
6. A heat exchanger tube assembly (110) comprising:
 - a pair of tube sheets (120); and
 - a plurality of the heat exchanger tube (100) of any one of claims 1 to 5 disposed between said pair of tube sheets (120);
 - wherein each tube end of each tube mechanically coupled to a tube sheet (120).
7. The heat exchanger tube assembly of claim 6, wherein said pair of tube sheets comprise one of:
 - (i) a plurality of circular holes to accept and mechanically couple to a round tube end cross section;

- (ii) a plurality of C-shaped openings to accept and mechanically couple to a C-shaped tube end cross section;
- (iii) a plurality of openings to accept and mechanically couple to a tube end cross section in a tube end pass-through configuration; or
- (iv) a C-shaped opening nested pattern wherein at least one end of said C-shaped openings is nested into a concave part of another C-shaped opening.
8. The heat exchanger tube assembly of claim 6, wherein said heat exchanger tube assembly (110) comprises a hot water heater heat exchanger tube assembly.
9. A method for manufacturing a C-shape heat exchanger tube (100) according to any one of claims 1 to 8, the method comprising:
- providing a cylindrical shaped tube;
- placing said cylindrical shaped tube into a die; and
- striking said cylindrical shaped tube on only one side to produce said C-shaped heat exchanger tube (100).
10. The method of claim 9, wherein said step of striking comprises striking said cylindrical shaped tube on one side to produce said C-shaped heat exchanger tube (100) for a hot water heater.
- Patentansprüche**
1. Wärmetauscherrohr (100), das Folgendes umfasst:
- einen mittleren Rohrabschnitt, der einen C-förmigen Querschnitt (390) aufweist; und ein Paar von Rohrenden (171), die den C-förmigen Querschnitt (390) oder einen anderen Querschnitt umfassen;
- dadurch gekennzeichnet, dass** der mittlere Rohrabschnitt eine Abfolge von periodischen Wölbungsmustern umfasst, wobei die Abfolge von periodischen Wölbungsmustern eine alternierende Abfolge von seitlichen Wölbungsquetschungen (153) und mittleren Wölbungsquetschungen (163) umfasst und ein alternierendes Strömungsmuster eines Gases oder Fluids, das durch das Wärmetauscherrohr (100) strömt, alternierend zwischen beiden Seiten und einer Mitte des C-förmigen Querschnitts (390) bewirkt.
2. Wärmetauscherrohr nach Anspruch 1, wobei der andere Querschnitt einen kreisförmigen Querschnitt umfasst.
3. Wärmetauscherrohr nach Anspruch 2, das ferner einen Übergangsabschnitt (173) zwischen dem C-förmigen Querschnitt (390) des mittleren Rohrabschnitts und dem kreisförmigen Querschnitt umfasst.
4. Wärmetauscherrohr nach einem der Ansprüche 1 bis 3, wobei die Abfolge von periodischen Wölbungsmustern eine Vielzahl von Mikrokanälen erzeugt, die eine laminare Strömung bewirken.
5. Wärmetauscherrohr nach einem der Ansprüche 1 bis 4, wobei das Wärmetauscherrohr (100) ein Warmwasserbereiter-Wärmetauscherrohr umfasst.
6. Wärmetauscherrohranordnung (110) die Folgendes umfasst:
- ein Paar von Rohrplatten (120); und eine Vielzahl von Wärmetauscherrohren (100) nach einem der Ansprüche 1 bis 5, die zwischen dem Paar von Rohrplatten (120) angeordnet sind; wobei jedes Rohrende jedes Rohrs mit einer Rohrplatte (120) mechanisch gekoppelt ist.
7. Wärmetauscherrohranordnung nach Anspruch 6, wobei das Paar von Rohrplatten eines der Folgenden umfasst:
- (i) eine Vielzahl von kreisförmigen Löchern, um einen runden Rohrende-Querschnitt aufzunehmen und mechanisch mit diesem gekoppelt zu sein;
- (ii) eine Vielzahl von C-förmigen Öffnungen, um einen C-förmigen Rohrende-Querschnitt aufzunehmen und mechanisch mit diesem gekoppelt zu sein;
- (iii) eine Vielzahl von Öffnungen, um einen Rohrende-Querschnitt in einer Rohrende-Durchgangskonfiguration aufzunehmen und mit diesem gekoppelt zu sein;
- (iv) ein C-förmiges Öffnungsverschachtelungsmuster, wobei zumindest ein Ende der C-förmigen Öffnungen in einen konkaven Teil einer weiteren C-förmigen Öffnung verschachtelt ist.
8. Wärmetauscherrohranordnung nach Anspruch 6, wobei die Wärmetauscherrohranordnung (110) eine Warmwasserbereiter-Wärmetauscherrohranordnung umfasst.
9. Verfahren zur Herstellung eines C-förmigen Wärmetauscherrohrs (100) nach einem der Ansprüche 1 bis 8, wobei das Verfahren Folgendes umfasst:
- Bereitstellen eines zylindrisch geformten Rohrs; Positionieren des zylindrisch geformten Rohrs

in einer Form; und
 Ausüben von Stößen auf das zylindrisch geformte Rohr nur auf einer Seite, um das C-förmige Wärmetauscherrohr (100) zu erzeugen.

10. Verfahren nach Anspruch 9, wobei der Schritt des Ausübens von Stößen das Ausüben von Stößen auf das zylindrisch geformte Rohr auf einer Seite umfasst, um das C-förmige Wärmetauscherrohr (100) für einen Warmwasserbereiter zu erzeugen.

Revendications

1. Tube d'échangeur de chaleur (100) comprenant : 15

une partie de tube centrale ayant une section transversale en forme de C (390) ; et une paire d'extrémités de tube (171) comprenant ladite section transversale en forme de C (390) ou une section transversale différente ; **caractérisé en ce que** ladite partie de tube centrale comprend une série de motifs de bossages périodiques, dans lequel ladite série de motifs de bossages périodiques comprend une série alternée de pincement de bossage latéral (153) et de pincement de bossage médian (163) et provoque un motif d'écoulement alterné d'un gaz ou d'un fluide s'écoulant à travers ledit tube d'échangeur de chaleur (100) en alternance entre les deux côtés et un milieu de ladite section transversale en forme de C (390).

2. Tube d'échangeur de chaleur selon la revendication 1, dans lequel ladite section transversale différente comprend une section transversale circulaire. 35

3. Tube d'échangeur de chaleur selon la revendication 2, comprenant en outre une partie de transition (173) entre ladite section transversale en forme de C (390) de ladite partie de tube centrale et ladite section transversale circulaire. 40

4. Tube d'échangeur de chaleur selon l'une quelconque des revendications 1 à 3, dans lequel ladite série de motifs de bossages périodiques crée une pluralité de micro-canaux qui provoquent un écoulement laminaire. 45

5. Tube d'échangeur de chaleur selon l'une quelconque des revendications 1 à 4, dans lequel ledit tube d'échangeur de chaleur (100) comprend un tube d'échangeur de chaleur de chauffage à eau chaude. 50

6. Assemblage de tubes d'échangeur de chaleur (110) comprenant : 55

une paire de feuilles de tubes (120) ; et

une pluralité de tubes d'échangeur de chaleur (100) selon l'une quelconque des revendications 1 à 5, disposés entre ladite paire de feuilles de tubes (120) ;

- 5 dans lequel chaque extrémité de tube de chaque tube est couplée mécaniquement à une feuille tubulaire (120).

7. Assemblage de tubes d'échangeur de chaleur selon la revendication 6, dans lequel ladite paire de feuilles de tubes comprend un parmi :

(i) une pluralité de trous circulaires pour recevoir et coupler mécaniquement à une section transversale d'extrémité de tube ronde ;

(ii) une pluralité d'ouvertures en forme de C pour accepter et coupler mécaniquement à une section transversale d'extrémité de tube en forme de C ;

(iii) une pluralité d'ouvertures pour recevoir et coupler mécaniquement à une section transversale d'extrémité de tube dans une configuration de passage d'extrémité de tube ; ou

(iv) un motif emboîté d'ouvertures en forme de C dans lequel au moins une extrémité desdites ouvertures en forme de C est emboîtée dans une partie concave d'une autre ouverture en forme de C.

8. Ensemble de tubes d'échangeur de chaleur selon la revendication 6, dans lequel ledit ensemble de tubes d'échangeur de chaleur (110) comprend un ensemble de tubes d'échangeur de chaleur de chauffage à eau chaude. 30

9. Procédé de fabrication d'un tube d'échangeur de chaleur en forme de C selon l'une quelconque des revendications 1 à 8, le procédé comprenant les étapes consistant à :

fournir un tube de forme cylindrique ; placer ledit tube de forme cylindrique dans une matrice ; et

frapper ledit tube de forme cylindrique sur un seul côté pour produire ledit tube d'échangeur de chaleur en forme de C (100).

10. Procédé selon la revendication 9, dans lequel ladite étape consistant à frapper comprend la frappe dudit tube de forme cylindrique sur un côté pour produire ledit tube d'échangeur de chaleur en forme de C (100) pour un chauffage à eau chaude. 50

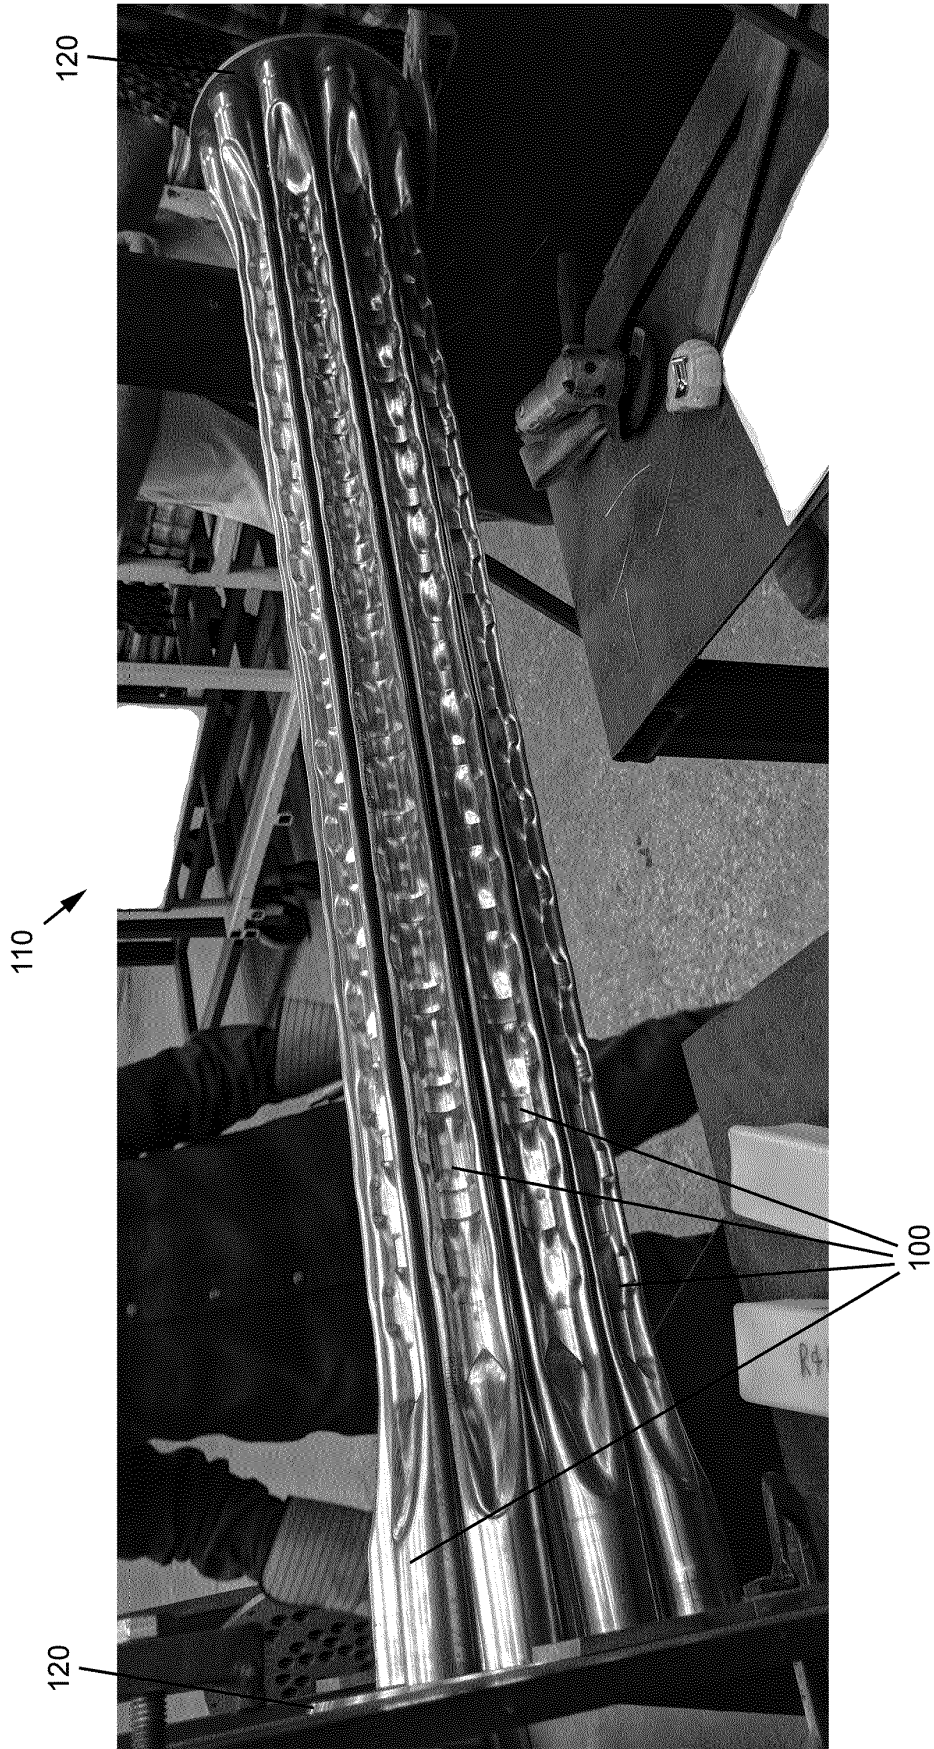


FIG. 1

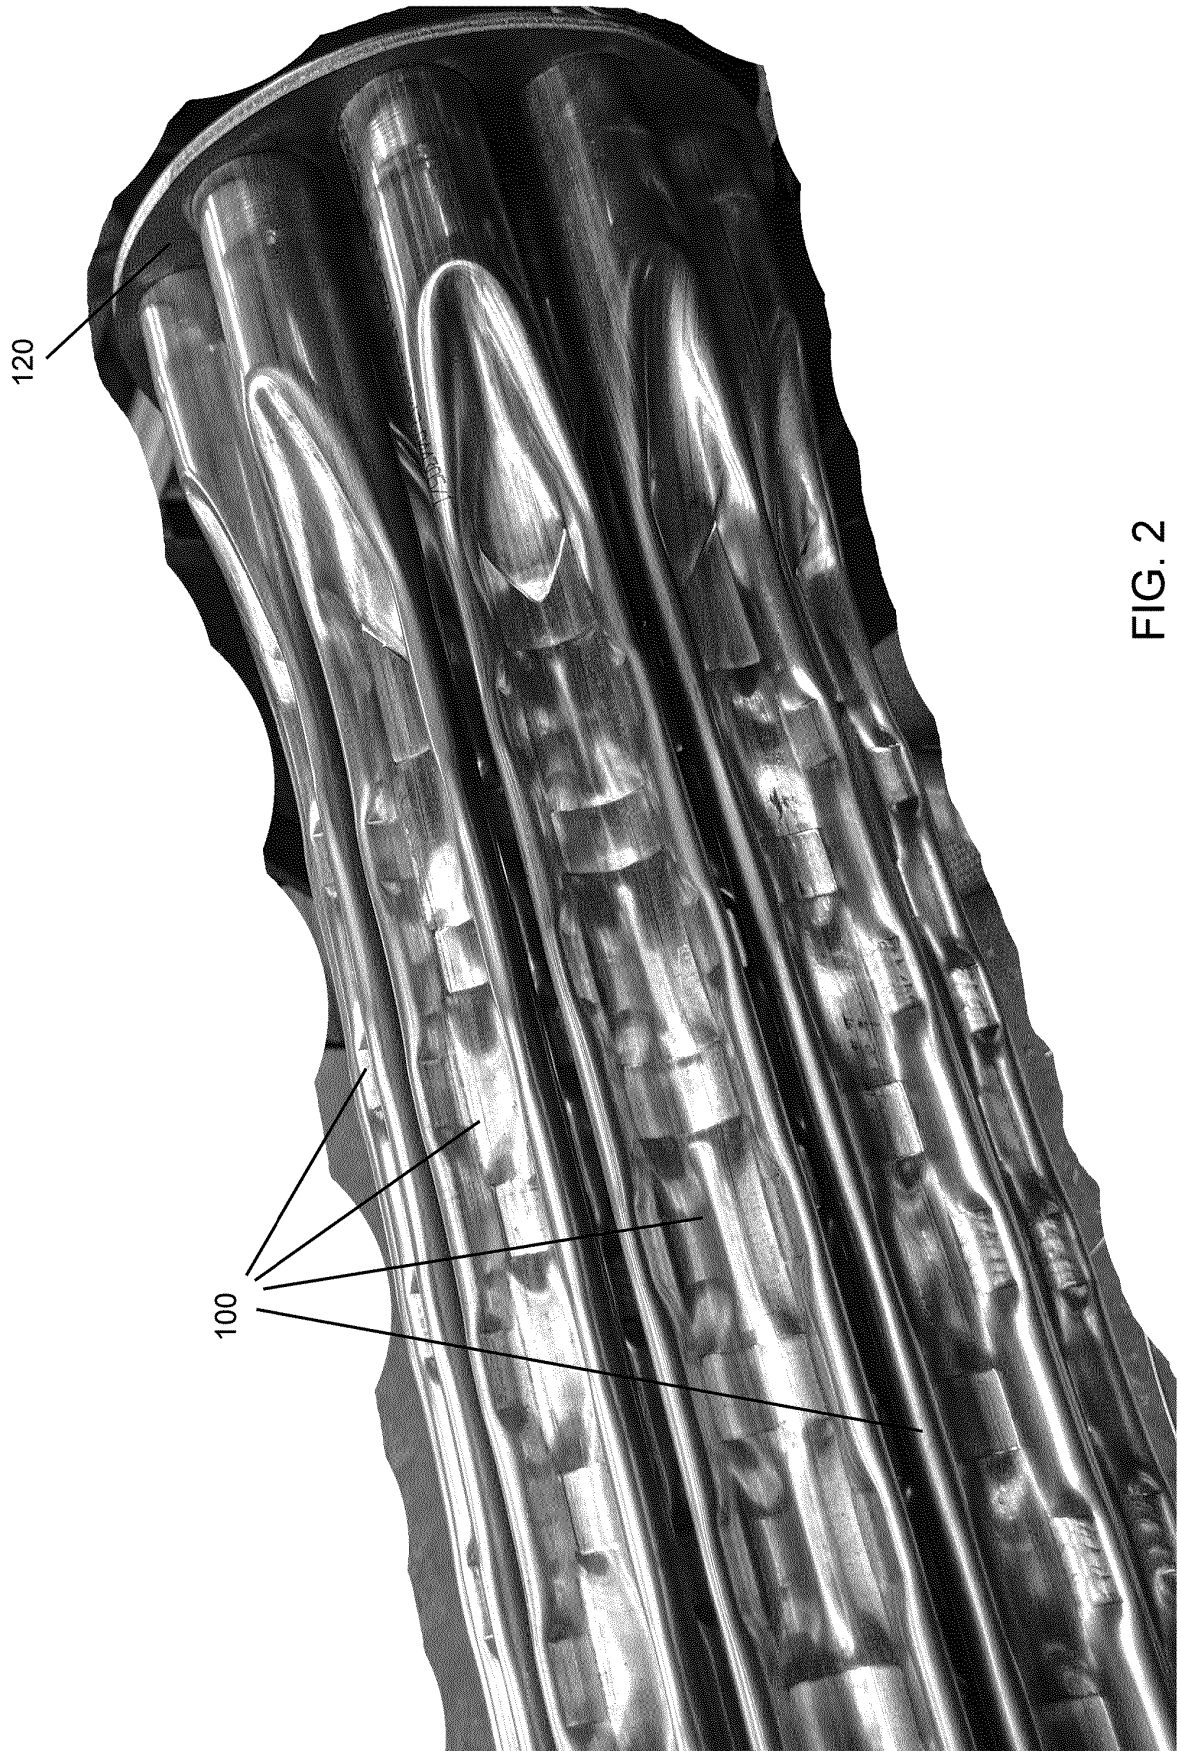


FIG. 2



FIG. 3A

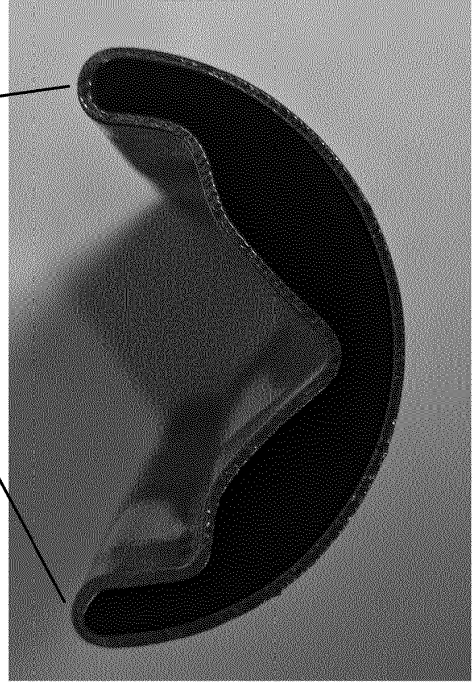


FIG. 3C



FIG. 3B

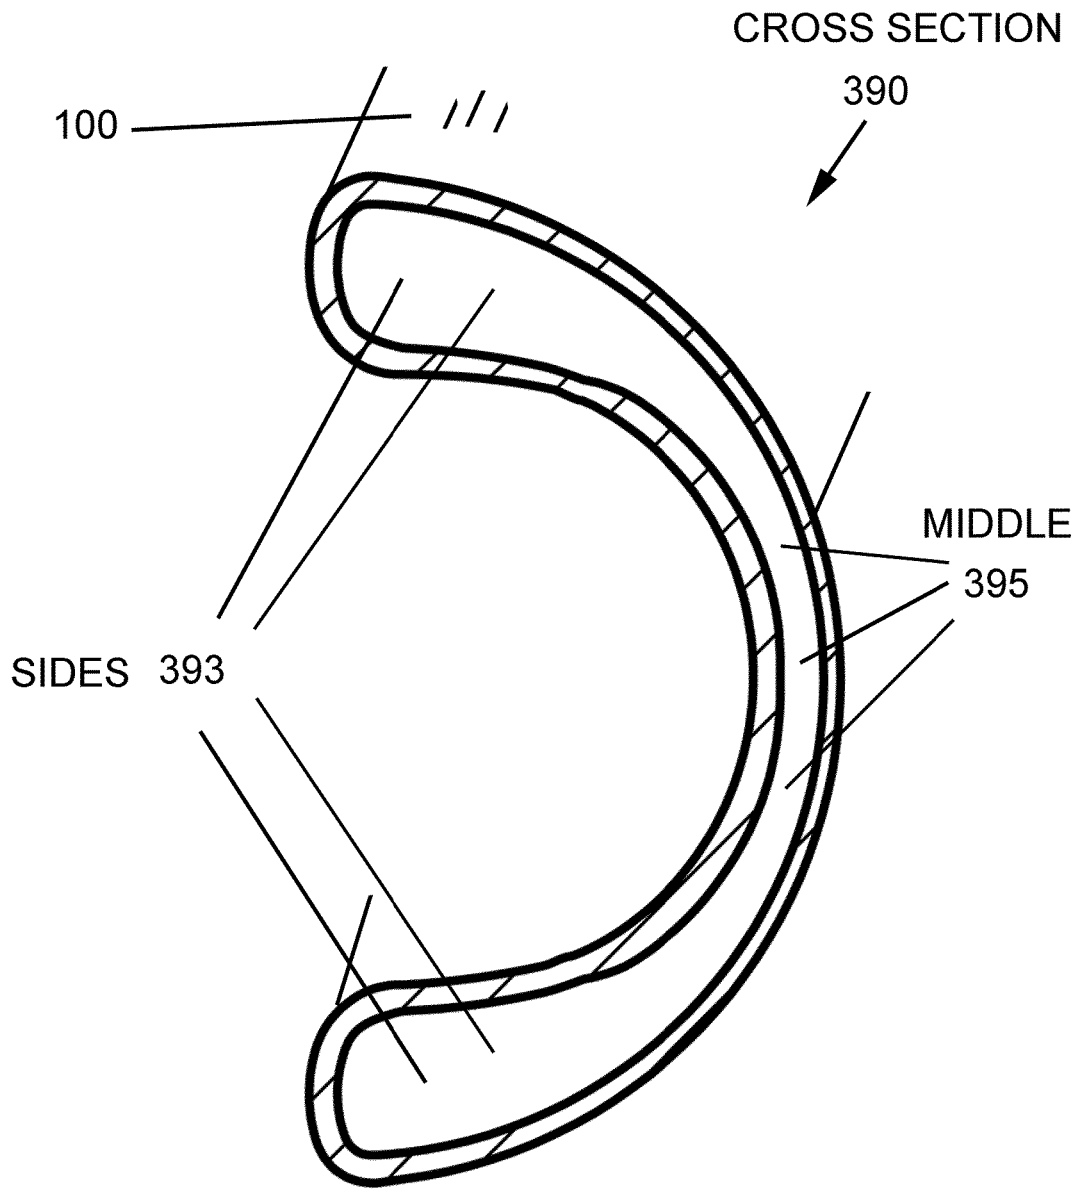


FIG. 3D

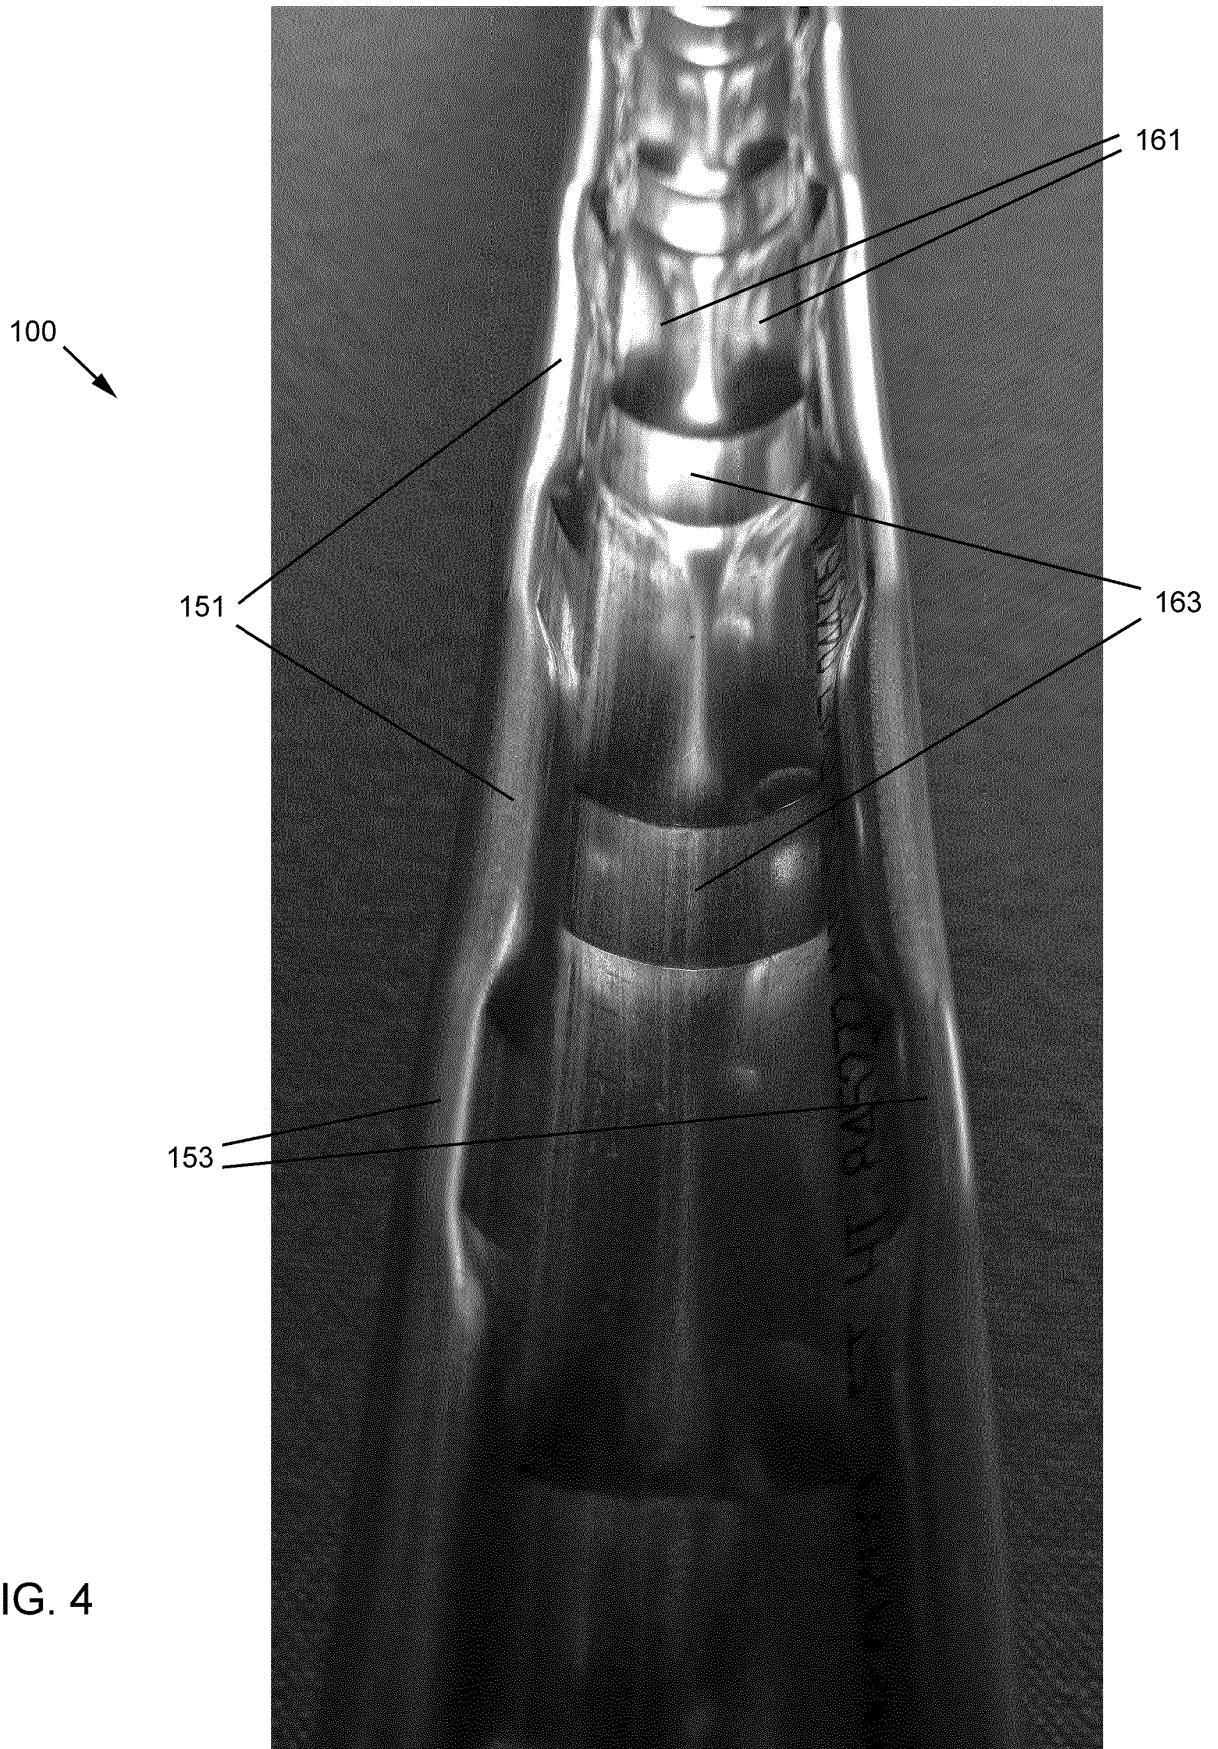


FIG. 4



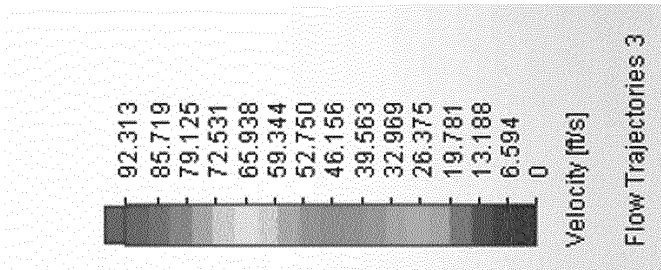


FIG. 5

100

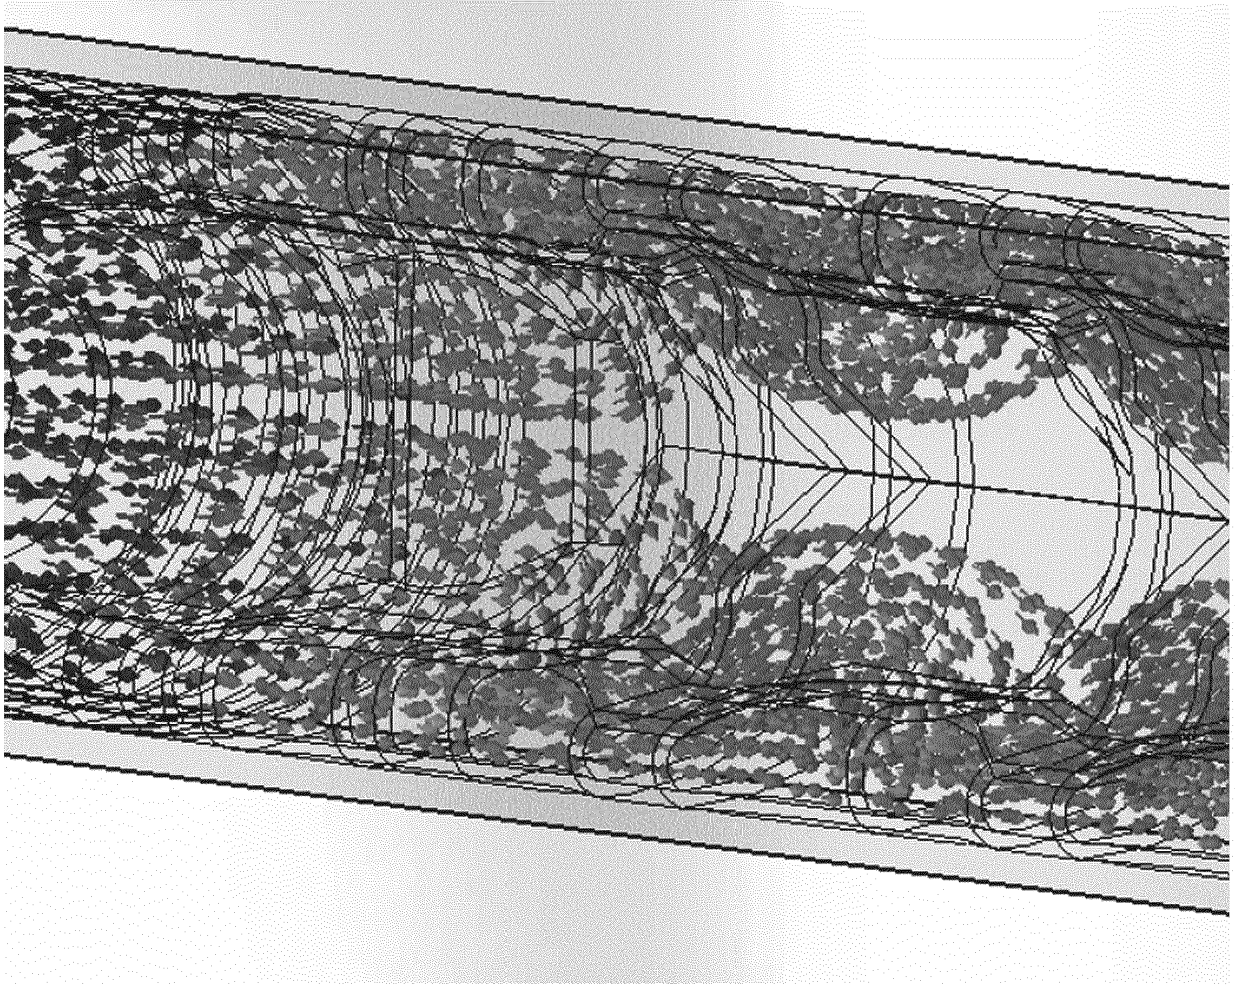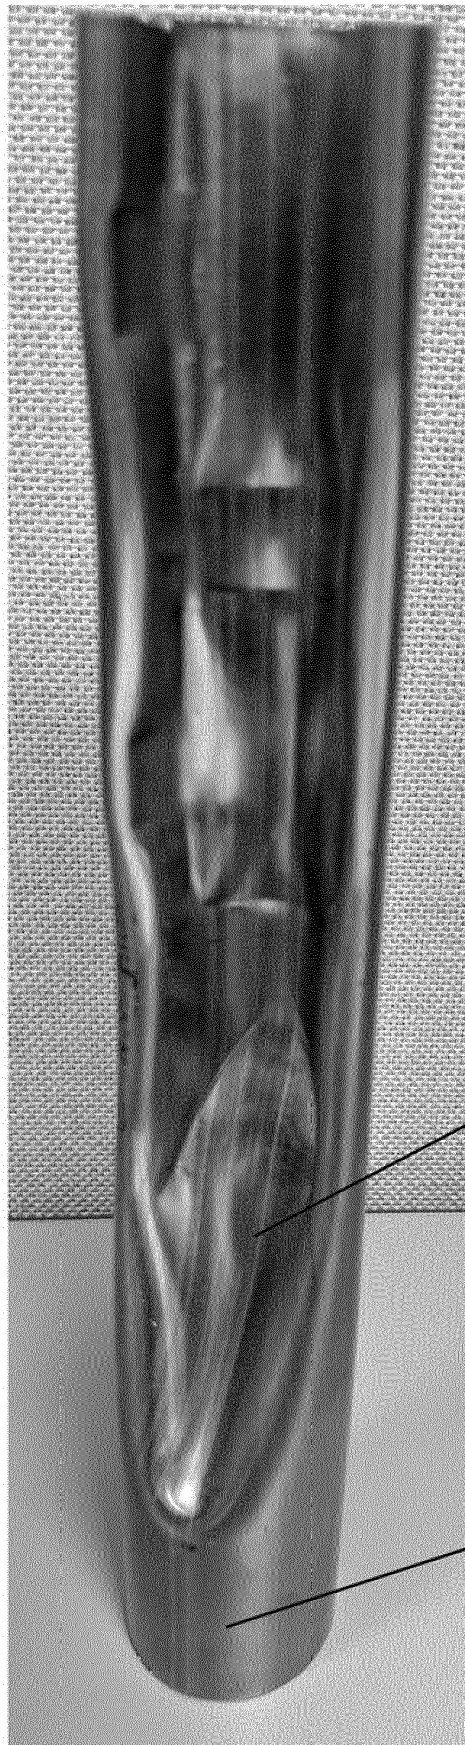

173

171

FIG. 6

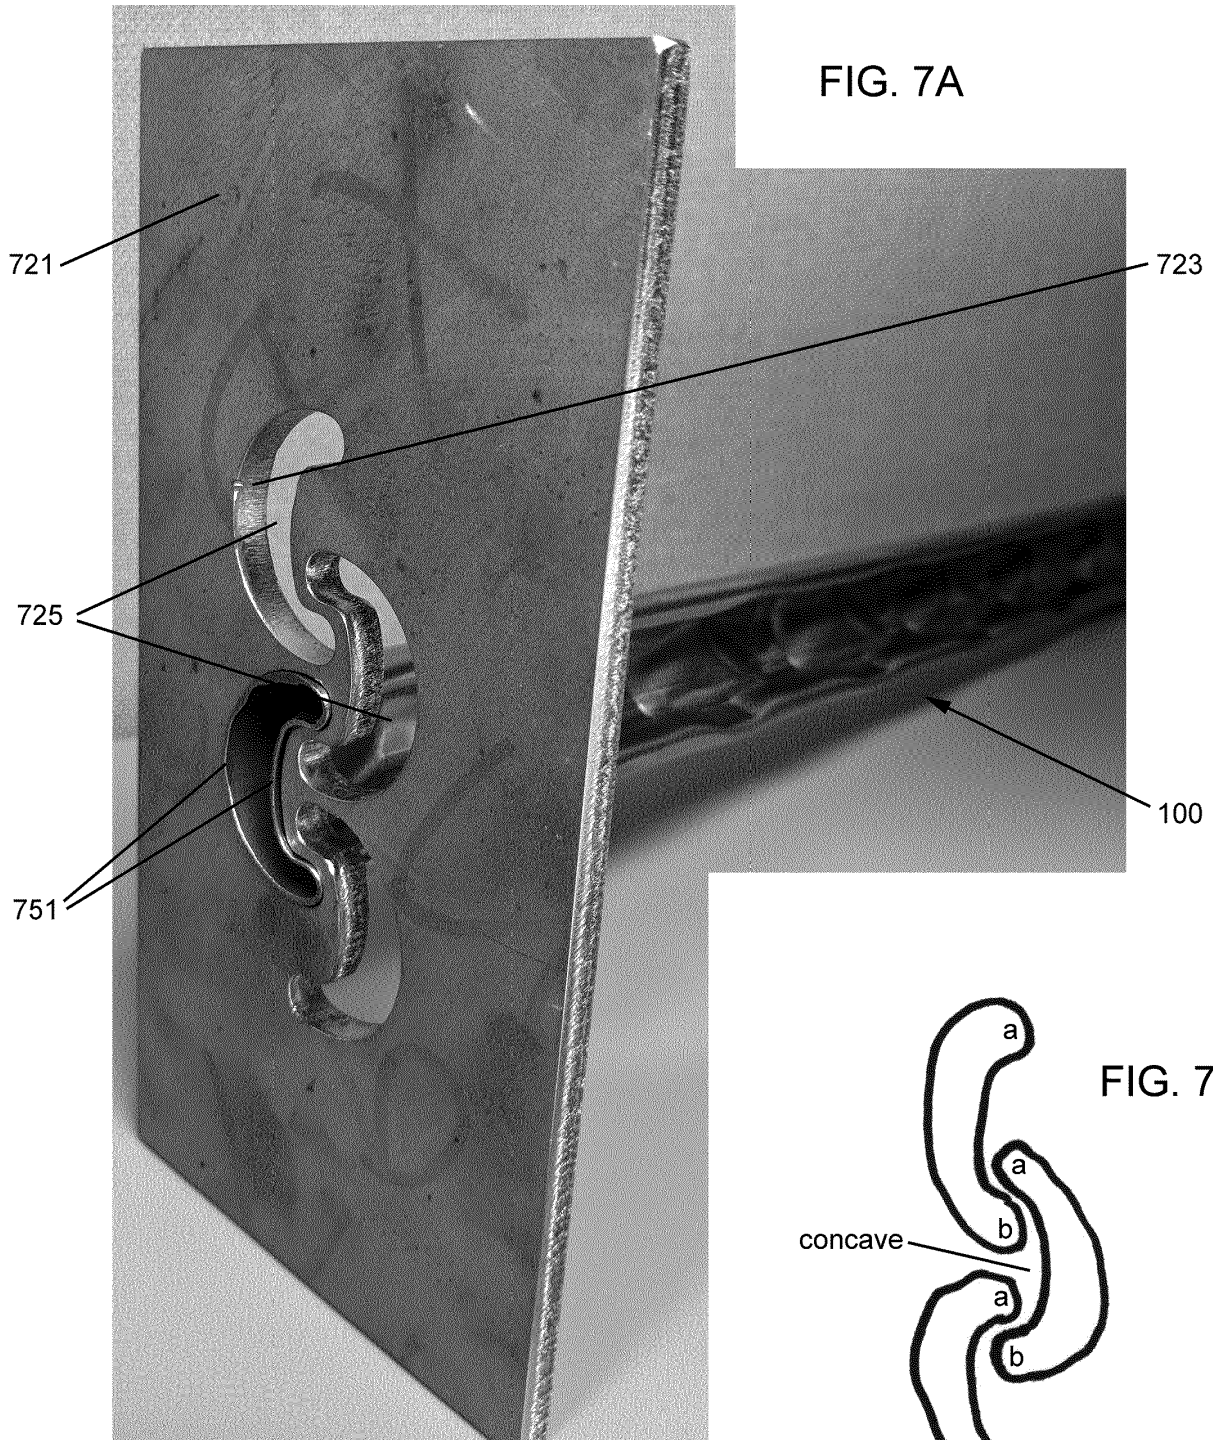


FIG. 8B




FIG. 8C





FIG. 8D



SECTION A-A
SCALE 1.75

SECTION B-B
SCALE 1.75

SECTION C-C
SCALE 1.75

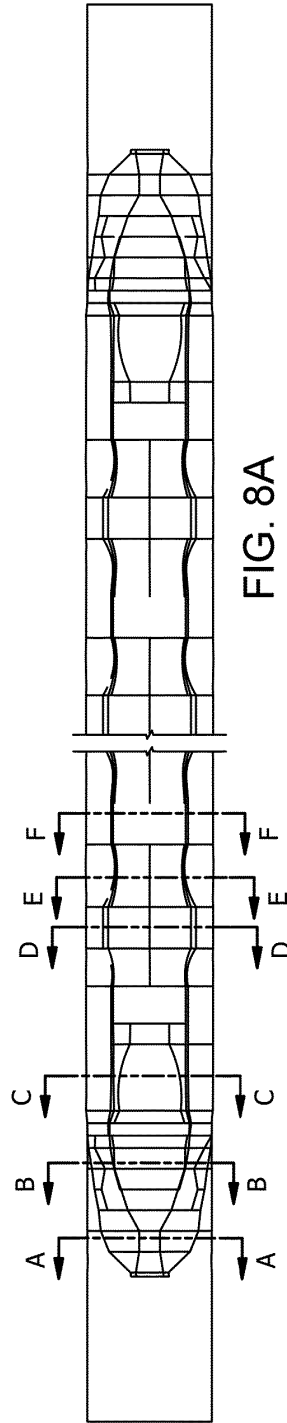



FIG. 8A

FIG. 8E




SECTION D-D
SCALE 1.5

FIG. 8F



SECTION E-E
SCALE 1.5

FIG. 8G



SECTION F-F
SCALE 1.5

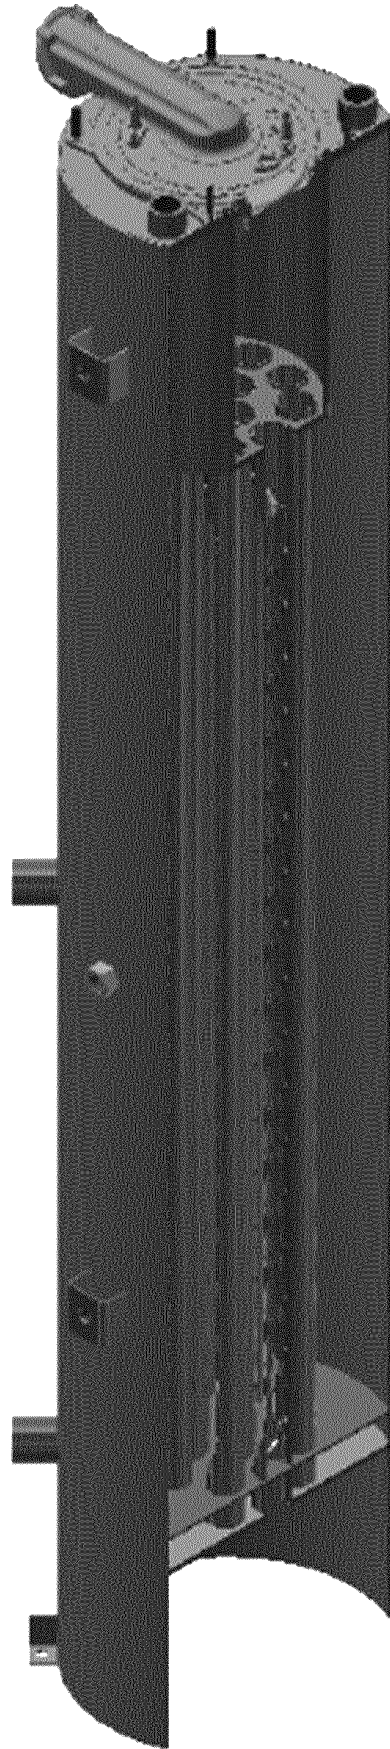


FIG. 9A

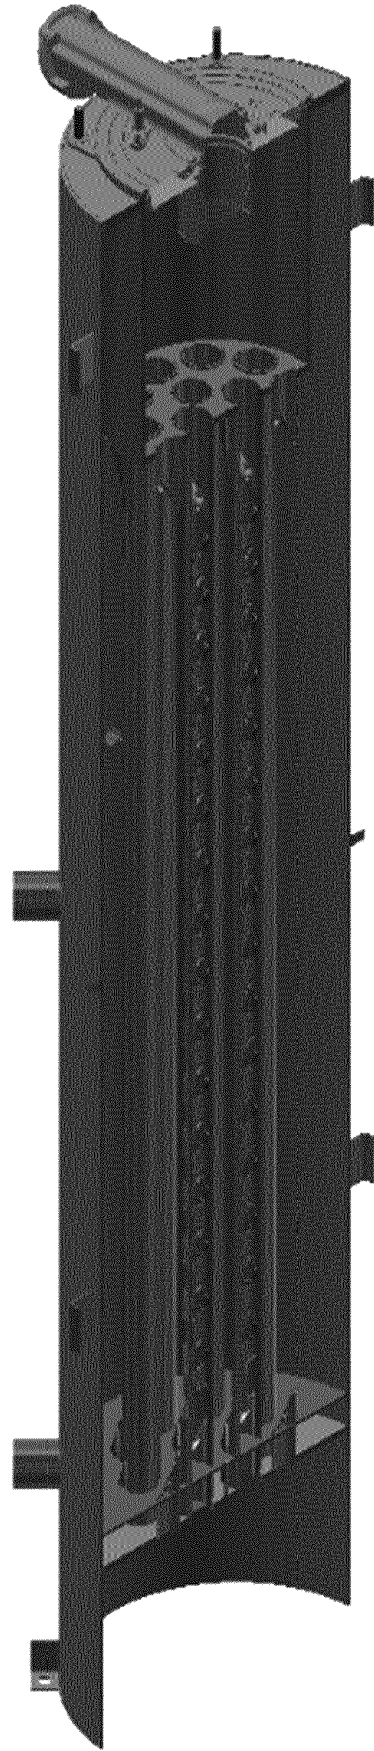


FIG. 9B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2014099250 A1 [0002]
- EP 2226602 A1 [0003]