



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.05.2020 Bulletin 2020/22

(51) Int Cl.:
E01F 15/14 (2006.01)

(21) Application number: **19209619.6**

(22) Date of filing: **26.11.2018**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **BLOWEY, Andrew Thomas**
1970 CA IJmuiden (NL)
- **MUSTARD, Trevor Raymond**
1970 CA IJmuiden (NL)
- **LONG, Raymond William**
1970 CA IJmuiden (NL)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
18208381.6 / 3 656 924

(74) Representative: **Group Intellectual Property
Services**
c/o Tata Steel Nederland Technology B.V.
P.O. Box 10000 - 3G.37
1970 CA IJmuiden (NL)

(71) Applicant: **TATA STEEL UK Limited**
London SW1P 4WY (GB)

Remarks:

This application was filed on 18-11-2019 as a
divisional application to the application mentioned
under INID code 62.

(72) Inventors:
• **SIRMAN, Steven Charles**
1970 CA IJmuiden (NL)

(54) **END TERMINAL FOR A SAFETY GUARDRAIL**

(57) End terminal (1) for a safety guardrail, said end terminal (1) comprising an elongated beam (2) which is on opposite ends connected to a ground anchor (3) and to the safety guardrail, respectively, and further comprising a collision catcher (4) which is slidably mounted on the beam (2), wherein the collision catcher (4) connects to a sliding block (5) with an aperture (6) through which the beam (2) is guided, wherein the sliding block (5) is

provided with at least one of upper (5') wall portions inside the aperture (6) that directly engage the elongated beam (2) for support of the sliding block (5), and that in or between said at least one of upper (5') wall portions a slit (9) or slits are provided providing room for passing of bolt heads (10) or other fixtures extending from the elongated beam (2).

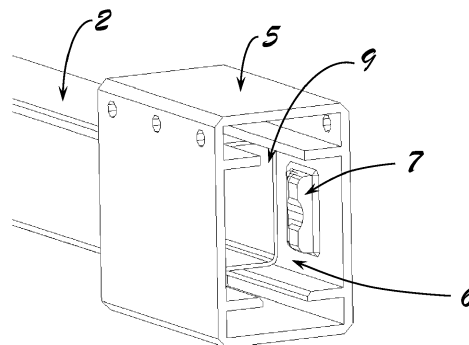


Fig. 1

Description

[0001] The invention relates to an end terminal for a safety guardrail, said end terminal comprising an elongated beam which is on opposite ends connected to a ground anchor and to the safety guardrail, respectively, and further comprising a collision catcher which is slidably mounted on the beam, wherein the collision catcher connects to a sliding block with an aperture through which the beam is guided.

[0002] Such an end terminal for a safety guardrail is known from EP-B-2 646 624. This known end terminal for a safety guardrail comprises an energy absorbing device and a metallic, elongated draw element, one of which is connected to the collision catcher, and wherein the impact energy of a collision is absorbed due to a relative movement of the elongated draw element and the energy absorbing device.

[0003] WO 2017 / 125740 A1 also discloses an end terminal, wherein the end terminal is provided with shearing elements projecting into cut-outs to transfer the load from the impact post, as the first point of impact to the shearing elements. The shearing elements cut through the rail upon collision of a vehicle with the impact device.

[0004] US 2003 / 0034484 A1 describes an impact head of a box beam rail member that is provided to bend and deflect the rail member during a collision, allowing the rail member to be deflected away from the roadway and out of the path of an impacting vehicle. The impact head includes a striking face and a chute portion that receives the box beam rail member therewithin when it is telescopically forced onto the rail member by the collision force.

[0005] US 2006 / 0054876 A1 discloses a vehicle crash cushion with a deformable attenuator member extending in the longitudinal direction and having a first end coupled to the front anchor and a second end coupled to the rear anchor. A support member is positioned adjacent the attenuator member and is moveable in the longitudinal direction relative thereto between an initial position and an impact position toward the rear anchor and away from the front anchor.

[0006] US 2003 / 0070894 A1 discloses a crash cushion system having an impact head and a three stage energy absorption mechanism.

[0007] WO 2016 / 033122 A1 discloses a guardrail terminal incorporating an impact head of open front configuration adapted with a rear portion as a funnel disposed with the narrow end of the funnel facing forward which will flatten the W beam guardrail as it moves down the beam when impacted by the vehicle.

[0008] Any end terminal for a safety guardrail is required to pass a series of ENV1317-4:2002 crash tests. The EN1317 European crash test standard is developed within the framework of the Construction Products Directive 89/106/EEC and EN1317-5 serves as a basis for the CE marking of road safety systems such as safety barriers and guardrails, crash cushions, barrier extremities

and transitions. One of these tests is a head on impact at 110km/h with a 1500kg car to get a classification in the energy absorbing class of EN1317. In order to achieve this, it is desirable for the vehicle to be decelerated in a smooth manner.

[0009] The invention is that the sliding block is provided with at least one of upper wall portions inside the aperture that directly engage the elongated beam for support of the sliding block, and that in or between said at least one of upper and lower wall portions a slit or slits are provided providing room for passing of bolt heads or other fixtures extending from the elongated beam. Preferably the sliding block is also provided with at least one of lower wall portions inside the aperture that directly engage the elongated beam for support of the sliding block, and that in or between said at least one of lower wall portions a slit or slits are provided providing room for passing of bolt heads or other fixtures extending from the elongated beam.

[0010] In a preferred embodiment, inside the aperture the sliding block is provided with one or more protruding deformation elements that engage the beam so as to arrange that upon movement of the sliding block towards the safety guardrail, the deformation elements provide a depressed portion in the beam that extends towards the safety guardrail. As the sliding block moves along the beam during vehicle impact, the deformation elements thus deform the beam, which takes energy and slows the car down.

[0011] For mounting the sliding block on the elongated beam it may be preferable that the elongated beam has an initial depressed portion in which the one or more protruding deformation elements protrude.

[0012] To promote the achievements of the invention it is preferred that the elongated beam has a substantially square or rectangular cross-section, and that at least two deformation elements are provided within the aperture on the sliding block, and projecting to opposite sides of the elongated beam reaching through the sliding block. The sliding block is then mounted in a more or less balanced way on the elongated beam, and the further depression of the elongated beam during impact can then take place on opposite sides of the elongated beam so as to secure the maintenance of a stable movement of the sliding block along the elongated beam during slowing down of the impacting car.

[0013] In an preferred embodiment, the sidewalls of the sliding block are provided with indents protruding inwardly into the aperture through which the elongated beam is guided, wherein said indents directly engage the elongated beam for support of the sliding block whilst providing room for passing of bolt heads or other fixtures extending from the elongated beam.

[0014] With respect to the invention it is remarked that, with current state-of-the-art end terminal designs, if a vehicle heavier or travelling at a higher speed than the above-mentioned 1500kg car traveling at 110km/h were to impact the end terminal, once the prescribed energy

had been absorbed, the terminal would cease to function in its desired way and could be dangerous. The just mentioned two embodiments relating to the invention are embodied with features which secure that the end terminal will continue to absorb energy beyond the EN1317 requirement for as long as is needed to bring the vehicle to rest. To achieve this result it is instrumental that the sliding block will pass over bolted joints of the elongated beam allowing the end terminal to continue working along its entire length without getting caught up.

[0015] It is preferred that the collision catcher has a hook part, which is preferably upstanding and/or swivable, for catching behind a bumper of a colliding car. As mentioned above an end terminal for a safety guardrail is required to pass EN1317 crash tests. One of these tests in particular causes the car to spin out and away from the end terminal, which can lead to the vehicle rebounding into other road traffic. The EN1317 standard has criteria that must be met to gain successful accreditation. The problem is that the nature of this test is likely to cause the vehicle to spin out beyond limits set in the standard and therefore fail the test. According to the invention a hooked front end is provided on the collision catcher which is designed to 'capture' the front bumper of a vehicle and therefore reduce motion of the vehicle during impact and stay within the limits prescribed by the test standard EN1317. The hook part can also be embodied with a locking pin that breaks under impact. The hook part can also be embodied as an active feature which becomes operational upon impact of a car.

[0016] It is preferred that below the elongated beam a stander is provided with a U-shaped receptacle in which the elongated beam is received. The stander with the U-shaped receptacle only supports the elongated beam. This has the advantage that the connection between the stander and the beam is relatively strong in a lateral direction, but relatively weak in a longitudinal direction.

[0017] Preferably the stander is designed to collapse when the elongated beam is loaded during the impact of a colliding car.

[0018] It is preferred that the elongated beam is provided with at least one insert beam extending over a part of the length of the elongated beam to provide said elongated beam with portions of different impact resistance. This differentiates from prior art solutions that are equipped with a single mechanism for absorbing energy and therefore do not have any ability to tailor the resistive force level for different vehicle impacts. According to the invention the at least one insert beam that extends over a part of the length of the elongated beam provides it with different levels of impact resistance, so that one thing and another can be tailored to the required properties of the end terminal.

[0019] The benefits of applying at least one insert beam in the elongated beam can be further promoted by arranging that the elongated beam is provided with a plurality of insert beams, preferably having mutually differing lengths, gauges and/or material properties.

[0020] It is preferable that the at least one insert beam is closer to the safety guardrail than to the ground anchor in order to provide that upon impact the elongated beam initially provides a lower impact resistance than at a final stage when the part of the elongated beam wherein the insert beam is provided becomes operational.

[0021] It is preferred that the end terminal is provided with a deflector, wherein the deflector extends below the elongated beam. This provides a solution for the problem in certain cases of vehicle impact from an opposite rather than from the regular impact side, that the vehicle can become wedged between the underside of the elongated beam and the rigid anchor to the ground. The deflector is arranged to deflect parts of the vehicle (mainly the wheel) back out away from the anchor to the ground, to prevent such parts from getting trapped.

[0022] The deflector can either be mounted on the elongated beam or another suitable part of the end terminal, or to the ground.

[0023] The invention will hereinafter be further elucidated with reference to the drawing of an exemplary embodiment of an apparatus operating according to a prior art method and according to the method of the invention that is not limiting as to the appended claims.

[0024] In the drawing:

- figure 1 shows a detail of an end terminal for a safety guardrail according to the invention with a view at the sliding block; and
- figure 2A and figure 2B show the sliding block after it has moved over a certain distance along the elongated beam of the end terminal;
- figures 3A - 3C show the sliding block according to a first embodiment after it has moved over a certain distance along the elongated beam of the end terminal, also showing the bolt heads on top of the elongated beam;
- figure 3D shows separately a sliding block according to a second embodiment;
- figure 4A and figure 4B show the end terminal for a safety guardrail, as provided with an upstanding hook for catching behind the bumper of a car;
- figure 5 shows the end terminal of the invention in a specific embodiment with an insert beam provided in the part of the elongated beam; and
- figure 6A and figure 6B respectively show the end terminal of the invention as provided with a deflector in rest, and after impact with a colliding car.

[0025] Whenever in the figures the same reference numerals are applied, these numerals refer to the same parts.

[0026] Making first reference to figure 6A, this figure most clearly shows the substance of a nominal configuration of an end terminal 1 for a safety guardrail. Such an end terminal 1 comprises an elongated beam 2 which is on opposite ends connected to a ground anchor 3 and to a safety guardrail, respectively. The safety guardrail

is not shown in the figure, but its construction and its combination with an end terminal 1 as shown in figure 6A is abundantly clear to the skilled person and requires no further elucidation. The end terminal 1 comprises a collision catcher 4 which is slidably mounted on the beam 2, wherein the collision catcher 4 connects to a sliding block 5 with an aperture 6 through which the beam 2 is guided.

[0027] Turning now to figure 1, the invention is illustrated by a detailed view at the beam 2 and the sliding block 5 with its aperture 6. It is shown in figure 1 that inside the aperture 6 the sliding block 5 is provided with one or more protruding deformation elements 7. Figure 1 only provides a view of a single deformation element 7, but it is preferred that at least two deformation elements 7 are provided within the aperture 6 and on the sliding block 5, projecting to opposite sides of the elongated beam 2 reaching through the sliding block 5.

[0028] Figure 2A and figure 2B show from different perspectives how the beam 2 is deformed during a vehicle impact as the sliding block 5 is moved in the direction of arrow A, towards the safety guardrail, along beam 2. Beam 2 may be arranged as having an optional initial depressed portion 8 that the deformation elements 7 engage with. This is however not necessary as the beam 2 may also be arranged with a square or rectangular cross-section over its entire length.

[0029] There are no specific requirements as to the tensile strength of the elongated beam 2 and the tensile strength of the sliding block 5, as long as the beam 2 and the sliding block 5 are arranged such that upon movement of the sliding block 5 along the beam 2 towards the safety guardrail - that is in the direction of the arrow A - the deformation element or elements 7 provide a depressed portion 8 in the beam 2, or extend an initial depressed portion 8 of the beam 2 towards the safety guardrail. As the sliding block moves along the beam 2 during vehicle impact, the deformation elements 7 deform the beam 2, which takes energy and slows the car down. As the elongated beam 2 has a substantially square or rectangular cross-section before movement of the sliding block 5, after passing of the sliding block 5 this square or rectangular cross-section is converted by the operation of the deformation elements 7 into a non-square or non-rectangular cross-section with depressed portions 8.

[0030] Taking reference now to figures 3A - 3C it is shown that the sliding block 5 is provided with at least one of upper 5' wall portions inside the aperture 6. Preferably also at least one of lower wall portions 5" are provided. This means that not both upper 5' and lower 5" wall portions need to be present, but that it is preferred that at least one of the upper wall portions 5' and at least one of lower wall portions 5" are provided. Whatever wall portions are actually present, these wall portions are intended to directly engage the elongated beam 2 for support of the sliding block 5, and that in or between said at least one of upper 5' and lower 5" wall portions a slit 9 or slits are provided providing room for passing of bolt

heads 10 or other fixtures on top of the elongated beam 2. Going from figure 3A to figure 3C the progressing movement of the sliding block 5 along the elongated beam 2 is shown, wherein the bolt heads 10 can pass through the upper slit 9 between the two adjacent upper wall portions 5'. A similar construction can be provided at the underside of the beam 2 wherein a lower slit 9 can be provided between the optional lower wall portions 5". This is not visible in the figures 3A - 3C but entirely clear for the skilled person, so that a further elucidation is superfluous.

[0031] In an embodiment shown in figure 3D an embodiment of a sliding block 5 is shown wherein the side-walls 15', 15" of the sliding block 5 are provided with indents 16', 16" protruding inwardly into the aperture 6 through which the elongated beam (not shown) is guided, wherein said indents 16', 16" are designed to directly engage the elongated beam for support of the sliding block 5 whilst providing room for passing of bolt heads 10 or other fixtures extending from the elongated beam 2.

[0032] Turning now to figure 4A and figure 4B it shows that the collision catcher 4 has a hook part 11. Figure 4B shows its function for catching behind a bumper 12 of a colliding car.

[0033] Preferably the hook part 11 is upstanding, which has proven to be most effective. It can also be beneficial that the hook part 11 is swivable. Other options are to embody the hook part with a locking pin that breaks under impact. The hook part can also be embodied as an active feature which becomes operational upon impact of a car. The way this can be executed requires no further elucidation, and is therefore not further shown in the drawing.

[0034] In figure 5 it is indicated that the elongated beam 2 is provided with an insert beam extending over a part 13 of the length of the elongated beam 2 to provide said elongated beam with portions of different impact resistance. As will be clear from figure 5, the insert beam in part 13 of the elongated beam 2 is closer to the safety guardrail (which is not shown but which is present at the left of the figure), than to the ground anchor 3 in order to provide that upon impact the elongated beam 2 initially provides a lower impact resistance than at a final stage when the part 13 of the elongated beam 2, wherein the insert beam is provided, becomes operational. Although figure 5 only shows a single insert beam, it may be preferable to provide the elongated beam 2 with a plurality of insert beams, wherein the insert beams have mutually differing lengths, gauges and/or material properties. This increases the flexibility in the design to provide the elongated beam with portions of different impact resistance.

[0035] As another feature shown in figure 5, below the elongated beam 2 a stander 17 is provided with a U-shaped receptacle 18 in which the elongated beam 2 is received. Preferably the stander 17 is designed to collapse when the elongated beam 2 is loaded during the impact of a colliding car.

[0036] Turning back to figure 6A, it is shown near to the collision catcher 4 the end terminal is provided with

a deflector 14, wherein the deflector 14 is mounted on and extends below the elongated beam 2. Alternatively the deflector 14 can also be mounted to the ground. Figure 6B shows the functionality of the deflector 14 to deflect parts of the vehicle (mainly the wheel 15) back out, away from the anchor 3 to the ground, to prevent such parts from getting wedged and trapped between the underside of the elongated beam 2 and the rigid anchor 3 to the ground.

[0037] Although the invention has been discussed in the foregoing with reference to exemplary embodiments of the end terminal for a safety guard of the invention, the invention is not restricted to these particular embodiments which can be varied in many ways without departing from the invention. The discussed exemplary embodiments shall therefore not be used to construe the appended claims strictly in accordance therewith. On the contrary the embodiments are merely intended to explain the wording of the appended claims without intent to limit the claims to these exemplary embodiments. The scope of protection of the invention shall therefore be construed in accordance with the appended claims only, wherein a possible ambiguity in the wording of the claims shall be resolved using these exemplary embodiments.

Claims

1. End terminal (1) for a safety guardrail, said end terminal (1) comprising an elongated beam (2) which is on opposite ends connected to a ground anchor (3) and to the safety guardrail, respectively, and further comprising a collision catcher (4) which is slidably mounted on the beam (2), wherein the collision catcher (4) connects to a sliding block (5) with an aperture (6) through which the beam (2) is guided, **characterized in that** the sliding block (5) is provided with at least one of upper (5') wall portions inside the aperture (6) that directly engage the elongated beam (2) for support of the sliding block (5), and that in or between said at least one of upper (5') wall portions a slit (9) or slits are provided providing room for passing of bolt heads (10) or other fixtures extending from the elongated beam (2).
2. End terminal according to claim 1, **characterized in that** the sliding block (5) is also provided with at least one of lower (5'') wall portions inside the aperture (6) that directly engage the elongated beam (2) for support of the sliding block (5), and that in or between said at least one of lower (5'') wall portions a slit (9) or slits are provided providing room for passing of bolt heads (10) or other fixtures extending from the elongated beam (2).
3. End terminal according to claim 1 or 2, **characterized in that** inside the aperture (6) the sliding block (5) is provided with one or more protruding deforma-

tion elements (7) that engage the beam (2) so as to arrange that upon movement of the sliding block (5) towards the safety guardrail, the deformation elements (7) provide a depressed portion (8) in the beam (2) that extends towards the safety guardrail.

4. End terminal according to any one of claims 1 - 3, **characterized in that** the elongated beam (2) has an initial depressed portion (8) in which the one or more protruding deformation elements (7) protrude.
5. End terminal according to any one of claims 1 - 4, **characterized in that** the elongated beam (2) has a substantially square or rectangular cross-section, and that at least two deformation elements (7) are provided within the aperture (6) on the sliding block (5), and projecting to opposite sides of the elongated beam (2) reaching through the sliding block (5).
6. End terminal according to any one of claims 1 - 5, **characterized in that** the sidewalls (15', 15'') of the sliding block (5) are provided with indents (16', 16'') protruding inwardly into the aperture (6) through which the elongated beam (2) is guided, wherein said indents (16', 16'') directly engage the elongated beam (2) for support of the sliding block (5) whilst providing room for passing of bolt heads (10) or other fixtures extending from the elongated beam (2).
7. End terminal according to any one of claims 1 - 6, **characterized in that** the collision catcher (4) has a hook part (11) for catching behind a bumper (12) of a colliding car.
8. End terminal according to claim 7, **characterized in that** the hook part (11) is an upstanding hook part.
9. End terminal according to any one of claims 1 - 8, **characterized in that** below the elongated beam (2) a stander (17) is provided with a U-shaped receptacle (18) in which the elongated beam (2) is received.
10. End terminal according to claim 9, **characterized in that** the stander (17) is designed to collapse when the elongated beam (2) is loaded during the impact of a colliding car.
11. End terminal according to any one of claims 1 - 10, **characterized in that** the elongated beam (2) is provided with at least one insert beam extending over a part (13) of the length of the elongated beam (2) to provide said elongated beam (2) with portions of different impact resistance.
12. End terminal according to claim 11, **characterized in that** the insert beams have mutually differing lengths, gauges and/or material properties.

13. End terminal according to any one of claims 11 - 12,
characterized in that the at least one insert beam
is closer to the safety guardrail than to the ground
anchor (3) in order to provide that upon impact the
elongated beam (2) initially provides a lower impact 5
resistance than at a final stage when the part (13) of
the elongated beam (2) wherein the at least one in-
sert beam is provided becomes operational.
14. End terminal according to any one of claims 1 - 13, 10
characterized in that the end terminal (1) is provid-
ed with a deflector (14), wherein the deflector (14)
extends below the elongated beam (2).
15. End terminal according to claim 14, **characterized** 15
in that the deflector (14) is mounted to the ground.

20

25

30

35

40

45

50

55

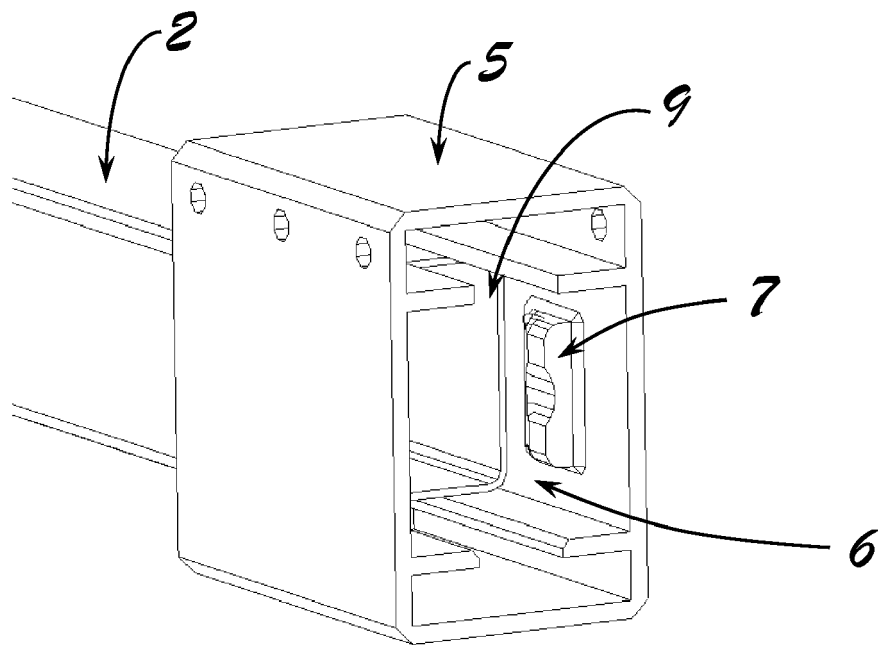
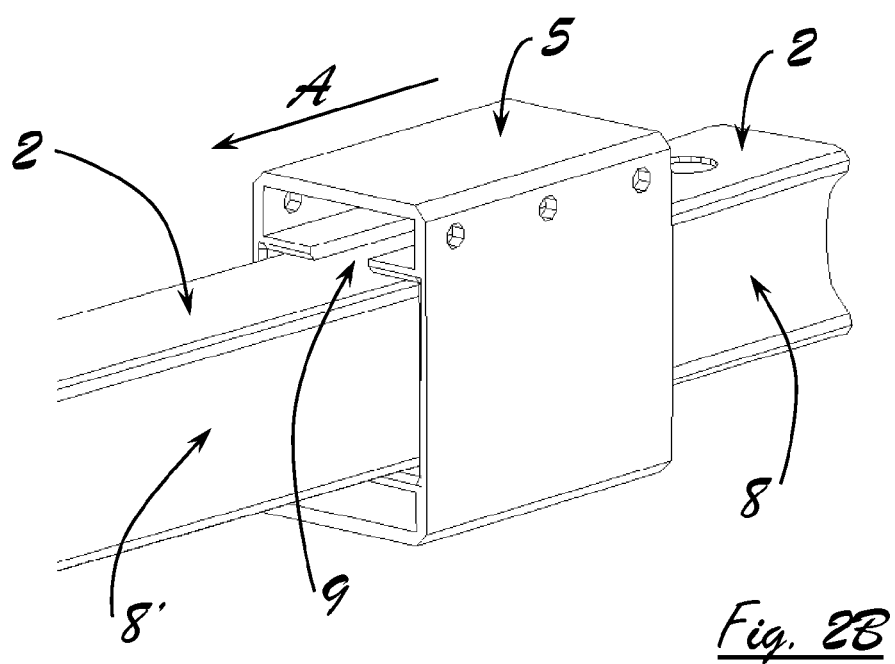
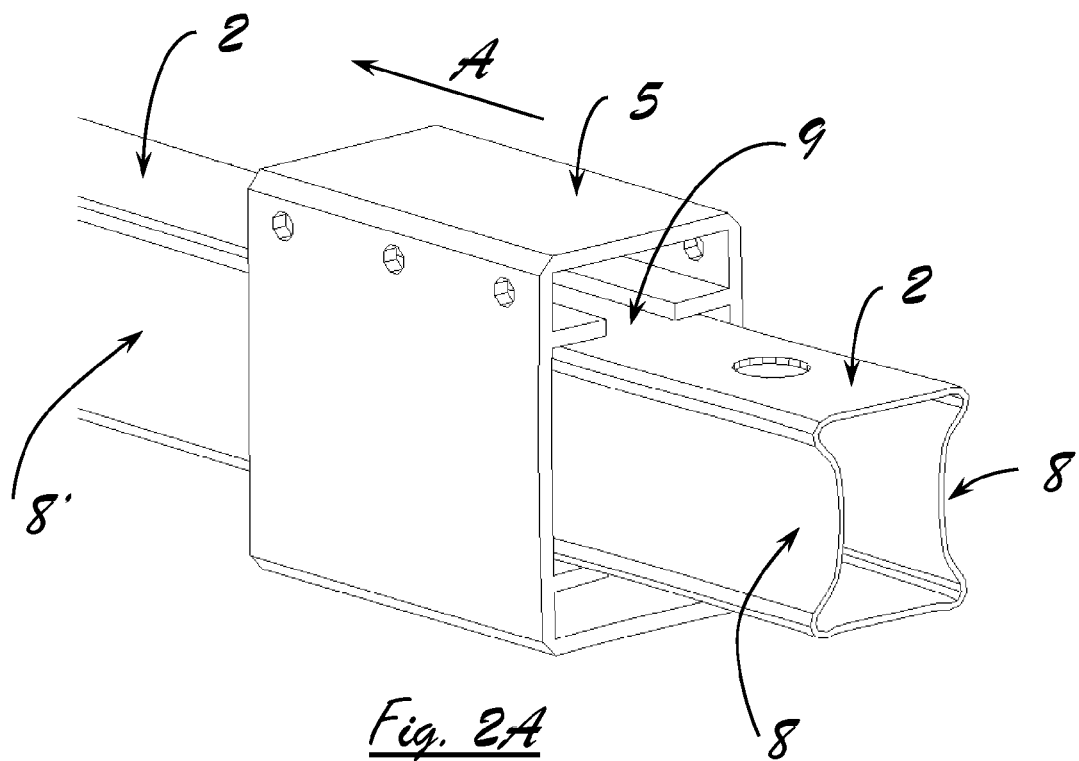


Fig. 1



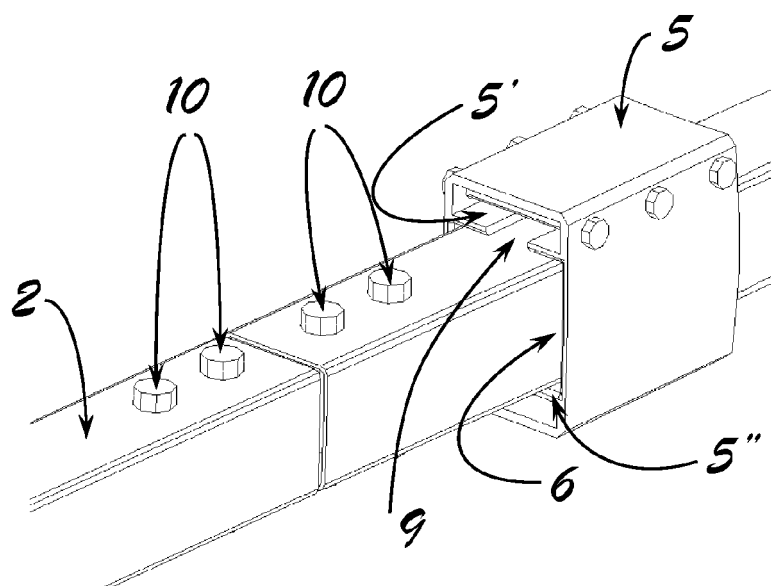


Fig. 3A

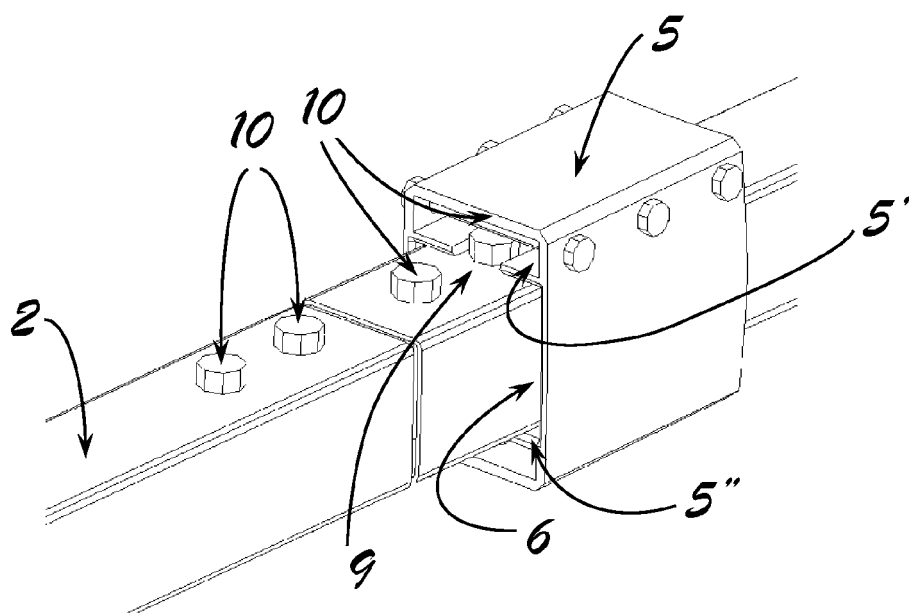


Fig. 3B

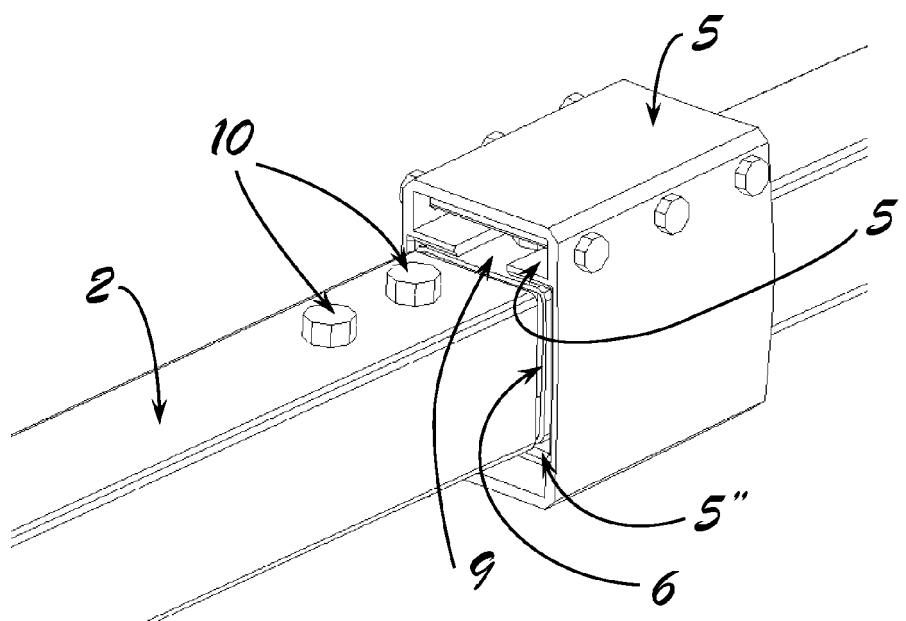


Fig. 3C

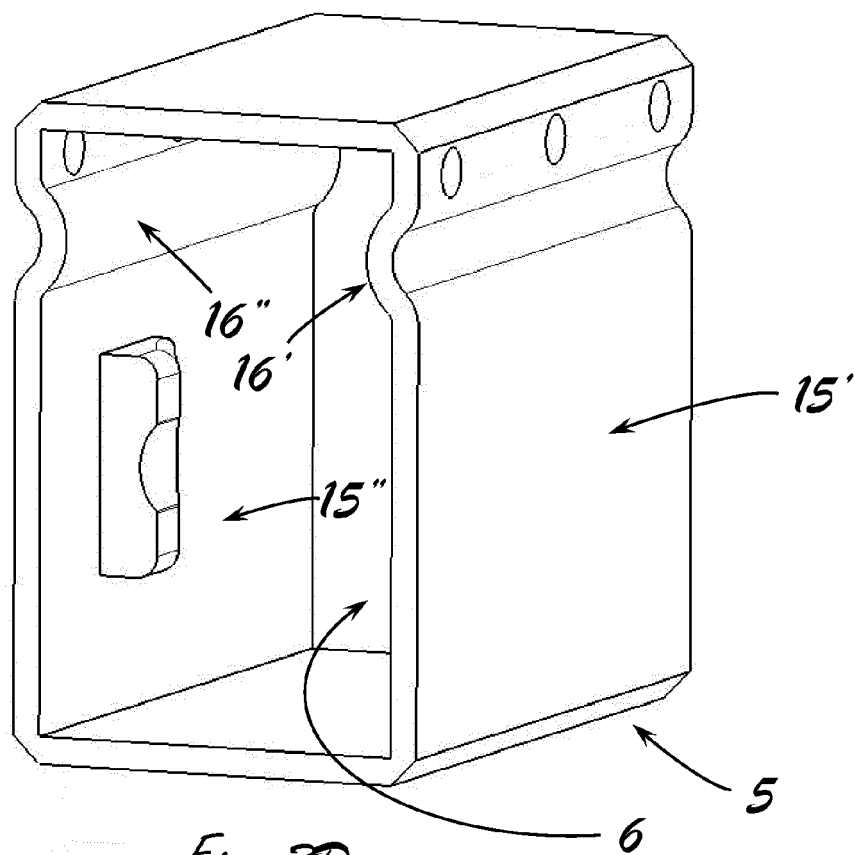
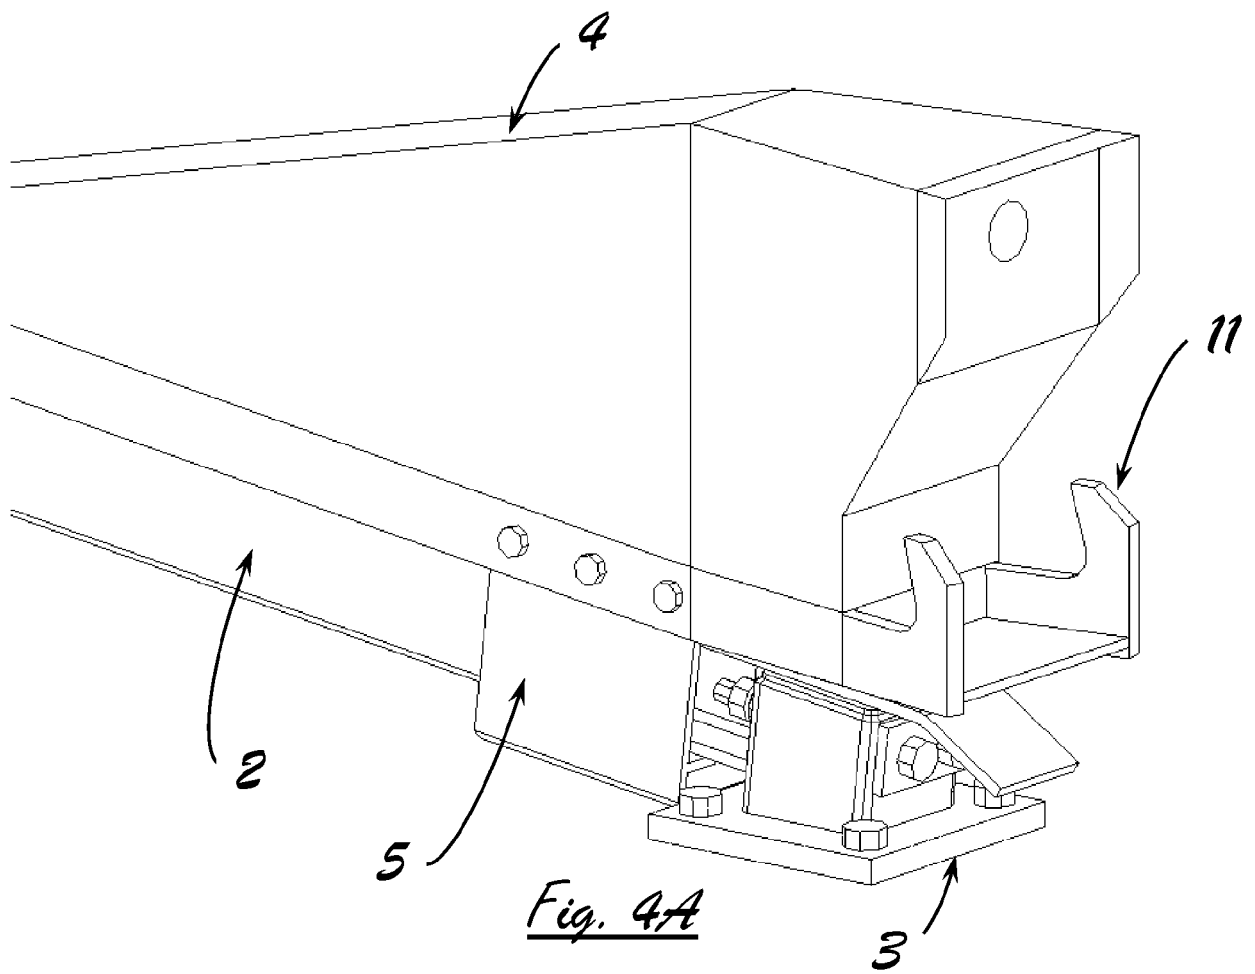
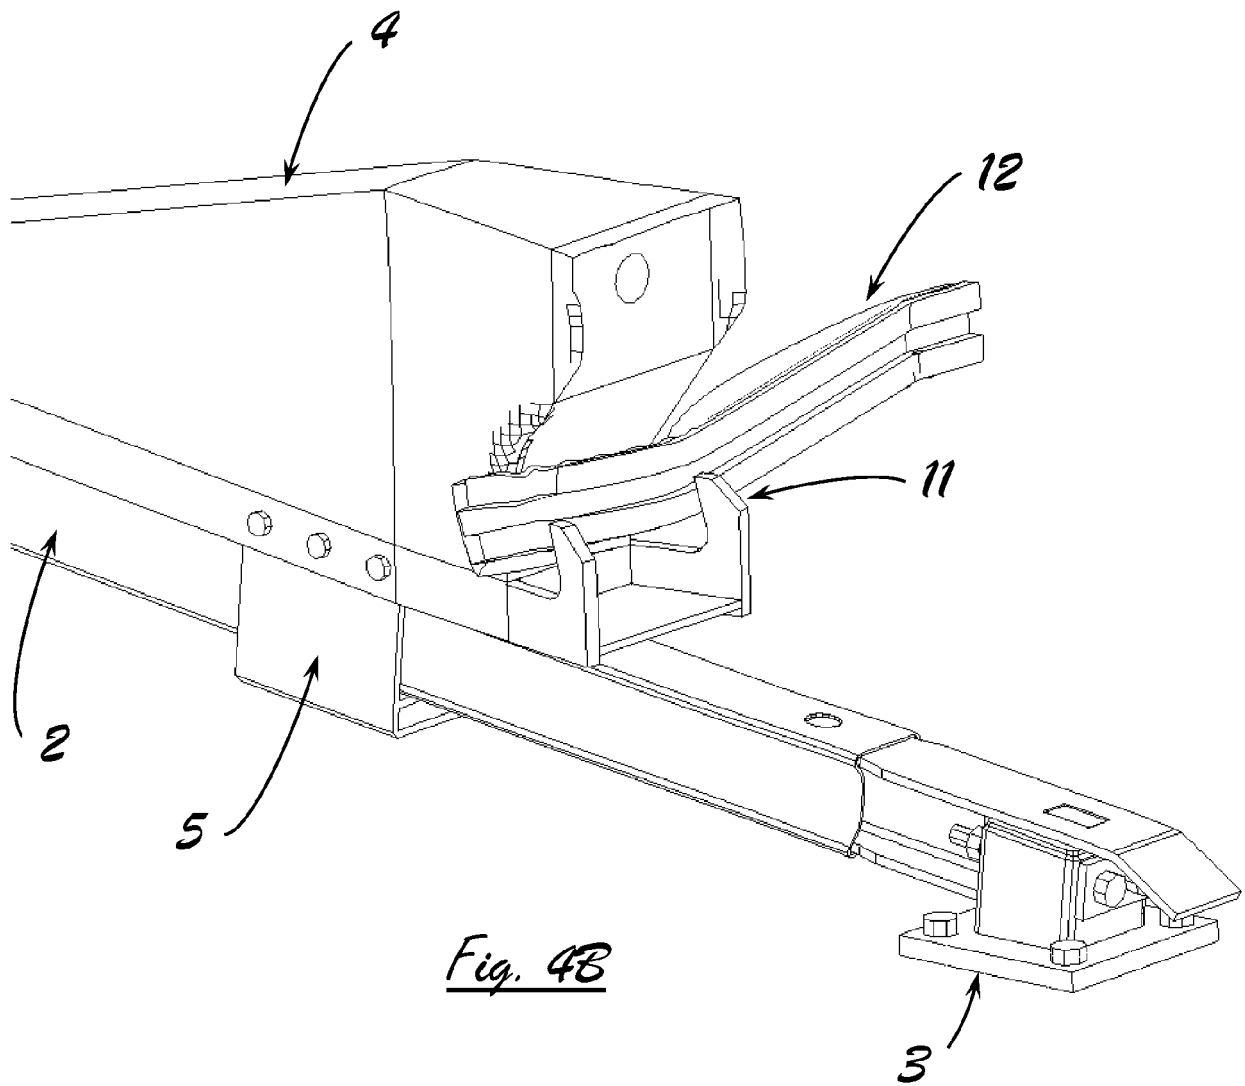


Fig. 3D





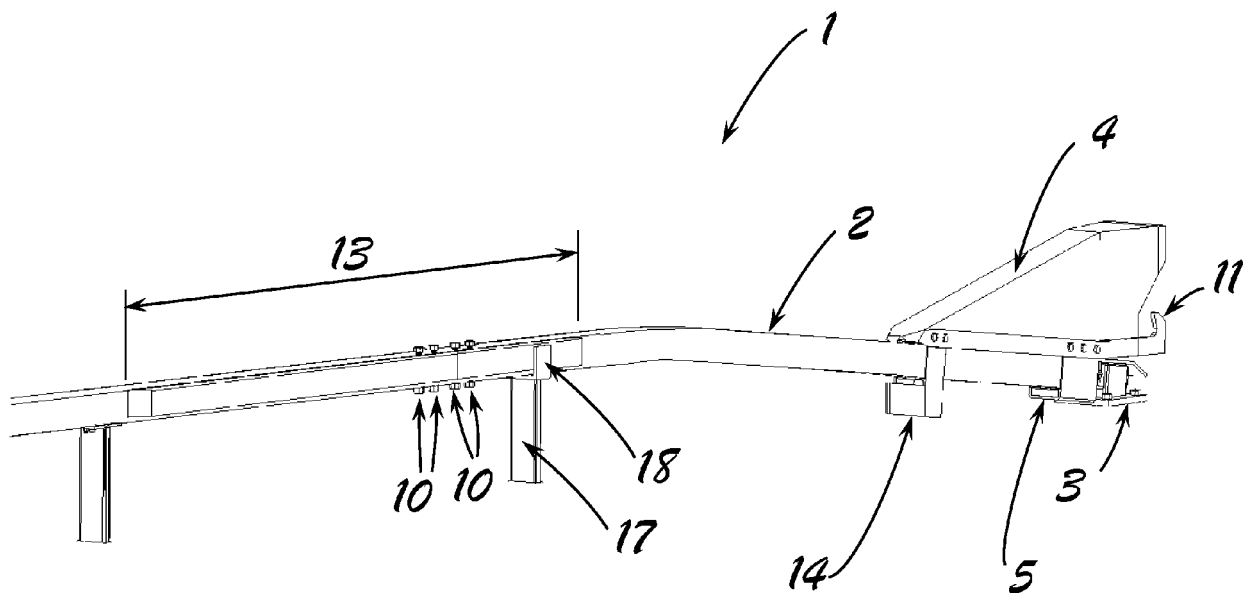


Fig. 5

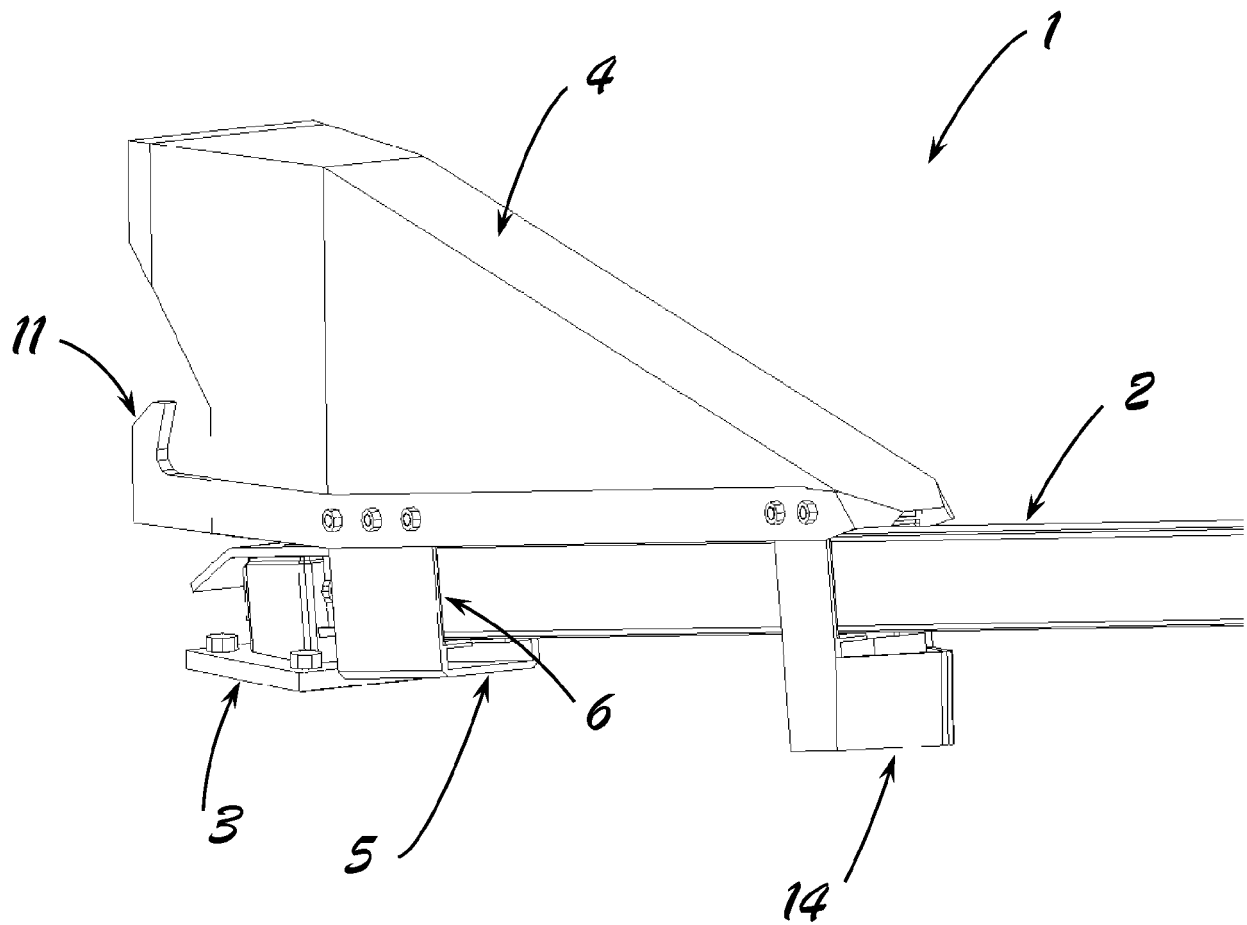


Fig. 6A

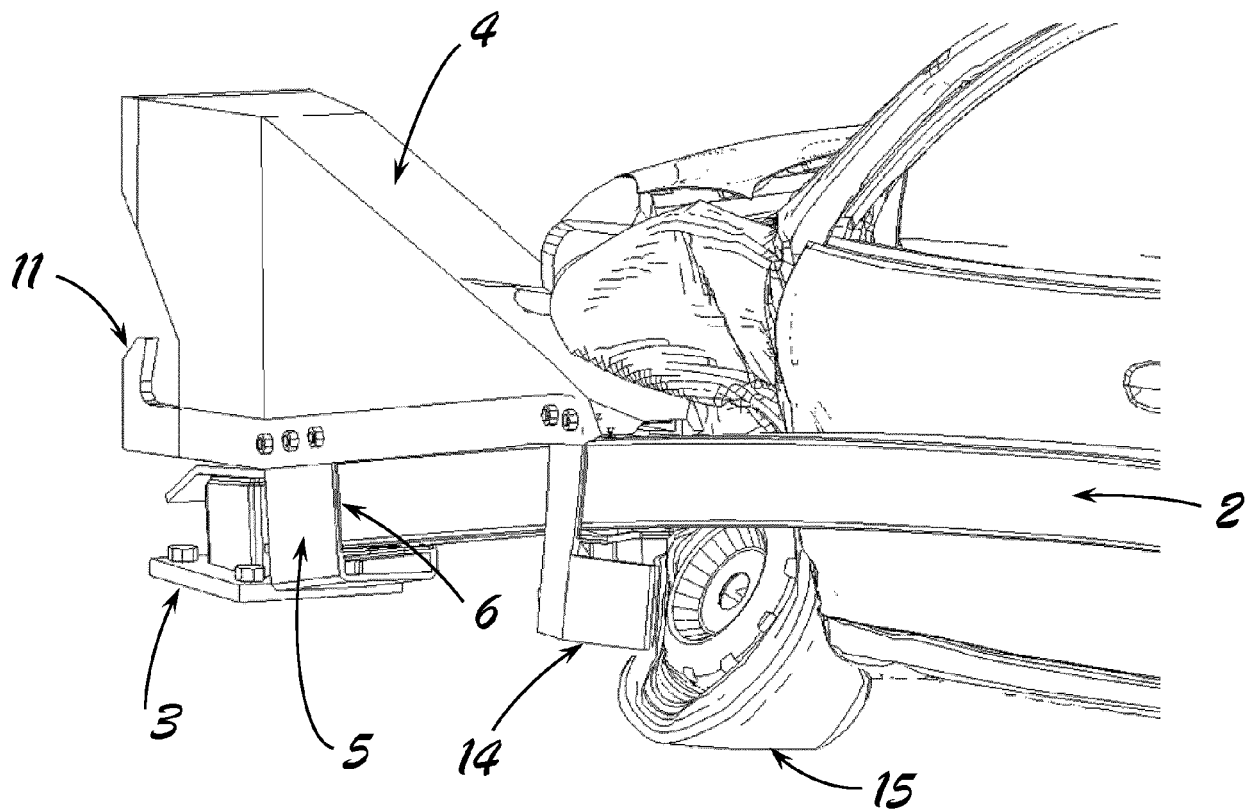


Fig. 6B



EUROPEAN SEARCH REPORT

 Application Number
EP 19 20 9619

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2017/125740 A1 (HILL & SMITH HOLDINGS PLC [GB]) 27 July 2017 (2017-07-27) * page 1, lines 3-5,16-31 * * page 2, lines 1-7,29,30 * * page 3, lines 5-27 * * page 5, line 29 - page 6, line 25 * * page 8, lines 4-8 * * page 8, line 31 - page 9, line 33 * * page 13, line 18 - page 14, line 22 * * page 15, lines 13-29 * * page 16, line 17 - page 18, line 33 * * figures 1-12 *	1-15	INV. E01F15/14
A	US 2003/034484 A1 (BUTH C EUGENE [US] ET AL) 20 February 2003 (2003-02-20) * paragraphs [0003], [0005], [0006], [0011] - [0013], [0043], [0045], [0046], [0050], [0051], [0052], [0058] * * figures 1,8-13,22-26 *	1-15	
A	US 2006/054876 A1 (LATURNER JOHN F [US] ET AL) 16 March 2006 (2006-03-16) * the whole document *	1-15	TECHNICAL FIELDS SEARCHED (IPC) E01F
A	US 2003/070894 A1 (REID JOHN D [US] ET AL) 17 April 2003 (2003-04-17) * paragraphs [0002], [0029], [0031], [0032], [0055], [0056] * * figures 2A-2D,6A-7 *	1-15	
A	WO 2016/033122 A1 (SICKING DEAN [US]) 3 March 2016 (2016-03-03) * paragraphs [0017], [0026] * * figures 1,3 *	1-15	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 March 2020	Examiner Kremsler, Stefan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 19 20 9619

5

10

15

20

25

30

35

40

45

2

EPO FORM 1503 03.82 (P04C01)

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2009/272956 A1 (ABU-ODEH AKRAM Y [US] ET AL) 5 November 2009 (2009-11-05) * paragraphs [0001], [0023] - [0039] * * figures 2-4A,8B * -----	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 March 2020	Examiner Kremsler, Stefan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 20 9619

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-03-2020

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2017125740 A1	27-07-2017	EP 3405617 A1	28-11-2018
		WO 2017125740 A1	27-07-2017

US 2003034484 A1	20-02-2003	AT 385275 T	15-02-2008
		CA 2454554 A1	30-01-2003
		EP 1409794 A1	21-04-2004
		US 2003034484 A1	20-02-2003
		US 2007147957 A1	28-06-2007
		WO 03008714 A1	30-01-2003

US 2006054876 A1	16-03-2006	AR 053970 A1	30-05-2007
		AU 2005285021 A1	23-03-2006
		AU 2010212308 A1	02-09-2010
		AU 2010212309 A1	02-09-2010
		BR P10515324 A	22-07-2008
		CA 2579047 A1	23-03-2006
		CN 101099003 A	02-01-2008
		DK 1794372 T3	12-01-2015
		EP 1794372 A2	13-06-2007
		HK 1116843 A1	19-11-2010
		JP 5047796 B2	10-10-2012
		JP 2008513629 A	01-05-2008
		KR 20070051333 A	17-05-2007
		PA 8645801 A1	16-05-2006
		PL 1794372 T3	30-04-2015
		TR 200701606 T2	21-05-2007
		TW 200615428 A	16-05-2006
		US 2006054876 A1	16-03-2006
		US 2008085153 A1	10-04-2008
		US 2009129860 A1	21-05-2009
		WO 2006031701 A2	23-03-2006

US 2003070894 A1	17-04-2003	AU 2003275342 A1	23-04-2004
		CA 2501290 A1	15-04-2004
		EP 1549864 A2	06-07-2005
		NZ 539123 A	27-07-2007
		US 2003070894 A1	17-04-2003
		US 2005252742 A1	17-11-2005
		US 2006034959 A1	16-02-2006
		WO 2004030987 A2	15-04-2004

WO 2016033122 A1	03-03-2016	AU 2015306711 A1	30-03-2017
		CA 2955819 A1	03-03-2016
		EP 3186444 A1	05-07-2017
		US 2016060831 A1	03-03-2016
		WO 2016033122 A1	03-03-2016

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 20 9619

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-03-2020

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009272956	A1	05-11-2009	NONE

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2646624 B **[0002]**
- WO 2017125740 A1 **[0003]**
- US 20030034484 A1 **[0004]**
- US 20060054876 A1 **[0005]**
- US 20030070894 A1 **[0006]**
- WO 2016033122 A1 **[0007]**