

(19)



(11)

**EP 3 660 596 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**03.03.2021 Bulletin 2021/09**

(51) Int Cl.:  
**G03G 15/20 (2006.01)**

(21) Application number: **19211866.9**

(22) Date of filing: **27.11.2019**

(54) **FIXING DEVICE AND IMAGE FORMING APPARATUS INCORPORATING SAME**  
**FIXIERVORRICHTUNG UND BILDERZEUGUNGSVORRICHTUNG DAMIT**  
**DISPOSITIF DE FIXATION ET APPAREIL DE FORMATION D'IMAGES L'INTÉGRANT**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.11.2018 JP 2018225166**  
**13.03.2019 JP 2019045824**

(43) Date of publication of application:  
**03.06.2020 Bulletin 2020/23**

(73) Proprietor: **Ricoh Company, Ltd.**  
**Tokyo 143-8555 (JP)**

(72) Inventors:  
• **SUGIYAMA, Ryohei**  
**Tokyo, 143-8555 (JP)**  
• **FURUICHI, Yuusuke**  
**Tokyo, 143-8555 (JP)**

(74) Representative: **J A Kemp LLP**  
**14 South Square**  
**Gray's Inn**  
**London WC1R 5JJ (GB)**

(56) References cited:  
**US-A1- 2013 272 756 US-A1- 2013 330 111**  
**US-A1- 2016 223 964 US-A1- 2016 306 306**

**EP 3 660 596 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND

#### Technical Field

**[0001]** Embodiments of the present disclosure generally relate to a fixing device and an image forming apparatus incorporating the fixing device.

#### Related Art

**[0002]** An image forming apparatus such as a copier, a printer, a facsimile machine, and a multi-functional apparatus including at least two functions of the copier, printer, facsimile machine includes a fixing device to convey a recording medium such as a sheet on which an unfixed image is formed to a fixing nip formed between a fixing belt and a pressing member in the fixing device, heat the recording medium, and fix the unfixed image onto the recording medium.

**[0003]** The fixing device includes a nip formation pad that is disposed inside of a loop of the fixing belt and contacts the pressing member via the fixing belt to form the fixing nip, and a support to support the nip formation pad.

**[0004]** In such a type of fixing device, the recording medium that has passed through the fixing nip needs to be separated from the fixing belt and conveyed downstream. To enhance the separability of the recording medium from the fixing belt, a large separation angle is set as an angle between the fixing belt and the conveyance direction of the recording medium after the recording medium passes through the fixing nip.

**[0005]** For example, in a fixing device 100 as illustrated in JP-2014-66851-A, as illustrated in FIG. 9, a nip plate 103 abuts a pressure roller 102 via a fixing belt 101 to form a fixing nip N. The nip plate 103 includes, e.g., a flat plate-shaped portion 103a, a bent portion 103b extending downward from the rear end of the plate-shaped portion 103a, and a bottom portion 103c extending rearward from a lower end of the bent portion 103b. The conveyance direction of the sheet S heated and pressed in the fixing nip N is changed by the bent portion 103b. That is, the separation angle  $\alpha$  is formed between the conveyance direction of the sheet S and the fixing belt 101, and the sheet S is separated from the fixing belt 101.

**[0006]** As in JP-2014-66851-A, when the bent portion bent toward the pressure member is disposed downstream from the fixing nip, the separation angle of the recording medium from the fixing belt can be increased, thus enhancing the separability of the recording medium. However, in the configuration as in JP-2014-66851-A, the portion downstream from the bent portion 103b is not in contact with the pressure member. Accordingly, a nip portion is not formed between the pressure member and the downstream portion, which causes a problem in that the length of the fixing nip in the conveyance direction

becomes small. Therefore, depending on the configuration of the fixing device, there is a problem that the recording medium cannot be heated sufficiently.

**[0007]** US 2016/223964 A1, US 2013/330111 A1, US 2013/272756 A1 and US 2016/306306 A1 disclose background art to the invention.

### SUMMARY

**[0008]** The invention is defined by the appended claims.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0009]** The aforementioned and other aspects, features, and advantages of the present disclosure would be better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

FIG. 1 is a schematic sectional view of an image forming apparatus according to an embodiment of the present disclosure;

FIG. 2 is a cross-sectional side view of a fixing device according to an embodiment of the present disclosure;

FIG. 3 is a perspective view of the fixing device of FIG. 2;

FIG. 4 is a cross-sectional front view of the fixing device of FIG. 2;

FIG. 5 is a vertical cross-sectional view of a fixing device according to a comparative example;

FIG. 6 is a vertical cross-sectional view of a fixing device according to another embodiment of the present disclosure;

FIGS. 7A and 7B are cross-sectional side views of a fixing device according to still another embodiment of the present disclosure in a state of elastic deformation of a second nip forming portion;

FIG. 8 is a side view of a biasing member that biases the second nip forming portion; and

FIG. 9 is a cross-sectional side view of a conventional fixing device.

**[0010]** The accompanying drawings are intended to depict embodiments of the present disclosure and should not be interpreted to limit the scope thereof. The accompanying drawings are not to be considered as drawn to scale unless explicitly noted.

### DETAILED DESCRIPTION

**[0011]** Although the embodiments are described with technical limitations with reference to the attached drawings, such description is not intended to limit the scope of the invention, which is defined by the claims.

**[0012]** Referring now to the drawings, embodiments of the present disclosure are described below. Identical ref-

erence numerals are assigned to identical components or equivalents and a description of those components is simplified or omitted.

**[0013]** As illustrated in FIG. 1, an image forming apparatus 1 according to an embodiment of the present disclosure includes an image forming device 2 disposed in a center portion of the image forming apparatus 1. The image forming device 2 includes four process units 9Y, 9M, 9C, and 9K (hereinafter, may be collectively referred to process unit(s) 9 unless distinguished) as removably installed in the image forming apparatus 1. Although the process units 9Y, 9M, 9C, and 9K contain developers (e.g., yellow, magenta, cyan, and black toners) in different colors, that is, yellow, magenta, cyan, and black corresponding to color separation components of a color image, respectively, the process units 9Y, 9M, 9C, and 9K have an identical structure.

**[0014]** Each process unit 9 includes a photoconductor drum 10 serving as a rotatable image bearer to bear toner as the developer on the surface of the photoconductor drum 10, a charging roller 11 to uniformly charge the surface of the photoconductor drum 10, and a developing device 12 that includes a developing roller to supply toner to the surface of the photoconductor drum 10.

**[0015]** Below the process units 9Y, 9C, 9M, and 9K, an exposure device 3 is disposed. The exposure device 3 emits laser light beams based on image data.

**[0016]** Above the image forming device 2, a transfer device 4 is disposed. The transfer device 4 includes, e.g., a drive roller 14, a driven roller 15, an intermediate transfer belt 16, and four primary transfer rollers 17. The intermediate transfer belt 16 is an endless belt rotatably stretched around the drive roller 14, the driven roller 15, and the like. Each of the four primary transfer rollers 17 is disposed opposite the corresponding photoconductor drum 10 in each of the process units 9Y, 9C, 9M, and 9K via the intermediate transfer belt 16. At the different positions, the primary transfer rollers 17 press against an inner circumferential surface of the intermediate transfer belt 16. Thus, primary transfer nips are formed at positions at which the photoconductor drums 10 contact respective pressed portions of the intermediate transfer belt 16 pressed by the primary transfer rollers 17.

**[0017]** The drive roller 14 rotates the intermediate transfer belt 16. In addition, the transfer device 4 includes a secondary-transfer roller 18 disposed opposite the drive roller 14 via the intermediate transfer belt 16. The secondary-transfer roller 18 is pressed against an outer circumferential surface of the intermediate transfer belt 16, and thus a secondary-transfer nip is formed between the secondary-transfer roller 18 and the intermediate transfer belt 16.

**[0018]** A sheet feeder 5 is disposed in a lower portion of the image forming apparatus 1. The sheet feeder 5 includes a sheet tray 19, which contains sheets P as recording media, and a sheet feeding roller 20 to feed the sheets P from the sheet tray 19.

**[0019]** The sheets P are conveyed along a conveyance

passage 6 from the sheet feeder 5 toward a sheet ejector 8. Conveyance roller pairs including a registration roller pair 21 are disposed along the conveyance passage 6.

**[0020]** A fixing device 7 is disposed downstream from the secondary-transfer nip in a sheet conveyance direction. The fixing device 7 includes a fixing belt 22 heated by a heater and a pressure roller 23 as a pressing member to press the fixing belt 22.

**[0021]** The sheet ejector 8 is disposed at an extreme downstream side of the conveyance passage 6 in the image forming apparatus 1. The sheet ejector 8 includes an ejection roller pair 24 and an output tray 25. The ejection roller pair 24 ejects the sheets P onto the output tray 25 disposed atop a housing of the image forming apparatus 1. Thus, the sheets P lie stacked on the output tray 25.

**[0022]** In an upper portion of the image forming apparatus 1, removable toner bottles 29Y, 29C, 29M, and 29K are disposed. The toner bottles 29Y, 29C, 29M, and 29K are filled with fresh toner of yellow, cyan, magenta, and black, respectively. A toner supply tube is interposed between each of the toner bottles 29Y, 29C, 29M, and 29K and the corresponding developing device 12. The fresh toner is supplied from each of the toner bottles 29Y, 29C, 29M, and 29K to the corresponding developing device 12 through the toner supply tube.

**[0023]** Next, a description is given of a basic operation of the image forming apparatus 1 with reference to FIG. 1.

**[0024]** As the image forming apparatus 1 receives a print job and starts an image forming operation, the exposure device 3 emits laser light beams onto the outer circumferential surfaces of the photoconductor drums 10 of the process units 9Y, 9M, 9C, and 9K according to image data, thus forming electrostatic latent images on the photoconductor drums 10. The image data used to expose the respective photoconductor drums 10 by the exposure device 3 is monochrome image data produced by decomposing a desired full color image into yellow, magenta, cyan, and black image data. After the exposure device 3 forms the electrostatic latent images on the photoconductor drums 10, the drum-shaped developing rollers of the developing devices 12 supply yellow, magenta, cyan, and black toners stored in the developing devices 12 to the electrostatic latent images, rendering visible the electrostatic latent images as developed visible images, that is, yellow, magenta, cyan, and black toner images, respectively.

**[0025]** In the transfer device 4, the intermediate transfer belt 16 moves along with rotation of the drive roller 14 in a direction indicated by arrow D in FIG. 1. A power supply applies a constant voltage or a constant current control voltage having a polarity opposite a polarity of the toner to each primary transfer roller 17. As a result, a transfer electric field is formed at the primary transfer nip. The yellow, magenta, cyan, and black toner images are primarily transferred from the photoconductor drums 10 onto the intermediate transfer belt 16 successively at the primary transfer nips such that the yellow, magenta, cy-

an, and black toner images are superimposed on a same position on the intermediate transfer belt 16.

**[0026]** As the image forming operation starts, the sheet feeding roller 20 of the sheet feeder 5 disposed in the lower portion of the image forming apparatus 1 is driven and rotated to feed a sheet P from the sheet tray 19 toward the registration roller pair 21 through the conveyance passage 6. The registration roller pair 21 conveys the sheet P fed to the conveyance passage 6 by the sheet feeding roller 20 to the secondary-transfer nip formed between the secondary-transfer roller 18 and the intermediate transfer belt 16 supported by the drive roller 14, timed to coincide with the superimposed toner image on the intermediate transfer belt 16. At this time, a transfer voltage having a polarity opposite the toner charge polarity of the toner image formed on the surface of the intermediate transfer belt 16 is applied to the sheet P and the transfer electric field is generated in the secondary-transfer nip. Due to the transfer electric field generated in the secondary transfer nip, the toner images formed on the intermediate transfer belt 16 are collectively transferred onto the sheet P.

**[0027]** The sheet P bearing the full color toner image is conveyed to the fixing device 7 where the fixing belt 22 and the pressure roller 23 fix the full color toner image onto the sheet P under heat and pressure. The sheet P having the fixed toner image thereon is separated from the fixing belt 22 and conveyed by the conveyance roller pair to the sheet ejector 8. The ejection roller pair 24 of the sheet ejector 8 ejects the sheet P onto the output tray 25.

**[0028]** The above describes the image forming operation of the image forming apparatus 1 to form the full color toner image on the sheet P. Alternatively, the image forming apparatus 1 may form a monochrome toner image by using any one of the four process units 9Y, 9M, 9C, and 9K or may form a bicolor toner image or a tricolor toner image by using two or three of the process units 9Y, 9M, 9C, and 9K.

**[0029]** As illustrated in FIG. 2, the fixing device 7 includes the fixing belt 22, the pressure roller 23, a halogen heater 31 as a heater, a nip formation pad 32 as a nip formation member, a stay 33 as a support, and a reflector 34. As illustrated in FIG. 3, the halogen heater 31, the nip formation pad 32, the stay 33, and the reflector 34 are disposed inside the loop of the fixing belt 22 and across the fixing belt 22 in a width direction of the fixing belt 22 that is a direction orthogonal to a sheet surface on which FIG. 2 is printed and hereinafter may be simply referred to as the width direction.

**[0030]** As illustrated in FIG. 2, the fixing belt 22 is a cylindrical fixing member to fix an unfixed image T to the sheet P and is disposed on the side of the sheet P on which the unfixed image T is held. The fixing belt 22 in the present embodiment is an endless belt or film, including a base layer formed on an inner side of the fixing belt 22 and made of a metal such as nickel and stainless steel (SUS) or a resin such as polyimide, and a release layer

formed on the outer side of the fixing belt 22 and made of tetrafluoroethylene-perfluoroalkylvinylether copolymer (PFA), polytetrafluoroethylene (PTFE), or the like. Optionally, an elastic layer made of rubber such as silicone rubber, silicone rubber foam, and fluoro rubber may be interposed between the base layer and the release layer. While the fixing belt 22 and the pressure roller 23 press the unfixed toner image against the sheet P to fix the toner image onto the sheet P, the elastic layer having a thickness of about 100 micrometers elastically deforms to absorb slight surface asperities of the fixing belt 22, preventing variation in gloss of the toner image on the sheet P. In the present embodiment, the fixing belt 22 is thin and has a small loop diameter to decrease the thermal capacity of the fixing belt 22. For example, the base layer of the fixing belt 22 has a thickness of from 20  $\mu\text{m}$  to 50  $\mu\text{m}$  and the release layer has a thickness of from 10  $\mu\text{m}$  to 50  $\mu\text{m}$ . Thus, the fixing belt 22 has a total thickness not greater than 1 mm. When the fixing belt 22 includes the elastic layer, the thickness of the elastic layer may be set to 100 to 300  $\mu\text{m}$ . In order to further decrease the thermal capacity of the fixing belt 22, the fixing belt 22 may have the total thickness not greater than 0.20 mm and preferably not greater than 0.16 mm. In the present embodiment, the fixing belt 22 may have a loop diameter from 20 to 40 mm and preferably 30 mm or less.

**[0031]** The pressure roller 23 is an opposed member disposed opposite an outer circumferential surface of the fixing belt 22. The pressure roller 23 includes a cored bar; an elastic layer coating the cored bar and being made of silicone rubber foam, fluoro rubber, or the like; and a release layer coating the elastic layer and being made of PFA, PTFE, or the like. According to the present embodiment, the pressure roller 23 is a solid roller. Alternatively, the pressure roller 23 may be a hollow roller. When the pressure roller 23 is a hollow roller, a heater such as a halogen heater may be disposed inside the pressure roller 23. The elastic layer of the pressure roller 23 may be made of solid rubber. Alternatively, if no heater is disposed inside the pressure roller 23, the elastic layer of the pressure roller 23 is preferably made of sponge rubber to enhance thermal insulation of the pressure roller 23. Such a configuration reduces heat conduction from the fixing belt 22 to the pressure roller 23 and improves heating efficiency of the fixing belt 22.

**[0032]** A driver disposed inside the image forming apparatus 1 drives and rotates the pressure roller 23 in the direction indicated by arrow A in FIG. 2. The rotation of the pressure roller 23 drives the fixing belt 22 to rotate in a direction indicated by arrow B in FIG. 2 (hereinafter, belt rotation direction B) due to frictional force therebetween. After the toner image is transferred onto the sheet P, the sheet P bearing the unfixed toner image T is sent to between the fixing belt 22 and the pressure roller 23. The rotating fixing belt 22 and the rotating pressure roller 23 convey the sheet P, and the sheet P passes through a fixing nip N1 and a fixing nip N2. Heat and pressure are applied to the sheet P to fix the unfixed toner image

T onto the sheet P.

**[0033]** The pressure roller 23 and the fixing belt 22 are configured to be able to contact and separate each other. If the sheet is jammed in the fixing nip N1 and the fixing nip N2, the pressure roller 23 and the fixing belt 22 are separated from each other and the fixing nip N1 and the fixing nip N2 are opened, thus allowing maintenance operation, such as removal of the jammed sheet. One of the pressure roller 23 and the fixing belt 22 may be configured to be fixed and the other may be configured to be movable so that the pressure roller 23 and the fixing belt 22 contact and separate each other. Alternatively, both the pressure roller 23 and the fixing belt 22 may be configured to move so that the pressure roller 23 and the fixing belt 22 contact and separate from each other.

**[0034]** The halogen heater 31 is a heater disposed inside the loop of the fixing belt 22 to emit infrared light, and radiant heat from the halogen heater 31 heats the fixing belt 22 from the inside. Alternatively, instead of the halogen heater 31, a carbon heater, a ceramic heater or the like may be employed as the heater. In the present embodiment, one halogen heater 31 is disposed in the loop of the fixing belt 22, but a plurality of halogen heaters 31 having different heat generation areas may be used according to the width of the sheet.

**[0035]** The nip formation pad 32 sandwiches the fixing belt 22 together with the pressure roller 23, to form the fixing nip N1 and the fixing nip N2. Specifically, the nip formation pad 32 is disposed in the inner circumferential side of the fixing belt 22 to extend in a longitudinal shape in the width direction. The nip formation pad 32 includes, e.g., a first nip forming portion 32a, a bent portion 32b, and a second nip forming portion 32e. The first nip forming portion 32a has a flat shape and contacts the inner circumferential surface of the fixing belt 22. The bent portion 32b bends from an upstream end of the first nip forming portion 32a in the belt rotation direction B to the side opposite to the pressure roller 23. The second nip forming portion 32e, which is described later, is disposed downstream from the first nip forming portion 32a in the belt rotation direction B. A pressing member such as a spring presses the pressure roller 23 against the nip formation pad 32, which causes the pressure roller 23 to contact the fixing belt 22 and form the fixing nip N1 and the fixing nip N2 between the pressure roller 23 and the fixing belt 22.

**[0036]** The nip formation surface 32a1 of the first nip forming portion 32a and the nip formation surface 32e1 of the second nip forming portion 32e facing the fixing belt 22 are in direct contact with the inner circumferential surface of the fixing belt 22. As the fixing belt 22 rotates, the fixing belt 22 slides on the nip formation surfaces 32a1 and 32e1. To enhance the abrasion resistance and the slidability of the nip formation surface 32a1, preferably the nip formation surfaces 32a1 and 32e1 are treated with alumite or coated with a fluororesin material. To ensure the slidability over time, a lubricant such as fluorine-based grease may be applied to the nip formation sur-

faces 32a1 and 32e1. In the present embodiment, the nip formation surface 32a1 is planar. Alternatively, the nip formation surface 32a1 may define recesses or other shapes.

**[0037]** The nip formation pad 32 is made of a material having a thermal conductivity larger than a thermal conductivity of the stay 33. For example, the material of the nip formation pad 32 is preferably copper (thermal conductivity: 398 W / mk) or aluminum (thermal conductivity: 236 W / mk). The nip formation pad 32 made of the material having such a large thermal conductivity absorbs the radiant heat from the halogen heater 31 and effectively transmits heat to the fixing belt 22. For example, setting the thickness of the nip formation pad 32 to 1 mm or less can shorten a heat transfer time in which the heat transfers from the nip formation pad 32 to the fixing belt 22, which is advantageous in shortening a warm-up time of the fixing device 7. In contrast, setting the thickness of the nip formation pad 32 to be larger than 1 mm and 5 mm or less can improve a heat storage capacity of the nip formation pad 32.

**[0038]** The stay 33 is a support that indirectly contacts the nip formation pad 32 from the side (upper side in FIG. 2) opposite to the pressure roller 23 via another member (in the present embodiment, the bent portion 34b of the reflector 34) and supports the nip formation pad 32 against the pressure of the pressure roller 23. Similar to the nip formation pad 32, the stay 33 extends in a longitudinal shape in the width direction of the fixing belt 22 and is disposed inside the loop of the fixing belt 22. In the present embodiment, the stay 33 has a U-shaped cross-section including a pair of side wall portions 33a and a bottom wall portion 33b that connects the pair of side wall portions 33a. The pair of side wall portions 33a of the stay 33 supports both ends of the nip formation pad 32 in the belt rotation direction B. The side wall portions 33a extending in a direction in which the pressure roller 23 presses against the nip formation pad 32 that is a vertical direction in FIG. 2 strengthens the rigidity of the stay 33 in the direction in which the pressure roller 23 presses against the nip formation pad 32 and reduces the bend of the first nip forming portion 32a caused by the pressure force of the pressure roller 23. Such a configuration results in a uniform width of the nip in the longitudinal direction. The stay 33 is preferably made of an iron-based metal such as stainless steel (SUS) or Steel Electrolytic Cold Commercial (SECC) that is electrogalvanized sheet steel to ensure rigidity.

**[0039]** Note that the stay 33 "supports" the nip formation pad 32 means that a portion (in the present embodiment, the side wall portion 33a) of the stay 33 extending in the pressing direction of the pressure roller 23 (the vertical direction in FIG. 2) or a portion having a certain thickness is brought into contact with the nip formation pad 32 from the side (upper side in FIG. 2) opposite to the pressure roller 23. Such a configuration reduces the bend (in particular, the bend in the longitudinal direction in the present embodiment) of the nip formation pad 32

caused by the pressure from the pressure roller 23. However, the above-described contact includes not only the case where the stay 33 is in direct contact with the nip formation pad 32 but also the case where the stay 33 contacts the nip formation pad 32 via another member as in the present embodiment. The "contact via another member" means a state in which another member is interposed between the stay 33 and the nip formation pad 32 in the vertical direction in FIG. 2 and at a position corresponding to at least a part of the member, the stay 33 contacts the member and the member contacts the nip formation pad 32. The term "extending in the pressing direction" is not limited to a case where the portion of the stay 33 extends in the same direction as the pressing direction of the pressure roller 23, but includes the case where the portion of the stay 33 extends in a direction with a certain angle from the pressing direction of the pressure roller 23. Even in such cases, the stay 33 can reduce the bend of the nip formation pad 32 against the pressing force from the pressure roller 23.

**[0040]** The reflector 34 is disposed opposite the halogen heater 31 inside the loop of the fixing belt 22 to reflect the radiant heat that is infrared light emitted from the halogen heater 31 to the nip formation pad 32. In the present embodiment, the reflector 34 includes a reflector portion 34a formed as an ellipse cross-section and a pair of bent portions 34b bent from both ends of the reflector portion 34a in a direction in which the bent portions separate from each other in the belt rotation direction B. Each bent portion 34b is sandwiched between each side wall portion 33a of the stay 33 and the first nip forming portion 32a of the nip formation pad 32 to hold the reflector 34.

**[0041]** An opening of an ellipse concave surface of the reflector portion 34a that opens toward the nip formation pad 32 reflects the radiant heat from the halogen heater 31 toward the nip formation pad 32. That is, the halogen heater 31 directly irradiates the nip formation pad 32 with the infrared light, and, additionally, the nip formation pad 32 is also irradiated with the infrared light reflected by the reflector portion 34a. Therefore, the nip formation pad 32 is effectively heated.

**[0042]** Since the reflector portion 34a is interposed between the halogen heater 31 and the stay 33, the reflector portion 34a functions to block the infrared light from the halogen heater 31 to the stay 33. The function reduces wasteful energy use to heat the stay 33. Additionally, in the present embodiment, the thermal insulation of the layer of air in a gap between the stay 33 and the reflector portion 34a further reduces heat transfer to the stay 33.

**[0043]** As described above, in the present embodiment, the reflector 34 is provided to cover the halogen heater 31, and the radiant heat from the halogen heater 31 and the radiant heat reflected by the reflector 34 are efficiently collected to an opening of the reflector 34, that is, to the nip formation pad 32. The heated nip formation pad 32 can efficiently heat the fixing belt 22 in the fixing nips N1 and N2. The stay 33 covers the outer circumferential side of the reflector 34 and the fixing belt 22 is

disposed outside the stay 33. That is, in the circumferential direction of the fixing belt 22, the fixing belt 22 faces the halogen heater 31 via the nip formation pad 32 in the fixing nip N1 and, in the portion other than the fixing nip N1, faces the halogen heater 31 via the reflector 34 and the stay 33.

**[0044]** The surface of the reflector portion 34a of the reflector 34 facing the halogen heater 31 is treated with mirror finish or the like to increase reflectance. In the present embodiment, reflectance is measured using the spectrophotometer that is the ultraviolet visible infrared spectrophotometer UH4150 manufactured by Hitachi High-Technologies Corporation in which the incident angle is set to be 5°. In general, the color temperature of the halogen heater varies depending on the application. The color temperature of the heater for the fixing device is about 2500 K. The reflectance of the reflector 34 used in the present embodiment is preferably 70% or more with wavelengths of high emission intensity in the halogen heater 31, that is, specifically the wavelengths of 900 to 1600 nm and more preferably 70% or more with the wavelengths of 1000 to 1300 nm.

**[0045]** Alternatively, the stay 33 may have the function of reflection and thermal insulation of the reflector 34. For example, performing the thermal insulation treatment or the mirror finishing on the inner surface of the stay 33 in the halogen heater 31 side enables the stay 33 to function as the reflector 34. Such a configuration can obviate the reflector 34 that is a separate component from the stay 33. The reflectance of the stay 33 subjected to the mirror finishing is preferably similar to the reflectance of the reflector 34.

**[0046]** The temperature sensors 28 are disposed outside the loop of the fixing belt 22 and detect temperatures of the fixing belt 22. In the present embodiment, the temperature sensors 28 are disposed at two positions, the central position in the width direction of the fixing belt 22, and one end position in the belt width direction of the fixing belt 22. Output of the halogen heater 31 is controlled based on the temperature of the outer circumferential surface of the fixing belt 22 detected by the temperature sensor 28. Thus, the temperature of the fixing belt 22 is adjusted to a desired fixing temperature. The temperature sensor 28 may be either contact type or non-contact type. The temperature sensor 28 may be a known temperature sensor type such as a thermopile, a thermostat, a thermistor, or a non-contact (NC) sensor.

**[0047]** As illustrated in FIG. 4, a pair of belt holders 35 is inserted in both lateral ends of the fixing belt 22 in the axial direction of the fixing belt 22 to rotatably support the fixing belt 22. As described above, the belt holders 35 inserted into the inner periphery of the fixing belt 22 support the fixing belt 22 in a state in which the fixing belt 22 is not basically applied with tension in a circumferential direction thereof while the fixing belt 22 does not rotate, that is, by a free belt system.

**[0048]** The pressure roller 23 is biased toward the fixing belt 22 by a biasing member such as a spring at both

ends in the longitudinal direction (see arrows H in FIG. 4) and pressed against the fixing belt 22. As a result, the elastic layer of the pressure roller 23 is pressed and deforms, and the fixing nip N is formed.

**[0049]** Next, the second nip forming portion 32e provided in the nip formation pad 32 is further described with reference to FIG. 2.

**[0050]** As illustrated in FIG. 2, the nip formation pad 32 includes the first nip forming portion 32a on an upstream side (right side in FIG. 2) in the sheet conveyance direction B and the second nip forming portion 32e on a downstream side from the first nip forming portion 32a. The first nip forming portion 32a has a substantially flat plate shape and is disposed in parallel with a direction C1 in which the sheet P enters the fixing nip N1. Relative to the first nip forming portion 32a, the second nip forming portion 32e is curved toward the pressure roller 23 from an inflection portion 32d that is a boundary between the first nip forming portion 32a and the second nip forming portion 32e. In other words, the second nip forming portion 32e is disposed closer to the pressure roller 23 than the first nip forming portion 32a in a direction (vertical direction in FIG. 2) of contact of the fixing belt 22 and the pressure roller 23. In particular, in the present embodiment, the second nip forming portion 32e is more inclined toward the pressure roller 23 (the lower side in FIG. 2) as a portion of the second nip forming portion 32e approaches a downstream end of the second nip forming portion 32e in the sheet conveyance direction. Hereinafter, the upstream side and the downstream side in the sheet conveyance direction may also be simply referred to as the upstream side and the downstream side.

**[0051]** In the present embodiment, a supported portion 32c supported by the side wall portion 33a on the downstream side of the stay 33 is disposed at a downstream portion of the first nip forming portion 32a. In addition to the supported portion 32c, a supported portion 32z supported by the side wall portion 33a on the upstream side of the stay 33 is also disposed at an upstream portion of the first nip forming portion 32a.

**[0052]** At the downstream end of the second nip forming portion 32e, a bent portion 32f is disposed that is bent from the downstream end of the second nip forming portion 32e to the side opposite to the pressure roller 23. The downstream side of the second nip forming portion 32e including the bent portion 32f is a free end that is not secured (supported) by the stay 33 or the like.

**[0053]** The sheet P conveyed to the fixing device 7 is first conveyed in the direction indicated by arrow C1 and passes through the first fixing nip N1. That is, the sheet P is conveyed in the direction indicated by arrow C1 along the first nip forming portion 32a. The conveyance direction of the sheet P having passed through the first fixing nip N1 changes at the inflection portion 32d, and the sheet P is conveyed to the second fixing nip N2. That is, the sheet P is conveyed in the direction along the second nip forming portion 32e from the inflection portion 32d, and the conveyance direction of the sheet P changes in

a direction indicated by arrow C2 that is a direction closer to the pressure roller 23.

**[0054]** The sheet P is further conveyed and separated from the fixing belt 22 at a separation point D disposed at the downstream end of the second nip forming portion 32e. At the separation point D, the sheet P is separated from the fixing belt 22 at a separation angle  $\theta$  formed by the fixing belt 22 and arrow C2 that is the conveyance direction of the sheet P toward the downstream side.

**[0055]** As described above, in the present embodiment, the nip formation pad 32 includes the second nip forming portion 32e that is curved toward the pressure roller 23, thus allowing setting of the large separation angle  $\theta$ . For example, as a comparative example of a nip formation pad different from the embodiments of the present disclosure, in a case where a nip formation pad 32' of a fixing device 7' includes a nip forming portion 32a' having a substantially flat surface as illustrated in FIG. 5, there is almost no difference between the sheet conveyance direction and the direction in which the fixing belt 22 extends downstream, which results in a small separation angle  $\theta'$ .

**[0056]** On the other hand, as in the present embodiment, the second nip forming portion 32e curved toward the pressure roller 23 is disposed on the downstream side of the nip formation pad 32 (in particular, the downstream end of the second nip forming portion 32e is disposed closer to the pressure roller 23 than the first nip forming portion 32a. Accordingly, the fixing belt 22 is greatly displaced to a lower side of FIG. 2, at which the pressure roller 23 is disposed, on the downstream side in the sheet conveyance direction to contact the surface of the pressure roller 23. In other words, the pressure roller 23 is pressed against the fixing belt 22 to form a substantially horizontal fixing nip with the fixing belt 22 (in the range of the fixing nip N in FIG. 5). On the further downstream side, in a region (for example, a region like a range X in FIG. 5) where the outer circumferential surface of the pressure roller 23 is separated away from the fixing belt 22, as illustrated in FIG. 2, the fixing belt 22 is displaced toward the pressure roller 23 to contact the pressure roller 23, thus forming the second fixing nip N2. As described above, the second nip forming portion 32e deforms the fixing belt 22 toward the pressure roller 23. Thus, at the end point of the second fixing nip N2, that is, the separation point D at which the sheet P is separated from the fixing belt 22, the fixing belt 22 can be raised in the conveyance direction C2 of the sheet P or in a direction away from the surface of the pressure roller 23. That is, the separation angle  $\theta$  of the sheet P can be set to be large, thus enhancing the separability of the sheet P from the fixing belt 22.

**[0057]** In particular, in the present embodiment, the bent portion 32f bent to the opposite side of the pressure roller 23 is disposed at the downstream end of the second nip forming portion 32e. With such a configuration, the direction in which the fixing belt 22 extends on the downstream side from the separation point D can be set to a

direction along the bent portion 32f, thus allowing the separation angle  $\theta$  to be disposed at a stable angle. As described above, the separation point D can be disposed upstream from the downstream end of the nip formation pad 32, and the portion downstream from the separation point D, that is, the bent portion 32f in the present embodiment can also be provided as a guide portion to guide rotation of the fixing belt 22. However, in some embodiments, the bent portion 32f may not be provided, and for example, the separation point D may be provided at the downstream end of the nip formation pad 32.

**[0058]** Further, the second nip forming portion 32e is curved toward the pressure roller 23. At a portion downstream from the supported portion 32c supported by the stay 33, the second nip forming portion 32e can also contact the pressure roller 23 to form the second fixing nip N2. Accordingly, the fixing nip having a sufficient length in the conveyance direction can be formed, thus enhancing the fixability of an image on the sheet surface.

**[0059]** Hereinafter, variations of the nip formation pad are described. Note that, about the structures which are common in the above-described embodiment, redundant descriptions are omitted as needed.

**[0060]** As illustrated in FIG. 6, in the present embodiment, the inflection portion 32d between the first nip forming portion 32a and the second nip forming portion 32e is disposed at a position of the supported portion 32c at which the nip formation pad 32 is secured and supported by the stay 33. Such a configuration allows the size, shape, separation angle, and the like of the fixing nip in the conveyance direction to be changed at the inflection portion 32d acting as a boundary. In particular, in the present embodiment, the upstream end portion of the second nip forming portion 32e is supported by the stay 33 at the downstream end portion of the first nip forming portion 32a in the sheet conveyance direction. In such a case, the upstream end portion of the second nip forming portion 32e is a fixed end fixed and supported by the stay 33. The downstream side of the second nip forming portion 32e including the bent portion 32f is a free end not fixed by the stay 33 or the like. Such a configuration allows the size, shape, separation angle, and the like of the fixing nip in the conveyance direction to be changed at the side of the free end.

**[0061]** The second nip forming portion 32e is formed of a material rich in elasticity and can be elastically deformed with the supported portion 32c as a fulcrum. It is desirable to provide the second nip forming portion 32e thinner than other portion of the nip formation pad 32 so that the second nip forming portion 32e can be easily elastically deformed.

**[0062]** As illustrated in FIG. 7A, the pressure roller 23 is pressed in the direction indicated by arrow E by a pressing member such as a spring. Thus, the pressure roller 23 is pressed against the fixing belt 22 to form the fixing nips N1 and N2.

**[0063]** In the present embodiment, the pressing force of the pressure roller 23 to the fixing belt 22 (the nip for-

mation pad 32) can be changed to elastically deform and change the posture of the second nip forming portion 32e, thus changing the shape of the fixing nip N2. For example, as illustrated in FIG. 7B, when the pressure roller 23 is pressed against the fixing belt 22 with a larger force, the pressing force is applied to the nip formation pad 32 via the fixing belt 22. The second nip forming portion 32e is elastically deformed to the side opposite to the pressure roller 23 with the supported portion 32c, which is the fixed end, acting as a fulcrum. Accordingly, as illustrated in FIG. 7B, the first nip forming portion 32a and the second nip forming portion 32e are arranged in a substantially straight line (substantially the same plane) and extend in a horizontal direction in the conveyance direction, to form one fixing nip N. In such a case, the separation angle  $\theta_2$  is smaller than the separation angle  $\theta_1$  in FIG. 7A. Since the first nip forming portion 32a is fixed and supported at both ends by the stay 33, the shape of the first nip forming portion 32a hardly changes even if the pressing force is changed as described above.

**[0064]** As a means for changing the pressing force of the pressure roller 23 to the fixing belt 22 (the nip formation pad 32), the arrangement of the pressure roller 23 or the arrangements of the fixing belt 22 and members in the fixing belt 22 may be changed to approach the pressure roller 23 and the fixing belt 22 each other or approach, to the pressure roller 23, a pressing means such as a spring that presses the pressure roller 23 in a direction to approach the fixing belt to increase the pressing force. Moreover, the pressing means that presses the pressure roller 23 may be configured to vary the pressing force. In the present embodiment, the pressure roller 23 is pressed toward the fixing belt 22. However, in some embodiments, by contrast, the fixing belt 22 may be pressed toward the pressure roller 23.

**[0065]** Further, as illustrated in FIG. 8, the fixing device 7 may include a biasing spring (biasing member or means) 37 to bias the second nip forming portion 32e toward the fixing belt 22 (lower side in FIG. 8). The posture of the second nip forming portion 32e may be changed by changing the posture of the biasing spring 37 (changing the biasing force of the spring). The biasing spring 37 is connected to a portion at the vicinity of the downstream end of the second nip forming portion 32e, to bias the connected portion toward the fixing belt 22. Changing the biasing force of the biasing spring 37 allows changing of the size, shape, the separation angle, and the like of the fixing nip in the conveyance direction.

**[0066]** As described above, in the present embodiment, adjusting the pressing force of the pressure roller 23 to the fixing belt 22 (the nip formation pad 32) allows changing of the size, shape, separation angle, and the like of the fixing nip in the conveyance direction. Accordingly, when the sheet P is unlikely to separate from the fixing belt 22, the posture of the second nip forming portion 32e is changed to have a large separation angle as illustrated in FIG. 7A. To reduce wrinkles of the sheet P, the posture of the second nip forming portion 32e is



changed to form the fixing nip N in a substantially flat shape as illustrated in FIG. 7B. As described above, changing the posture of the second nip forming portion 32e according to the purpose allows changing of the fixing nip(s).

**[0067]** The above-described adjustment of the separation angle or the like by changing the pressing force of the pressure roller 23 may be performed depending on, for example, the type or size of the sheet P that is passed through the fixing device 7. That is, the pressing force of the pressure roller 23 can be set in consideration of the ease of separation of the sheet P, the ease of occurrence of wrinkles, the image fixability, and the like based on the type and size of the sheet P.

**[0068]** As in the present embodiment, when the inflection portion 32d of the first nip forming portion 32a and the second nip forming portion 32e is provided at the position of the supported portion 32c supported by the stay 33, the second nip forming portion 32e being elastically deformable can be elastically deformed in the pressing direction (upward direction in FIG. 7A) of the pressure roller 23, with the position of the inflection portion 32d as a start position. Such a configuration facilitates adjustment of the posture of the second nip forming portion 32e, that is, the separation angle and the shape of the fixing nip, thus facilitating the separation angle and the shape of the fixing nip to be changed to the target separation angle and the target shape of the fixing nip.

**[0069]** As described above, the supported portion 32c may be provided at the inflection portion 32d between the first nip forming portion 32a and the second nip forming portion 32e, or at some midpoint in the first nip forming portion 32a upstream from the inflection portion 32d (see Fig. 2)

**[0070]** The above-described embodiments and variations are examples of embodiments and variations of the present disclosure. Embodiments of the present invention are not limited to the above-described embodiments and various modifications and improvements are possible in ranges without departing from the scope of the present invention, which is defined by the claims.

**[0071]** The image forming apparatus according to an embodiment of the present disclosure is not limited to a color image forming apparatus 1 illustrated in FIG. 1 but may be a monochrome image forming apparatus, a copier, a printer, a facsimile machine, or a multifunction peripheral including at least two functions of the copier, printer, and facsimile machine.

**[0072]** The sheets P serving as recording media may be thick paper, postcards, envelopes, plain paper, thin paper, coated paper, art paper, tracing paper, overhead projector (OHP) transparencies, plastic film, prepreg, copper foil, and the like.

## Claims

1. A fixing device (7) comprising:

a fixing belt (22) having an endless shape;  
a pressure member (23) configured to press the fixing belt (22);  
a nip formation member (32) disposed inside a loop of the fixing belt (22) and configured to contact the pressure member (23) via the fixing belt (22);  
a heater (31) configured to heat the fixing belt (22); and  
a support (33) disposed inside the loop of the fixing belt (22) and configured to support the nip formation member (32),  
the nip formation member (32) including:

a first nip forming portion (32a) configured to contact the pressure member (23) via the fixing belt (22) to form a first fixing nip (N1);  
a second nip forming portion (32e) disposed downstream from the first nip forming portion (32a) in a direction (C1, C2) of conveyance of a recording medium (S) and configured to contact the pressure member (23) via the fixing belt (22) to form a second fixing nip (N2);

an inflection portion (32d) at which a direction of extension of the nip formation member (32) changes; and

a supported portion (32c) disposed downstream from the first nip forming portion (32a) in the direction (C1) of conveyance of the recording medium (S), the supported portion (32c) supported by and in contact with the support (33),

wherein the inflection portion (32d) is disposed at a position of the supported portion (33c) or a position downstream from the supported portion (33c) in the direction (C1) of conveyance of the recording medium (S), wherein the second nip forming portion (32e) is disposed downstream from the inflection portion (32d) and **characterized in that**

the fixing device further comprises means for changing the pressing force of the pressure member (23) to the fixing belt (22) and **in that** a posture of the second nip forming portion (32e) relative to the first nip forming portion (32a) is variable with a change in a pressing force between the nip formation member (32) and the pressure member (23).

2. The fixing device (7) according to claim 1, wherein the inflection portion (32d) is disposed at the supported portion (33c).
3. The fixing device (7) according to claim 1 or 2, wherein the second nip forming portion (32e) is made

of an elastic material.

4. The fixing device (7) according to any one of claims 1 to 3,  
wherein the second nip forming portion (32e) is thinner than the first nip forming portion (32a). 5
5. The fixing device (7) according to any one of claims 1 to 4, further comprising a biasing member (37) configured to bias the second nip forming portion (32e) toward the fixing belt (22). 10
6. The fixing device (7) according to any one of claims 1 to 5,  
wherein the pressing force is adjustable according to a type of the recording medium on which the fixing device (7) fixes an image. 15
7. An image forming apparatus (1) comprising the fixing device (7) according to any one of claims 1 to 6. 20

#### Patentansprüche

1. Fixiervorrichtung (7), die Folgendes umfasst: 25  
 einen Fixiergurt (22) mit einer Endlosform;  
 ein Druckelement (23), das konfiguriert ist, um den Fixiergurt (22) zu drücken;  
 ein Walzenspaltbildungselement (32), das innerhalb einer Schleife des Fixiergurtes (22) angeordnet und konfiguriert ist, um das Druckelement (23) über den Fixiergurt (22) zu berühren;  
 eine Heizvorrichtung (31), die konfiguriert ist, um den Fixiergurt (22) zu erhitzen; und  
 eine Stütze (33), die innerhalb der Schleife des Fixiergurtes (22) angeordnet und konfiguriert ist, um das Walzenspaltbildungselement (32) zu stützen,  
 wobei das Walzenspaltbildungselement (32) Folgendes umfasst: 30  
 einen ersten walzenspaltbildenden Abschnitt (32a), der konfiguriert ist, um das Druckelement (23) über den Fixiergurt (22) zu berühren, um einen ersten Fixierwalzenspalt (N1) zu bilden;  
 einen zweiten walzenspaltbildenden Abschnitt (32e), der abwärts von dem ersten walzenspaltbildenden Abschnitt (32a) in einer Zuführrichtung (C1, C2) eines Aufzeichnungsmediums (S) angeordnet und konfiguriert ist, um das Druckelement (23) über den Fixiergurt (22) zu berühren, um einen zweiten Fixierwalzenspalt (N2) zu bilden;  
 einen Krümmungsabschnitt (32d), an dem sich eine Ausweitungsrichtung des Walzenspaltbildungselements (32) ändert; und 40  
 einen gestützten Abschnitt (32c), der abwärts von dem ersten walzenspaltbildenden Abschnitt (32a) in der Zuführrichtung (C1) des Aufzeichnungsmediums (S) angeordnet ist, wobei der gestützte Abschnitt (32c) von der Stütze (33) gestützt wird und mit dieser in Kontakt steht,  
 wobei der Krümmungsabschnitt (32d) an einer Position des gestützten Abschnitts (33c) oder einer Position abwärts von dem gestützten Abschnitt (33c) in der Zuführrichtung (C1) des Aufzeichnungsmediums (S) angeordnet ist,  
 wobei der zweite walzenspaltbildende Abschnitt (32e) abwärts von dem Krümmungsabschnitt (32d) angeordnet ist und **dadurch gekennzeichnet ist, dass**  
 die Fixiervorrichtung ferner Mittel zum Ändern der Druckkraft des Druckelements (23) auf den Fixiergurt (22) umfasst und dass eine Stellung des zweiten walzenspaltbildenden Abschnitts (32e) relativ zu dem ersten walzenspaltbildenden Abschnitt (32a) mit einer Änderung der Druckkraft zwischen dem Walzenspaltbildungselement (32) und dem Druckelement (23) veränderbar ist. 45  
 50  
 55

2. Fixiervorrichtung (7) nach Anspruch 1, wobei der Krümmungsabschnitt (32d) an dem gestützten Abschnitt (33c) angeordnet ist.
3. Fixiervorrichtung (7) nach Anspruch 1 oder 2, wobei der zweite walzenspaltbildende Abschnitt (32e) aus einem elastischen Material besteht.
4. Fixiervorrichtung (7) nach einem der Ansprüche 1 bis 3, wobei der zweite walzenspaltbildende Abschnitt (32e) dünner als der erste walzenspaltbildende Abschnitt (32a) ist.
5. Fixiervorrichtung (7) nach einem der Ansprüche 1 bis 4, die ferner ein Vorspannelement (37) umfasst, das konfiguriert ist, um den zweiten walzenspaltbildenden Abschnitt (32e) in Richtung des Fixiergurtes (22) vorzuspannen.
6. Fixiervorrichtung (7) nach einem der Ansprüche 1 bis 5, wobei die Druckkraft gemäß einer Art von Aufzeichnungsmedium, auf dem die Fixiervorrichtung (7) ein Bild fixiert, angepasst werden kann.
7. Bildgebungsvorrichtung (1), die die Fixiervorrichtung (7) nach einem der Ansprüche 1 bis 6 umfasst.

## Revendications

### 1. Dispositif de fixation (7) comprenant :

une courroie de fixation (22) ayant une forme sans fin ;  
 un élément de pression (23) configuré pour presser la courroie de fixation (22) ;  
 un élément de formation de pincement (32) disposé à l'intérieur d'une boucle de la courroie de fixation (22) et configuré pour entrer en contact avec l'élément de pression (23) via la courroie de fixation (22) ;  
 un élément chauffant (31) configuré pour chauffer la courroie de fixation (22) ; et  
 un support (33) disposé à l'intérieur de la boucle de la courroie de fixation (22) et configuré pour supporter l'élément de formation de pincement (32),  
 l'élément de formation de pincement (32) comprenant :

une première partie de formation de pincement (32a) configurée pour contacter l'élément de pression (23) via la courroie de fixation (22) pour former un premier pincement de fixation (N1) ;  
 une seconde partie de formation de pincement (32e) disposée en aval de la première partie de formation de pincement (32a) dans une direction (C1, C2) de transport d'un support d'enregistrement (S) et configurée pour entrer en contact avec l'élément de pression (23) via la courroie de fixation (22) pour former un second pincement de fixation (N2) ;  
 une partie d'inflexion (32d) au niveau de laquelle une direction d'extension de l'élément de formation de pincement (32) change ; et  
 une partie supportée (32c) disposée en aval de la première partie de formation de pincement (32a) dans la direction (C1) de transport du support d'enregistrement (S), la partie supportée (32c) étant supportée par le support (33) et étant en contact avec celui-ci,  
 dans lequel la partie d'inflexion (32d) est disposée à une position de la partie supportée (33c) ou à une position en aval de la partie supportée (33c) dans la direction (C1) de transport du support d'enregistrement (S),  
 dans lequel la seconde partie de formation de pincement (32e) est disposée en aval de la partie d'inflexion (32d) et **caractérisée en ce que**  
 le dispositif de fixation comprend en outre

un moyen pour modifier la force de pression de l'élément de pression (23) sur la courroie de fixation (22) et **en ce qu'**une posture de la seconde partie de formation de pincement (32e) par rapport à la première partie de formation de pincement (32a) est variable avec un changement de la force de pression entre l'élément de formation de pincement (32) et l'élément de pression (23).

2. Dispositif de fixation (7) selon la revendication 1, dans lequel la partie d'inflexion (32d) est disposée au niveau de la partie supportée (33c).
3. Dispositif de fixation (7) selon la revendication 1 ou 2, dans lequel la seconde partie de formation de pincement (32e) est réalisée en un matériau élastique.
4. Dispositif de fixation (7) selon l'une quelconque des revendications 1 à 3, dans lequel la seconde partie de formation de pincement (32e) est plus mince que la première partie de formation de pincement (32a).
5. Dispositif de fixation (7) selon l'une quelconque des revendications 1 à 4, comprenant en outre un élément de sollicitation (37) configuré pour solliciter la seconde partie de formation de pincement (32e) vers la courroie de fixation (22).
6. Dispositif de fixation (7) selon l'une quelconque des revendications 1 à 5, dans lequel la force de pression est réglable selon un type de support d'enregistrement sur lequel le dispositif de fixation (7) fixe une image.
7. Appareil de formation d'images (1) comprenant le dispositif de fixation (7) selon l'une quelconque des revendications 1 à 6.

FIG. 1

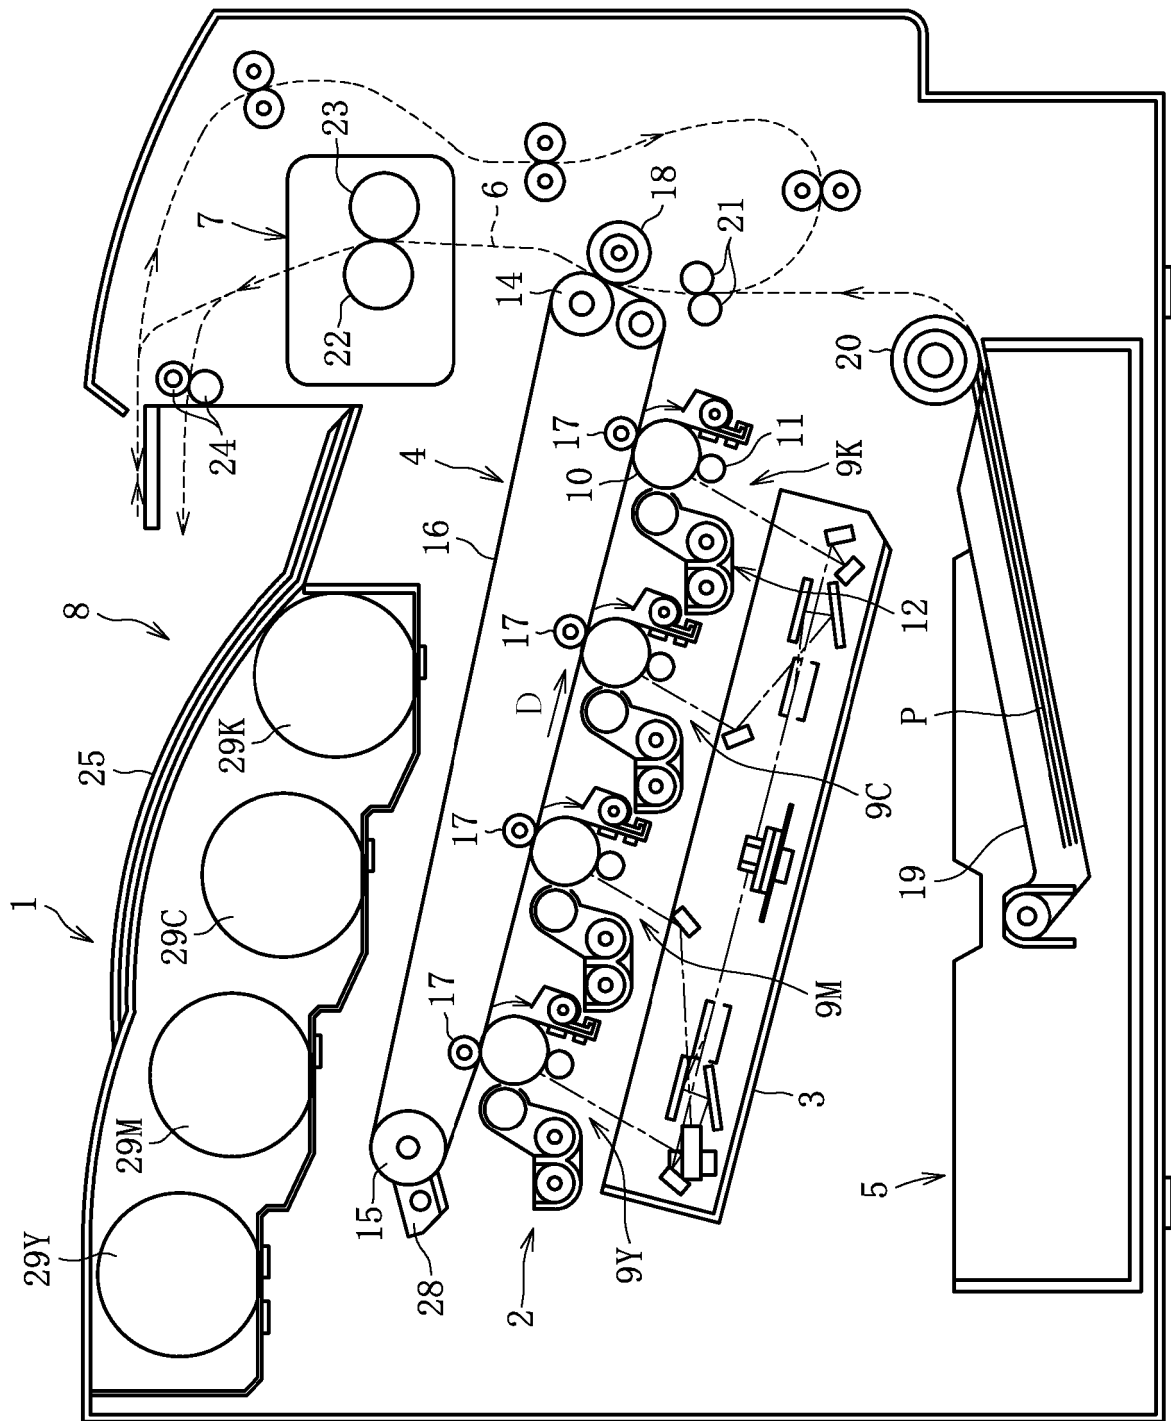


FIG. 2

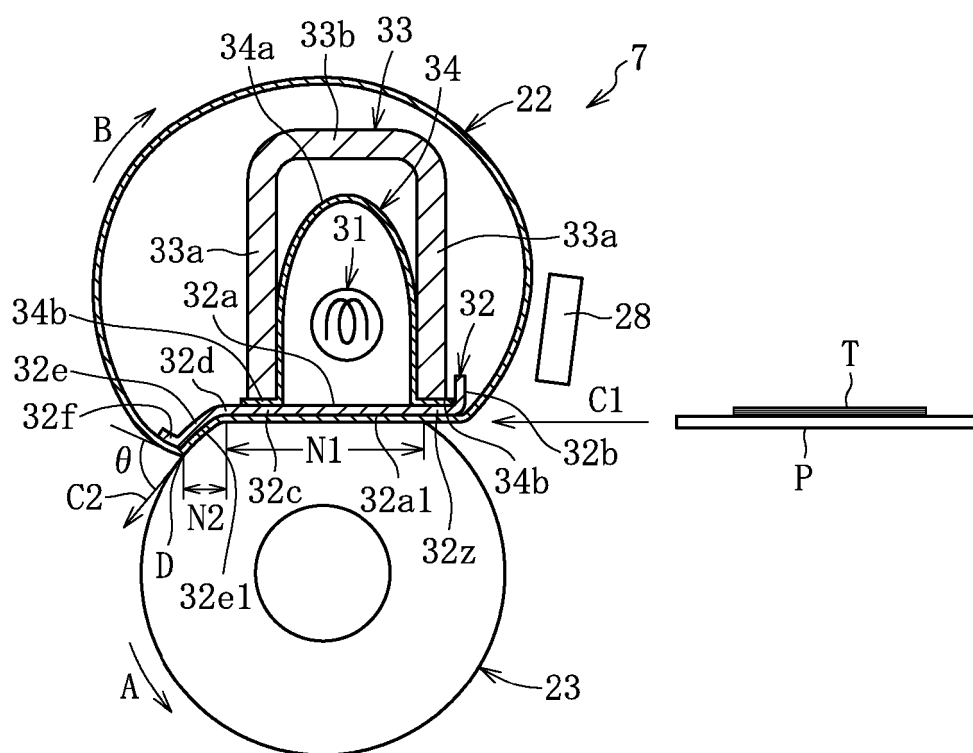


FIG. 3

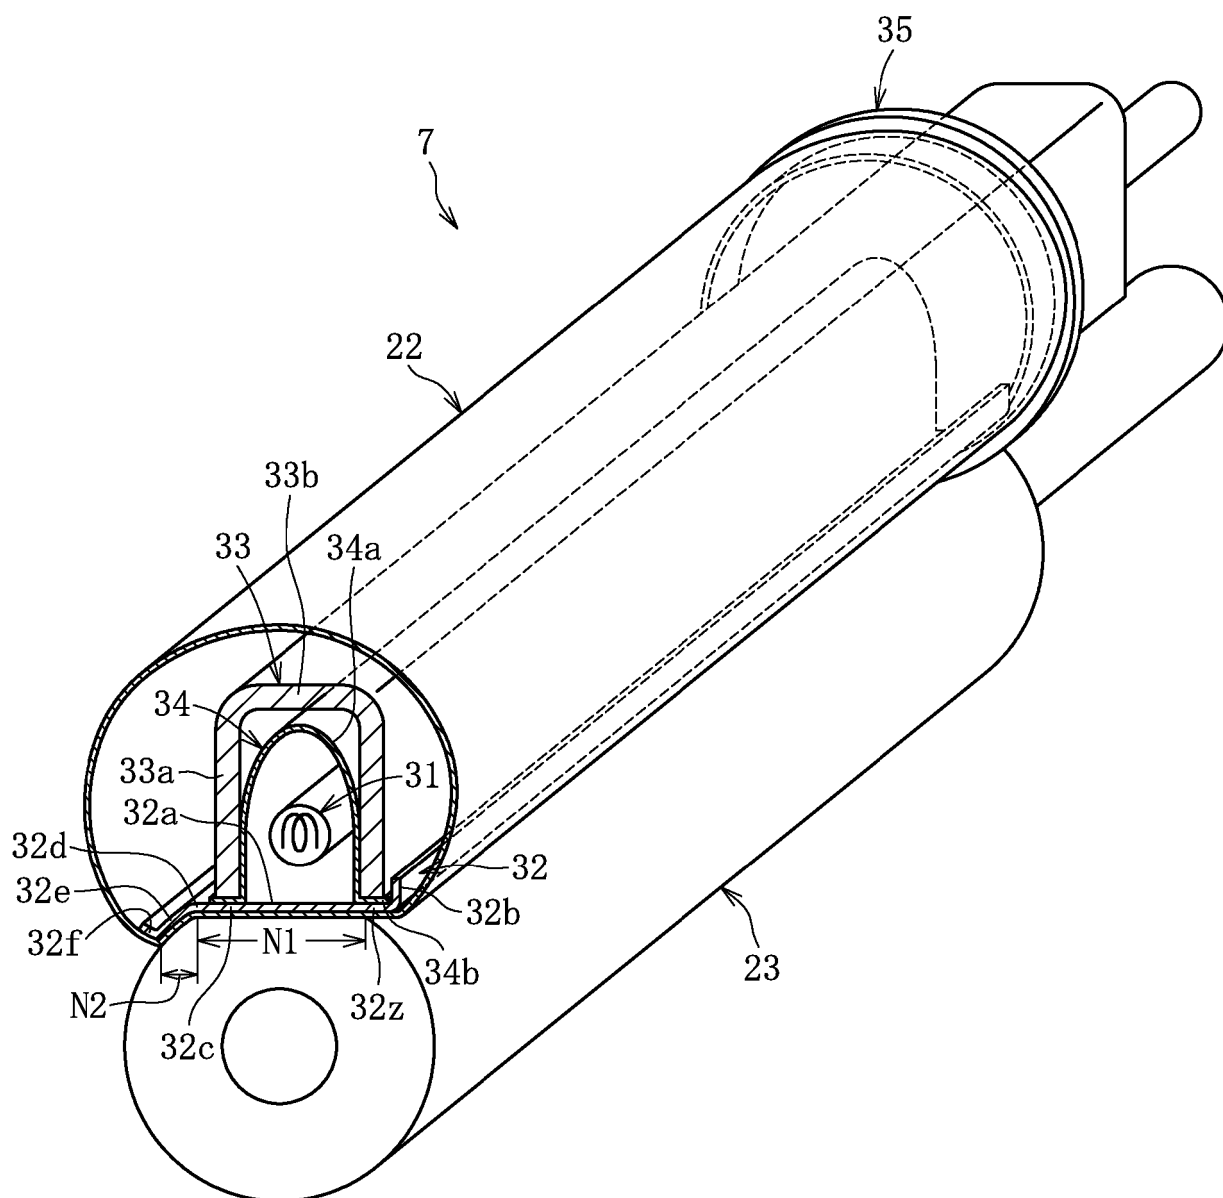


FIG. 4

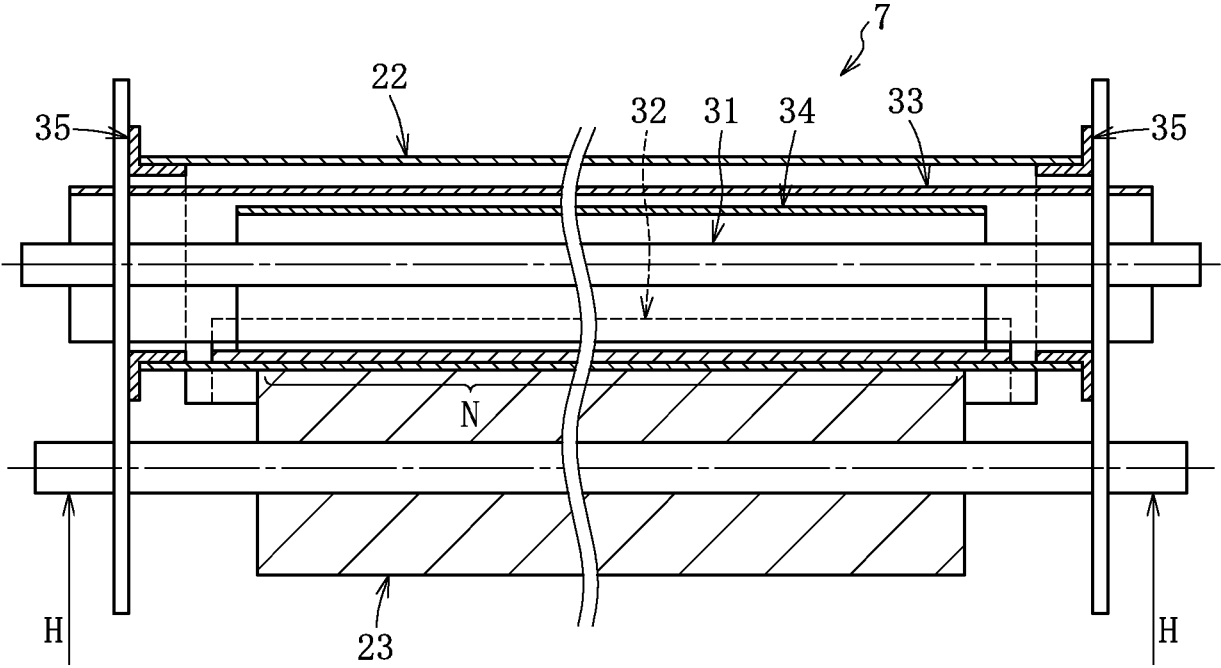


FIG. 5

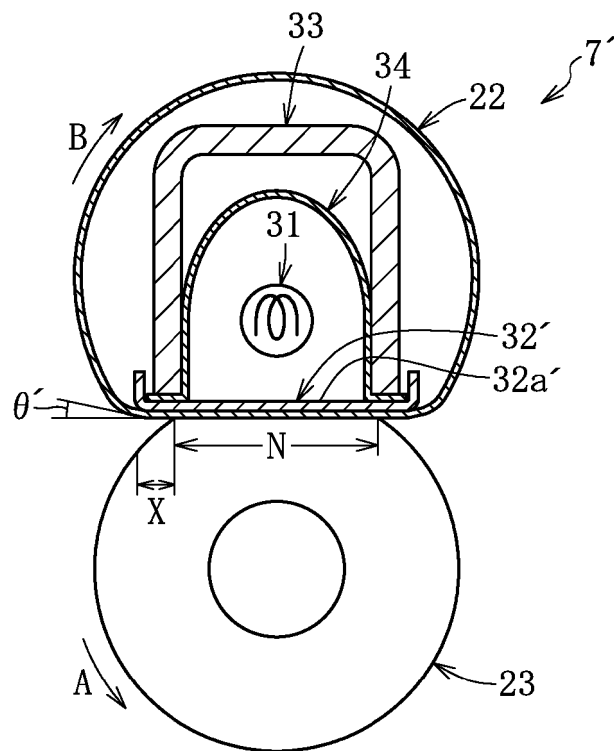




FIG. 6

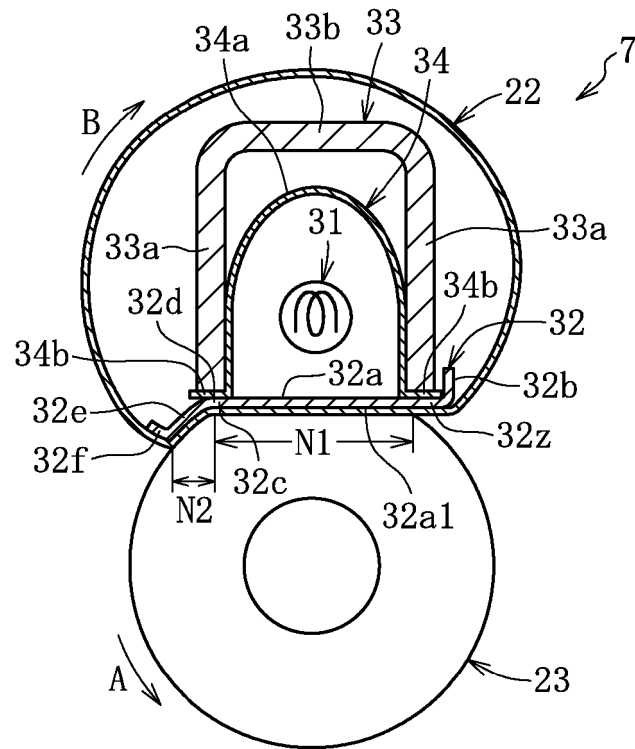


FIG. 7A

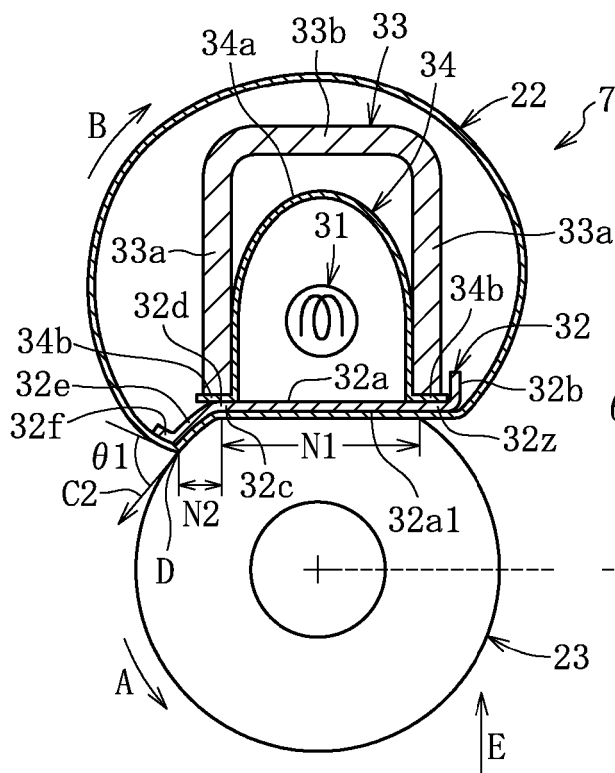


FIG. 7B

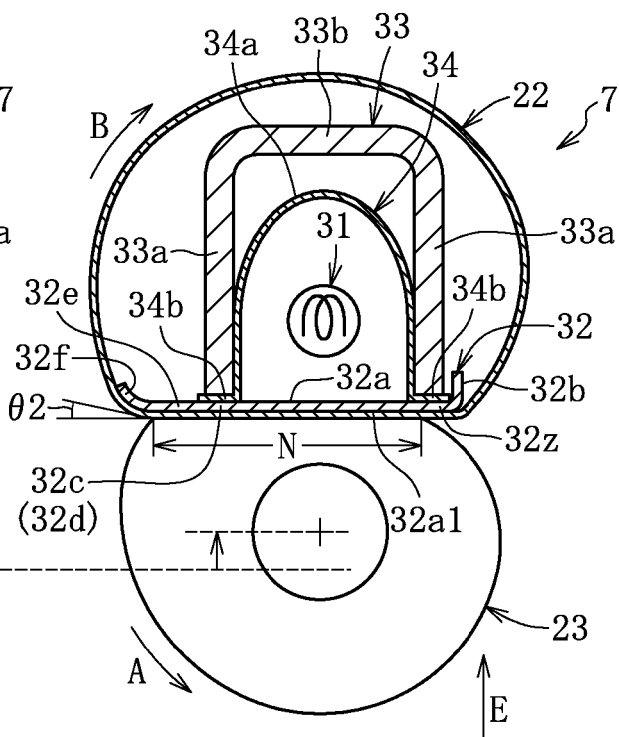


FIG. 8


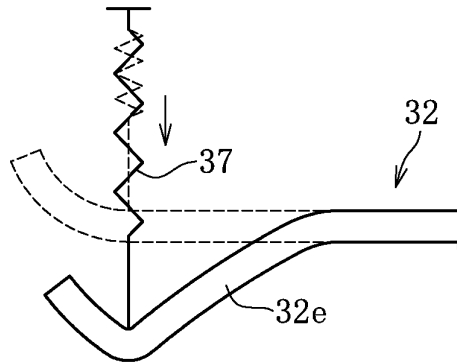


FIG. 9

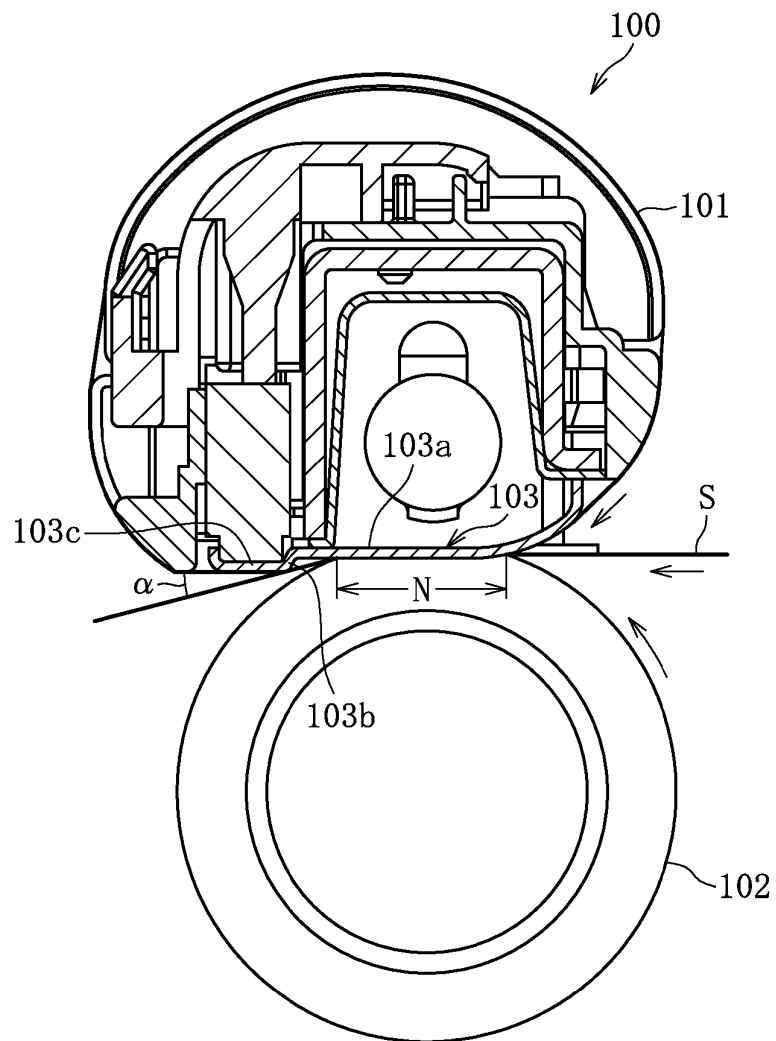

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2014066851 A [0005] [0006]
- US 2016223964 A1 [0007]
- US 2013330111 A1 [0007]
- US 2013272756 A1 [0007]
- US 2016306306 A1 [0007]