



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.06.2020 Bulletin 2020/25

(51) Int Cl.:
A24F 47/00 (2020.01)

(21) Application number: **19168562.7**

(22) Date of filing: **11.04.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Liu, Tuanfang**
518000 Shenzhen, Guangdong (CN)

(72) Inventor: **Liu, Tuanfang**
518000 Shenzhen, Guangdong (CN)

(74) Representative: **Hryszkiewicz, Danuta**
Matthias Scholl, Inc.
Friedrichstrasse 123
10117 Berlin (DE)

(30) Priority: **10.12.2018 CN 201811501124**
10.12.2018 CN 201822059318 U

(54) **ELECTRONIC CIGARETTE**

(57) An electronic cigarette, including a mouthpiece assembly, an atomizing assembly, and a base assembly. The mouthpiece assembly includes a mouthpiece, a first seal ring adapted to seal the mouthpiece, a decorative ring, a first fixed seat adapted to fix the mouthpiece, a second seal ring adapted to seal the first fixed seat, a decorative cover, a fixed cover, a fixed ring adapted to fix the fixed cover, and a slide block. The atomizing assembly includes a silicone seal, a pin, a spring, a second fixed seat adapted to fix the slide block, a vapor regulating ring, a second seal ring adapted to seal the vapor regulating ring, a glass tube, a third seal ring, a fourth seal ring, and an atomizing unit. The base assembly includes a fifth seal ring, a base, an insulation ring, and a joint.

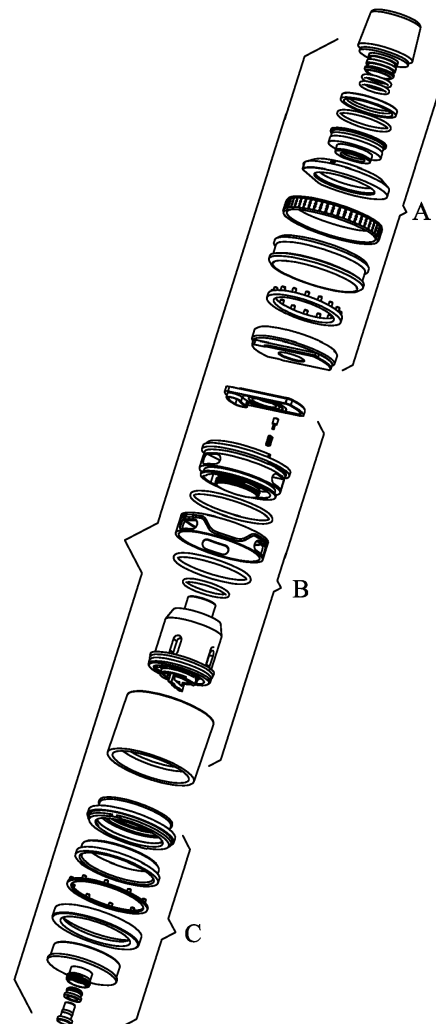


FIG. 1

Description

[0001] This disclosure relates to an electronic cigarette.

[0002] Electronic cigarettes atomize nicotine-containing e-liquid. The e-liquid inlet of conventional electronic cigarettes is not sealed tightly enough. In addition, the vapor amount produced is usually either too small or too large, which negatively affects the user experience.

[0003] The disclosure provides an electronic cigarette comprising an e-liquid inlet that is reliably sealed.

[0004] Provided is an electronic cigarette, comprising a mouthpiece assembly, an atomizing assembly, and a base assembly. The mouthpiece assembly is disposed on the atomizing assembly. The atomizing assembly is disposed on the base assembly.

[0005] The mouthpiece assembly comprises a mouthpiece, a first seal ring adapted to seal the mouthpiece, a decorative ring, a first fixed seat adapted to fix the mouthpiece, a second seal ring adapted to seal the first fixed seat, a decorative cover, a fixed cover, a fixed ring adapted to fix the fixed cover, and a slide block.

[0006] The atomizing assembly comprises a silicone seal, a pin, a spring, a second fixed seat adapted to fix the slide block, a vapor regulating ring, a second seal ring adapted to seal the vapor regulating ring, a glass tube, a third seal ring adapted to seal an upper part of the glass tube, a fourth seal ring, and an atomizing unit.

[0007] The base assembly comprises a fifth seal ring adapted to seal a lower part of the glass tube, a base, an insulation ring, and a joint.

[0008] The first seal ring and the decorative ring are sheathed on the mouthpiece; the mouthpiece is fixed on the first fixed seat; the first fixed seat comprises a side wall comprising an annular groove, and the second seal ring is embedded in the annular groove; the first fixed seat is screwed on the decorative cover; the fixed ring is sheathed on the fixed cover; the decorative cover is disposed on the fixed cover; the slide block is disposed in the fixed cover.

[0009] The silicone seal is disposed on the second fixed seat; the second fixed seat comprises an upper annular groove and a lower annular groove, and the second seal ring and the third seal ring are disposed in the upper annular groove and the lower annular groove, respectively; the vapor regulating ring is connected to the second fixed seat; the fourth seal ring is embedded in the second fixed seat; the atomizing unit is inserted in the second fixed seat; the glass tube is in threaded connection to the second fixed seat; the spring is sheathed on the pin; the second fixed seat comprises a location hole, and the pin is inserted in the location hole; the second fixed seat comprises a side wall comprising a plurality of air inlets, and the atomizing unit comprises a side wall comprising a plurality of holes; the plurality of air inlets communicates with the plurality of holes.

[0010] The fifth seal ring is sheathed on the base and embedded in the glass tube; the insulation ring is

sheathed on the joint; the joint is inserted in a central hole of the base; and the base is in threaded connection to the atomizing unit.

[0011] Advantages of the electronic cigarette according to embodiments of the disclosure are summarized as follows. To refill the atomization unit, the fixed cover can be rotated upwards, and the slide block is pushed to one side. The e-liquid inlet of the atomizing assembly is exposed, and the e-liquid can be injected. After refilling, the slide block is pushed back and the fixed cover descends to seal the e-liquid inlet. The second fixed seat comprises a side wall comprising a plurality of air inlets, and the atomizing unit comprises a side wall comprising a plurality of holes. Rotating the vapor regulating ring can expose the air inlets of the second fixed seat. The air inlets communicate with the plurality of holes. The vapor is diffused via the holes on the atomizing unit, producing soft mouthfeel.

FIG. 1 is an exploded view of an electronic cigarette as described in the disclosure;

FIG. 2 is an exploded view of a mouthpiece assembly of an electronic cigarette as described in the disclosure

FIG. 3 is an exploded view of an atomizing assembly of an electronic cigarette as described in the disclosure;

FIG. 4 is an exploded view of a base assembly of an electronic cigarette as described in the disclosure;

FIG. 5 is a stereogram of an electronic cigarette as described in the disclosure; and

FIG. 6 is a sectional view of an electronic cigarette as described in the disclosure.

[0012] To further illustrate, embodiments detailing an electronic cigarette are described below. It should be noted that the following embodiments are intended to describe and not to limit the disclosure.

[0013] As shown in FIGS. 1-6, provided is an electronic cigarette, comprising: a mouthpiece assembly A, an atomizing assembly B, and a base assembly C. The mouthpiece assembly A is disposed on the atomizing assembly B. The atomizing assembly B is disposed on the base assembly C.

[0014] The mouthpiece assembly A comprises a mouthpiece 1, a first seal ring 2 adapted to seal the mouthpiece 1, a decorative ring 3, a first fixed seat 5 adapted to fix the mouthpiece 1, a second seal ring 4 adapted to seal the first fixed seat 5, a decorative cover 6, a fixed cover 8, a fixed ring 7 adapted to fix the fixed cover 8, and a slide block 9.

[0015] The first seal ring 2 and the decorative ring 3 are sheathed on the mouthpiece 1; the mouthpiece 1 is

fixed on the first fixed seat 5; the first fixed seat 5 comprises a side wall comprising an annular groove, and the second seal ring 4 is embedded in the annular groove; the first fixed seat 5 is screwed on the decorative cover 6; the fixed ring 7 is sheathed on the fixed cover 8; the decorative cover 6 is disposed on the fixed cover 8; the slide block 9 is disposed in the fixed cover 8.

[0016] The atomizing assembly comprises a silicone seal 10, a pin 11, a spring 12, a second fixed seat 13 adapted to fix the slide block 9, a vapor regulating ring 15, a second seal ring 14 adapted to seal the vapor regulating ring 15, a glass tube 19, a third seal ring 16 adapted to seal an upper part of the glass tube 19, a fourth seal ring 17, and an atomizing unit 18.

[0017] The silicone seal 10 is disposed on the second fixed seat 13; the second fixed seat 13 comprises an upper annular groove and a lower annular groove, and the second seal ring 14 and the third seal ring 16 are disposed in the upper annular groove and the lower annular groove, respectively.

[0018] The vapor regulating ring 15 is connected to the second fixed seat 13; the fourth seal ring 17 is embedded in the second fixed seat 13; the atomizing unit 18 is inserted in the second fixed seat 13; the glass tube 19 is in threaded connection to the second fixed seat 13; the spring 12 is sheathed on the pin 11; the second fixed seat 13 comprises a location hole, and the pin 11 is inserted in the location hole; the second fixed seat 13 comprises a side wall comprising a plurality of air inlets, and the atomizing unit 18 comprises a side wall comprising a plurality of holes; the plurality of air inlets communicates with the plurality of holes.

[0019] To refill the atomization unit, the fixed cover 8 can be rotated upwards, and the slide block 9 is pushed to one side. The e-liquid inlet of the atomizing assembly is exposed, and the e-liquid can be injected. After refilling, the slide block 9 is pushed back and the fixed cover 8 descends to seal the e-liquid inlet.

[0020] The second fixed seat 13 comprises a side wall comprising a plurality of air inlets, and the atomizing unit 18 comprises a side wall comprising a plurality of holes. Rotating the vapor regulating ring 15 can expose the air inlets of the second fixed seat 13. The air inlets communicate with the plurality of holes. The vapor is diffused via the holes on the atomizing unit 18, producing soft mouthfeel.

[0021] The base assembly comprises a fifth seal ring 20 adapted to seal a lower part of the glass tube 19, a base 21, an insulation ring 22, and a joint 23. The fifth seal ring 20 is sheathed on the base 21 and embedded in the glass tube 19; the insulation ring 22 is sheathed on the joint 23; the joint 23 is inserted in a central hole of the base 21; and the base 21 is in threaded connection to the atomizing unit 18.

[0022] It will be obvious to those skilled in the art that changes and modifications may be made, and therefore, the aim in the appended claims is to cover all such changes and modifications.

Claims

1. An electronic cigarette, comprising:

a mouthpiece assembly (A), the mouthpiece assembly (A) comprising a mouthpiece (1), a first seal ring (2) adapted to seal the mouthpiece (1), a decorative ring (3), a first fixed seat (5) adapted to fix the mouthpiece (1), a second seal ring (4) adapted to seal the first fixed seat (5), a decorative cover (6), a fixed cover (8), a fixed ring (7) adapted to fix the fixed cover (8), and a slide block (9);

an atomizing assembly (B), the atomizing assembly (B) comprising a silicone seal (10), a pin (11), a spring (12), a second fixed seat (13) adapted to fix the slide block (9), a vapor regulating ring (15), a second seal ring (14) adapted to seal the vapor regulating ring (15), a glass tube (19), a third seal ring (16) adapted to seal an upper part of the glass tube (19), a fourth seal ring (17), and an atomizing unit (18); and
a base assembly (C), the base assembly (C) comprising a fifth seal ring (20) adapted to seal a lower part of the glass tube (19), a base (21), an insulation ring (22), and a joint (23);

wherein:

the first seal ring (2) and the decorative ring 3 are sheathed on the mouthpiece (1); the mouthpiece (1) is fixed on the first fixed seat (5); the first fixed seat (5) comprises a side wall comprising an annular groove, and the second seal ring (4) is embedded in the annular groove; the first fixed seat (5) is screwed on the decorative cover (6); the fixed ring (7) is sheathed on the fixed cover (8); the decorative cover (6) is disposed on the fixed cover (8); the slide block (9) is disposed in the fixed cover (8); the silicone seal (10) is disposed on the second fixed seat (13); the second fixed seat (13) comprises an upper annular groove and a lower annular groove, and the second seal ring (14) and the third seal ring (16) are disposed in the upper annular groove and the lower annular groove, respectively; the vapor regulating ring (15) is connected to the second fixed seat (13); the fourth seal ring (17) is embedded in the second fixed seat (13); the atomizing unit (18) is inserted in the second fixed seat (13); the glass tube (19) is in threaded connection to the second fixed seat (13); the spring (12) is sheathed on the pin (11); the second fixed seat (13) comprises a location hole, and the pin (11) is inserted in the location hole; the second fixed seat (13) comprises a side wall

comprising a plurality of air inlets, and the atomizing unit (18) comprises a side wall comprising a plurality of holes; the plurality of air inlets communicates with the plurality of holes; and the fifth seal ring (20) is sheathed on the base (21) and embedded in the glass tube (19); the insulation ring (22) is sheathed on the joint (23); the joint (23) is inserted in a central hole of the base (21); and the base (21) is in threaded connection to the atomizing unit (18).

5

10

15

20

25

30

35

40

45

50

55

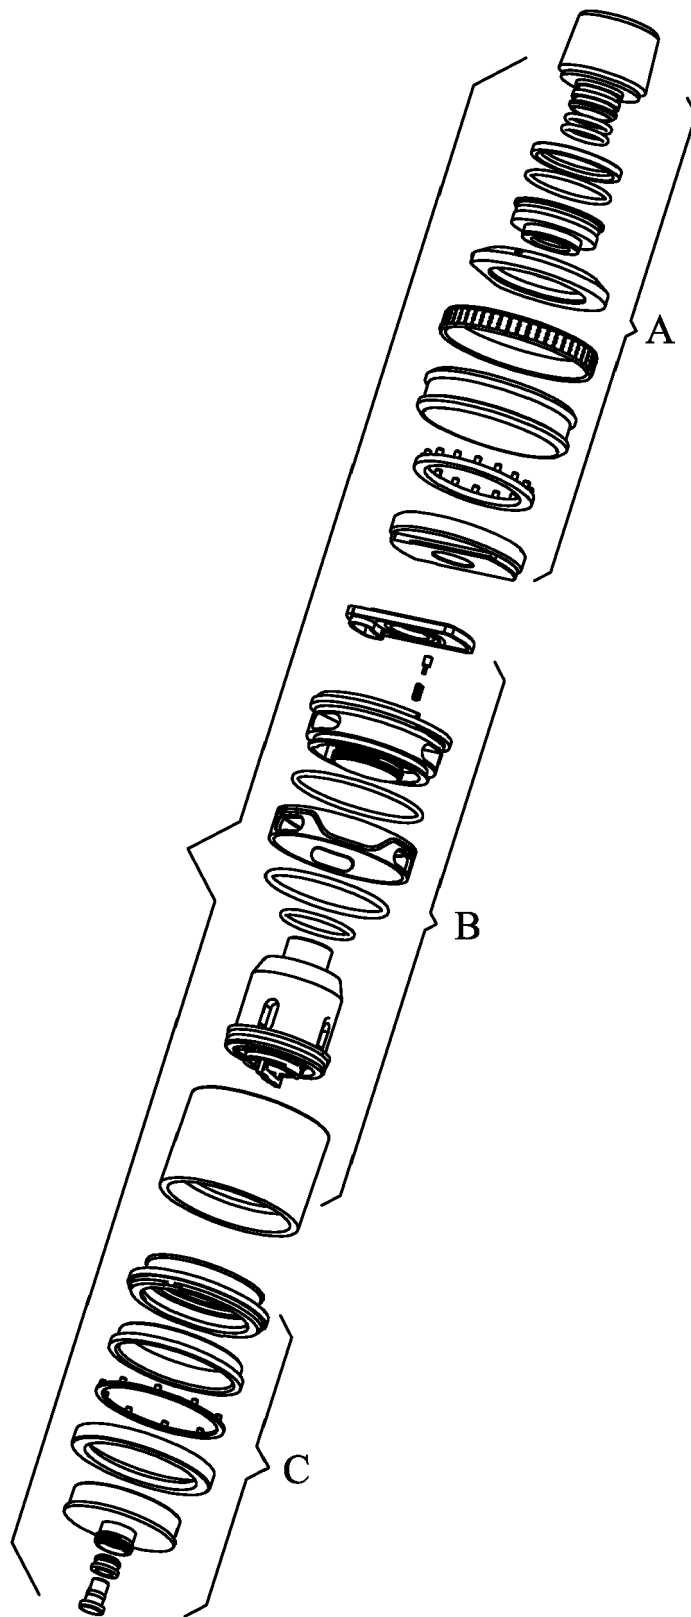


FIG. 1

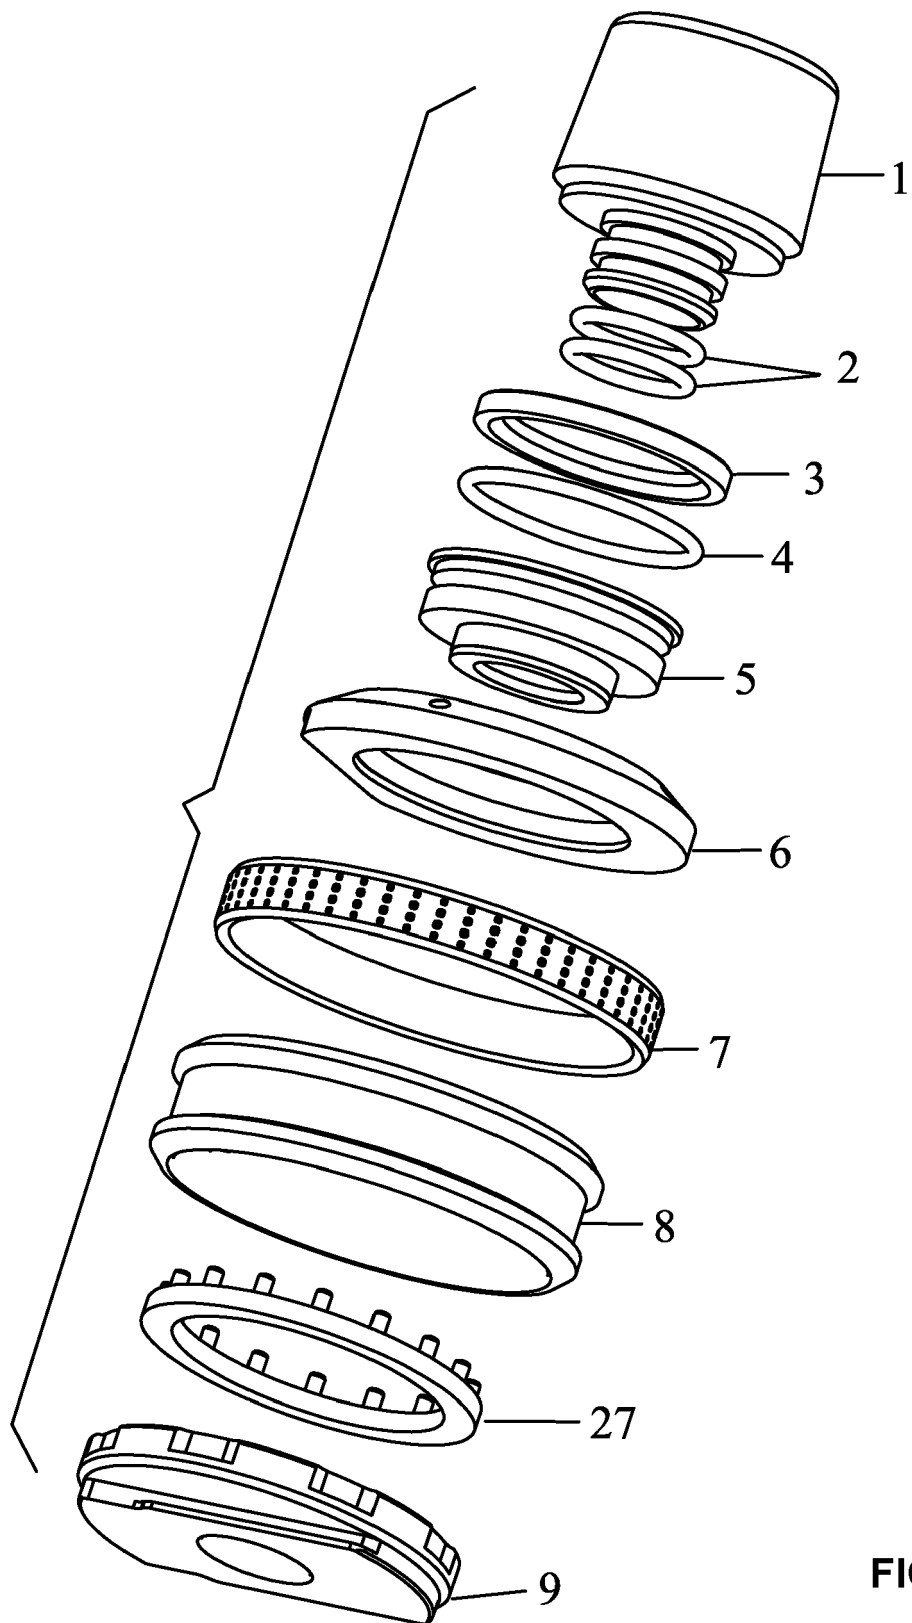


FIG. 2

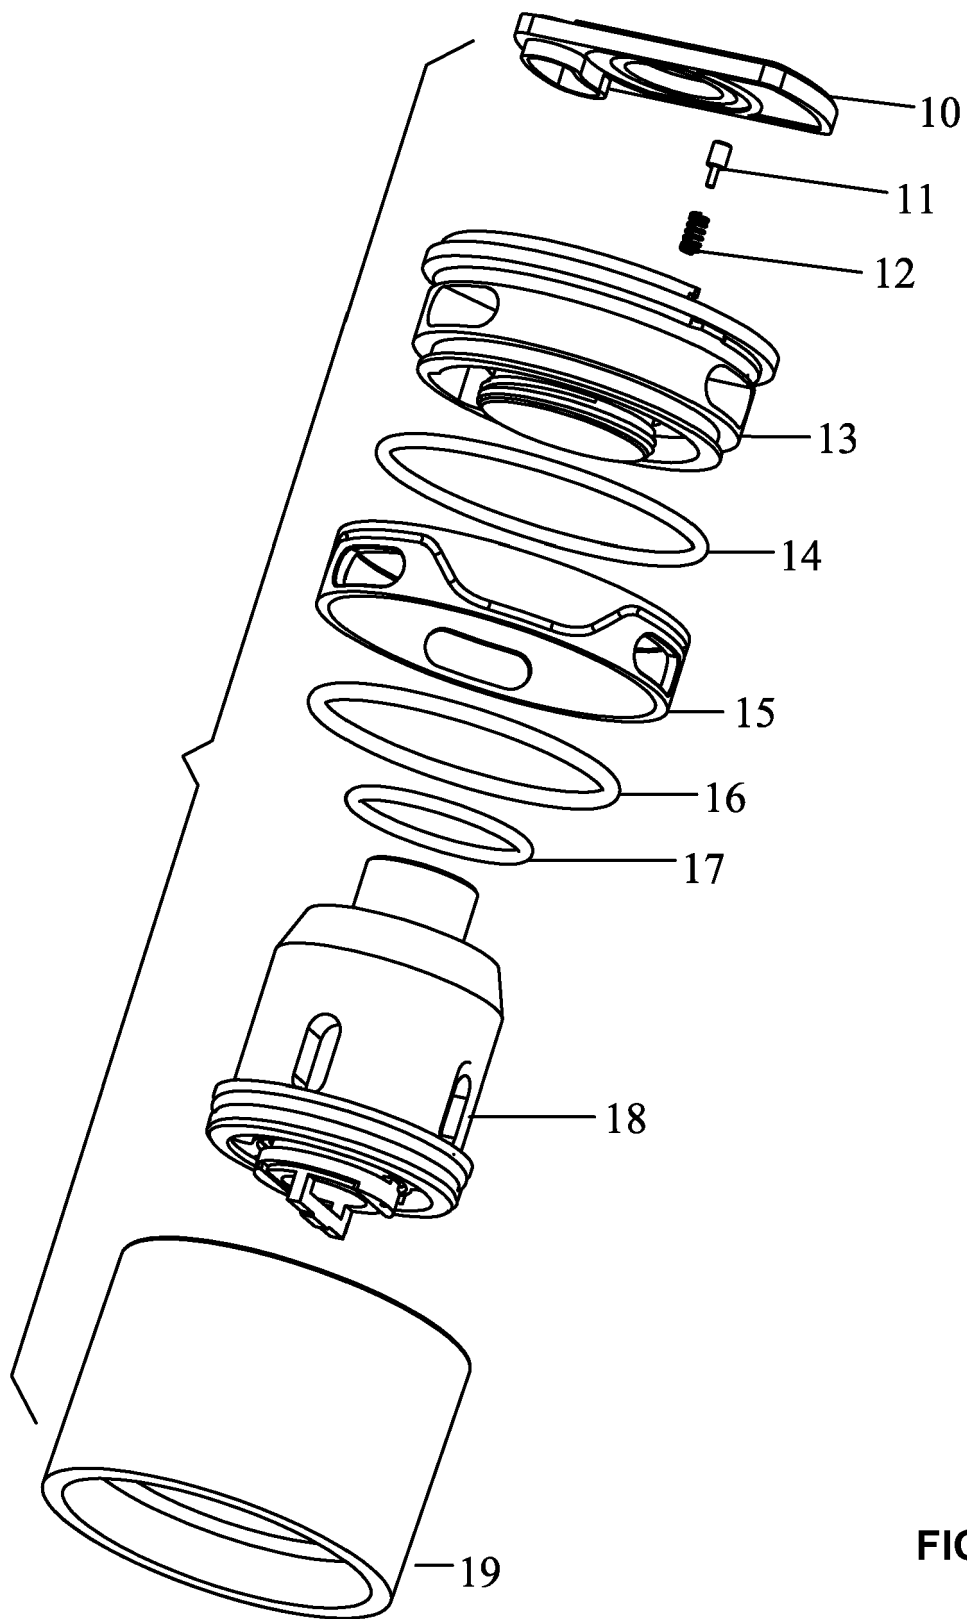


FIG. 3



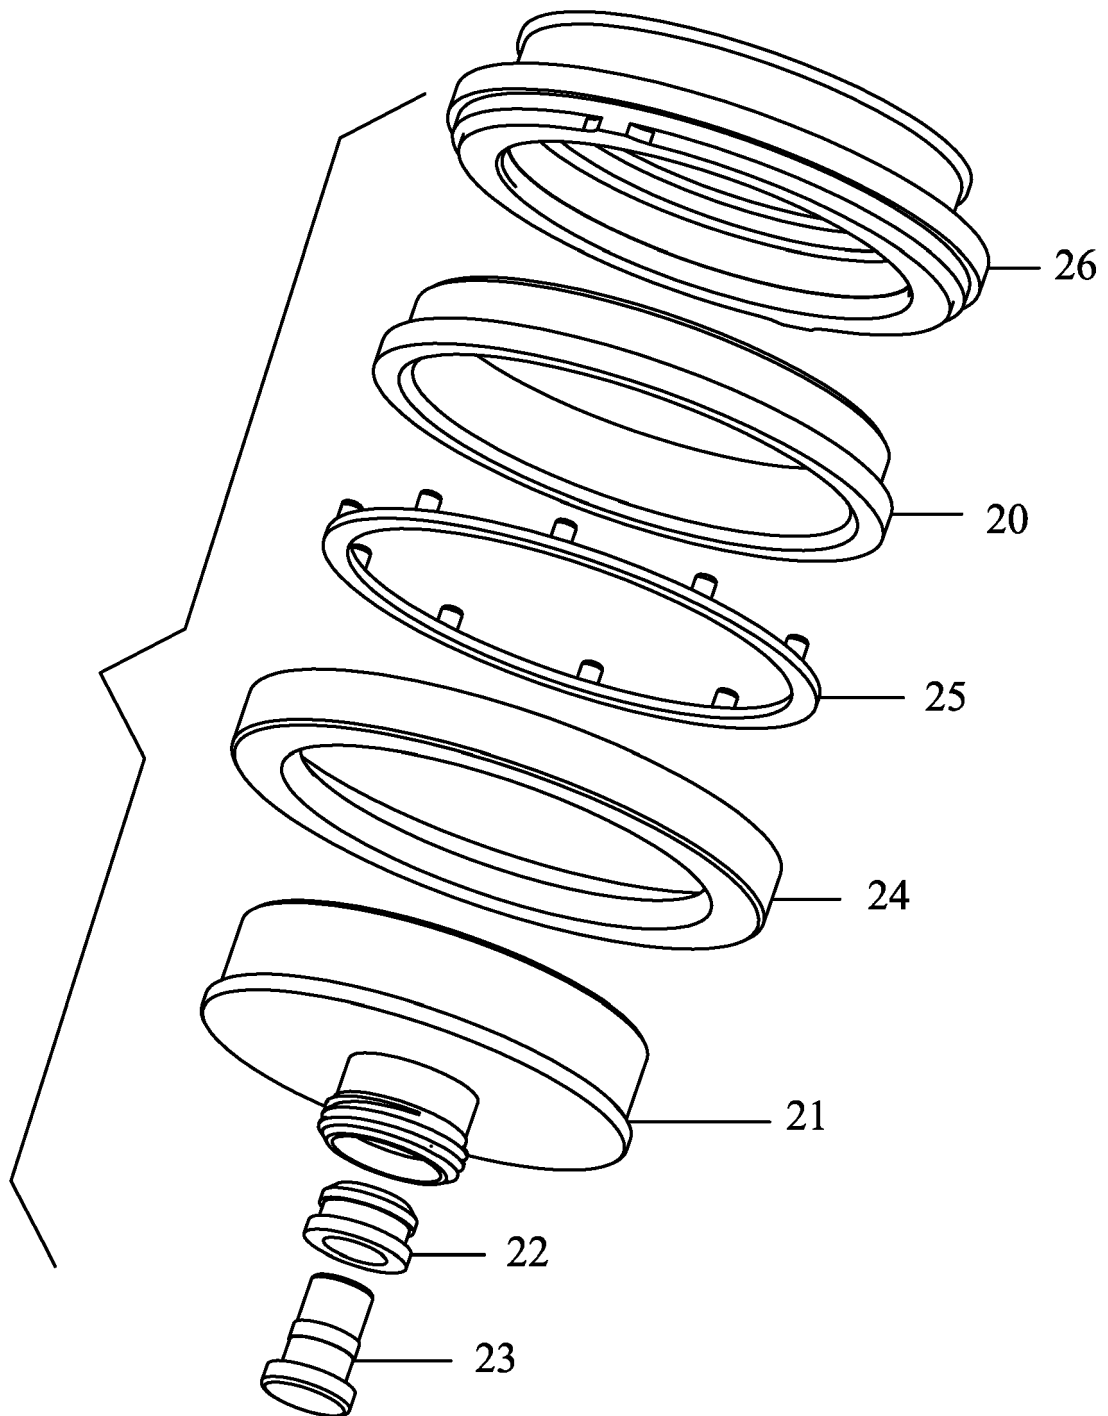


FIG. 4



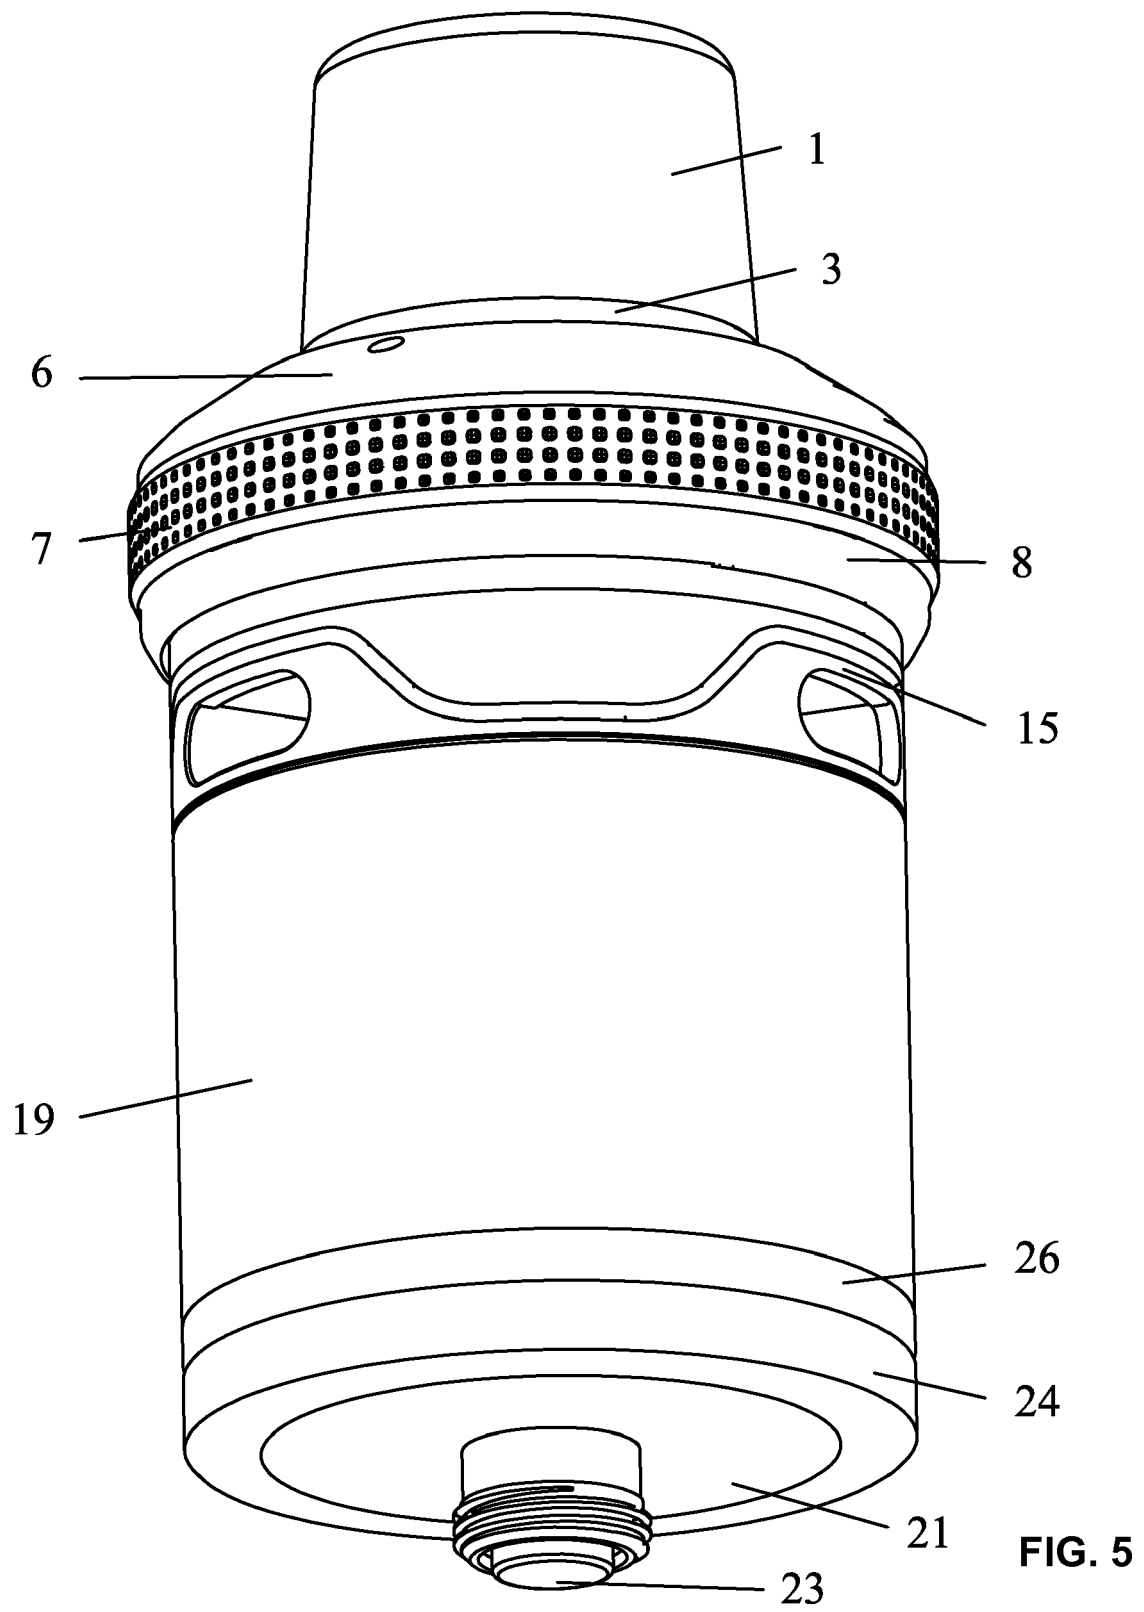

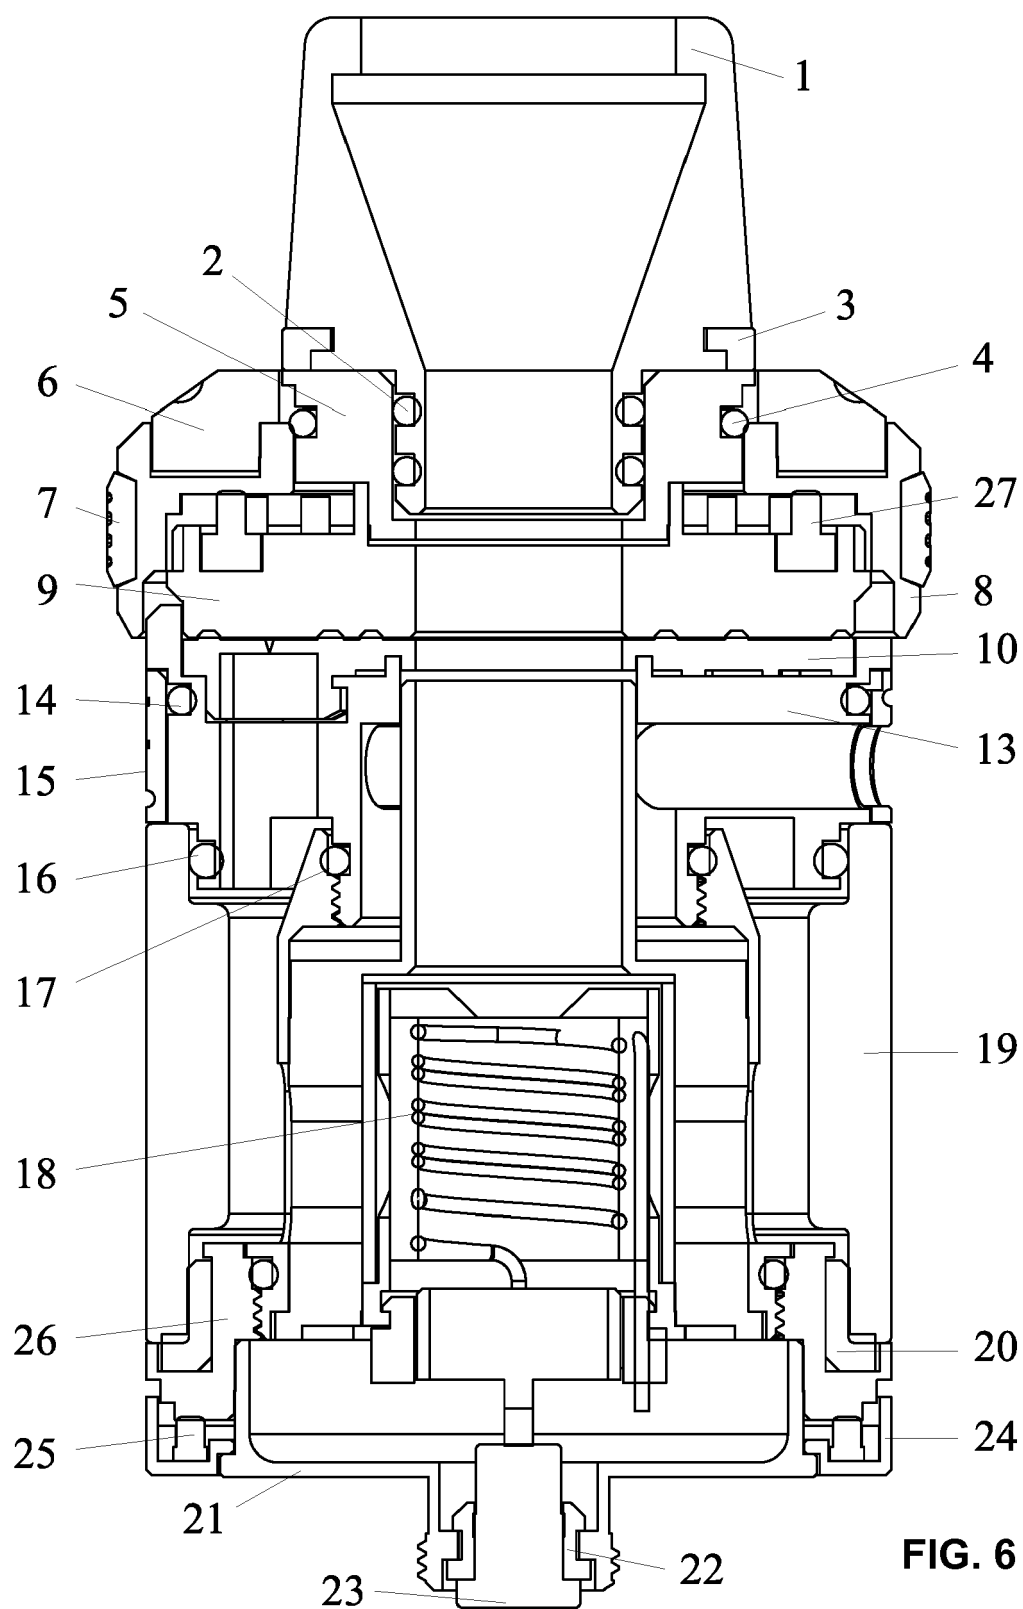

EUROPEAN SEARCH REPORT

 Application Number
 EP 19 16 8562

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 3 238 553 A1 (LIU TUANFANG [CN]) 1 November 2017 (2017-11-01) -----	1	INV. A24F47/00
A	EP 3 117 725 A1 (LIU TUANFANG [CN]) 18 January 2017 (2017-01-18) -----	1	
A	US 2017/354182 A1 (LIU TUANFANG [CN]) 14 December 2017 (2017-12-14) -----	1	
A	CN 108 634 386 A (LIU TUANFANG) 12 October 2018 (2018-10-12) -----	1	
A	EP 3 078 282 A1 (LIU TUANFANG [CN]) 12 October 2016 (2016-10-12) -----	1	
A	US 2018/146707 A1 (CHEN WEN [CN]) 31 May 2018 (2018-05-31) -----	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			A24F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 31 October 2019	Examiner Pavón Mayo, Manuel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
 EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 16 8562

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-10-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 3238553 A1	01-11-2017	CN 205671479 U EP 3238553 A1 US 2017311646 A1	09-11-2016 01-11-2017 02-11-2017
EP 3117725 A1	18-01-2017	EP 3117725 A1 US 2017013881 A1	18-01-2017 19-01-2017
US 2017354182 A1	14-12-2017	CN 205794807 U US 2017354182 A1	14-12-2016 14-12-2017
CN 108634386 A	12-10-2018	NONE	
EP 3078282 A1	12-10-2016	CN 204499488 U EP 3078282 A1 US 2016295920 A1	29-07-2015 12-10-2016 13-10-2016
US 2018146707 A1	31-05-2018	CN 206423562 U GB 2561428 A US 2018146707 A1	22-08-2017 17-10-2018 31-05-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82