



(11) **EP 3 671 068 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.09.2023 Bulletin 2023/37

(51) International Patent Classification (IPC):
F25B 39/04 ^(2006.01) **B60H 1/00** ^(2006.01)
F25B 43/00 ^(2006.01) **F28F 19/00** ^(2006.01)
F28F 19/01 ^(2006.01) **F28B 1/06** ^(2006.01)

(21) Application number: **18461649.8**

(52) Cooperative Patent Classification (CPC):
F25B 39/04; F25B 43/003; F28F 9/0251;
F28F 19/01; F25B 2339/043; F25B 2339/0441;
F28D 2021/0061; F28F 2275/04

(22) Date of filing: **18.12.2018**

(54) **HEAT EXCHANGER WITH FILTER, FOR REFRIGERANT FLUID LOOP**

WÄRMETAUSCHER MIT FILTER FÜR KÜHLMITTELFÜSSIGKEITSKREISLAUF

ÉCHANGEUR DE CHALEUR COMPORTANT UN FILTRE, POUR BOUCLE DE FLUIDE RÉFRIGÉRANT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

- **POKRYWINSKI, Karol**
PL-32-050 Skawina (PL)
- **SUS, Pawe**
PL-32-050 Skawina (PL)

(43) Date of publication of application:
24.06.2020 Bulletin 2020/26

(74) Representative: **Valeo Systèmes Thermiques**
Service Propriété Intellectuelle
ZA l'Agiot, 8 rue Louis Lormand
CS 80517
La Verrière
78322 Le Mesnil-Saint-Denis Cedex (FR)

(73) Proprietor: **Valeo Autosystemy SP. Z.O.O.**
32-050 Skawina (PL)

(72) Inventors:

- **CICHOSZ, Filip**
PL-32-050 Skawina (PL)
- **KACZMARCZYK, Mateusz**
PL-32-050 Skawina (PL)

(56) References cited:
EP-A1- 2 587 194 CN-B- 103 727 706
US-A- 5 901 573 US-B1- 6 694 773

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention concerns a heat exchanger for a refrigerant fluid loop. More specifically, the present invention concerns such a heat exchanger comprising devices for filtering the refrigerant fluid that flows through such heat exchangers.

[0002] A refrigerant fluid loop generally comprises at least two heat exchangers, at least one compressor and at least one expansion device. The compressor and the expansion device are both fragile and comprise movable elements that can easily break. It is therefore important that only the refrigerant fluid enters this compressor or the expansion device. In order to achieve that goal, it is already known to filter the refrigerant fluid before it reaches one of these components. Documents [US5901573A], [EP2587194] A1 and [CN103727706B] show such heat exchangers, where out of these documents, document [US5901573A] shows a heat exchanger according to the preamble of claim 1.

[0003] Some particles may be inside heat exchangers, for instance due to manufacturing processes or default in the cleaning system of such heat exchanger. The cleaning of such particles appears to be really expensive and complex. And even with all the care that can be given to this cleaning, some of those particles, especially particles that have a diameter smaller than 60 μm can remain in those heat exchangers and can then be dragged by the refrigerant fluid to finally damage the compressor, the expansion device or any other element in which this refrigerant fluid could flow.

[0004] As a result, automotive suppliers are more and more concerned with this filtration, and they aim to filter even smaller particles than what is already filtered.

[0005] The present invention solves at least this issue, by providing a heat exchanger for a refrigerant fluid loop, the heat exchanger being defined by appended independent claim 1 and comprising inter alia at least one inlet configured to allow a refrigerant fluid to enter in the heat exchanger, and at least one outlet configured to allow the refrigerant fluid to exit the heat exchanger, the heat exchanger comprising at least one block in which a filter is arranged. According to the invention, the at least one block is arranged downstream the at least one outlet of the heat exchanger, the block comprises at least one first part and at least one second part secured to the first part, and the filter is arranged between said first part and said second part. According to the invention, the filter therefore comprises at least one portion which is in contact with both the first part and the second part of the block. The word "downstream" is to be understood with respect to a direction of the refrigerant fluid flow. The parts of the block are configured as defined by appended independent claim 1.

[0006] According to a first embodiment of the present invention, the block comprises at least one first orifice through which the refrigerant fluid enters the block and at least one second orifice through which the refrigerant

fluid exits the block, the first orifice being arranged in the first part of the block and the second orifice being arranged in the second part of the block. According to a feature of this first embodiment, the first part comprises a first path through which the refrigerant fluid is able to flow, the second part comprises a second path through which the refrigerant fluid is able to flow, the first path being connected to the second path and the first path extending mainly along a first axis, this first axis intersecting a second axis along which the second path mainly extends. The word "connected" must, here, be understood as a fluidic connection, that is to say that the refrigerant fluid that flows through the first path reaches the second path as soon as it leaves the first path.

[0007] According to a second embodiment of the invention, the block comprises at least a third part secured, at least, to the second part of said block, the block comprising at least one first orifice through which the refrigerant fluid enters the block and at least one second orifice through which the refrigerant fluid exits the block, the first orifice being arranged in the first part of the block and the second orifice being arranged in the third part of the block. According to a feature of this second embodiment, the first part, the second part and the third part of the block comprise, respectively, a first path, a second path and a third path, the refrigerant fluid being able to flow through each of these paths and at least the second path being connected to both the first path and the third path. According to this feature, the first path, the second path and the third path extend along a unique axis. In other words, the first path, the second path and the third path extend parallel to each other, and are arranged one after the other, therefore forming a unique path extending from the first orifice to the second orifice. Obviously other arrangements of said paths is conceivable within the scope of the invention.

[0008] According to an aspect of the invention, the refrigerant fluid enters the block along a first direction and exits the block along a second direction, the first direction and the second direction intersecting each other. In other words, the first orifice and the second orifice of the block, which respectively allow the entrance and the exit of the refrigerant fluid in the block, are non-linear, that is to say that the second orifice through which the refrigerant fluid exits the block is arranged obliquely with respect to the first orifice through which the refrigerant fluid enters the block.

[0009] According to the invention, the heat exchanger comprises at least one manifold in which the outlet is arranged. For instance, the first part of the block can be secured to the manifold of the heat exchanger in such a way that said outlet is directly continued by the first orifice of the block. It is understood that the first part of the block is, according to this example, directly secured to the manifold, in the vicinity of the outlet.

[0010] Alternately, a conduit can be interposed between the outlet of the heat exchanger and the first orifice of the block. In other words, according to this alternative,

the block can be placed away from the heat exchanger. Obviously, said conduit is able to carry the refrigerant fluid, in order for this refrigerant fluid to reach the first orifice of the block once out of the heat exchanger.

[0011] According to a feature of the invention, the first path arranged in the first part of the block comprises a chamber which houses the filter, this chamber presenting a diameter bigger than a diameter of the rest of the first path. Advantageously, the diameter of the chamber which houses the filter is bigger than a diameter of the second path arranged in the second part of the block. Even more advantageously, a diameter of the third path arranged in the third part of the block is smaller than the diameter of the chamber which houses the filter. Optionally, the diameter of the second path arranged in the second part can be bigger than the diameter of the third path arranged in the third part of the block. Those diameters are all measured along a straight line extending perpendicularly to at least one face defining the concerned path, the diameter being the longest dimension of said path measurable along said straight line.

[0012] For example, the block can be made of a single piece. That is to say that, at least, the first part and the second part form, together, a single piece which cannot be separated without damaging at least the first part and/or the second part. According to the second embodiment of the invention, the first part, the second part and the third part can therefore form, together, a single piece which cannot be separated without damaging at least the first part and/or the second part and/or the third part.

[0013] Alternately, the first part and the second part of the block are two distinct parts. For instance, the first part can be screwed to the second part. Alternately, the first part and the second part of the block can be brazed together. It is understood that, according to this alternative, the filter is made of a material that resists high temperatures, and in particular, that resists at least the temperature at which the brazing is operated, that is to say for example up to 660°C, depending on the material used for the brazing operation.

[0014] According to one example of application of the present invention, the heat exchanger is used as condenser. In other words, the heat exchanger according to this example of application is configured to liquefy the refrigerant fluid that flows through it, that is to say that the refrigerant fluid enters the heat exchanger in a gaseous state and exits it in a liquid state.

[0015] Other features, details and advantages of the invention can be inferred from the specification of the invention given hereunder. Various embodiments are represented in the figures, wherein:

- figure 1 is a schematic representation of a refrigerant fluid loop comprising at least one heat exchanger according to the invention, this heat exchanger comprising at least one block in which a filter is arranged;
- figures 2 and 3 are two different perspective views

of the block schematically illustrated on figure 1 according to a first embodiment of the invention;

- figure 4 is a perspective view of the block schematically illustrated on figure 1 according to a second embodiment of the invention;
- figures 5 and 6 are, respectively, cross-section views of the block according to the first embodiment and of the block according to the second embodiment.

[0016] In the following specification, the words "upstream" and "downstream" both refer to a direction of circulation of a refrigerant fluid in the concerned object.

[0017] Figure 1 is a schematic view of a refrigerant fluid loop 100 intended to be accommodated in a motor vehicle. This refrigerant fluid loop 100 comprises at least a compressor 110 configured to increase the pressure of a refrigerant fluid R circulating through the loop 100, a first heat exchanger 120 configured to undertake a heat exchange between the refrigerant fluid R and a first airflow AF₁, an expansion device 130 configured to decrease the pressure of the refrigerant fluid R and a second heat exchanger 140 configured to undertake a heat exchange between the refrigerant fluid R and a second airflow AF₂. For instance, the first airflow AF₁ is taken outside the motor vehicle in which the refrigerant fluid loop 100 is accommodated, and the second airflow AF₂ is reserved to be sent in a passenger compartment of said motor vehicle.

[0018] According to the illustrated embodiment, the first heat exchanger 120 is realized according to the invention and comprises a block 200 in which, as explained in more details below, a filter 300 is arranged. According to the invention, this filter 300 is located at an outlet 122 of the heat exchanger, that is to say that the block 200 which houses said filter 300 is arranged downstream the first heat exchanger 120 along a flowing direction of the refrigerant fluid R, this flowing direction being illustrated by the arrow R.

[0019] First, the refrigerant fluid R exits the compressor 110 in a gaseous state and reaches the first heat exchanger 120, and more precisely it reaches an inlet 121 of the first heat exchanger 120. Once the refrigerant fluid R has entered the first heat exchanger 120, a transfer of calories is undertaken between said refrigerant fluid R circulating in this first heat exchanger 120 and the first airflow AF₁ that flows through it. More precisely, the refrigerant fluid R gives calories to the first airflow AF₁ and liquefies. In other words, the first heat exchanger 120 acts, in this particular example, as a condenser. As a result, the refrigerant fluid R exits the first heat exchanger 120 in a liquefied state and reaches the block 200 wherein it is filtered by the filter 300. In other words, it is to be understood that the block 200 is connected on one hand to an outlet 122 of the first heat exchanger 120 configured to allow the refrigerant fluid R to exit said first heat exchanger 120 and on the other hand to a pipe 101 of the

refrigerant fluid loop 100. Then the refrigerant fluid R goes through the expansion device 130 in which its pressure is reduced before it reaches the second heat exchanger 140. In this second heat exchanger 140, the refrigerant fluid R takes calories from the second airflow AF2 and evaporates. The second airflow AF2 can then be sent to the passenger compartment to drop the temperature of this compartment and the refrigerant fluid R, which is again in a gaseous state, can again reach the compressor 110 to start a new cycle.

[0020] Generally speaking, the first heat exchanger 120 and the second heat exchanger 140 are similar and both comprise at least two manifolds or header tanks arranged at an extremity of a heat exchange area wherein the heat exchange between the refrigerant fluid and the first or the second airflow AF1, AF2 takes place. According to the invention, the outlet 122 of the first heat exchanger 120 is arranged in one of its head tanks, and the inlet 121 of this first heat exchanger 120 is arranged in the other one.

[0021] We are now going to describe with more details the block 200 connected to the first heat exchanger 120. For the rest of the specification, the words "first heat exchanger" and "heat exchanger" will be used with no distinction. Anyway, it is understood that the block 200 arranged near the outlet 122 of the first heat exchanger 120 could be placed at an outlet of the second heat exchanger without departing from the scope of the invention.

[0022] Figures 2 and 4 illustrate, in perspective views, the block 200 according, respectively, to a first embodiment and to a second embodiment of the invention. Figure 3 illustrates another perspective view of the block 200 according to the first embodiment.

[0023] The block 200 according to the first embodiment of the invention comprises a first part 201 and a second part 202 secured to the first part 201. A first orifice 211 is arranged in the first part 201 of this block 200, such first orifice 211 being configured to allow the refrigerant fluid to enter the block 200. A second orifice 212 is arranged in the second part 202 of the block 200, such second orifice 212 being configured to allow the refrigerant fluid to exit the block 200. In other words, the first part 201, and more specifically the first orifice 211 arranged in this first part 201, is intended to be connected, directly or indirectly, to the outlet of the heat exchanger and the second part 202, and especially the second orifice 212 arranged in this second part 202, is intended to be connected to the pipe of the refrigerant fluid loop described above.

[0024] According to an example of the first embodiment shown on figure 2, the first part 201 and the second part 202 can, for instance, be brazed together. Obviously this feature does not restrict the invention and the first part 201 could be secured to the second part 202 thanks to any other existing means within the scope of the invention. Still according to this example of the first embodiment, the first part 201 of the block 200 comprises

two ribs 210 configured to allow the crimping of said first part 201 to one of the head tanks of the heat exchanger the block 200 is designed for. As illustrated on figure 2, such ribs 210 extend parallel to each other and are distributed on both sides of the first orifice 211. As mentioned above, the first orifice 211 arranged in the first part 201 of the block 200 is intended to be connected to the outlet of the heat exchanger. As a result, according to the example illustrated on figure 1, the ribs 210 of the first part 201 of the block 200 is configured to allow the crimping of said first part 201 to the header tank of the heat exchanger in which said outlet is arranged.

[0025] We also note that the first part 201 of the block 200 presents a bulge 204 created near the ribs 210, such bulge 204 resulting of the arrangement of a baffle near the first orifice 211 of the first part 201.

[0026] According to the first embodiment shown on figure 2, the first part 201 and the second part 202 of the block 200 present different shapes. More precisely, the second part 202 has the general shape of an L, therefore comprising at least two branches 205, 206 arranged perpendicularly to one another, a first branch 205 being longer than a second branch 206 of this general L-shape. According to the example illustrated on figure 2, the first part 201 extends mainly along a straight line that is perpendicular to a plane which comprises both the first branch 205 and the second branch 206. In other words, an angle of approximately 90° is formed between the first part 201 and the second part 202 of the block 200.

[0027] As detailed below, the first part 201 can take different position thanks to a cooperation between a finger 207 realized on the first part 201 of the block 200 and a groove 208 realized in the second part 202 of said block 200. This cooperation is for instance illustrated on figure 3 which displays a different perspective view of the block 200 according to the first embodiment of the invention.

[0028] As illustrated on this figure 3, the finger 207 presents a rounded end 217 and the groove 208 presents a complementary shape, that is to say that a bottom of this groove 208 is curved. As a result, the rounded end 217 of the finger 207 can be moved with respect to the groove 208, along the illustrated arrow A, thus modifying the position of the first part 201, and more precisely, modifying the orientation of the ribs 210 distributed on either side of the first orifice. Advantageously, this movement enables the block 200 of the invention to be attached to different heat exchangers, and more particularly to different head tanks of such heat exchangers. It is understood, that this position has to be chosen before the brazing operation. Indeed, once the two parts are brazed the first part 201 and the second part 202 cannot be moved anymore.

[0029] Obviously the shape and the orientation of the first part 201 and of the second part 202 of the block can be modified without departing from the scope of the invention.

[0030] The block 200 according to the second embodiment illustrated on figure 4, differs from the first embod-

iment in that the block 200 comprises a third part 203 and in that the second orifice 212 is arranged in this third part 203. As a result, according to such second embodiment of the invention, the first part 201, and more precisely the first orifice 211 arranged in this first part 201, is connected, directly or indirectly to the outlet of the heat exchanger, the third part 203, and more specifically the second orifice 212 arranged in such third part 203, is connected to the pipe of the refrigerant loop and the second part 202 is interposed between the first part 201 and the third part 203. According to the second embodiment illustrated on figure 4, the first part 201, the second part 202 and the third part 203 are screwed together. Again, it is understood that this is only an example and that any other means for fixing pieces together can be used within the scope of the invention. Another difference between the example of the first embodiment illustrated on figure 2 and the example of the second embodiment represented on figure 4 stands in that the block 200 according to the second embodiment lacks the ribs 210. In other words, said block 200 cannot be crimped to the head tank of the heat exchanger. Instead, the first orifice 211 is connected to the outlet of the heat exchanger thanks to a conduit - not shown on the figures. Advantageously, using this conduit allows to place the block away from the heat exchanger, reducing the bulk of such heat exchanger.

[0031] As illustrated on both figures 2 and 4, the first orifice 211 and the second orifice 212 of the block 200 are not linear. To put it another way, the refrigerant fluid enters the block 200, via the first orifice 211 along a first direction R1 and the refrigerant fluid exits said block 200, via the second orifice 212 along a second direction R2, the second direction R2 intersecting the first direction R1.

[0032] As mentioned above, a filter 300 is disposed in the block 200, and especially, said filter 300 is interposed between the first part 201 and the second part 202 of the block 200. We are now going to describe this filter and its function referring to figures 5 and 6. Figure 5 represents a cross-section view of the block 200 according to the first embodiment and figure 6 illustrates a cross-section view of the block 200 according to the second embodiment.

[0033] In the illustrated embodiments, a first path 221 is arranged in the first part 201 and a second path 222 is arranged in the second part 202, both this paths 221, 222 being adapted to the circulation of the refrigerant fluid. It is understood that the first path 221 is connected, directly or indirectly, to the first orifice 211 through which the refrigerant fluid enters the block 200 on one end and to the second path 222 on another end. The word "connected" must, here, be understood as a "fluidic connection", that is to say a connection that allows the circulation of the refrigerant fluid.

[0034] According to the first embodiment illustrated on figure 5, the first path 221 extends mainly along a first axis A1 and the second path 222 - which is only partially represented on figure 5 - extends along a second axis

A2, the first axis A1 intersecting the second axis A2. According to one example of the invention, the second axis A2 can extend perpendicular to the first axis A1. As shown on figure 5, the filter 300 extends mainly along a direction parallel to the first axis A1. The filter 300 according to the invention has a cylindrical shape adapted to fit at least in the first path 221 and/or in the second path 222 arranged in the first part 201 and/or in the second part 202 of the block 200. More precisely, a wall 301 defining the filter 300 has a cylindrical shape that fits an internal shape of said paths 221, 222. In other words, the first path 221 and the second path 222 are both formed as rounded tubes. As a result, the filter 300, viewed in the cross-sections illustrated on figures 5 and 6, has a U-shaped profile, an opening 302 of the U-shape facing the first orifice 211 through which the refrigerant fluid enters the block 200. In other words, the refrigerant fluid enters the filter 300 along the first axis A1 and exits this filter 300 along the second axis A2. We also note that an edge 303 defining the opening 302 of the U-shape extends perpendicular to the first axis A1, beyond the wall 301 defining the filter 300.

[0035] As previously mentioned, the filter 300 is interposed between the first part 201 and the second part 202 of the block 200. For this purpose, a first groove 232 is arranged in the second part 202, such groove 232 being configured to receive, at least, the edge 303 defining the opening 302 of the filter 300. Additionally, the first part 201 comprises a second groove 231 which presents a shape which complement the shape of the first groove 232 arranged in the second part 202. As illustrated, the first groove 232 arranged in the second part 202 extends from an internal face of the second part 202, that is to say a face of this second part 202 that defines the second path 222 and the second groove 231 arranged in the first part 201 extends from an external face of the first part 201, that is to say a face of this first part 201 that faces an external environment of the block 200. As shown on figure 5, the first groove 232 arranged in the second part 202 receives the edge 303 of the filter 300 as described above and a rim 241 defining the second groove 231 is also received in said first groove 232, this rim 241 forming an abutment to the edge 303 of the filter 300. As mentioned earlier, the first part 201 and the second part 202 of the block 200 are, according to the first embodiment described in this document, brazed together. It is understood that the filter 300 is, according to said first embodiment, disposed between the first part 201 and the second part 202 before the brazing of those pieces. As a consequence, once the first part 201 and the second part 202 of the block 200 are brazed together, the filter 300 is firmly maintained between them. According to the example of the first embodiment given here, the filter 300 is therefore made of a material that resists high temperatures, and especially a material that resists temperatures at which the brazing operation is realized.

[0036] Referring now to figure 6, we are going to describe the block 200 according to the second embodi-

ment of the invention. According to this second embodiment, the block 200 comprises three parts 201, 202, 203 in which are realized, respectively, the first path 221, the second path 222 and a third path 223. In a similar manner to what have been described referring to the first embodiment, the first path 221 is connected to the first orifice 211 on one end and to the second path 222 on another end. The second path 222 is therefore connected to the first path 221 on one side and to the third path 223 on another side and this third path 223 is connected both to the second path 222 and to the second orifice 212 through which the refrigerant fluid exits the block 200. According to the illustrated example of the second embodiment, the third path 223 partially extends in the second path 222.

[0037] As illustrated, the second embodiment of the present invention differs from the first embodiment in that it comprises three parts 201, 202, 203 instead of two and in that the first path 221, the second path 222 and the third path 223 extend mainly along a unique axis A3. In other words, the first path 221, the second path 222 and the third path 223 extend parallel to one another, thus forming a unique path starting from the first orifice 211 and ending at the second orifice 212. As described above, the first part 201, the second part 202 and the third part 203 of the block 200 according to the second embodiment illustrated on figure 6 are screwed together. More precisely, the first part 201 is screwed to the second part 202 which is, in turn, screwed to the third part 203. For that purpose, at least two holes 242, 243 are pierced in the second part 202, a first hole 242 extending through the first part 201 and receiving a first screw 401 which fixes the first part 201 to the second part 202 and a second hole 243 extending through the third part 203 and receiving a second screw 402 for fixing the third part 203 to the second part 202. We also note that the third part 203 presents an L-shaped profile, viewed in the cross-section illustrated on figure 6. As illustrated, this specific profile is designed to allow the screwing of each part to one another. More precisely, the second hole 243 is arranged through one branch 213 of this L-shaped profile and the other branch 214 extends in a way that a free space is created, this free space being able to receive a head 411 of the first screw 401. According to the second embodiment illustrated on figure 6, the first part 201 and the second part 202 both presents rectangular cross-sections.

[0038] The block 200 according to the second embodiment illustrated here also comprises the filter 300, which is, as mentioned above, disposed between the first part 201 and the second part 202 of the block 200. The filter 300 presents, according to this second embodiment, a similar shape to the shape of the filter 300 according to the first embodiment, that is to say a U-shaped profile viewed in the cross-section illustrated here, this U-shaped profile comprising the opening 302 defined by the edge 303 that extends beyond the wall 301 defining the filter 300. Focusing on the differences between first

and second embodiments, the opening 302 of the filter 300 faces away from the first orifice 211 through which the refrigerant fluid enters the block 200. In other word, a base of the U-shaped profile faces this first orifice 211.

[0039] The filter 300 according to this example of the second embodiment of the invention, also comprises at least one aperture 304, advantageously several apertures 304, closed by a meshed element 305 configured to filter the refrigerant fluid. For instance, the meshed element 305 can be configured to retain particles presenting a diameter bigger than 50 μ m. In other configurations, the meshed element 305 can be configured to retain particles presenting a diameter bigger than 30 μ m.

[0039] As shown, the first path 221 comprises a chamber 251 in which the filter 300 is housed. This chamber 251 advantageously presents a diameter Dc bigger than a diameter D1 of the rest of the first path 201, bigger than a diameter D2 of the second path 222 and also bigger than a diameter D3 of the third path 223. We also note that the third path 223 partially protrudes in the second path 222, resulting in that the diameter D3 of this third path 223 is smaller than the diameter D2 of the second path 222.

[0040] The second part 202 also comprises at least a first annular cut 262 and a second annular cut 272, which respectively receive a first sealing device 261 and a second sealing device 263, the first sealing device 261 being adapted to seal a junction between the first part 201 and the second part 202 and the second sealing device 263 being designed to seal a junction between the second part 202 and the third part 203.

[0041] Obviously, the features that have just been described referring to one or the other embodiment illustrated in this document can be combined between them. For instance, the block according to the second embodiment of the invention can be provided with ribs allowing it to be crimped to the head tank of the heat exchanger within the scope of the invention. Any other combination of the features described above is also possible within the scope of the invention.

[0042] It will be understood from the foregoing that the present invention provides a simple, easily adaptable and easily replaceable means to filter the refrigerant fluid that exit a heat exchanger accommodated on a refrigerant fluid loop so as to prevent any damage on other components of such a refrigerant fluid loop. Advantageously, said means can be mounted directly or indirectly to the heat exchanger, allowing its use in a various number of refrigerant loops.

[0043] However, the invention cannot be limited to the means and configurations described and illustrated herein, where it is defined by the appended claims.

55 Claims

1. Heat exchanger (120) for a refrigerant fluid loop (100), the heat exchanger (120) comprising at least

one inlet (121) configured to allow a refrigerant fluid (R) to enter in the heat exchanger (120) and at least one outlet (122) configured to allow the refrigerant fluid (R) to exit the heat exchanger (120), the heat exchanger (120) comprising at least one block (200) in which a filter (300) is arranged, **characterized in that** the at least one block (200) is arranged downstream the at least one outlet (122) of the heat exchanger (120),

wherein the block (200) comprises at least one first part (201) and at least one second part (202) secured to the first part (201), and wherein the filter (300) is arranged between said first part (201) and said second part (202),

characterised in that the first part (201) comprises a finger (207) realized on said first part (201) of the block (200) and the second part (202) comprises a groove (208) realized in said second part (202) of said block (200), wherein the first part (201) is positioned thanks to a co-operation between the finger (207) and the groove (208) .

2. Heat exchanger (120) according to the preceding claim, wherein the block (200) comprises at least one first orifice (211) through which the refrigerant fluid (R) enters the block (200) and at least one second orifice (212) through which the refrigerant fluid (R) exits the block (200), the first orifice (211) being arranged in the first part (201) of the block (200) and the second orifice (212) being arranged in the second part (202) of the block (200).
3. Heat exchanger (120) according to the any of the preceding claims, wherein the first part (201) comprises a first path (221) through which the refrigerant fluid (R) is able to flow, wherein the second part (202) comprises a second path (222) through which the refrigerant fluid (R) is able to flow, the first path (221) being connected to the second path (222), and wherein the first path (221) extends mainly along a first axis (A1), this first axis (A1) intersecting a second axis (A2) along which the second path (222) mainly extends.
4. Heat exchanger (120) according to claim 1, wherein the block (200) comprises at least a third part (203) secured, at least, to the second part (202) of said block (200), the block (200) comprising at least one first orifice (211) through which the refrigerant fluid (R) enters the block (200) and at least one second orifice (212) through which the refrigerant fluid (R) exits the block (200), the first orifice (211) being arranged in the first part (201) of the block (200) and the second orifice (212) being arranged in the third part (203) of the block (200).

5. Heat exchanger (120) according to the preceding claim, wherein the first part (201), the second part (202) and the third part (203) of the block (200) comprise, respectively, a first path (221), a second path (222) and a third path (223), the refrigerant fluid being able to flow through each of these paths (221, 222, 223), at least the second path (222) being connected to both the first path (221) and the third path (223), and wherein the first path (221), the second path (222) and the third path (223) extend along a unique axis (A3).
6. Heat exchanger (120) according to any of the preceding claims, wherein the refrigerant fluid (R) enters the block (200) along a first direction (R1) and exits the block (200) along a second direction (R2), the first direction (R1) and the second direction (R2) intersecting each other.
7. Heat exchanger (120) according to any of the preceding claims, comprising at least one manifold in which the outlet (122) is arranged, wherein the first part (201) of the block (200) is secured to the manifold of the heat exchanger (120), in such a way that said outlet (122) is directly continued by the first orifice (211) of the block (200).
8. Heat exchanger (120) according to any of claims 1 to 6, wherein a conduit is interposed between the outlet (122) of the heat exchanger (120) and the first orifice (211) of the block (200).
9. Heat exchanger (120) according to any of the preceding claims in combination with claim 3 or 5, wherein the first path (221) arranged in the first part (201) of the block (200) comprises a chamber (251) which houses the filter (300), this chamber (251) presenting a diameter (Dc) bigger than a diameter (D1) of the rest of the first path (201).
10. Heat exchanger (120) according to claim 9, wherein the diameter (Dc) of the chamber (251) which houses the filter (300) is bigger than a diameter (D2) of the second path (222) arranged in the second part (202) of the block (200).
11. Heat exchanger (120) according to claims 5 and 9, wherein a diameter (D3) of the third path (223) arranged in the third part (203) of the block (200) is smaller than the diameter (Dc) of the chamber (251) which houses the filter (300).
12. Heat exchanger (120) according to any of the preceding claims, wherein the first part (201) and the second part (202) of the block (200) are brazed together, so that said block (200) is made of a single piece.

13. Heat exchanger (120) according to any of claims 1 to 11, wherein at least the first part (201) and the second part (202) of the block (200) are two distinct parts.
14. Heat exchanger (120) according to the preceding claim, wherein the first part (201) is screwed to the second part (202).
15. Heat exchanger (120) according to claim 13, wherein the first part (201) and the second part (202) of the block (200) are brazed together.
16. Heat exchanger (120) according to any of the preceding claims, wherein the heat exchanger (120) is used as condenser.

Patentansprüche

1. Wärmetauscher (120) für einen Kältemittelfluidkreislauf (100), der Wärmetauscher (120) umfassend mindestens einen Einlass (121), dazu konfiguriert, zu ermöglichen, dass ein Kältemittelfluid (R) in den Wärmetauscher (120) eintritt, und mindestens einen Auslass (122), dazu konfiguriert, zu ermöglichen, dass das Kältemittelfluid (R) aus dem Wärmetauscher (120) austritt, der Wärmetauscher (120) umfassend mindestens einen Block (200), in dem ein Filter (300) angeordnet ist, **dadurch gekennzeichnet, dass** der mindestens eine Block (200) stromabwärts des mindestens einen Auslasses (122) des Wärmetauschers (120) angeordnet ist, wobei der Block (200) mindestens einen ersten Teil (201) und mindestens einen zweiten Teil (202), der an dem ersten Teil (201) gesichert ist, umfasst, und wobei der Filter (300) zwischen dem ersten Teil (201) und dem zweiten Teil (202) angeordnet ist, **dadurch gekennzeichnet, dass** der erste Teil (201) einen Finger (207) umfasst, der auf dem ersten Teil (201) des Blocks (200) ausgebildet ist, und der zweite Teil (202) eine Nut (208) umfasst, die auf dem zweiten Teil (202) des Blocks (200) ausgebildet ist, wobei der erste Teil (201) durch ein Zusammenwirken zwischen dem Finger (207) und der Nut (208) positioniert wird.
2. Wärmetauscher (120) nach dem vorhergehenden Anspruch, wobei der Block (200) mindestens eine erste Öffnung (211) umfasst, durch die das Kältemittelfluid (R) in den Block (200) eintritt, und mindestens eine zweite Öffnung (212), durch die das Kältemittelfluid (R) aus dem Block (200) austritt, wobei die erste Öffnung (211) im ersten Teil (201) des Blocks (200) angeordnet ist und die zweite Öffnung (212) im zweiten Teil (202) des Blocks (200) angeordnet ist.
3. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche, wobei der erste Teil (201) einen ersten Pfad (221) umfasst, durch den das Kältemittelfluid (R) strömen kann, wobei der zweite Teil (202) einen zweiten Pfad (222) umfasst, durch den das Kältemittelfluid (R) strömen kann, wobei der erste Pfad (221) mit dem zweiten Pfad (222) verbunden ist und wobei sich der erste Pfad (221) hauptsächlich entlang einer ersten Achse (A1) erstreckt, wobei diese erste Achse (A1) eine zweite Achse (A2) schneidet, entlang derer sich der zweite Pfad (222) hauptsächlich erstreckt.
4. Wärmetauscher (120) nach Anspruch 1, wobei der Block (200) mindestens einen dritten Teil (203) umfasst, mindestens an dem zweiten Teil (202) des Blocks (200) gesichert, der Block (200) umfassend mindestens eine erste Öffnung (211), durch die das Kältemittelfluid (R) in den Block (200) eintritt, und mindestens eine zweite Öffnung (212), durch die das Kältemittelfluid (R) aus dem Block (200) austritt, wobei die erste Öffnung (211) im ersten Teil (201) des Blocks (200) angeordnet ist und die zweite Öffnung (212) im dritten Teil (203) des Blocks (200) angeordnet ist.
5. Wärmetauscher (120) nach dem vorhergehenden Anspruch, wobei der erste Teil (201), der zweite Teil (202) und der dritte Teil (203) des Blocks (200) einen ersten Pfad (221), einen zweiten Pfad (222) bzw. einen dritten Pfad (223) umfassen, wobei das Kältemittelfluid durch jeden dieser Pfade (221, 222, 223) strömen kann, wobei mindestens der zweite Pfad (222) sowohl mit dem ersten Pfad (221) als auch mit dem dritten Pfad (223) verbunden ist, und wobei der erste Pfad (221), der zweite Pfad (222) und der dritte Pfad (223) sich entlang einer eindeutigen Achse (A3) erstrecken.
6. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche, wobei das Kältemittelfluid (R) entlang einer ersten Richtung (R1) in den Block (200) eintritt und entlang einer zweiten Richtung (R2) aus dem Block (200) austritt, wobei die erste Richtung (R1) und die zweite Richtung (R2) einander schneiden.
7. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche, umfassend mindestens einen Verteiler, in dem der Auslass (122) angeordnet ist, wobei der erste Teil (201) des Blocks (200) derart am Verteiler des Wärmetauschers (120) gesichert ist, dass der Auslass (122) direkt durch die erste Öffnung (211) des Blocks (200) fortgesetzt wird.
8. Wärmetauscher (120) nach einem der Ansprüche 1 bis 6, wobei eine Leitung zwischen dem Auslass (122) des Wärmetauschers (120) und der ersten Öff-

nung (211) des Blocks (200) angeordnet ist.

9. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche in Kombination mit Anspruch 3 oder 5, wobei der erste Pfad (221), der im ersten Teil (201) des Blocks (200) angeordnet ist, eine Kammer (251) umfasst, die den Filter (300) aufnimmt, wobei diese Kammer (251) einen Durchmesser (Dc) aufweist, der größer ist als ein Durchmesser (D1) des Rests des ersten Pfads (201). 5 10
10. Wärmetauscher (120) nach Anspruch 9, wobei der Durchmesser (Dc) der Kammer (251), die den Filter (300) aufnimmt, größer ist als ein Durchmesser (D2) des zweiten Pfads (222), der im zweiten Teil (202) des Blocks (200) angeordnet ist. 15
11. Wärmetauscher (120) nach den Ansprüchen 5 und 9, wobei ein Durchmesser (D3) des im dritten Teil (203) des Blocks (200) angeordneten dritten Pfads (223) kleiner ist als der Durchmesser (Dc) der Kammer (251), die den Filter (300) aufnimmt. 20
12. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche, wobei der erste Teil (201) und der zweite Teil (202) des Blocks (200) miteinander verlötet sind, sodass der Block (200) aus einem einzigen Stück besteht. 25
13. Wärmetauscher (120) nach einem der Ansprüche 1 bis 11, wobei mindestens der erste Teil (201) und der zweite Teil (202) des Blocks (200) zwei separate Teile sind. 30
14. Wärmetauscher (120) nach dem vorhergehenden Anspruch, wobei der erste Teil (201) mit dem zweiten Teil (202) verschraubt ist. 35
15. Wärmetauscher (120) nach Anspruch 13, wobei der erste Teil (201) und der zweite Teil (202) des Blocks (200) miteinander verlötet sind. 40
16. Wärmetauscher (120) nach einem der vorhergehenden Ansprüche, wobei der Wärmetauscher (120) als Kondensator verwendet wird. 45

Revendications

1. Échangeur de chaleur (120) pour une boucle de fluide réfrigérant (100), l'échangeur de chaleur (120) comprenant au moins une entrée (121) configurée pour permettre à un fluide réfrigérant (R) d'entrer dans l'échangeur de chaleur (120) et au moins une sortie (122) configurée pour permettre au fluide réfrigérant (R) de sortir de l'échangeur de chaleur (120), l'échangeur de chaleur (120) comprenant au moins un bloc (200) dans lequel un filtre (300) est 50 55

agencé, **caractérisé en ce que** l'au moins un bloc (200) est agencé en aval de l'au moins une sortie (122) de l'échangeur de chaleur (120),

dans lequel le bloc (200) comprend au moins une première partie (201) et au moins une deuxième partie (202) fixée à la première partie (201), et dans lequel le filtre (300) est agencé entre ladite première partie (201) et ladite deuxième partie (202),

caractérisé en ce que la première partie (201) comprend un doigt (207) réalisé sur ladite première partie (201) du bloc (200) et la deuxième partie (202) comprend une rainure (208) réalisée dans ladite deuxième partie (202) dudit bloc (200), dans lequel la première partie (201) est positionnée grâce à une coopération entre le doigt (207) et la rainure (208).

2. Échangeur de chaleur (120) selon la revendication précédente, dans lequel le bloc (200) comprend au moins un premier orifice (211) à travers lequel le fluide réfrigérant (R) entre dans le bloc (200) et au moins un second orifice (212) à travers lequel le fluide réfrigérant (R) sort du bloc (200), le premier orifice (211) étant agencé dans la première partie (201) du bloc (200) et le second orifice (212) étant agencé dans la deuxième partie (202) du bloc (200).
3. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes, dans lequel la première partie (201) comprend un premier chemin (221) à travers lequel le fluide réfrigérant (R) peut s'écouler, dans lequel la deuxième partie (202) comprend un second chemin (222) à travers lequel le fluide réfrigérant (R) peut s'écouler, le premier chemin (221) étant relié au second chemin (222), et dans lequel le premier chemin (221) s'étend principalement le long d'un premier axe (A1), ce premier axe (A1) intersectant un second axe (A2) le long duquel le second chemin (222) s'étend principalement.
4. Échangeur de chaleur (120) selon la revendication 1, dans lequel le bloc (200) comprend au moins une troisième partie (203) fixée, au moins, à la deuxième partie (202) dudit bloc (200), le bloc (200) comprenant au moins un premier orifice (211) à travers lequel le fluide réfrigérant (R) entre dans le bloc (200) et au moins un second orifice (212) à travers lequel le fluide réfrigérant (R) sort du bloc (200), le premier orifice (211) étant agencé dans la première partie (201) du bloc (200) et le second orifice (212) étant agencé dans la troisième partie (203) du bloc (200).
5. Échangeur de chaleur (120) selon la revendication précédente, dans lequel la première partie (201), la deuxième partie (202) et la troisième partie (203) du bloc (200) comprennent, respectivement, un premier

- chemin (221), un deuxième chemin (222) et un troisième chemin (223), le fluide réfrigérant pouvant s'écouler à travers chacun de ces chemins (221, 222, 223), au moins le deuxième chemin (222) étant relié au premier chemin (221) ainsi qu'au troisième chemin (223), et dans lequel le premier chemin (221), le deuxième chemin (222) et le troisième chemin (223) s'étendent le long d'un axe unique (A3).
6. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes, dans lequel le fluide réfrigérant (R) entre dans le bloc (200) le long d'une première direction (R1) et sort du bloc (200) le long d'une seconde direction (R2), la première direction (R1) et la seconde direction (R2) s'intersectant l'une l'autre.
7. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes, comprenant au moins une tubulure dans laquelle la sortie (122) est agencée, dans lequel la première partie (201) du bloc (200) est fixée à la tubulure de l'échangeur de chaleur (120), de manière telle que ladite sortie (122) soit directement continuée par le premier orifice (211) du bloc (200).
8. Échangeur de chaleur (120) selon l'une quelconque des revendications 1 à 6, dans lequel un conduit est interposé entre la sortie (122) de l'échangeur de chaleur (120) et le premier orifice (211) du bloc (200).
9. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes en combinaison avec la revendication 3 ou 5, dans lequel le premier chemin (221) agencé dans la première partie (201) du bloc (200) comprend une chambre (251) qui loge le filtre (300), cette chambre (251) présentant un diamètre (Dc) plus gros qu'un diamètre (D1) du reste du premier chemin (201).
10. Échangeur de chaleur (120) selon la revendication 9, dans lequel le diamètre (Dc) de la chambre (251) qui loge le filtre (300) est plus gros qu'un diamètre (D2) du deuxième chemin (222) agencé dans la deuxième partie (202) du bloc (200).
11. Échangeur de chaleur (120) selon les revendications 5 et 9, dans lequel un diamètre (D3) du troisième chemin (223) agencé dans la troisième partie (203) du bloc (200) est plus petit que le diamètre (Dc) de la chambre (251) qui loge le filtre (300).
12. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes, dans lequel la première partie (201) et la deuxième partie (202) du bloc (200) sont brasées ensemble, pour que ledit bloc (200) soit fait d'une seule pièce.
13. Échangeur de chaleur (120) selon l'une quelconque des revendications 1 à 11, dans lequel au moins la première partie (201) et la deuxième partie (202) du bloc (200) sont deux parties distinctes.
14. Échangeur de chaleur (120) selon la revendication précédente, dans lequel la première partie (201) est vissée sur la deuxième partie (202).
15. Échangeur de chaleur (120) selon la revendication 13, dans lequel la première partie (201) et la deuxième partie (202) du bloc (200) sont brasées ensemble.
16. Échangeur de chaleur (120) selon l'une quelconque des revendications précédentes, dans lequel l'échangeur de chaleur (120) est utilisé en tant que condenseur.

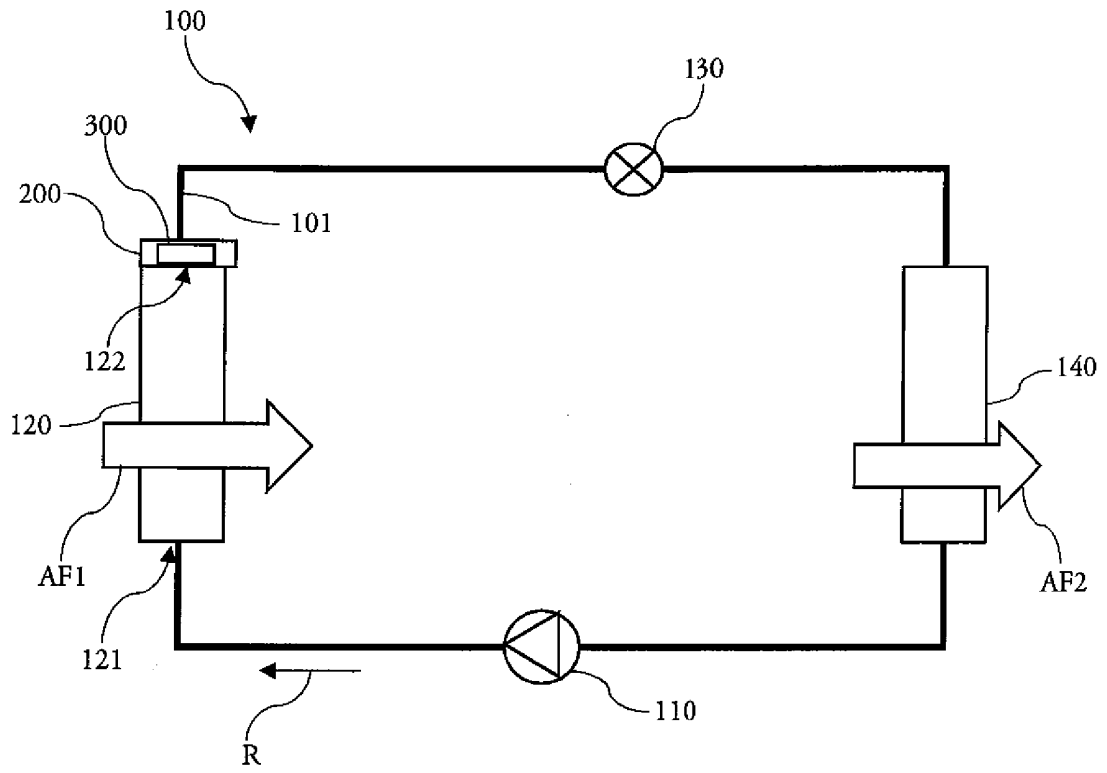


Fig. 1

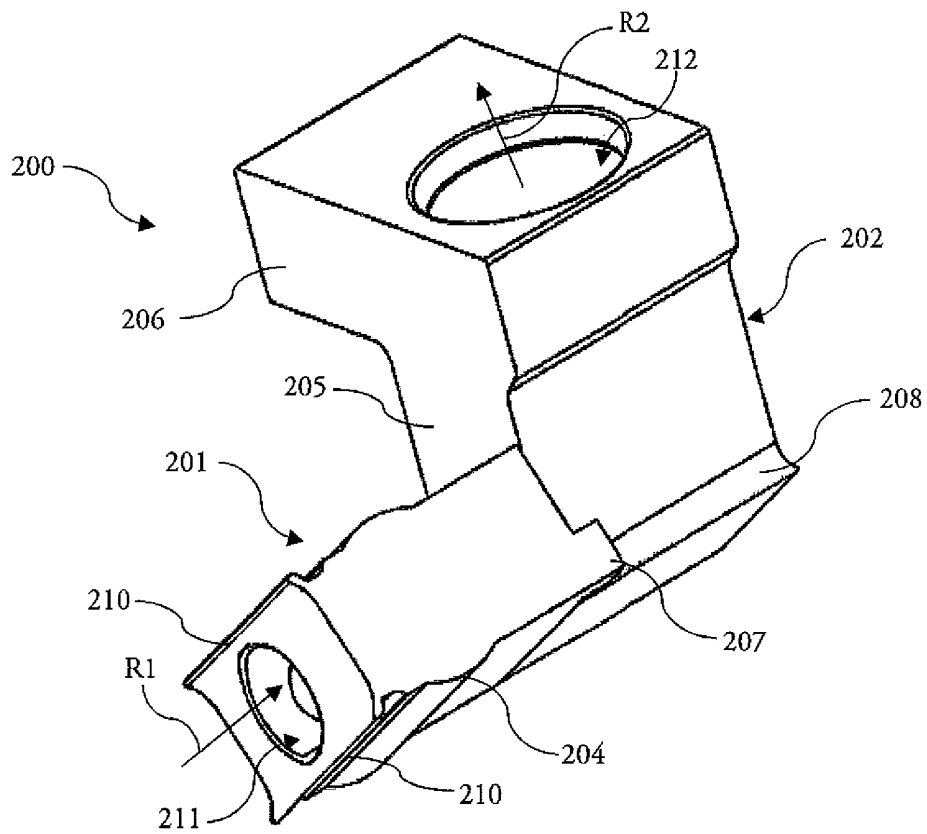


Fig. 2

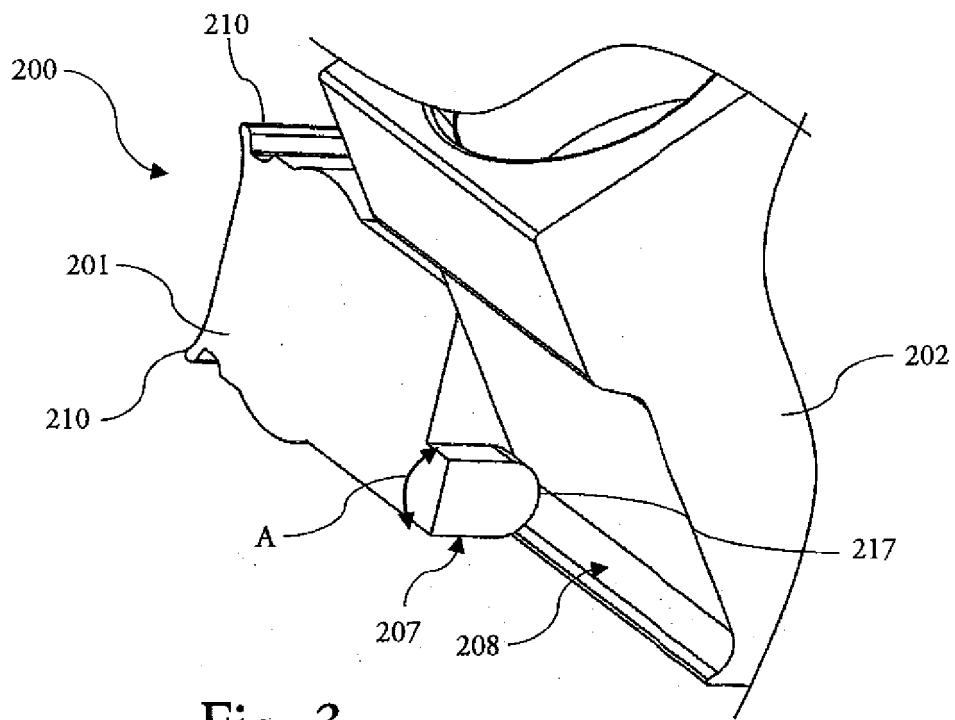


Fig. 3

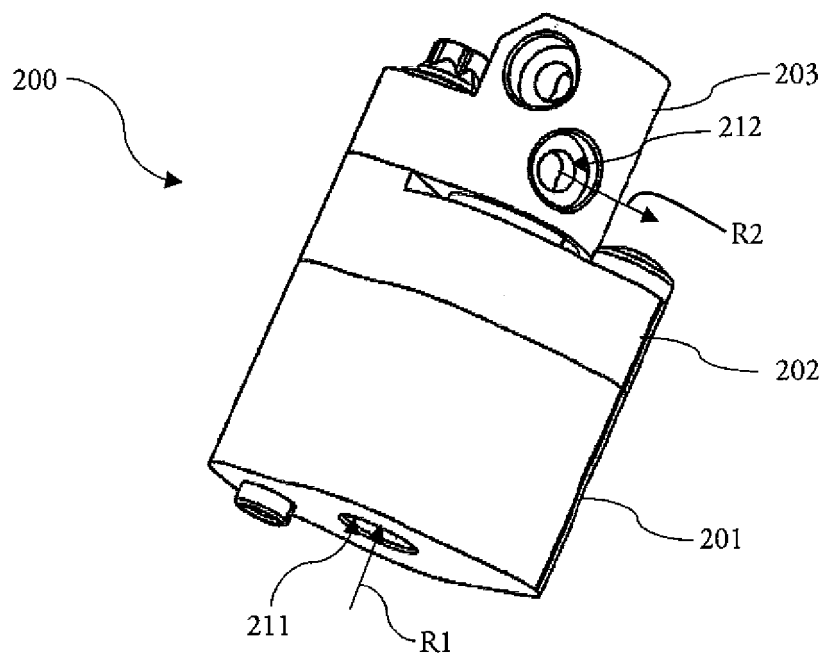


Fig. 4

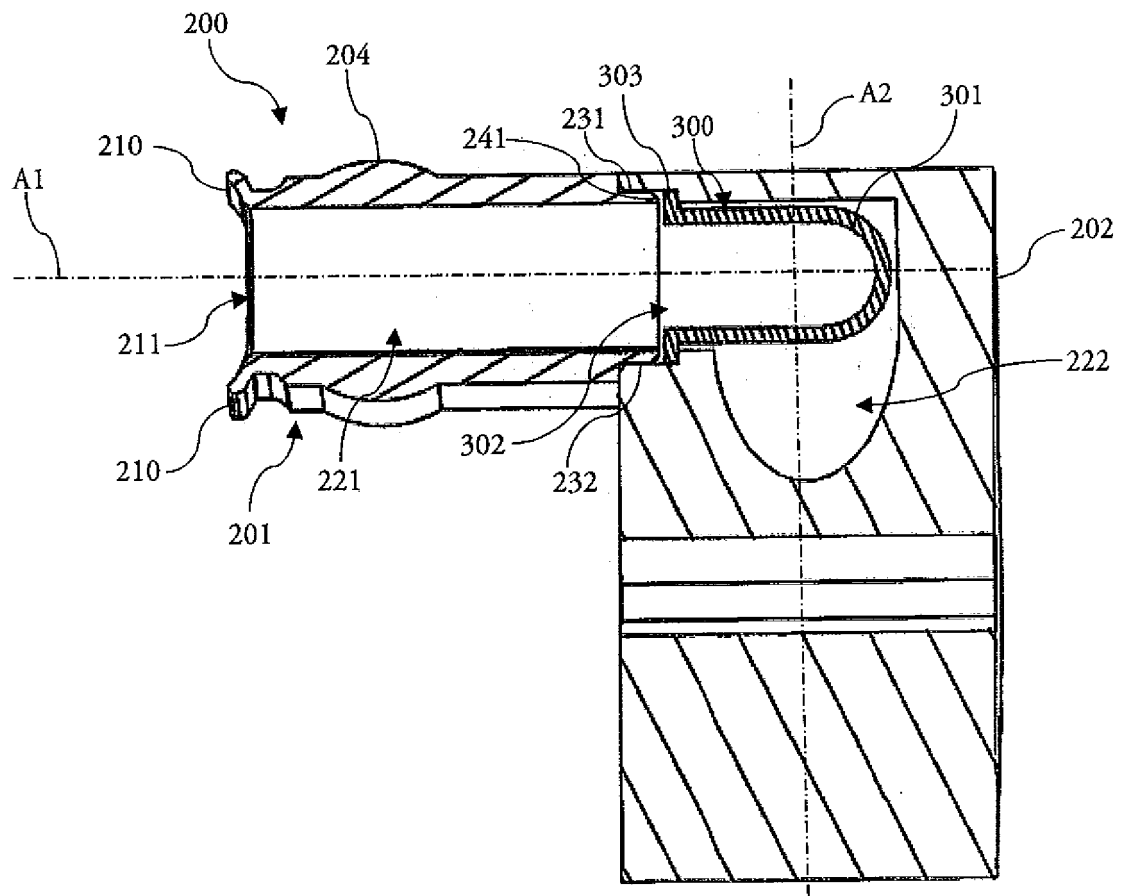


Fig. 5

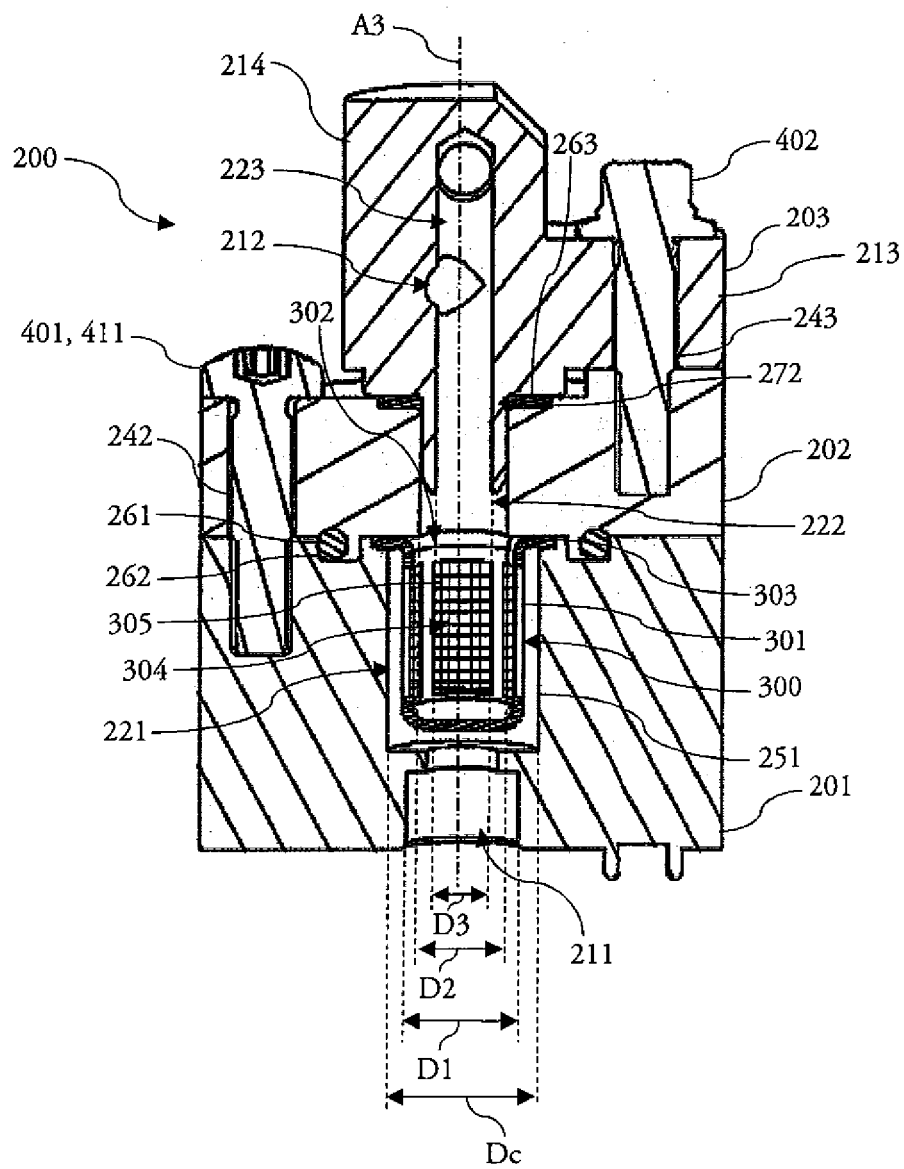


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5901573 A [0002]
- EP 2587194 A1 [0002]
- CN 103727706 B [0002]