



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.07.2020 Bulletin 2020/27

(51) Int Cl.:
F04C 14/26 ^(2006.01) **F04C 2/10** ^(2006.01)

(21) Application number: **19206842.7**

(22) Date of filing: **04.11.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

• **Kia Motors Corporation**
Seoul 06797 (KR)

(72) Inventor: **KANG, Dong-Hun**
08750 Seoul (KR)

(74) Representative: **Viering, Jentschura & Partner**
mbB
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(30) Priority: **27.12.2018 KR 20180170482**


(71) Applicants:
• **HYUNDAI MOTOR COMPANY**
Seoul 06797 (KR)

(54) **TWO-STAGE VARIABLE RELIEF VALVE FOR OIL PUMP**

(57) A two-stage variable relief valve for an oil pump may include as the relief valve for adjusting discharge of oil to an engine side by the oil pump, a plunger operated in a valve housing, and a spring for elastically supporting the plunger, wherein the valve housing is formed with a bypass inlet passage and a bypass outlet passage, and

the bypass inlet passage and the bypass outlet passage are opened or closed according to the displacement of the plunger, and wherein the area of the bypass inlet passage is smaller than the area of the bypass outlet passage.

FIG.1

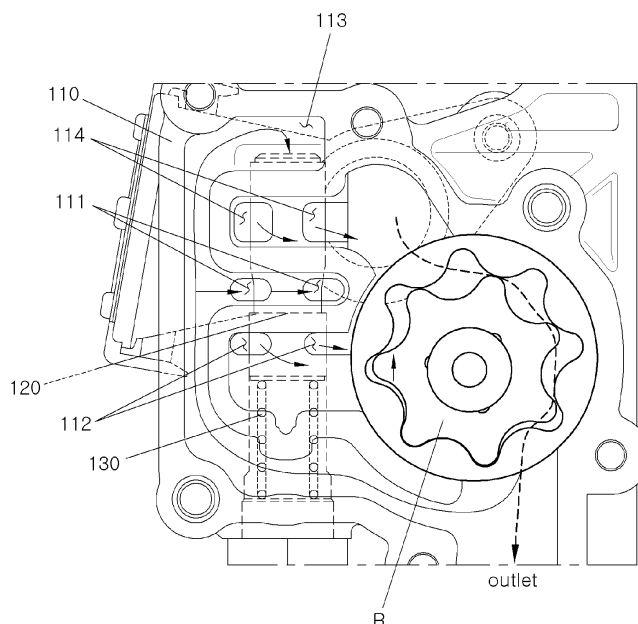

Description

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

[0001] The present disclosure relates to a relief valve for controlling a flow rate of an oil pump for supplying oil to a vehicle engine side.

Description of Related Art

[0002] In general, since an internal combustion engine such as a vehicle is driven in high temperature and high pressure conditions inside a cylinder due to the high-speed movement of a piston and the explosion stroke of a mixer, it is important to continuously supply oil to the sliding surface of a cylinder wall and the piston, a crankshaft, a camshaft, etc.

[0003] As described above, an oil pump for pumping oil is used to feed oil for lubrication and cooling of an engine, and as illustrated in FIG. 1, the oil pump discharges an oil pressure to an outlet while a rotor R connected to the engine side is driven.

[0004] Then, a relief valve for preventing the discharge pressure discharged from the oil pump from rising by a certain pressure or more is used in the oil pump.

[0005] As illustrated, the relief valve is received to be elevated in the figure by elastically supporting a plunger 120 by a spring 130 inside a valve housing 110, bypass passages 111, 112, 113, 114 are formed in the valve housing 110, and the plunger is formed with a bypass hole.

[0006] Therefore, the relief valve adjusts the discharge degree of the oil by repeatedly opening and closing the bypass passages 111, 112, 113, 114 according to the degree of the plunger 120 pressing the spring 130 by the discharge pressure of the oil.

[0007] That is, as illustrated, the bypass passage of a two-stage variable relief valve is formed of the primary bypass inlet passage 111, the primary bypass outlet passage 112, the secondary bypass inlet passage 113, and the secondary bypass outlet passage 114 to be operated to bypass to a suction side through the primary bypass outlet passage 112 through the primary bypass inlet passage 111 at the time of the primary bypass according to the displacement of the plunger 120, and to bypass to the suction side through the secondary bypass outlet passage 114 through the secondary bypass inlet passage 113 at the time of the secondary bypass.

[0008] However, in case of the oil pump to which such a two-stage variable relief valve has been applied, an oil pressure hysteresis phenomenon easily occurs in the RPM speed-up or speed-down condition.

[0009] That is, the oil pressure hysteresis means a phenomenon that a timing difference occurs in the section between the closing and the opening of the valve due to the inherent phenomena of the spring and the

valve.

[0010] The contents described in Description of Related Art are to help the understanding of the background of the present disclosure, and can include what is not previously known to those skilled in the art to which the present disclosure pertains.

[Related Art Document]

10 [Patent Document]

[0011] (Patent Document 1) Korean Patent Laid-Open Publication No. 10-2005-0048151

15 SUMMARY OF THE DISCLOSURE

[0012] The present disclosure is intended to solve the above problem, and an object of the present disclosure is to provide a two-stage variable relief valve for an oil pump, which can reduce an oil pump hysteresis phenomenon, thereby improving oil lubrication performance.

[0013] A two-stage variable relief valve for an oil pump according to one aspect of the present disclosure includes, as the relief valve for adjusting discharge of oil to an engine side by the oil pump, a plunger operated in a valve housing, and a spring for elastically supporting the plunger, and the valve housing is formed with a bypass inlet passage and a bypass outlet passage, and the bypass inlet passage and the bypass outlet passage are opened or closed according to the displacement of the plunger, and the area of the bypass inlet passage is smaller than the area of the bypass outlet passage.

[0014] Then, the overall area of the bypass inlet passage is smaller than 1/2 or less of the overall area of the bypass outlet passage.

[0015] In addition, each of the bypass inlet passage and the bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and the area of each passage hole of the bypass inlet passage is smaller than the area of each passage hole of the bypass outlet passage.

[0016] Alternatively, each of the bypass inlet passage and the bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and the number of passage holes of the bypass inlet passage is smaller than the number of passage holes of the bypass outlet passage.

[0017] Furthermore, the bypass inlet passage includes a primary bypass inlet passage and a secondary bypass inlet passage, the bypass outlet passage includes a primary bypass outlet passage and a secondary bypass outlet passage, the primary bypass inlet passage and the primary bypass outlet passage are opened and closed at the same time, and the secondary bypass inlet passage and the secondary bypass outlet passage are opened and closed at the same time.

[0018] Herein, the primary bypass inlet passage and the primary bypass outlet passage are opened when the

displacement of the plunger is relatively small compared to the secondary bypass inlet passage and the secondary bypass outlet passage, and the area of the primary bypass inlet passage is smaller than the area of the primary bypass outlet passage.

[0019] Then, each of the primary bypass inlet passage and the primary bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and the area of each passage hole of the primary bypass inlet passage is smaller than the area of each passage hole of the primary bypass outlet passage.

[0020] Alternatively, each of the primary bypass inlet passage and the primary bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and the number of passage holes of the primary bypass inlet passage is smaller than the number of passage holes of the primary bypass outlet passage.

[0021] The opening/closing timings of the bypass in the oil pump are closely related to the fuel efficiency and function of the engine.

[0022] In the main fuel efficiency section, the bypass is opened to suppress the occurrence of a high oil pressure to maintain a constant and low pressure level, and in the high speed section requiring the high oil pressure, the bypass is temporarily closed to transmit the oil of a high pressure to various hydraulic mechanisms side.

[0023] Therefore, the valve timing for opening and closing the bypass is an important design factor that is determined by considering both the performance/function of the engine.

[0024] However, when the oil pressure hysteresis becomes excessive, the valve does not operate as intended, thereby becoming disadvantageous all in terms of the performance/function of the engine.

[0025] The present disclosure can reduce the area of the primary bypass inlet passage of the two-stage variable relief valve by 50% or more or reduce the places thereof compared to the primary bypass outlet passage, thereby minimizing or completely avoiding the hysteresis phenomenon.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026]

FIG. 1 is a diagram illustrating a general relief valve for an oil pump.

FIG. 2 is a diagram illustrating a performance map between the pressure and the flow rate of the oil pump.

FIG. 3 is a diagram illustrating an oil pressure hysteresis phenomenon.

FIGS. 4A to 5B are diagrams illustrating the area

reduction results of a bypass passage.

FIG. 6 is a diagram illustrating the hysteresis result according to a reduction ratio of a primary bypass inlet passage.

FIG. 7 is a diagram illustrating a performance map between the pressure and the flow rate of the oil pump according to the reduction ratio of the primary bypass inlet passage.

FIG. 8 is a diagram illustrating an embodiment of a relief valve for an oil pump according to the present disclosure.

FIG. 9 is a diagram illustrating the hysteresis result according to FIG. 8.

FIG. 10 is a diagram illustrating the hysteresis result according to another embodiment of the present disclosure.

FIG. 11 is a diagram comparatively illustrating the performance map between the pressure and the flow rate of the oil pump according to an embodiment of the present disclosure.

DESCRIPTION OF SPECIFIC EMBODIMENTS

[0027] In order to fully understand the present disclosure, operational advantages of the present disclosure, and objects achieved by the embodiment of the present disclosure, reference should be made to the accompanying drawings exemplifying the preferred embodiments of the present disclosure and the contents illustrated in the accompanying drawings.

[0028] In describing the preferred embodiments of the present disclosure, a description of known technology or repeated descriptions that can unnecessarily obscure the subject matter of the present disclosure will be reduced or omitted.

[0029] FIG. 1 is a diagram illustrating a general relief valve for an oil pump, FIG. 2 is a diagram illustrating a performance map between the pressure and the flow rate of the oil pump, and FIG. 3 is a diagram illustrating an oil pressure hysteresis phenomenon.

[0030] The present disclosure is for solving the oil pressure hysteresis of an oil pump by a two-stage variable relief valve.

[0031] As illustrated in FIG. 2, in the oil pump illustrated in FIG. 1, when the pressure applied to the oil pump and the front end of a valve rises, the displacement of the plunger 120 increases, such that the primary bypass inlet passage 111 and the primary bypass outlet passage 112 are opened.

[0032] Then, as the pressure rises, the oil pump operates by opening the secondary bypass passages 113, 114 after the primary bypass passages 111, 112 are

closed.

[0033] As illustrated, the slope of the bypass section (a ratio of a change in a flow rate according to a change in pressure) is related to the area of each corresponding passage of the oil pump.

[0034] That is, the wider the area of the bypass passage, the larger the amount of the oil flows, such that the slope becomes sharp.

[0035] Herein, the number and the area of the primary bypass inlet passage 111 and the primary bypass outlet passage 112 are designed to be the same.

[0036] In case of such a conventional oil pump, the oil pressure hysteresis phenomenon easily occurs in the RPM speed-up/speed-down conditions.

[0037] That is, as illustrated in FIG. 3, the pressure rises as the primary bypass passages 111, 112 starts closing at about 4,500 rpm in the speed-up condition, but a pressure rising section occurs at about 3,200 rpm in the speed-down condition.

[0038] The oil pressure hysteresis phenomenon of about 1,300 rpm occurs as a difference of the bypass closing timing occurs according to the speed-up/speed-down conditions.

[0039] The present disclosure solves the oil pressure hysteresis by optimizing the area of the oil pump bypass passage considering the relevance between the area of the oil pump bypass passage and the oil pressure hysteresis phenomenon.

[0040] FIGS. 4A to 5B are diagrams illustrating the results of reducing the area of the bypass passage compared to the conventional one.

[0041] FIG. 4A is a diagram illustrating the result of reducing the area of the primary bypass inlet passage 111 by 60%, FIG. 4B is a diagram illustrating the result of reducing the area of the primary bypass outlet passage 112 by 60%, FIG. 5A is a diagram illustrating the result of reducing the area of the secondary bypass outlet passage 114 by 60%, and FIG. 5B is a diagram illustrating the result of reducing the area of the secondary bypass inlet passage 113 by 60%.

[0042] As can be seen in the figure, it was found that the result of reducing the area of the primary bypass inlet passage 111 is the most effective in reducing the hysteresis.

[0043] The result of reducing the area of the primary bypass outlet passage 112 is also somewhat effective in reducing the hysteresis, but the bypass performance is reduced at 2,000 to 3,000 rpm that is the primary bypass section compared to the conventional one to highly form the oil pressure compared to the conventional one, thereby becoming disadvantageous in terms of fuel efficiency.

[0044] Then, it was found that there was no hysteresis phenomenon reduction effect by the change in the secondary bypass passages 113, 114.

[0045] Therefore, the present disclosure reduces the area of the primary bypass inlet passage of the two-stage variable relief valve, thereby reducing the hysteresis phenomenon.

[0046] Next, the hysteresis reduction effect according to a reduction ratio will be described.

[0047] FIG. 6 is a diagram illustrating the hysteresis result according to a reduction ratio of a primary bypass inlet passage, and FIG. 7 is a diagram illustrating a performance map between the pressure and the flow rate of the oil pump according to the reduction ratio of the primary bypass inlet passage.

[0048] As illustrated in FIG. 6, it was found that when the area of the primary bypass inlet passage 111 was reduced by 50% or more, the oil pressure hysteresis was recovered to a normal level that is within 500 rpm.

[0049] FIG. 7 is a graph illustrating the flow rate measured by increasing the pressure applied to the rear end of the oil pump at the same rpm, and it can be seen that when the primary bypass inlet passage 111 is reduced compared to the primary bypass outlet passage 112, a change in the bypass flow rate according to the same pressure change becomes small. That is, it can be seen that the slope becomes gentle in the bypass opening section and closing section.

[0050] As a result, the flow-in and the flow-out of the bypassed flow rate are not rapidly made but are gently made by reducing the area of the primary bypass inlet passage, thereby reducing the hysteresis phenomenon, and as illustrated in FIG. 8, based on this, the present disclosure reduces the area of a primary bypass inlet passage 11 of the two-stage variable relief valve having a pair of the bypass inlet passages and a pair of the bypass outlet passages compared to the area of a primary bypass outlet passage 12, thereby reducing the oil pressure hysteresis.

[0051] FIG. 9 is a diagram illustrating the hypothesis result according to the two-stage variable relief valve for the oil pump according to the present disclosure of FIG. 8.

[0052] As illustrated, the time point at which the primary bypass passage is closed becomes early from 3,200 rpm to 2,300 rpm, thereby reducing the hysteresis.

[0053] In the relief valve for the oil pump according to the present disclosure, the bypass passage can be configured in the form of dividing a plurality of passage holes. That is, the primary bypass inlet passage, the primary bypass outlet passage, the secondary bypass inlet passage, and the secondary bypass outlet passage can be arranged, respectively, so that a plurality of the passage holes are spaced apart from each other in parallel.

[0054] Therefore, as illustrated in FIG. 8, the present disclosure can reduce the area of each of the plurality of passage holes of the primary bypass inlet passage to 1/2 or less of the primary bypass outlet passage.

[0055] Furthermore, for example, it is possible to reduce the area of the primary bypass inlet passage by reducing the primary bypass inlet passage composed of two passage holes to one passage hole, that is, by reducing the places thereof by 1/2 or less.

[0056] FIG. 10 is a diagram illustrating the hypothesis result in case of reducing the primary bypass inlet passage from two places to one place. Through this, it can

be seen that the oil pressure hysteresis can also be reduced to the level of about 600 rpm, and as illustrated in FIG. 11, it can be seen that the slope becomes gentle in the bypass section.

[0057] As described above, while the present disclosure has been described with reference to the exemplary drawings, it is not limited to the described embodiments, and it is to be understood by those skilled in the art that various modifications and deformations can be made without departing from the spirit and the scope of the present disclosure. Therefore, the modified examples or the deformed examples should be included in the claims of the present disclosure, and the scope of the present disclosure should be construed based on the appended claims.

Claims

1. A two-stage variable relief valve for an oil pump, comprising:

as the relief valve for adjusting discharge of oil to an engine side by the oil pump,
a plunger operated in a valve housing, and a spring for elastically supporting the plunger, wherein the valve housing is formed with a bypass inlet passage and a bypass outlet passage, and the bypass inlet passage and/or the bypass outlet passage are opened or closed according to the displacement of the plunger, and wherein the area of the bypass inlet passage is smaller than the area of the bypass outlet passage.

2. The two-stage variable relief valve for the oil pump of claim 1, wherein the overall area of the bypass inlet passage is smaller than 1/2 or less of the overall area of the bypass outlet passage.

3. The two-stage variable relief valve for the oil pump of claim 1 or 2,
wherein each of the bypass inlet passage and the bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and
wherein the area of each passage hole of the bypass inlet passage is smaller than the area of each passage hole of the bypass outlet passage.

4. The two-stage variable relief valve for the oil pump of claim 1 or 2,
wherein each of the bypass inlet passage and the bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and
wherein the number of passage holes of the bypass inlet passage is smaller than the number of passage

holes of the bypass outlet passage.

5. The two-stage variable relief valve for the oil pump of any one of claims 1 to 4,
wherein the bypass inlet passage comprises a primary bypass inlet passage and a secondary bypass inlet passage,
wherein the bypass outlet passage comprises a primary bypass outlet passage and a secondary bypass outlet passage, and
wherein the primary bypass inlet passage and the primary bypass outlet passage are opened and closed at the same time, and the secondary bypass inlet passage and the secondary bypass outlet passage are opened and closed at the same time.
6. The two-stage variable relief valve for the oil pump of claim 5,
wherein the primary bypass inlet passage and the primary bypass outlet passage are opened when the displacement of the plunger is relatively small compared to the secondary bypass inlet passage and the secondary bypass outlet passage, and
wherein the area of the primary bypass inlet passage is smaller than the area of the primary bypass outlet passage.
7. The two-stage variable relief valve for the oil pump of claim 5 or 6,
wherein each of the primary bypass inlet passage and the primary bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and
wherein the area of each passage hole of the primary bypass inlet passage is smaller than the area of each passage hole of the primary bypass outlet passage.
8. The two-stage variable relief valve for the oil pump of claim 5 or 6,
wherein each of the primary bypass inlet passage and the primary bypass outlet passage is disposed so that a plurality of passage holes are spaced apart from each other in parallel, and
wherein the number of passage holes of the primary bypass inlet passage is smaller than the number of passage holes of the primary bypass outlet passage.

FIG.1

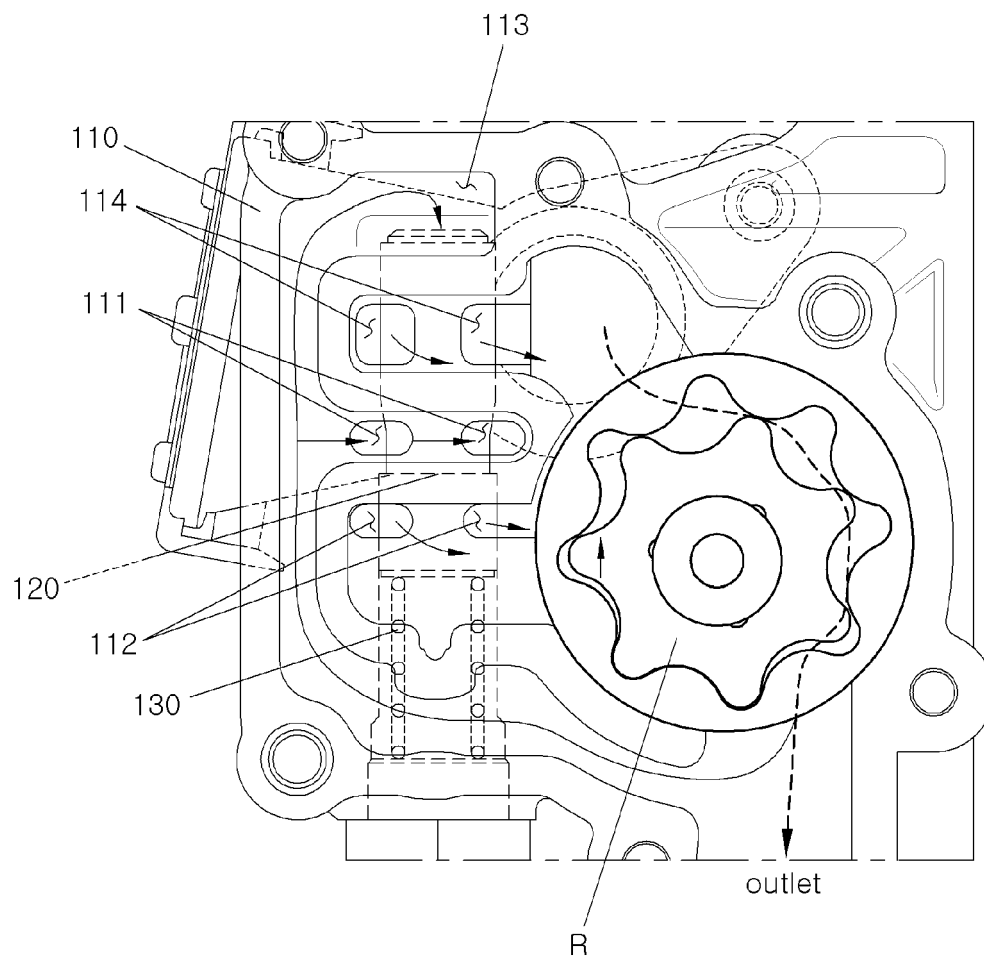


FIG.2

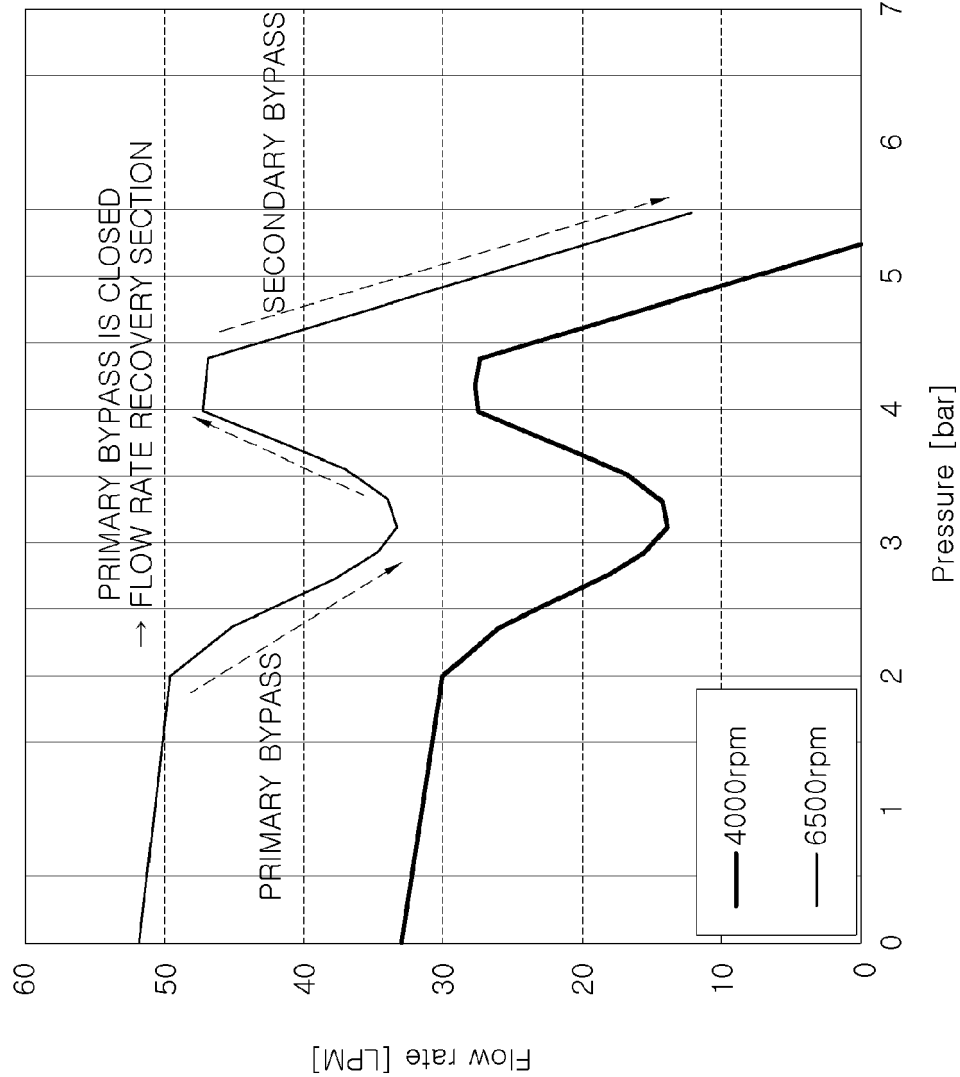


FIG.3

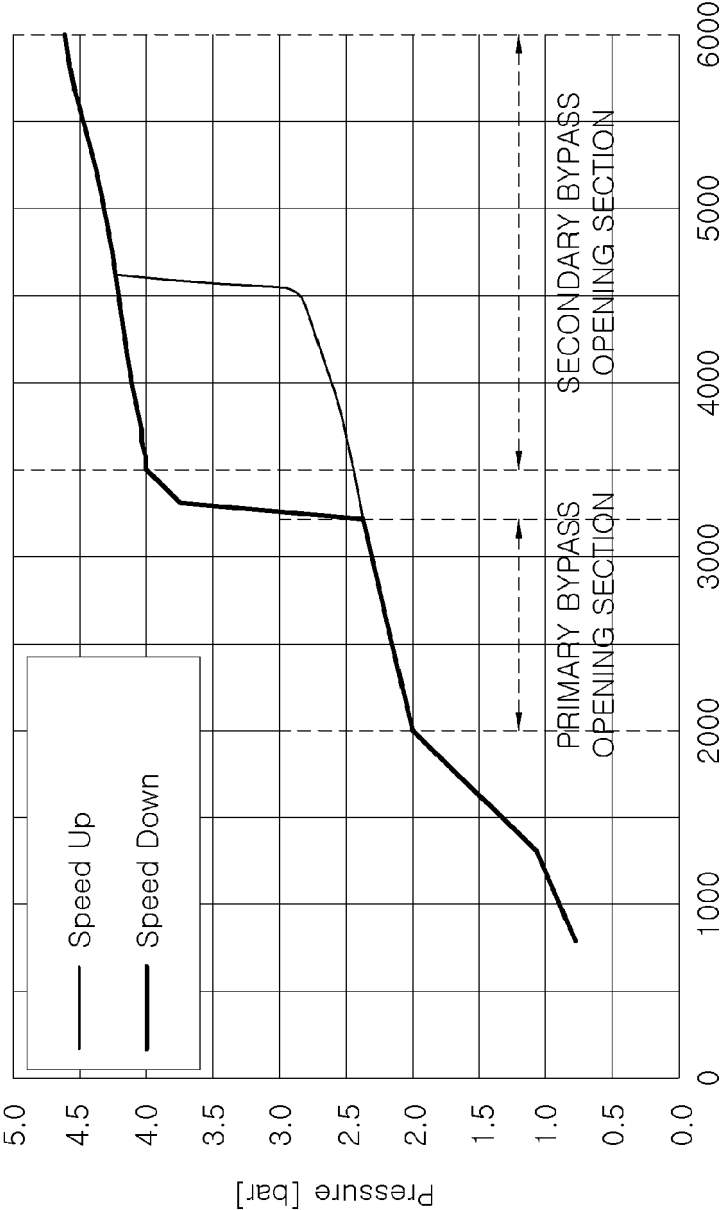


FIG. 4A



FIG.4B



FIG.5A



FIG. 5B

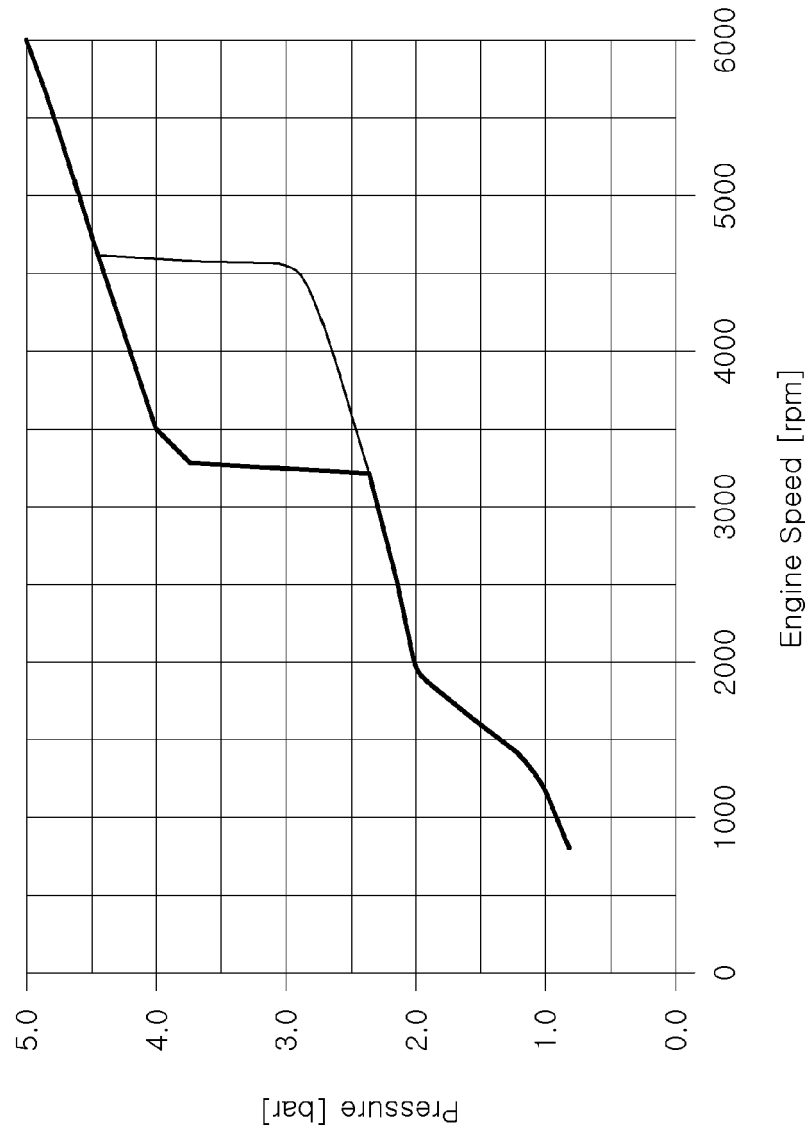


FIG.6

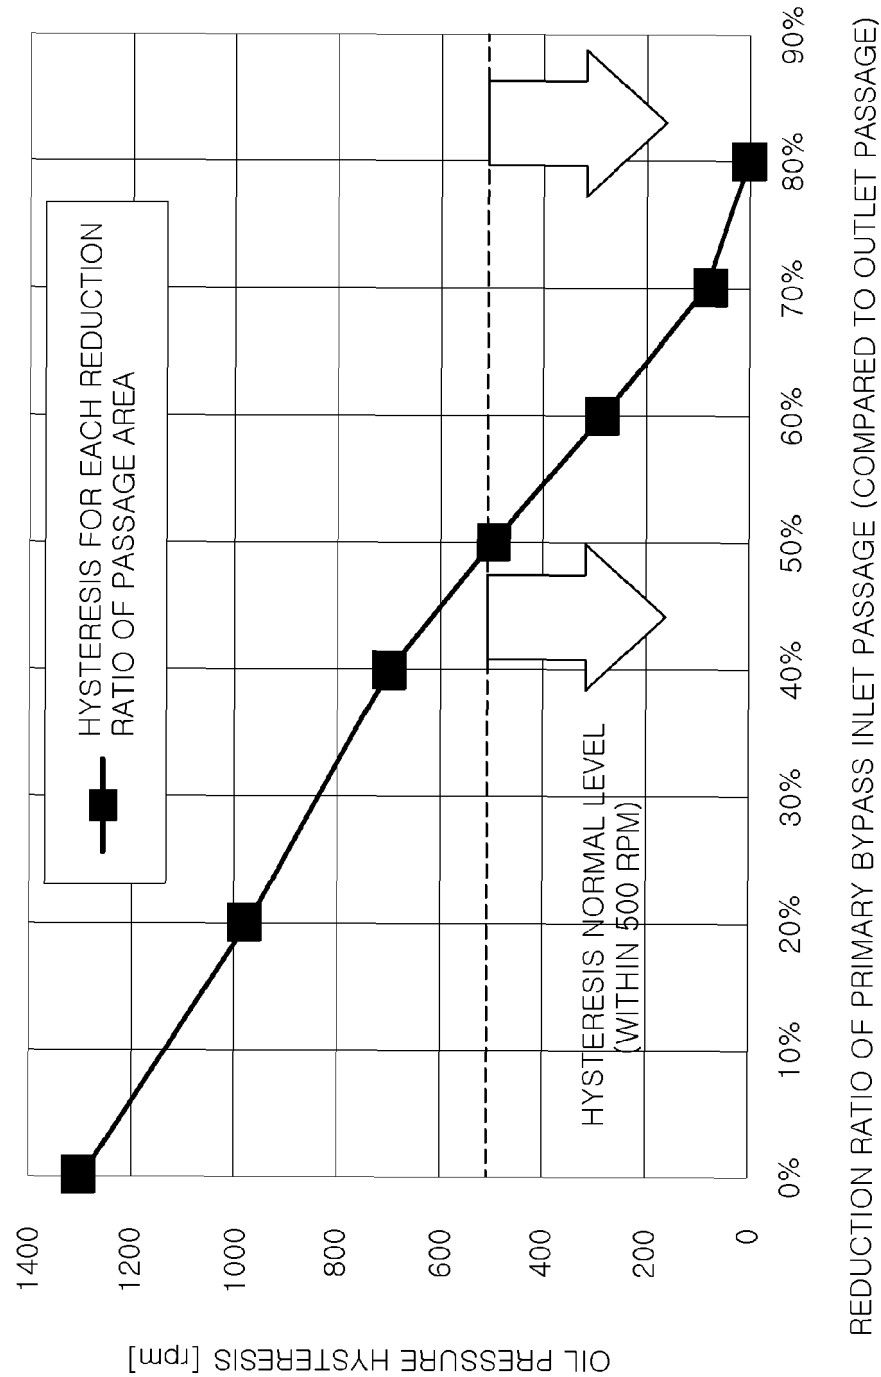


FIG.7

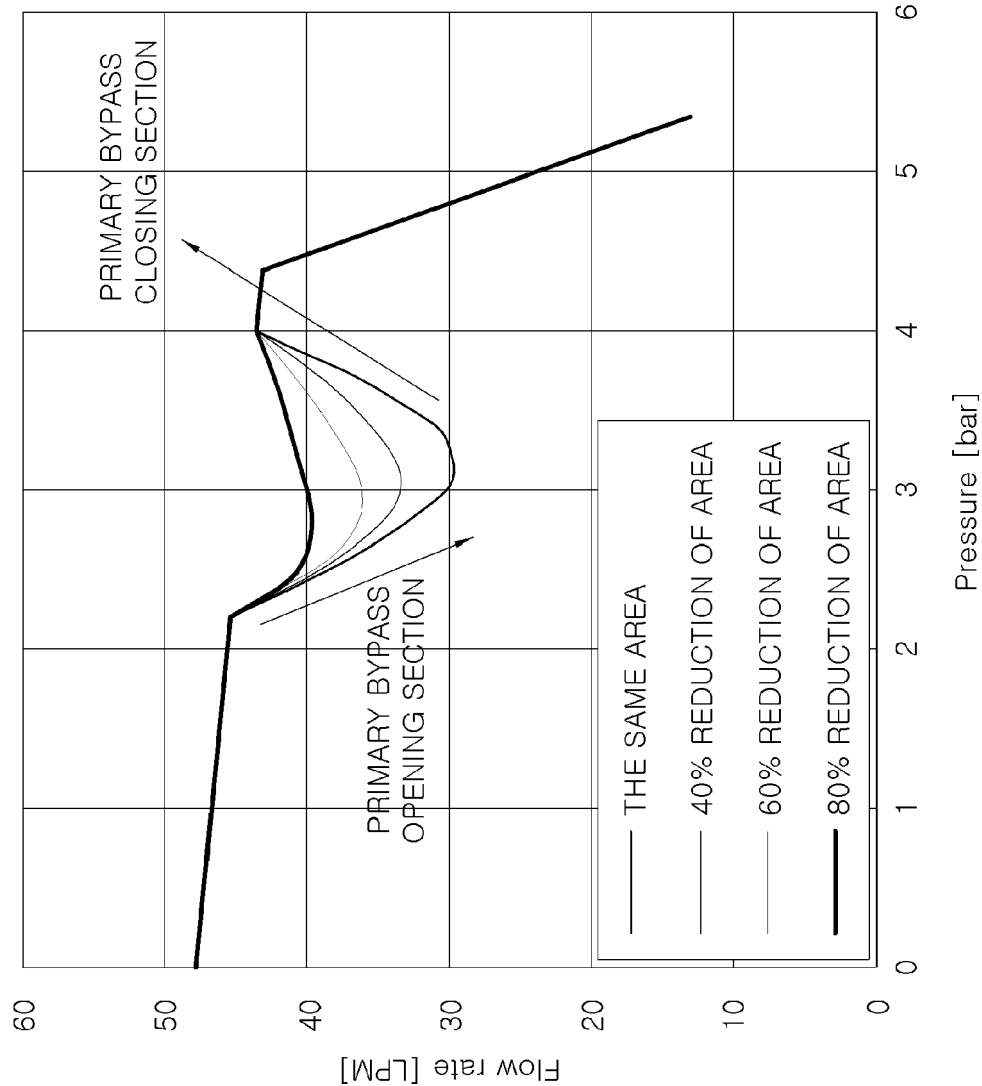


FIG.8

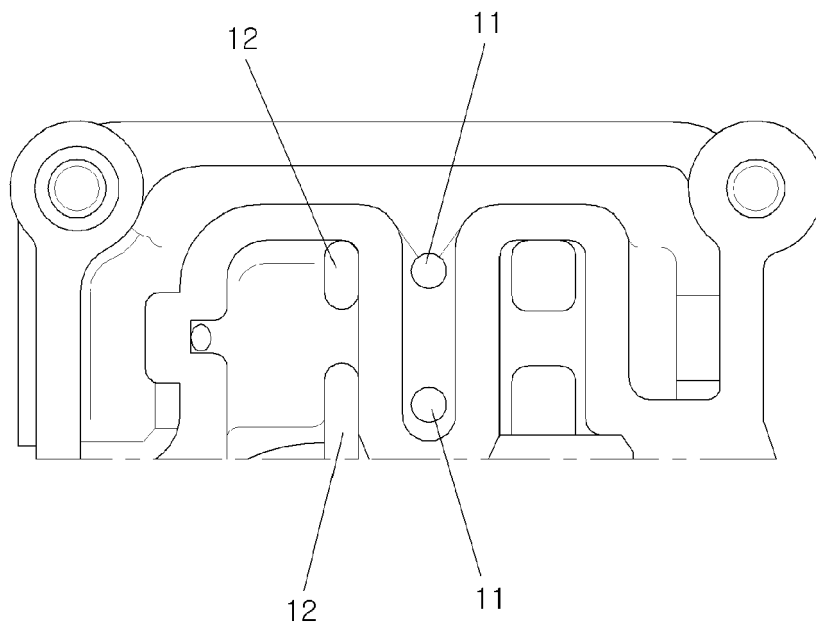


FIG.9

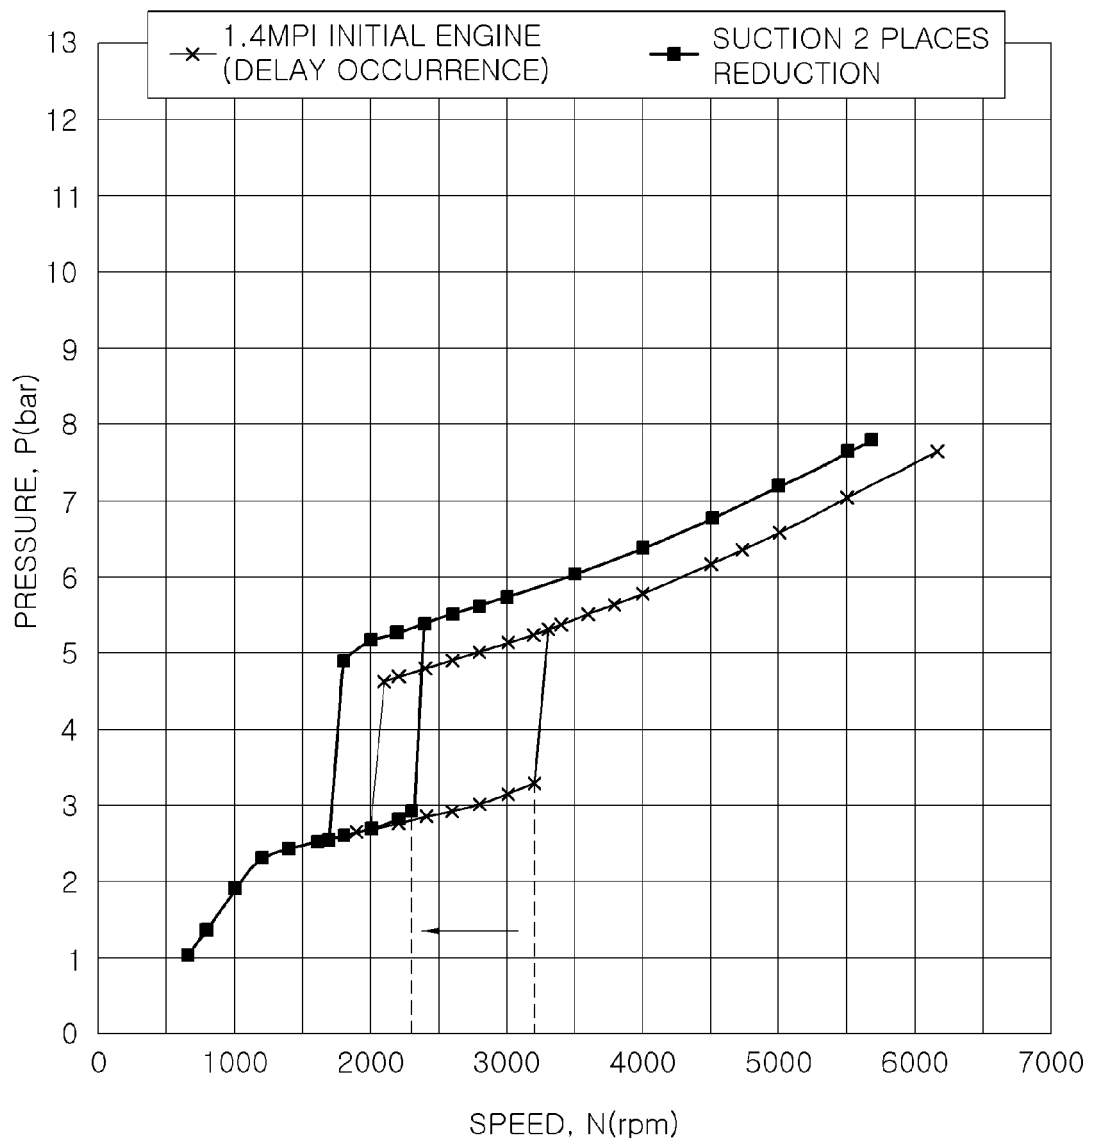


FIG.10


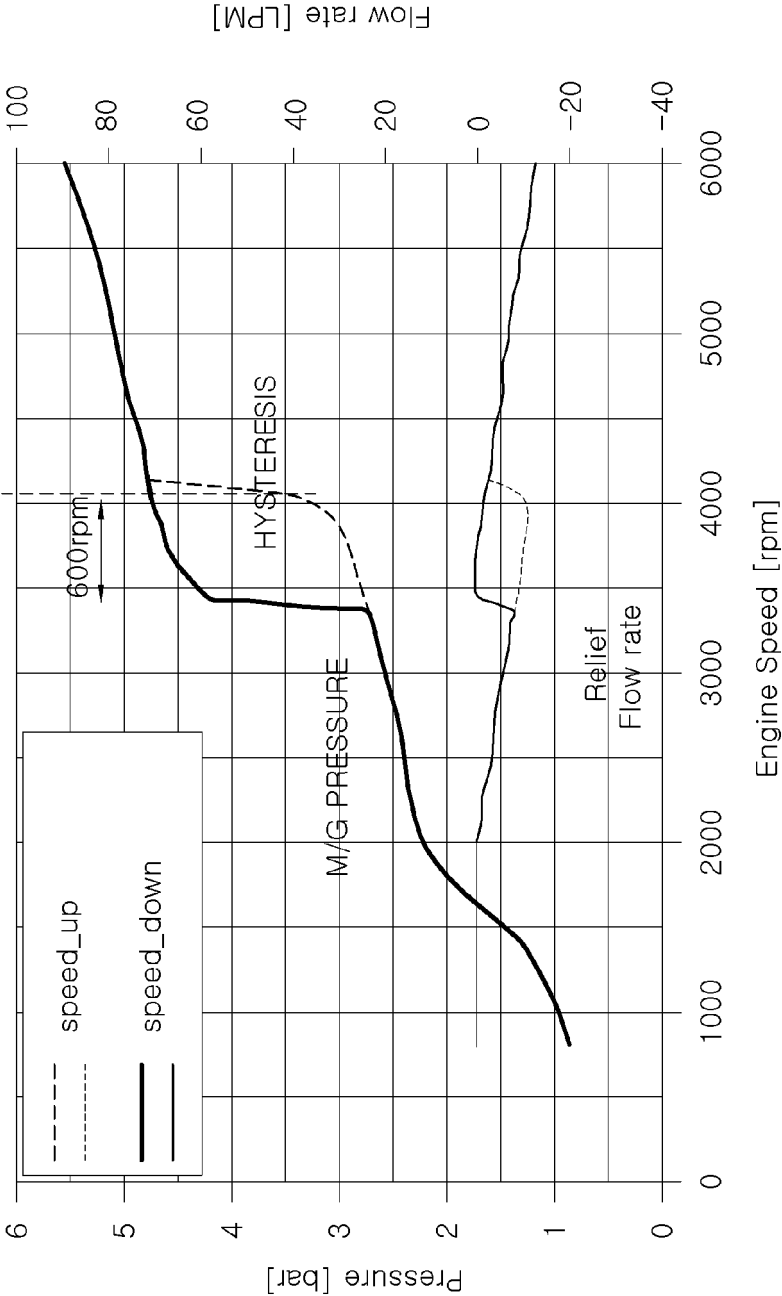


FIG.11



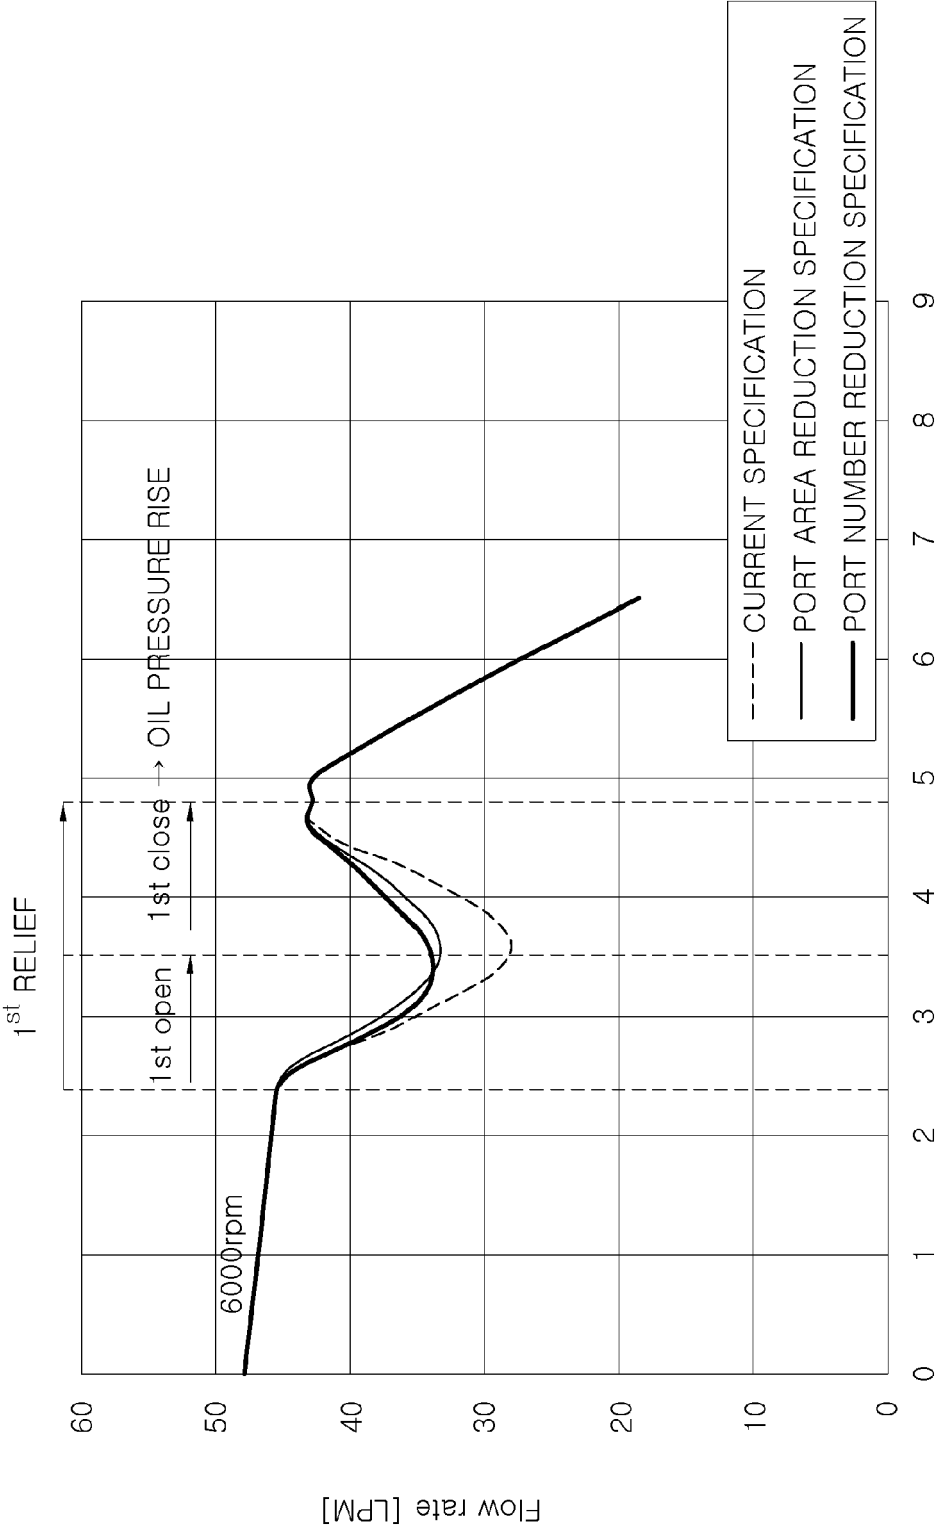

EUROPEAN SEARCH REPORT

Application Number
EP 19 20 6842

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	KR 2005 0048151 A (HYUNDAI MOTOR CO LTD [KR]) 24 May 2005 (2005-05-24) * the whole document *	1-4	INV. F04C14/26 F04C2/10
X	US 5 921 274 A (SCHULLER RONALD A [US] ET AL) 13 July 1999 (1999-07-13) * abstract; figures 1, 2 *	1-4	
X	US 2008/041472 A1 (HOJI TAKESHI [JP] ET AL) 21 February 2008 (2008-02-21) * abstract; figures 1,4,5 *	1-4	
A	EP 2 600 004 A2 (MYUNGHW A IND CO LTD [KR]) 5 June 2013 (2013-06-05) * the whole document *	1-8	
			TECHNICAL FIELDS SEARCHED (IPC)
			F04C F01M F16K
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 20 May 2020	Examiner Alquezar Getan, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 20 6842

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-05-2020

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 20050048151 A	24-05-2005	NONE	
US 5921274 A	13-07-1999	CA 2186063 A1 US 5921274 A	11-12-1997 13-07-1999
US 2008041472 A1	21-02-2008	JP 5007085 B2 JP 2008045482 A US 2008041472 A1	22-08-2012 28-02-2008 21-02-2008
EP 2600004 A2	05-06-2013	CN 103133845 A EP 2600004 A2 JP 5392797 B2 JP 2013117220 A US 2013142627 A1	05-06-2013 05-06-2013 22-01-2014 13-06-2013 06-06-2013

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020050048151 [0011]