

(19)



(11)

EP 3 677 525 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
08.07.2020 Bulletin 2020/28

(51) Int Cl.:
B65D 19/24 (2006.01) B65D 19/32 (2006.01)

(21) Application number: **19150440.6**

(22) Date of filing: **05.01.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **TALEBI AMIRI, Masoud**
1022 Chavannes-près-Renens (CH)
• **REALI, Matthew**
6918 Figino (CH)

(74) Representative: **Noll, Ronald et al**
ABREMA Agence Brevets & Marques
Ganguillet
Avenue du Théâtre 16
P.O. Box 5027
1002 Lausanne (CH)

(71) Applicant: **Ponera Group Sagl**
6918 Figino (CH)

(54) **ASSORTMENT OF PALLET MODULES, AND PALLET ASSEMBLY BUILT OF THE SAME**

(57) Assortment of pallet modules (10; 20; 30) configured to allow formation of a nested pallet assembly of at least two pallet modules, each pallet module comprising a main structural body (100; 200; 300) exhibiting a generally quadrilateral peripheral border (100A; 200A; 300A) with first to fourth lateral sides (101-104; 201-204; 301-304), a mating system (110, 120, 130, 140; 210, 220, 230, 240; 310, 320, 330, 340) provided on said first to fourth lateral sides to allow nesting of the pallet module with another pallet module, a securing system (51-54) configured to allow the pallet module to be secured to or

released from another pallet module, and a foot structure (90). The assortment of pallet modules includes a unit-size pallet module (10) whose main structural body (100) exhibits a unit size and at least one larger-size pallet module (20; 30) whose main structural body (200; 300) exhibits a length (L2; L3) corresponding to an integer multiple of a length (L1) of the main structural body of the unit-size pallet module, the unit-size pallet module and each larger-size pallet module being combinable with one another.

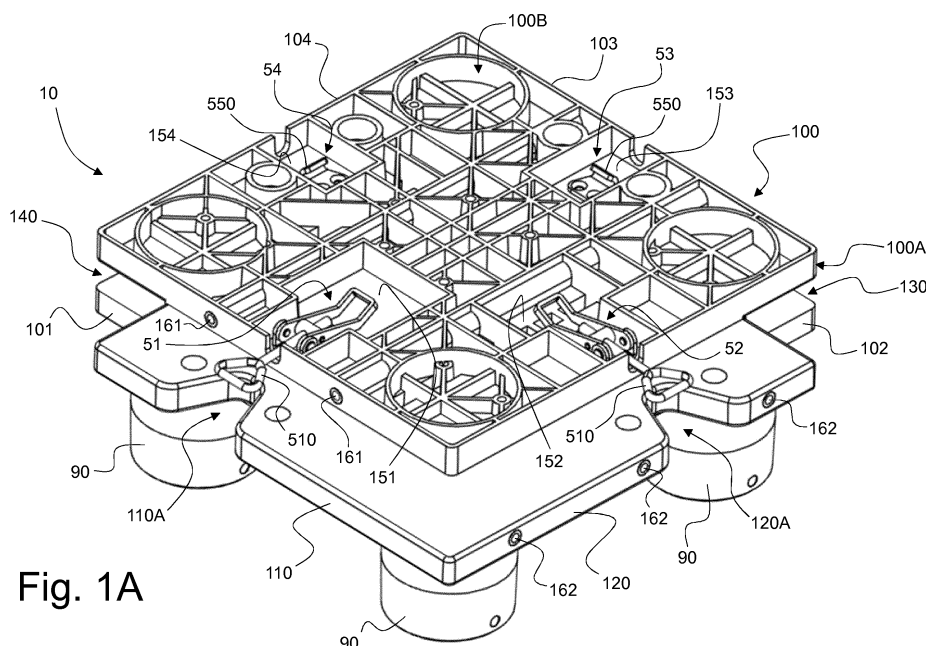


Fig. 1A

EP 3 677 525 A1

Description

TECHNICAL FIELD

[0001] The present invention generally relates to an assortment of pallet modules configured to allow formation of a nested pallet assembly of at least two pallet modules selected from the assortment of pallet modules. The invention also relates to a pallet assembly built of multiple pallet modules selected from the assortment of pallet modules.

BACKGROUND OF THE INVENTION

[0002] US Patent No. US 3,857,342 A discloses a pallet formed of nestable plastic modules each having four centrally located legs and four outwardly extending flanges, with each of the flanges having means for interlocking with the flanges of adjacent modules. While this solution is suitable for forming a nested pallet assembly of at least two pallet modules, the resulting pallet assembly is however insufficiently robust, the mating and interlocking system being prone to undesired release, leading to potential disconnection of the pallet modules during handling and/or transport of loads, which is clearly undesirable. This is especially critical for the transport of large loads.

[0003] The interlocking system contemplated in US Patent No. US 3,857,342 A is furthermore prone to breakage after repeated uses due to the inherent local deformations of the plastic material at the points of attachment between the pallet modules.

[0004] Other similar solutions are disclosed in US Patent No. US 5,105,746 A, Japanese Patent Publication No. JP (H) 5-85546 A, and International (PCT) Publication Nos. WO 98/31595 A1, WO 2017/023163 A1, WO 2017/200482 A1 and WO 2010/128261 A2.

[0005] These other known solutions likewise have drawbacks, including complex nesting and/or interlocking systems that unnecessarily complicate assembly and disassembly of multiple pallet modules one with, respectively from the other, which leads to reduced efficiency in usage.

[0006] A further problem with the aforementioned known pallet modules resides in that they are not optimized for shipment or warehousing of the individual pallet modules and components, especially due to the presence of feet that are typically made integral with a main structural body of the pallet module.

[0007] Another problem with the known pallet modules resides in the lack of flexibility thereof, especially in terms of sizes and dimensions which are not optimal and restrict the user's ability to build a large variety of pallet assemblies of varying sizes and dimensions for non-standard size goods or equipment. Furthermore, the height of the known pallet modules, and of the resulting pallet assemblies, is not optimized and the configuration thereof typically restricts the ability to use the full volume of the transport units and/or to efficiently stack individual pallet mod-

ules one above the other for e.g. shipment or warehousing purposes. This is especially the case for pallet modules comprising a foot structure that is made integral with the main structural body of the pallet modules.

[0008] As a consequence of these limitations, end users are typically led to make use of conventional wooden pallets, such as Euro-pallets and/or other non-standard wooden pallets for larger sized goods or equipment. Even though these wooden pallets can be produced in basically any sizes, and can be regarded as providing a reasonably flexible solution, they do not constitute an efficient solution for end users due to the fact that they are produced to meet specific needs and are typically intended for single use, which makes this solution cost inefficient and environmentally non-sustainable. As far as standard-size Euro-pallets are concerned, these are cheap to produce but, overall, their fixed size of 1200 mm x 800 mm x 144 mm (length x width x height) is not optimal when it comes to shipping and/or warehousing individual pallets and/or for the packaging and shipment of goods or equipment requiring a specific, non-standard pallet solution. The existing solutions do not therefore provide flexibility and adaptability in terms of pallet sizes, which is important for transport, packaging and cost efficiency. Conventional wooden pallets are furthermore not very robust and are prone to breakage, meaning that their usability and life cycle is typically limited to single use. Standard-sized pallets like the Euro-pallets do not furthermore constitute an optimal solution for shipment of goods or equipment having non-standard sizes and dimensions.

SUMMARY OF THE INVENTION

[0009] A general aim of the invention is to provide an improved assortment of pallet modules of the type configured to allow formation of a nested pallet assembly of at least two pallet modules selected from the assortment of pallet modules.

[0010] More specifically, an aim of the present invention is to provide such an assortment of pallet modules from which the end user can choose to build a large variety of pallet assemblies.

[0011] Yet another aim of the invention is to provide an assortment of pallet modules that ensures formation of a robust pallet assembly, while not compromising ease and speed of assembly and disassembly.

[0012] A further aim of the invention is to provide an assortment of pallet modules that are constructed and designed to facilitate and optimize shipment as well as warehousing of individual pallet modules and components thereof thanks to more optimal sizes and configurations.

[0013] Another aim of the invention is to reduce material consumption and increase shipment flexibility and efficiency, especially by reducing waste and providing a reusable solution.

[0014] These aims are achieved thanks to the solutions

defined in the claims.

[0015] In accordance with the invention, there is provided an assortment of pallet modules according to claim 1, namely an assortment of pallet modules configured to allow formation of a nested pallet assembly of at least two pallet modules selected from the assortment of pallet modules, each pallet module comprising:

- a main structural body exhibiting a generally quadrilateral peripheral border with first to fourth lateral sides extending between upper and lower sides of the main structural body;
- a mating system provided on the first to fourth lateral sides of the main structural body configured to allow nesting of the pallet module within a corresponding part of the mating system of another pallet module of the assortment;
- a securing system configured to allow the pallet module to be secured to or released from another pallet module of the assortment; and
- a foot structure disposed on the lower side of the main structural body.

[0016] In accordance with the invention, the pallet modules are produced in at least two different sizes and the assortment of pallet modules includes a unit-size pallet module whose main structural body exhibits a unit size and at least one larger-size pallet module whose main structural body exhibits a length corresponding to an integer multiple of a length of the main structural body of the unit-size pallet module, the unit-size pallet module and each larger-size pallet module being combinable with one another.

[0017] According to a preferred embodiment of the invention, the peripheral border of the main structural body of the unit-size pallet module exhibits a square shape, and the length of the main structural body of each larger-size pallet module is at least twice the length of the main structural body of the unit-size pallet module.

[0018] In accordance with a first variant of this preferred embodiment, the peripheral border of the main structural body of each larger-size pallet module has a square shape. In the context of this first variant, the assortment of pallet modules preferably includes at least two types of larger-size pallet modules, namely a medium-size pallet module and a large-size pallet module. The peripheral border of the main structural body of the medium-size pallet module exhibits a length that is twice the length of the main structural body of the unit-size pallet module. The peripheral border of the main structural body of the large-size pallet module exhibits a length that is at least three times, in particular four times, the length of the main structural body of the unit-size pallet module.

[0019] In accordance with a second variant of the aforementioned preferred embodiment, the assortment of pallet modules includes at least two types of larger-size pallet modules, namely a medium-size pallet module

and a large-size pallet module. The peripheral border of the main structural body of the medium-size pallet module exhibits a rectangular shape having a length equal to twice the length of the main structural body of the unit-size pallet module and a width which is less than twice the length of the main structural body of the unit-size pallet module. The peripheral border of the main structural body of the large-size pallet module exhibits a square shape having a length equal to twice the length of the main structural body of the unit-size pallet module.

[0020] In the context of this second variant, the length of the main structural body of the unit-size pallet module may be of the order of 300 mm, and a size of the medium-size pallet module may preferably correspond to substantially a quarter of the size of a standard Euro-pallet, the length and width of the main structural body of the medium-size pallet module being of the order of 600 mm and 400 mm, respectively.

[0021] From a more general perspective, the length of the main structural body of the pallet modules is preferably of the order of 150 mm to 1'200 mm.

[0022] According to a particularly preferred embodiment of the invention, the mating system of each pallet module includes:

- first and second lateral flanges extending outwardly from the peripheral border of the main structural body, along the first and second lateral sides; and
- first and second lateral grooves extending inwardly from the peripheral border of the main structural body, along the third and fourth lateral sides, the first and second lateral grooves being each configured to receive the first and second lateral flanges, respectively, of another pallet module of the assortment, so that the first, respectively second lateral flange of said other pallet module nests within the first, respectively second lateral groove to form the nested pallet assembly.

[0023] Advantageously, each of the first and second lateral flanges may exhibit at least one positioning notch formed along an outer edge of the first and second lateral flanges, and each of the first and second lateral grooves may likewise exhibit at least one protrusion configured to mate with the at least one positioning notch provided of the first and second lateral flanges of another pallet module of the assortment.

[0024] The first and second lateral flanges may in particular be offset sideways with respect to the first and second lateral sides, with the first and second lateral flanges being optionally joined together to form an L-shaped lateral flange.

[0025] The first and second lateral flanges may be formed integrally with the main structural body, in which case the main structural body and the first and second lateral flanges can advantageously be made of plastic.

[0026] In the aforementioned context, the pallet module may furthermore comprise a plurality of reinforcing

elements extending within the main structural body and the first and/or second lateral flanges. Such reinforcing element may in particular be made of a metal, such as aluminium, of a metal alloy, or of a composite material. Furthermore, the aforementioned reinforcing elements are preferably longitudinal rod elements extending between upper and lower surfaces of the main structural body and of the first and/or second lateral flanges.

[0027] According to a further refinement of the invention, the securing system of each pallet module includes:

- first and second toggle latch components arranged in the vicinity of the first and second lateral sides, respectively; and
- third and fourth toggle latch components arranged in the vicinity of the third and fourth lateral sides, respectively,

the first and second toggle latch components being each configured to cooperate and interlock with the third and fourth toggle latch components, respectively, of another pallet module of the assortment, to form releasable toggle latches allowing the pallet module to be secured to or released from said other pallet module.

[0028] In this latter context, the first to fourth toggle latch components are preferably provided on the upper side of the main structural body at least partly within recesses formed below an upper surface of the upper side of the main structural body.

[0029] Also claimed is a pallet assembly built of multiple pallet modules selected from the assortment of pallet modules according to the invention, which pallet modules are nested within and interlocked with one another.

[0030] Further advantageous embodiments of the invention are discussed below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] Other features and advantages of the present invention will appear more clearly from reading the following detailed description of embodiments of the invention which are presented solely by way of non-restrictive examples and illustrated by the attached drawings in which:

Figure 1A is a perspective view of a pallet module, seen from an upper angle, in accordance with an embodiment of the present invention;

Figure 1B is a perspective view of the pallet module of Figure 1A seen from a lower angle;

Figure 1C is a top view of the pallet module of Figure 1A;

Figure 1D is a bottom view of the pallet module of Figures 1A;

Figure 1E is a side view of the pallet module of Figure 1A as seen from a first side;

Figure 1F is a side view of the pallet module of Figure 1A as seen from a second side;

Figure 1G is a side view of the pallet module of Figure 1A as seen from a third side;

Figure 1H is a side view of the pallet module of Figure 1A as seen from a fourth side;

Figure 2A is a partial perspective view of the pallet module of Figure 1A as seen from a lower angle and which shows one of a plurality of foot elements of a foot structure provided on a lower side of the pallet module;

Figures 2B and 2C are exploded views of one of the foot elements of Figure 2A shown in isolation;

Figure 3A is a perspective view of a pallet module, seen from an upper angle, in accordance with an embodiment of the present invention;

Figure 3B is a perspective view of the pallet module of Figure 3A seen from a lower angle;

Figure 3C is a top view of the pallet module of Figure 3A;

Figure 4A is a perspective view of a pallet module, seen from an upper angle, in accordance with an embodiment of the present invention;

Figure 4B is a perspective view of the pallet module of Figure 4A seen from a lower angle;

Figure 4C is a top view of the pallet module of Figure 4A;

Figure 5A is a perspective view of the pallet module of Figure 1A, seen from an upper angle, which pallet module is further provided with a pair of cover elements in accordance with a further embodiment of the invention;

Figure 5B is a perspective view of the pallet module and cover elements of Figure 5A seen from a lower angle;

Figures 6A and 6B are perspective views of a first one of the cover elements of Figures 5A-5B seen from upper and lower angles;

Figures 7A and 7B are perspective views of the second one of the cover elements of Figures 5A-5B seen from upper and lower angles;

Figure 8 is a perspective view of a releasable toggle latch as used for securing two adjacent pallet modules one to the other in accordance with a preferred embodiment of the invention;

Figure 9A is a schematic top view of a pallet assembly formed by combining multiple pallet modules in accordance with the present invention; and

Figure 9B is another schematic top view of another pallet assembly formed by combining multiple pallet modules in accordance with the present invention;

Figure 10A is a perspective view of a pallet module, seen from an upper angle, in accordance with another embodiment of the present invention;

Figure 10B is a perspective view of the pallet module of Figure 10A seen from a lower angle;

Figure 11A is a perspective view of a pallet module, seen from an upper angle, in accordance with yet another embodiment of the present invention;

Figure 11B is a perspective view of the pallet module

of Figure 11B seen from a lower angle;

Figure 12A is a perspective view of a pallet module, seen from an upper angle, in accordance with a further embodiment of the present invention, which pallet module forms part of the same assortment of pallet modules as the pallet module of Figures 11A-B; Figure 12B is a perspective view of the pallet module of Figure 12A seen from a lower angle;

Figure 13A is a perspective view of a pallet module, seen from an upper angle, in accordance with still another embodiment of the present invention, which pallet module forms part of the same assortment of pallet modules as the pallet modules of Figures 11A-B and Figures 12A-B; and

Figure 13B is a perspective view of the pallet module of Figure 13A seen from a lower angle.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0032] The present invention will be described in relation to various illustrative embodiments. It shall be understood that the scope of the invention encompasses all combinations and sub-combinations of the features of the embodiments disclosed herein.

[0033] As described herein, when two or more parts or components are described as being connected, secured or coupled to one another, they can be so connected, secured or coupled directly to each other or through one or more intermediary parts.

[0034] The invention will be described in relation to various embodiments of pallet modules as depicted in Figures 1A-H to 13A-B, which pallet modules are each configured to allow formation of a nested pallet assembly of at least two similar pallet modules as schematically illustrated, by way of illustration, in Figures 9A and 9B. While some features of the invention will be discussed with reference to Figures 1A-H to 2A-C and 5A-B to 8, it shall be appreciated that the relevant considerations apply by analogy to the embodiments shown in Figures 3A-C, 4A-C and 10A-B to 13A-B.

[0035] Figures 1A and 1B are two perspective views, taken from different viewing angles, of a pallet module, designated globally by reference numeral 10, in accordance with an embodiment of the invention. The same pallet module 10 is shown from the top and bottom in Figures 1C and 1D and from all four sides in Figures 1E to 1H.

[0036] The pallet module 10 (as well as the other embodiments of pallet modules described herein) is configured to allow formation of a nested pallet assembly of at least two similar pallet modules, be it another identical pallet module 10 or e.g. a compatible pallet module 20 or 30 as for instance shown in Figures 3A-C or Figures 4A-C.

[0037] The pallet module 10 comprises a main structural body 100 exhibiting a generally quadrilateral peripheral border 100A with first to fourth lateral sides 101-104

extending between upper and lower sides 100B, 100C of the main structural body 100. The first to fourth lateral sides 101-104 are here numbered in sequence in the counter-clockwise direction when looking at the pallet module 10 from the top (as shown in Figure 1C). The pallet module 10 further comprises a foot structure 90 that is disposed on the lower side 100C of the main structural body 100. The foot structure 90 could be designed as a fixed foot structure comprising one or more fixed foot elements made integral with or permanently attached to the main structural body 100. By way of preference, however, the foot structure 90 is configured as a releasable foot structure comprising one or more releasable foot elements 91 that can each be secured to or removed from a corresponding foot-receiving element 92 provided on the lower side 100C of the main structural body 100.

[0038] In accordance with this embodiment, the peripheral border 100A here exhibits a square shape with a defined length (and width) L1 as reproduced on Figure 1C. By way of illustration, it will be assumed that the length L1 is of the order of 300 mm, but any other length could be contemplated. From a general perspective, the length of the pallet module of the invention may especially be within a range of the order of 150 mm to 1'200 mm.

[0039] More specifically, the pallet module 10 depicted in Figures 1A-H forms one pallet module of an assortment of pallet modules (including the pallet module 20 of Figures 3A-C and the pallet module 30 of Figures 4A-C) that are combinable together to form a nested pallet assembly. In that regard, the pallet module 10 will also be referred to as a "unit-size pallet module", namely a pallet module 10 whose main structural body exhibits a unit size of here L1 x L1, all other pallet modules of the relevant assortment exhibiting a larger size. More precisely, the larger-size pallet modules (e.g. the pallet modules 20 and 30 of Figures 3A-C and Figures 4A-C, respectively) are pallet modules whose main structural body (200, resp. 300) exhibits a length (L2, resp. L3) corresponding to an integer multiple of the length L1 of the main structural body 100 of the unit-size pallet module 10. In that respect, length L1 will also be referred to as "unit length".

[0040] One particular feature of the pallet module 10 of Figures 1A-H, which is likewise reflected on the pallet module 20 of Figures 3A-C and the pallet module 30 of Figures 4A-C, is the presence of first and second lateral flanges 110, 120 extending outwardly from the peripheral border 100A of the main structural body 100 along the first and second lateral sides 101, 102. These first and second lateral flanges 110, 120 form a first part of the mating system that is configured to allow nesting of multiple pallet modules within one another. As this will be appreciated hereafter, the first and second lateral flanges 110, 120 are configured to cooperate with a corresponding side portion of another similar pallet module, namely another part of the relevant mating system.

[0041] As shown in Figures 1A-1H, the main structural body 100 exhibits first and second lateral grooves 130,

140 extending inwardly from the peripheral border 100A of the main structural body 100 along the third and fourth lateral sides 103, 104. These first and second lateral grooves are each configured to receive the first and second lateral flanges, respectively, of another similar pallet module (including e.g. the first and second lateral flanges 110, 120 of another pallet module 10) so that the first, respectively second lateral flange of said other similar pallet module nests within the first, respectively second lateral groove 130, 140, thereby forming a nested pallet assembly.

[0042] As this is visible from the illustrations of Figures 1A-H (as well as Figures 3A-C and 4A-C), the first and second lateral flanges 110, 120 are advantageously offset sideways with respect to the first and second lateral sides 101, 102. This optimizes the available space for nesting pallet modules one within the other, and especially ensures that load can adequately be supported at each corner of the pallet module. In the illustrated example, in view of the fact that the first and second lateral sides 101, 102 are adjacent sides, it will be appreciated that the first and second lateral flanges 110, 120 jointly form an L-shaped lateral flange on the side of the pallet module, which constitutes a highly characteristic feature of this embodiment of the invention. This same feature is also present on the other illustrated embodiments of the pallet modules of Figures 3A-C and 4A-C.

[0043] In addition to the aforementioned mating system 110, 120, 130, 140, the pallet module 10 further comprises a securing system configured to allow the pallet module 10 to be secured to or released from another similar pallet module of the nested pallet assembly. This securing system includes first and second toggle latch components 51, 52 that are arranged in the vicinity of the first and second lateral sides 101, 102, respectively, and third and fourth toggle latch components 53, 54 that are arranged in the vicinity of the third and fourth lateral sides 103, 104, respectively. The first and second toggle latch components 51, 52 are each configured to cooperate and interlock with the third and fourth toggle latch components 53, 54, respectively, of another similar pallet module of the nested pallet assembly, to form releasable toggle latches 500 (see Figure 8) allowing the pallet module 10 to be secured to or released from the other similar pallet module.

[0044] As shown in Figure 8, the resulting releasable toggle latches 500 typically comprises a spring-loaded latch element with a moveable latch section 510 that extends outwardly to cooperate with a catch element comprising a catch section 550. The spring-loaded latch element is preferably manually actuatable and further comprises a handle section 520 that is mechanically linked to the moveable latch section 510 to allow manual actuation of the latch element. Each releasable toggle latch 500 is thus formed of two connectable or disconnectable sections, one being provided on one pallet module of the pallet assembly, and the other on the other, adjacent pallet module of the pallet assembly.

[0045] By way of preference, the first to fourth toggle latch components 51-54 are provided on the upper side 100B of the main structural body 100, as shown, namely at least partly within recesses 151-154 formed below an upper surface of the upper side 100B of the main structural body 100. The first to fourth toggle latch components 51-54 could alternatively be provided on the lower side 100C of the main structural body 100, but this constitutes a less favourable solution.

[0046] In the illustrated embodiment, the aforementioned spring-loaded latch element is advantageously located on the side where the first, respectively second lateral flange is provided. This provides for some protection of the moveable latch section 510 thanks to the presence of the neighbouring lateral flange. Referring to Figures 1A-H, the first and second toggle latch components 51, 52 thus consist of spring-loaded latch elements whose moveable latch section 510 extends outwardly beyond the peripheral border 100A of the main structural body 100, i.e. beyond the first and second lateral sides 101, 102, respectively. As a consequence, the third and fourth toggle latch components 53, 54 consist of catch elements whose catch section 550 is located entirely with the relevant recesses 153, 154, respectively. As illustrated, a corresponding clearance is formed in all four lateral sides 101 to 104 to allow passage of the relevant portion of the moveable latch section 510, thereby allowing assembly of multiple pallet modules together.

[0047] In accordance with a particularly preferred embodiment, each of the first and second lateral flanges 110, 120 exhibits at least one positioning notch 110A, respectively 120A, formed along an outer edge of the first and second lateral flanges 110, 120. In the illustrations of Figures 1A-H, only one positioning notch 110A, respectively 120A, is formed along the outer edge of the first and second lateral flanges 110, 120. Likewise, each of the first and second lateral grooves 130, 140 exhibits at least one corresponding protrusion 130A, respectively 140A, configured to mate with a corresponding positioning notch provided on the first and second lateral flanges of another similar pallet module.

[0048] In accordance with a particularly preferred variant, as shown, a position of each positioning notch 110A, 120A along the outer edge of the first and second lateral flanges 110, 120 and a position of each protrusion 130A, 140A within the first and second lateral grooves coincide with a position of each of the first to fourth toggle latch components 51-54 along the first to fourth lateral sides. This same principle is reflected on the other pallet modules of the same assortment and guarantees a precise and accurate positioning of the pallet modules one with respect to the other. This further ensures that the mating system 110, 120, 130, 140 ideally supports load applied on the pallet assembly and provides adequate resistance and robustness against shear stress.

[0049] By way of preference, the first and second lateral flanges 110, 120 are formed integrally with the main structural body 100, which ensures structural integrity of

the entire pallet module. One could alternatively contemplate to build the pallet module from multiple pallet components that are assembled one with the other.

[0050] An integral structure is however preferred in that the pallet module can be mass-produced, for instance by moulding. In that respect, the main structural body 100 and first and second lateral flanges 110, 120 can especially be made of plastic, which can especially be shaped into the desired configuration by moulding. In that respect, one may appreciate that the main structural body 100 shown in Figures 1A-H is advantageously structured to form ribs and valleys to save weight, while maintaining the structural integrity of the main structural body 100.

[0051] In this latter context especially, it is of interest for structural integrity to additionally provide a plurality of reinforcing element extending within the main structural body and the first and/or second lateral flanges. These reinforcing elements can be made of any suitable material, especially a metal, such as aluminium, a metal alloy or a composite material.

[0052] Reinforcing elements are shown in Figures 1A-H as longitudinal rod elements 161, 162 that extend within the main structural body 100 and the first and second lateral flanges 110, 120, between upper and lower surfaces thereof. More precisely, in the illustrated embodiment, a first series of longitudinal rod elements 161 extends in a first direction (here from the first lateral side 101 to the third lateral side 103 of the main structural body 100, both above and below the location of the first and second lateral flanges 110, 120), while a second series of longitudinal rod elements 162 extends in a second direction distinct from the first direction (here perpendicularly to the first series of rod elements 161, within the thickness of the first and second lateral flanges 110, 120).

[0053] The reinforcing elements 161, 162 can especially be integrated within the main structural body 100 and the first and second lateral flanges 110, 120, made of plastic, by combined moulding techniques, where the relevant reinforcing elements 161, 162 are prepositioned inside the mould prior to injection of the plastic material to ultimately form a combined metal-plastic structure.

[0054] Figure 2A is a partial perspective view of the pallet module of Figure 1A-H as seen from a lower angle and which shows one of a plurality of foot elements of the foot structure 90 provided on the lower side 100C of the main structural body 100 of the pallet module 10.

[0055] In accordance with a preferred variant of the invention, as illustrated, the foot structure 90 is configured as a releasable foot structure comprising one or more releasable foot elements 91 that can each be secured to or removed from a corresponding foot-receiving element 92 provided on the lower side 100C of the main structural body 100.

[0056] By way of preference, each releasable foot element 91 is connected to the foot-receiving element 92 by means of a spring-loaded locking mechanism (an example of which is shown in greater detail in Figures 2B

and 2C) that is configured to allow the releasable foot elements 91 to be manually inserted into and automatically interlock with the foot-receiving elements 92 without this requiring any tool.

[0057] Figures 2B and 2C are exploded views of a particularly advantageous configuration of the releasable foot elements 91 and foot-receiving elements 92, where the spring-loaded locking mechanism includes a mounting aperture 92A provided on each foot-receiving element 92 (see Figure 2C) and configured to receive a head portion 91A of each releasable foot element 91. This head portion 91A is provided with a retaining section 91B, namely a retaining groove forming a neck section on the head portion 91A, which retaining section 91B is configured to cooperate, upon axial insertion of the head portion 91A inside the mounting aperture 92A, with a plurality of spring-loaded retaining elements 95 provided on each foot-receiving element 92 and emerging inside the mounting aperture 92A. In the present example, four such retaining elements 95 are distributed about the mounting aperture 92A and only part thereof is accordingly visible in Figure 2C. The spring-loaded retaining elements 95 can be simple elongated elements that are mounted inside radial holes formed in the foot-receiving element 92 and that are urged towards the interior of the mounting aperture 92A by means of springs.

[0058] Each releasable foot element can further be provided with a lower mounting aperture 91C configured and dimensioned to receive a head portion 91A of another foot element 91, each releasable foot element 91 being provided with a plurality of spring-loaded retaining elements 95* (similar to the spring-loaded retaining elements 95 provided in the foot-receiving element 92) emerging inside the lower mounting aperture 91C and configured to cooperate with and retain the retaining section 91B of another foot element 91 upon axial insertion of the head portion 91A inside the lower mounting aperture 91C. In this way, multiple foot elements 91 can be assembled together to form component assemblies that are easier and more convenient to handle, especially for shipment purposes. In the illustrated example, only two spring-loaded retaining elements 95* are provided, which is sufficient for the contemplated purpose. The force exerted by these spring-loaded retaining elements 95* can furthermore be selected to facilitate purely manual release of the foot elements 91 one from another.

[0059] Also shown in Figures 2A-C is a spacing 92C provided between each foot-receiving element 92 and each releasable foot element 91. This spacing 92C is configured to allow lateral insertion of a tool, such as a crowbar or screwdriver, between the foot-receiving element 92 and the releasable foot element 91. Using the tool as a lever, the releasable foot element 91 can be easily released from the foot-receiving element 92.

[0060] Also visible in Figures 2B-C is a head portion 92B of the foot-receiving element 92. This head portion 92B is used for the purpose of securing the foot-receiving element 92 to the lower side 100C of the main structural

body 100. In a manner similar to the aforementioned reinforcing elements 161, 162, the foot-receiving elements 92 - or more precisely the head portion 92B thereof - can be integrated to the lower side 100C of the main structural body 100, made of plastic, by combined moulding techniques.

[0061] Figures 3A-C are two perspective views, taken from different viewing angles, and a top view of a pallet module, designated globally by reference numeral 20, in accordance with an embodiment of the invention, and which forms part of a same assortment of pallet modules as the pallet module 10 of Figures 1A-H. The pallet module 20 will also be referred to as a "large-size pallet module".

[0062] Figures 4A and 4B are two perspective views, taken from different viewing angles, and a top view of a pallet module, designated globally by reference numeral 30, in accordance with an embodiment of the invention, and which likewise forms part of a same assortment of pallet modules as the pallet module 10 of Figures 1A-H and the pallet module 20 of Figures 3A-C. The pallet module 30 will also be referred to as a "medium-size pallet module".

[0063] The pallet modules 20 and 30 share a substantial number of common features with the pallet module 10, including:

- a main structural body 200, resp. 300, exhibiting a generally quadrilateral peripheral border 200A, resp. 300A with first to fourth lateral sides 201-204, resp. 301-304, extending between upper and lower sides 200B, 200C, resp. 300B, 300C, of the main structural body 200, resp. 300;
- first and second lateral flanges 210, 220, resp. 310, 320, extending outwardly from the peripheral border 200A, resp. 300A, of the main structural body 200, resp. 300, along the first and second lateral sides 201, 202, resp. 301, 302;
- first and second lateral grooves 230, 240, resp. 330, 340, extending inwardly from the peripheral border 200A, resp. 300A, of the main structural body 200, resp. 300, along the third and fourth lateral sides 203, 204, resp. 303, 304;
- a foot structure 90 disposed on the lower side 200C, resp. 300C, of the main structural body 200, resp. 300;
- first and second toggle latch components 51, 52 arranged in the vicinity of the first and second lateral sides 201, 202, resp. 301, 302; and
- third and fourth toggle latch components 53, 54 arranged in the vicinity of the third and fourth lateral sides 203, 204, resp. 303, 304.

[0064] The first to fourth toggle latch components 51-54 are likewise provided on the upper side 200B, resp. 300B, of the main structural body 200, resp. 300, at least partly within corresponding recesses 251-254, resp. 351-354, formed below the upper surface of the upper side 200B, resp. 300B, of the main structural body 200,

resp. 300.

[0065] One difference between the pallet module 20 of Figures 3A-C and the pallet module 10 of Figures 1A-H resides in the dimensions of the pallet module 20, or more exactly the dimensions of the main structural body 200. In accordance with this embodiment, the peripheral border 200A here exhibits a square shape with a defined length (and width) L2 as reproduced on Figure 3C, which is twice the unit length L1 of the unit-size pallet module 10 of Figures 1A-H, i.e. of the order of 600 mm in the illustrated example, hence the reason why this pallet module 20 is being referred to as the large-size pallet module.

[0066] Similarly, one difference between the pallet module 30 of Figures 4A-C and the pallet module 10 of Figures 1A-H resides in the dimensions of the pallet module 30, or more exactly the dimensions of the main structural body 300. In accordance with this embodiment, the peripheral border 300A here exhibits a rectangular shape with a defined length L3 and defined width W3 as reproduced on Figure 4C. The length L3 is likewise twice the unit length L1 of the unit-size pallet module 10 of Figures 1A-H, i.e. of the order of 600 mm in the illustrated example, but the width W3, in the illustrated example, is of the order of 400 mm, hence the reason why this pallet module 30 is being referred to as the medium-size pallet module.

[0067] The overall size of the pallet module 30 is specifically chosen in the illustrated example to correspond to exactly a quarter of the dimensions of a standard Euro-pallet which has a length of 1'200 mm and a width of 800 mm. In other words, assembling four medium-size pallet modules 30 in a square would lead to a pallet assembly exhibiting substantially the size of a standard Euro-pallet. Other dimensions could however be contemplated.

[0068] As a result of the aforementioned choices of dimensions, and in order to ensure compatibility with e. g. the pallet module 10 of Figures 1A-H, the number of toggle latch components 51-54 on each side of the pallet module 20 is doubled, whereas only the number of second and fourth toggle latch components 52, 54 is doubled in the case of the pallet module 30. By the same token, each of the first and second lateral flanges 210, 220 and each of the first and second lateral grooves 230, 240 are provided with a pair of positioning notches 210A, 220A and a pair of protrusions 230A, 240A, respectively, whereas only the second lateral flange 320 and the second lateral groove 340 are each provided with a pair of positioning notches 320A and protrusions 340A.

[0069] In the example in Figures 3A-C, the position of the second and fourth toggle latch components 52 and 54 along the second and fourth lateral sides 202, 204 (and of the positioning notches 220A and protrusions 240A) is compatible with the position of the toggle latch components 51-54 (and of the position of the relevant notches and protrusions) along the lateral sides 101-104 of the pallet module 10 or of the toggle latch components 52, 54 along the lateral sides 302, 304 of the pallet module 30. In other words, two pallet modules 10 or one pallet

module 30 could be assembled to either one or both of the second and fourth lateral sides 202, 204 of the pallet module 20.

[0070] By contrast, the position of the first and third toggle latch components 51 and 53 along the first and third lateral sides 201, 203 (and of the positioning notches 210A and protrusions 230A) is different, meaning that the pallet module 20 can only be coupled via the first lateral side 201 or the third lateral side 203 to a corresponding lateral side of another pallet module 20 or to a similar pallet module exhibiting the same configuration.

[0071] The pallet module 20 could however be designed to ensure that all toggle latch components 51-54, positioning notches 210A, 220A and protrusions 230A, 240A are positioned in a symmetric manner and ensure compatibility of engagement on all sides with the other pallet modules.

[0072] As far as the toggle latch components 51-54 are concerned, these are identical to the toggle latch components 51-54 used in the embodiment of Figures 1A-H. In other words, the first and second toggle latch components 51, 52 shown in Figures 3A-C and 4A-C are likewise spring-loaded latch elements comprising a moveable latch section 510 (linked to a handle section 520) that extends outwardly beyond the peripheral border 200A, resp. 300A, of the main structural body 200, resp. 300, while the third and fourth toggle latch components 53, 54 are catch elements comprising a catch section 550 configured to cooperate with the moveable latch section 510 of the spring-loaded latch elements of another similar pallet module.

[0073] Other than that, substantially the same considerations as set forth in respect of the embodiment of Figures 1A-H apply to the pallet modules 20 and 30.

[0074] For instance, longitudinal rod elements 261, 262, resp. 361, 362, acting as reinforcing elements are likewise provided within the main structural body 200, resp. 300, and within the first and second lateral flanges 210, 220, resp. 310, 320.

[0075] In the same way, the foot structure 90 of pallet modules 20 and 30 can be strictly identical to the foot structure 90 discussed in relation to the embodiment of Figures 1A-H and Figures 2A-C, meaning that the releasable foot elements 91 are perfectly interchangeable between the pallet modules 10, 20 and 30.

[0076] It will therefore be appreciated that the present invention provides for unprecedented flexibility in that a large variety and sizes of pallet assemblies can be created to meet various requirements. Furthermore, this modularity is not made to the detriment of the ease and speed of assembly and disassembly, or of the robustness. This extensive modularity furthermore facilitates shipment of the relevant pallet modules and components, optimizes space usage, and increases transport efficiency as a result. The advantages of the invention are multiple and include in particular:

- multiple pallet module sizes, which reduces material

waste and leads to a more efficient solution for shipment purposes as multiple pallet assemblies of varying sizes can be built as a result, which pallet assemblies best fit the transport purpose and especially allow to reduce wasted space between palletized goods or equipment;

- improved stackability of the pallet modules when empty/unused, which optimizes shipment as well as warehousing of individual pallet modules;
- ease and speed of assembly and disassembly of the pallet modules;
- optimized height of the pallet modules, which allows for a further reduction of the volume when shipping or warehousing individual pallet modules; and
- high robustness and reliability, which leads to an increased life cycle and the ability to reuse the pallet modules for multiple transport operations.

[0077] Figures 10A-B are two perspective views, taken from different viewing angles, of a pallet module, designated globally by reference numeral 40, in accordance with another embodiment of the invention, and which forms part of another assortment of pallet modules. The pallet module 40 will, like the pallet module 10 of Figures 1A-H, be referred as a "unit-size pallet module".

[0078] The pallet module 40 shares a substantial number of common features with the pallet modules 10, 20 and 30, including:

- a main structural body 400 exhibiting a generally quadrilateral peripheral border 400A with first to fourth lateral sides 401-404 extending between upper and lower sides 400B, 400C of the main structural body 400;
- first and second lateral flanges 410, 420 extending outwardly from the peripheral border 400A of the main structural body 400 along the first and second lateral sides 401, 402;
- first and second lateral grooves 430, 440 extending inwardly from the peripheral border 400A of the main structural body 400 along the third and fourth lateral sides 403, 404;
- a foot structure 90* disposed on the lower side 400C of the main structural body 400;
- first and second toggle latch components 51, 52 arranged in the vicinity of the first and second lateral sides 401, 402; and
- third and fourth toggle latch components 53, 54 arranged in the vicinity of the third and fourth lateral sides 403, 404.

[0079] In a manner similar to the unit-size pallet module 10, the main structural body 400 of the unit-size pallet module 40 preferably exhibits a square shape, and all larger-size pallet modules of the same assortment (not shown) exhibit similar configurations allowing pallet modules to be combinable with one another. By way of illustration, the unit length (L1) of the unit-size pallet module

40 is here of the order of 192 mm.

[0080] The first to fourth toggle latch components 51-54 are likewise provided on the upper side 400B of the main structural body 400, at least partly within corresponding recesses 451-454 formed below the upper surface of the upper side 400B of the main structural body 400.

[0081] One difference between the pallet module 40 of Figures 10A-B and the pallet modules 10, 20, 30 of Figures 1A-H, 3A-C and 4A-C resides in the configuration of the first and second lateral flanges 410, 420 and first and second lateral grooves 430, 440, which only extend along a portion of the relevant lateral sides 401-404. It may furthermore be appreciated that each lateral flange 410, 420 is provided with a pair of positioning notches 410A, resp. 420A, and that each lateral groove 430, 440 is likewise provided with a pair of protrusions 430A, 440A, the function of which remains the same as previously described.

[0082] One further difference resides in the configuration of the foot structure 90*, which consists in this example of a fixed foot structure provided on the lower side 400C of the main structural body 400 and comprising a foot element 91* that is made integral with the main structural body 400. Advantageously, the foot element 91* exhibits a conical shape, as shown, and the main structural body 400 is structured to exhibit a corresponding depression on the upper side 400B allowing stacking of multiple pallet modules 40 one on top of the other, which reduces space consumption when stacked.

[0083] The aforementioned pallet module structures and sizes are illustrative of possible embodiments of the invention. In accordance with another embodiment of the invention, one could contemplate that the main structural body of each of the larger-size pallet modules has a size corresponding to an integer multiple of the unit size of the unit-size pallet module.

[0084] In particular, the unit-size pallet module could exhibit a square shape of dimensions $L1 \times L1$ (like the pallet module 10 of Figures 1A-H or the pallet module 40 of Figures 10A-B) and the peripheral border of the main structural body of each one of the larger-size pallet modules could exhibit a square shape of dimensions $n \times L1 \times n \times L1$, where n is an integer greater than or equal to 2. Even more preferably, the larger-size pallet modules could exhibit a square shape of dimension $2^n \times L1 \times 2^n \times L1$. Figures 11A-B to 13A-B are illustrative of an assortment of pallet modules following this principle. In this context, optimal sizes include especially sizes deriving from a unit length $L1$ ranging from 150 mm to 300 mm, and in particular a unit length of 180-192 mm, 239-256 mm or 272-288 mm, which constitute particularly preferred dimensions.

[0085] Figures 11A-B are two perspective views, taken from different viewing angles, of a pallet module, designated globally by reference numeral 10*, in accordance with yet another embodiment of the invention, and which forms part of a further assortment of pallet modules. The

pallet module 10* will, like the pallet module 10 of Figures 1A-H and the pallet module 40 of Figures 10A-B, be referred as a "unit-size pallet module".

[0086] Figures 12A-B are two perspective views, taken from different viewing angles, of a pallet module, designated globally by reference numeral 20*, in accordance with an embodiment of the invention, and which forms part of the same assortment of pallet modules as the pallet module 10* of Figures 11A-B. The pallet module 20* will also be referred as a "medium-size pallet module".

[0087] Figures 13A-B are two perspective views, taken from different viewing angles, of a pallet module, designated globally by reference numeral 30*, in accordance with an embodiment of the invention, and which likewise forms part of the same assortment of pallet modules as the pallet module 10* of Figures 11A-B and the pallet module 20* of Figures 12A-B. The pallet module 30* will also be referred as a "large-size pallet module".

[0088] The pallet modules 10*, 20* and 30* share a substantial number of common features, including:

- a main structural body 100*, 200*, resp. 300*, exhibiting a generally quadrilateral peripheral border 100A*, 200A*, resp. 300A* with first to fourth lateral sides 101*-104*, 201*-204*, resp. 301*-304*, extending between upper and lower sides 100B*, 100C*, 200B*, 200C*, resp. 300B*, 300C*, of the main structural body 100*, 200*, resp. 300*;
- first and second lateral flanges 110*, 120*, 210*, 220*, resp. 310*, 320*, extending outwardly from the peripheral border 100A*, 200A*, resp. 300A*, of the main structural body 100*, 200*, resp. 300*, along the first and second lateral sides 101*, 102*, 201*, 202*, resp. 301*, 302*;
- first and second lateral grooves 130*, 140*, 230*, 240*, resp. 330*, 340*, extending inwardly from the peripheral border 100A*, 200A*, resp. 300A*, of the main structural body 100*, 200*, resp. 300*, along the third and fourth lateral sides 103*, 104*, 203*, 204*, resp. 303*, 304*;
- a foot structure 90* disposed on the lower side 100C*, 200C*, resp. 300C*, of the main structural body 100*, 200*, resp. 300*;
- first and second toggle latch components 51, 52 arranged in the vicinity of the first and second lateral sides 101*, 102*, 201*, 202*, resp. 301*, 302*; and
- third and fourth toggle latch components 53, 54 arranged in the vicinity of the third and fourth lateral sides 103*, 104*, 203*, 204*, resp. 303*, 304*.

[0089] The first to fourth toggle latch components 51-54 are likewise provided on the upper side 100B*, 200B*, resp. 300B*, of the main structural body 100*, 200*, resp. 300*, at least partly within corresponding recesses 151*-154*, 251*-254*, resp. 351*-354*, formed below the upper surface of the upper side 100B*, 200B*, resp. 300B*, of the main structural body 100*, 200*, resp.

300*.

[0090] The main structural bodies 100*, 200*, 300* of the unit-size pallet module 10*, the medium-size pallet module 20* and the large-size pallet module 30*, respectively, each exhibit a square shape. The length of the main structural body 200* of the medium-size pallet module 20* is here twice the unit length (L1), while the length of the main structural body 300* of the large-size pallet module 30* is four times the unit length (L1). By way of illustration, the unit length (L1) of the unit-size pallet module 10* is of the order of 287,5 mm, meaning that the length of the medium-size pallet module 20* and of the large-size pallet module 30* is of 575 mm and 1'150 mm, respectively. Other dimensions could once again be contemplated, without departing from the scope of the invention as claimed. The number of toggle latch components 51-54 along each side increases as a function of the increase in dimensions of the pallet module, namely from one per side for the unit-size pallet module 10*, to two per side for the medium-size pallet module 20*, and four per side for the large-size pallet module 30*.

[0091] In a manner similar to pallet module 40 of Figures 10A-B, the foot structure 90* consists in each case of a fixed foot structure comprising one or more foot elements 91* that are made integral with the main structural body 100*, 200*, resp. 300*. Advantageously, the main structural bodies 100*, 200*, resp. 300* are likewise structured to exhibit one or more corresponding depressions on the upper side 100B*, 200B*, resp. 300B* allowing stacking of multiple pallet modules one on top of the other.

[0092] In accordance with another variant of the invention, which is reflected on all illustrated embodiments shown in Figures 1A-H, 3A-C, 4A-C, 10A-B, 11A-B, 12A-B and 13A-B, through-holes 190 could be provided in the main structural body 100, 200, 300, 400, 100*, 200* resp. 300* and the first and second lateral flanges 110, 120, 210, 220, 310, 320, 410, 420, 110*, 120*, 210*, 220* resp. 310*, 320*, next to the toggle latch components 51-54, which through-holes 190 extend from an upper surface to a lower surface of the main structural body and the first and second lateral flanges. Figures 1A-H, 3A-C, 4A-C, 11A-B, 12A-B and 13A-B actually show the provision of a pair of such through-holes 190 next to each of the toggle latch components 51-54, while Figures 10A-B show only one such through-hole 190 next to each of toggle latch component 51-54. These through-holes 190 are advantageous in that they can be exploited for the purpose of passing ropes, straps or like securing bands to secure a load on the relevant pallet assembly. These through-holes 190 can furthermore be used to mount vertical posts on the pallet assembly to support e.g. side walls or barriers.

[0093] Figures 5A-B to 7A-B illustrate a further refinement of the invention shown in the particular context of the pallet module 10, but that is applicable by analogy to any other pallet module, including the pallet modules 20 and 30 of Figures 3A-C and 4A-C, the pallet module 40

of Figures 10A-B, and the pallet modules 10*, 20* and 30* of Figures 11A-B to 13A-B.

[0094] Figures 5A-B show the pallet module 10 of Figures 1A-H additionally provided with a pair of cover elements 170, 180 configured to cover an upper side of the first and second lateral flanges 110, 120, each cover element 170, 180 having an upper surface that is flush with an upper surface of the upper side 100B of the main structural body 100 of the pallet module 10. Each cover element 170, 180 is separately shown in Figures 6A-B and 7A-B, respectively.

[0095] While two cover elements 170, 180 are shown in Figures 5A-B, one could obviously contemplate to use a single L-shaped cover element to cover both the first and second lateral flanges 110, 120.

[0096] It shall also be appreciated that each cover element may also cover part of the first or second lateral flanges of another pallet module of the nested pallet assembly as for instance disclosed by way of illustration in Figures 9A and 9B.

[0097] Irrespective of the above, each cover element comprises at least one toggle latch component 71, resp. 81, configured to cooperate and interlock with a corresponding one of the first and second latch components 51, 52 of the pallet module 10 to form a releasable toggle latch 500 allowing the cover element to be secured to or released from the pallet module 10. In the illustrated example, each toggle latch component 71, 81 consists of a catch element comprising a catch section 550, identical to that of the third and fourth toggle latch components 53, 54, which catch element is located within a corresponding recess 171, resp. 181, of the cover element.

[0098] Also visible in Figures 5A-B to 7A-B is an extension 170A, resp. 180A, provided on the underside of each cover element 170, 180 to fill the gap of the positioning notches 110A, 120A formed along the outer edge of the first and second lateral flanges 110, 120.

[0099] Figures 9A and 9B are two schematic top views of a pallet assembly formed by combining multiple pallet modules in accordance with the present invention.

[0100] More precisely, Figure 9A shows a pallet assembly 1000 formed of nine unit-size pallet modules 10 that are assembled together to form a square-shaped pallet assembly. In this illustrative example, two cover elements 170' and 180' are located on the portions of the pallet assembly 1000 where the first and second lateral flanges 110, 120 of pallet modules 10 would otherwise be exposed.

[0101] Figure 9B shows another pallet assembly 1000* formed of four pallet modules, namely two large-size pallet modules 20 and two medium-size pallet modules 30. In a manner similar to the pallet assembly 1000 of Figure 9A, two cover elements 170* and 180* are located on the portions of the pallet assembly 1000* where the first and second lateral flanges 210, 220, 310, 320 of pallet modules 20, 30 would otherwise be exposed.

[0102] Various modifications and/or improvements may be made to the above-described embodiments with-

out departing from the scope of the invention as defined by the annexed claims. For instance, while the illustrated embodiments show pallet modules where the first and second flanges and the first and second lateral grooves are contiguous, the first and second lateral flanges and the first and second lateral grooves could alternatively be provided on opposite lateral sides of the main structural body of the pallet module. In that respect, the expressions "first lateral side", "second lateral side", "third lateral side" and "fourth lateral side" shall not be construed as designating any particular sequence of sides, but rather any of the four lateral sides forming the quadrilateral peripheral border of the main structural body of the pallet module.

[0103] In addition, it will be understood that each pallet module may comprise a multiplicity of lateral flanges arranged in different levels and a corresponding multiplicity of lateral grooves configured to mate with the multiplicity of a lateral flanges of another similar pallet module.

[0104] Furthermore, as already mentioned hereabove, the foot structure could be designed as a releasable foot structure or as a fixed foot structure comprising one or more fixed foot elements that are made integral with the main structural body of the pallet module or that are permanently attached to the main structural body.

[0105] It is also to be appreciated that the invention is not limited to assortments of pallet modules including only a unit-size pallet module, a medium-size pallet module and a large-size pallet module.

LIST OF REFERENCE NUMERALS AND SIGNS USED THEREIN

[0106]

10	(unit-size) pallet module (first assortment of pallet modules)
100	main structural body of pallet module 10
100A	generally quadrilateral peripheral border of main structural body 100
100B	upper side of main structural body 100
100C	lower side of main structural body 100
101	first lateral side of main structural body 100
102	second lateral side of main structural body 100
103	third lateral side of main structural body 100
104	fourth lateral side of main structural body 100
110	first lateral flange extending outwardly from peripheral border 100A of main structural body 100, along first lateral side 101
110A	positioning notch formed along an outer edge of first lateral flange 110
120	second lateral flange extending outwardly from peripheral border 100A of main structural body 100, along second lateral side 102
120A	positioning notch formed along an outer edge of second lateral flange 120
130	first lateral groove extending inwardly from peripheral border 100A of main structural body

130A	100, along third lateral side 103	
140	protrusion formed within first lateral groove 130	
5	second lateral groove extending inwardly from peripheral border 100A of main structural body 100, along fourth lateral side 104	
140A	protrusion formed within second lateral groove 140	
151	recess accommodating first toggle latch component 51	
10	152	recess accommodating second toggle latch component 52
153	recess accommodating third toggle latch component 53	
154	recess accommodating third toggle latch component 54	
15	161	reinforcing elements extending within main structural body 100/ first series of longitudinal rod elements
20	162	reinforcing elements extending within main structural body 100 and first and second lateral flanges 110, 120 / second series of longitudinal rod elements
20		(large-size) pallet module (first assortment of pallet modules)
25	200	main structural body of pallet module 20
200A		generally quadrilateral peripheral border of main structural body 200
200B		upper side of main structural body 200
200C		lower side of main structural body 200
30	201	first lateral side of main structural body 200
202		second lateral side of main structural body 200
203		third lateral side of main structural body 200
204		fourth lateral side of main structural body 200
210		first lateral flange extending outwardly from peripheral border 200A of main structural body 200, along first lateral side 201
35	210A	positioning notch formed along an outer edge of first lateral flange 210
220		second lateral flange extending outwardly from peripheral border 200A of main structural body 200, along second lateral side 202
40	220A	positioning notch formed along an outer edge of second lateral flange 220
230		first lateral groove extending inwardly from peripheral border 200A of main structural body 200, along third lateral side 203
45	230A	protrusion formed within first lateral groove 230
240		second lateral groove extending inwardly from peripheral border 200A of main structural body 200, along fourth lateral side 204
50	240A	protrusion formed within second lateral groove 240
251		recess accommodating first toggle latch component 51
55	252	recess accommodating second toggle latch component 52
253		recess accommodating third toggle latch component 53

254	recess accommodating third toggle latch component 54		400B	main structural body 400
261	reinforcing elements extending within main structural body 200 / first series of longitudinal rod elements	5	400C	upper side of main structural body 400
262	reinforcing elements extending within main structural body 200 and first and second lateral flanges 210, 220 / second series of longitudinal rod elements		401	lower side of main structural body 400
30	(medium-size) pallet module (first assortment of pallet modules)	10	402	first lateral side of main structural body 400
300	main structural body of pallet module 30		403	second lateral side of main structural body 400
300A	generally quadrilateral peripheral border of main structural body 300		404	third lateral side of main structural body 400
300B	upper side of main structural body 300	15	410	fourth lateral side of main structural body 400
300C	lower side of main structural body 300		410A	first lateral flange extending outwardly from peripheral border 400A of main structural body 400, along portion of first lateral side 401
301	first lateral side of main structural body 300		420	positioning notches formed along an outer edge of first lateral flange 410
302	second lateral side of main structural body 300		420A	second lateral flange extending outwardly from peripheral border 400A of main structural body 400, along portion of second lateral side 402
303	third lateral side of main structural body 300		430	positioning notches formed along an outer edge of second lateral flange 420
304	fourth lateral side of main structural body 300	20	430A	first lateral groove extending inwardly from peripheral border 400A of main structural body 400, along portion of third lateral side 403
310	first lateral flange extending outwardly from peripheral border 300A of main structural body 300, along first lateral side 301		440	protrusions formed within first lateral groove 430
310A	positioning notch formed along an outer edge of first lateral flange 310	25	440A	second lateral groove extending inwardly from peripheral border 400A of main structural body 400, along fourth lateral side 404
320	second lateral flange extending outwardly from peripheral border 300A of main structural body 300, along second lateral side 302		451	protrusions formed within second lateral groove 440
320A	positioning notch formed along an outer edge of second lateral flange 320	30	452	recess accommodating first toggle latch component 51
330	first lateral groove extending inwardly from peripheral border 300A of main structural body 300, along third lateral side 303		453	recess accommodating second toggle latch component 52
330A	protrusion formed within first lateral groove 330		454	recess accommodating third toggle latch component 53
340	second lateral groove extending inwardly from peripheral border 300A of main structural body 300, along fourth lateral side 304	35	461	recess accommodating third toggle latch component 54
340A	protrusion formed within second lateral groove 340		462	reinforcing element (longitudinal rod) extending within main structural body 400
351	recess accommodating first toggle latch component 51	40	10*	reinforcing elements (longitudinal rods) extending within main structural body 400 and second lateral flange 420
352	recess accommodating second toggle latch component 52		100*	(unit-size) pallet module (third assortment of pallet modules)
353	recess accommodating third toggle latch component 53	45	100A*	main structural body of pallet module 10*
354	recess accommodating third toggle latch component 54		100B*	generally quadrilateral peripheral border of main structural body 100*
361	reinforcing elements extending within main structural body 300 / first series of longitudinal rod elements	50	100C*	upper side of main structural body 100*
362	reinforcing elements extending within main structural body 300 and first and second lateral flanges 310, 320 / second series of longitudinal rod elements		101*	lower side of main structural body 100*
40	(unit-size) pallet module (second assortment of pallet modules)	55	102*	first lateral side of main structural body 100*
400	main structural body of pallet module 40		103*	second lateral side of main structural body 100*
400A	generally quadrilateral peripheral border of		104*	third lateral side of main structural body 100*
			110*	fourth lateral side of main structural body 100*
			110A*	first lateral flange extending outwardly from peripheral border 100A* of main structural body 100*, along first lateral side 101*
			120*	positioning notch formed along an outer edge of first lateral flange 110*
				second lateral flange extending outwardly from

	peripheral border 100A* of main structural body 100*, along second lateral side 102*				240*
120A*	positioning notch formed along an outer edge of second lateral flange 120*		251*		recess accommodating first toggle latch component 51
130*	first lateral groove extending inwardly from peripheral border 100A* of main structural body 100*, along third lateral side 103*	5	252*		recess accommodating second toggle latch component 52
130A*	protrusion formed within first lateral groove 130*		253*		recess accommodating third toggle latch component 53
140*	second lateral groove extending inwardly from peripheral border 100A* of main structural body 100*, along fourth lateral side 104*	10	254*		recess accommodating third toggle latch component 54
140A*	protrusion formed within second lateral groove 140*		261*		reinforcing elements (longitudinal rods) extending within main structural body 200* and first lateral flange 210*
151*	recess accommodating first toggle latch component 51	15	262*		reinforcing elements (longitudinal rods) extending within main structural body 200*
152*	recess accommodating second toggle latch component 52		30*		(large-size) pallet module (third assortment of pallet modules)
153*	recess accommodating third toggle latch component 53		300*		main structural body of pallet module 30*
154*	recess accommodating third toggle latch component 54	20	300A*		generally quadrilateral peripheral border of main structural body 300*
161*	reinforcing elements (longitudinal rods) extending within main structural body 100* and first lateral flange 110*		300B*		upper side of main structural body 300*
162*	reinforcing elements (longitudinal rods) extending within main structural body 100*	25	300C*		lower side of main structural body 300*
20*	(medium-size) pallet module (third assortment of pallet modules)		301*		first lateral side of main structural body 300*
200*	main structural body of pallet module 20*		302*		second lateral side of main structural body 300*
200A*	generally quadrilateral peripheral border of main structural body 200*	30	303*		third lateral side of main structural body 300*
200B*	upper side of main structural body 200*		304*		fourth lateral side of main structural body 300*
200C*	lower side of main structural body 200*		310*		first lateral flange extending outwardly from peripheral border 300A* of main structural body 300*, along first lateral side 301*
201*	first lateral side of main structural body 200*	35	310A*		positioning notch formed along an outer edge of first lateral flange 310*
202*	second lateral side of main structural body 200*		320*		second lateral flange extending outwardly from peripheral border 300A* of main structural body 300*, along second lateral side 302*
203*	third lateral side of main structural body 200*		320A*		positioning notch formed along an outer edge of second lateral flange 320*
204*	fourth lateral side of main structural body 200*	40	330*		first lateral groove extending inwardly from peripheral border 300A* of main structural body 300*, along third lateral side 303*
210*	first lateral flange extending outwardly from peripheral border 200A* of main structural body 200*, along first lateral side 201*		330A*		protrusion formed within first lateral groove 330*
210A*	positioning notch formed along an outer edge of first lateral flange 210*		340*		second lateral groove extending inwardly from peripheral border 300A* of main structural body 300*, along fourth lateral side 304*
220*	second lateral flange extending outwardly from peripheral border 200A* of main structural body 200*, along second lateral side 202*	45	340A*		protrusion formed within second lateral groove 340*
220A*	positioning notch formed along an outer edge of second lateral flange 220*		351*		recess accommodating first toggle latch component 51
230*	first lateral groove extending inwardly from peripheral border 200A* of main structural body 200*, along third lateral side 203*	50	352*		recess accommodating second toggle latch component 52
230A*	protrusion formed within first lateral groove 230*		353*		recess accommodating third toggle latch component 53
240*	second lateral groove extending inwardly from peripheral border 200A* of main structural body 200*, along fourth lateral side 204*	55	354*		recess accommodating third toggle latch component 54
240A*	protrusion formed within second lateral groove		361*		reinforcing elements (longitudinal rods) extending within main structural body 300* and first lateral flange 310*
			362*		reinforcing elements (longitudinal rods) ex-

	tending within main structural body 300*				ing elements 95 or 95*
51	first toggle latch component(s) arranged in the vicinity of the first lateral side 101, 201, 301, 401, 101*, 201* resp. 301* / spring-loaded latch element(s)	5	91C		lower mounting aperture provided in lower portion of releasable foot element 91 / dimensioned to receive head portion 91A of another releasable foot element 91
52	second toggle latch component(s) arranged in the vicinity of the second lateral side 102, 202, 302, 402, 102*, 202* resp. 302* / spring-loaded latch element(s)		92		foot-receiving elements provided on lower side 100C, 200C, resp. 300C of main structural body 100, 200, resp. 300
53	third toggle latch component(s) arranged in the vicinity of the third lateral side 103, 203, 303, 403, 103*, 203* resp. 303* / catch element(s)	10	92A		mounting aperture provided in foot-receiving element 92 / dimensioned to receive head portion 91A of releasable foot element 91
54	fourth toggle latch component(s) arranged in the vicinity of the fourth lateral side 104, 204, 304, 404, 104*, 204* resp. 304* / catch element(s)	15	92B		head portion of foot-receiving element 92 for attachment to lower side 100C, 200C, resp. 300C of main structural body 100, 200, resp. 300
170	cover element configured to cover upper side of first lateral flange		95		spring-loaded retaining elements provided on foot-receiving element 92 and emerging inside mounting aperture 92A
170A	extension of cover element 170 configured to fill the gap of the positioning notch on the first lateral flange	20	95*		spring-loaded retaining elements provided on lower portion of releasable foot element 91 and emerging inside lower mounting aperture 91C
171	recess formed in cover element 170 to accommodate toggle latch component 71		90*		foot structure (fixed) of pallet modules 40, 10*, 20*, resp. 30*
180	cover element configured to cover upper side of second lateral flange	25	91*		fixed foot element(s)
180A	extension of cover element 180 configured to fill the gap of the positioning notch on the second lateral flange		190		through-holes extending from an upper surface to a lower surface of main structural body 100, 200, 300, 400, 100*, 200* resp. 300* and first and second lateral flanges 110, 120, 210, 220, 310, 320, 410, 420, 110*, 120*, 210*, 220*, 310* resp. 320*
181	recess formed in cover element 180 to accommodate toggle latch component 81	30			
170'	cover element configured to cover upper side of first lateral flange		1000		pallet assembly built of multiple pallet modules 10 nested within and interlocked with one another
180'	cover element configured to cover upper side of second lateral flange		1000*		pallet assembly built of multiple pallet modules 20, 30 nested within and interlocked with one another
170*	cover element configured to cover upper side of first lateral flange	35			
180*	cover element configured to cover upper side of second lateral flange		L1		length (and width) of unit-size pallet module 10, 40 resp. 10* ("unit length")
71	toggle latch component / catch element(s) provided on cover element 170, 170', resp. 170*	40	L2		length (and width) of pallet module 20
81	toggle latch component / catch element(s) provided on cover element 180, 180', resp. 180*		L3		length of pallet module 30
500	releasable toggle latch		W3		width of pallet module 30
510	moveable latch section of spring-loaded latch element 51, resp. 52	45			
520	handle section mechanically linked to moveable latch section 510				
550	catch section of catch element 53, 54, 71, resp. 81				
90	foot structure (releasable)	50			
91	releasable foot elements				
91A	head portion of releasable foot element 91 dimensioned and configured to be received in mounting aperture 92A of foot-receiving element 92 or in lower mounting aperture 91C of another releasable foot element 91	55			
91B	retaining section 91B of head portion 91A configured to cooperate with spring-loaded retain-				

Claims

1. An assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) configured to allow formation of a nested pallet assembly (1000; 1000*) of at least two pallet modules (10; 20; 30; 40; 10*; 20*; 30*) selected from the assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*), each pallet module (10; 20; 30; 40; 10*; 20*; 30*) comprising:

- a main structural body (100; 200; 300; 400; 100*; 200*; 300*) exhibiting a generally quadrilateral peripheral border (100A; 200A; 300A; 400A; 100A*; 200A*; 300A*) with first to fourth lateral sides (101-104; 201-204; 301-304;

401-404; 101*-104*; 201*-204*; 301*-304*) extending between upper and lower sides (100B, 100C; 200B, 200C; 300B, 300C; 400B, 400C; 100B*, 100C*; 200B*, 200C*; 300B*, 300C*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*);

- a mating system (110, 120, 130, 140; 210, 220, 230, 240; 310, 320, 330, 340; 410, 420, 430, 440; 110*, 120*, 130*, 140*; 210*, 220*, 230*, 240*; 310*, 320*, 330*, 340*) provided on the first to fourth lateral sides (101-104; 201-204; 301-304; 401-404; 101*-104*; 201*-204*; 301*-304* of the main structural body (100; 200; 300; 400; 100*; 200*; 300*) configured to allow nesting of the pallet module (10; 20; 30; 40; 10*; 20*; 30*) within a corresponding part of the mating system (110, 120, 130, 140; 210, 220, 230, 240; 310, 320, 330, 340; 410, 420, 430, 440; 110*, 120*, 130*, 140*; 210*, 220*, 230*, 240*; 310*, 320*, 330*, 340*) of another pallet module (10; 20; 30; 40; 10*; 20*; 30*) of the assortment;

- a securing system (51-54) configured to allow the pallet module (10; 20; 30; 40; 10*; 20*; 30*) to be secured to or released from another pallet module (10; 20; 30; 40; 10*; 20*; 30*) of the assortment; and

- a foot structure (90; 90*) disposed on the lower side (100C; 200C; 300C; 400C; 100C*; 200C*; 300C*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*),

characterized in that the pallet modules (10; 20; 30; 40; 10*; 20*; 30*) are produced in at least two different sizes and **in that** said assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) includes a unit-size pallet module (10; 40; 10*) whose main structural body (100; 400; 100*) exhibits a unit size and at least one larger-size pallet module (20; 30; 20*; 30*) whose main structural body (200; 300; 200*; 300*) exhibits a length (L2; L3) corresponding to an integer multiple of a length (L1) of the main structural body (100; 400; 100*) of the unit-size pallet module (10; 40; 10*), the unit-size pallet module (10; 40; 10*) and each larger-size pallet module (20; 30; 20*; 30*) being combinable with one another.

2. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to claim 1, wherein the peripheral border (100A; 400A; 100A*) of the main structural body (100; 400; 100*) of the unit-size pallet module (10; 40; 10*) exhibits a square shape, and wherein the length (L2; L3) of the main structural body (200; 300; 200*; 300*) of each larger-size pallet module (20; 30; 20*; 30*) is at least twice the length (L1) of the main structural body (100; 400; 100*) of the unit-size pallet module (10; 40; 10*).

3. The assortment of pallet modules (10*; 20*; 30*) ac-

cording to claim 2, wherein the peripheral border (200A*; 300A*) of the main structural body (200*; 300*) of each larger-size pallet module (20*; 30*) has a square shape.

4. The assortment of pallet modules (10*; 20*; 30*) according to claim 3, including at least two types of larger-size pallet modules (20*; 30*), namely a medium-size pallet module (20*) and a large-size pallet module (30*),

wherein the peripheral border (200A*) of the main structural body (200*) of the medium-size pallet module (20*) exhibits a length (L2) that is twice the length (L1) of the main structural body (100*) of the unit-size pallet module (10*), and wherein the peripheral border (300A*) of the main structural body (300*) of the large-size pallet module (30*) exhibits a length (L3) that is at least three times, in particular four times, the length (L1) of the main structural body (100*) of the unit-size pallet module (10*).

5. The assortment of pallet modules (10*; 20*; 30*) according to claim 3 or 4, wherein the length (L1) of the main structural body (100*) of the unit-size pallet module (10*) is of the order of 150 to 300 mm, and is preferably selected to be of 180-192 mm, 239-256 mm or 272-288 mm.
6. The assortment of pallet modules (10; 20; 30) according to claim 2, including at least two types of larger-size pallet modules (20; 30), namely a medium-size pallet module (30) and a large-size pallet module (20),

wherein the peripheral border (300A) of the main structural body (300) of the medium-size pallet module (30) exhibits a rectangular shape having a length (L3) equal to twice the length (L1) of the main structural body (100) of the unit-size pallet module (10) and a width (W3) which is less than twice the length (L1) of the main structural body (100) of the unit-size pallet module (10),

and wherein the peripheral border (200A) of the main structural body (200) of the large-size pallet module (20) exhibits a square shape having a length (L2) equal to twice the length (L1) of the main structural body (100) of the unit-size pallet module (10).

7. The assortment of pallet modules (10; 20; 30) according to claim 6, wherein the length (L1) of the main structural body (100) of the unit-size pallet module (10) is of the order of 300 mm, and wherein a size of the medium-size pallet module (30) preferably corresponds to substantially a quar-

ter of the size of a standard Euro-pallet, the length (L3) and width (W3) of the main structural body (300) of the medium-size pallet module (30) being of the order of 600 mm and 400 mm, respectively.

8. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to any one of the preceding claims, wherein the length (L1; L2; L3) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*) of the pallet modules (10; 20; 30; 40; 10*; 20*; 30*) is of the order of 150 mm to 1'200 mm.

9. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to any one of the preceding claims, wherein the mating system (110, 120, 130, 140; 210, 220, 230, 240; 310, 320, 330, 340; 410, 420, 430, 440; 110*, 120*, 130*, 140*; 210*, 220*, 230*, 240*; 310*, 320*, 330*, 340*) of each pallet module (10; 20; 30; 40; 10*; 20*; 30*) includes:

- first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) extending outwardly from the peripheral border (100A; 200A; 300A; 400A; 100A*; 200A*; 300A*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*), along the first and second lateral sides (101, 102; 201, 202; 301, 302; 401, 402; 101*, 102*; 201*, 202*; 301*, 302*); and

- first and second lateral grooves (130, 140; 230, 240; 330, 340; 430, 440; 130*, 140*; 230*, 240*; 330*, 340*) extending inwardly from the peripheral border (100A; 200A; 300A; 400A; 100A*; 200A*; 300A*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*), along the third and fourth lateral sides (103, 104; 203, 204; 303, 304; 403, 404; 103*, 104*; 203*, 204*; 303*, 304*), the first and second lateral grooves (130, 140; 230, 240; 330, 340; 430, 440; 130*, 140*; 230*, 240*; 330*, 340*) being each configured to receive the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*), respectively, of another pallet module (10; 20; 30; 40; 10*; 20*; 30*) of the assortment, so that the first, respectively second lateral flange (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) of said other pallet module (10; 20; 30; 40; 10*; 20*; 30*) nests within the first, respectively second lateral groove (130, 140; 230, 240; 330, 340; 430, 440; 130*, 140*; 230*, 240*; 330*, 340*) to form the nested pallet assembly (1000; 1000*).

10. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to claim 9, wherein each of the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*;

310*, 320*) exhibits at least one positioning notch (110A, 120A; 210A, 220A; 310A, 320A; 410A, 420A; 110A*, 120A*; 210A*, 220A*; 310A*, 320A*) formed along an outer edge of the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*),

and wherein each of the first and second lateral grooves (130, 140; 230, 240; 330, 340; 430, 440; 130*, 140*; 230*, 240*; 330*, 340*) exhibits at least one protrusion (130A, 140A; 230A, 240A; 330A, 340A; 430A, 440A; 130A*, 140A*; 230A*, 240A*; 330A*, 340A*) configured to mate with the at least one positioning notch (110A, 120A; 210A, 220A; 310A, 320A; 410A, 420A; 110A*, 120A*; 210A*, 220A*; 310A*, 320A*) provided of the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) of another pallet module (10; 20; 30; 40; 10*; 20*; 30*) of the assortment.

11. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to claim 9 or 10, wherein the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) are offset sideways with respect to the first and second lateral sides (101, 102; 201, 202; 301, 302; 401, 402; 101*, 102*; 201*, 202*; 301*, 302*), and wherein the first and second lateral flanges (110, 120; 210, 220; 310, 320; 110*, 120*; 210*, 220*; 310*, 320*) are optionally joined together to form an L-shaped lateral flange.

12. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to any one of claims 9 to 12, wherein the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) are formed integrally with the main structural body (100; 200; 300; 400; 100*; 200*; 300*), and wherein the main structural body (100; 200; 300; 400; 100*; 200*; 300*) and the first and second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*) are preferably made of plastic.

13. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to claim 12, wherein each pallet modules (10; 20; 30; 40; 10*; 20*; 30*) further comprises a plurality of reinforcing elements (161, 162; 261, 262; 361, 362; 461, 462; 161*, 162*; 261*, 262*; 361*, 362*) extending within the main structural body (100; 200; 300; 400; 100*; 200*; 300*) and the first and/or second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*),

which reinforcing elements (161, 162; 261, 262;

361, 362; 461, 462; 161*, 162*; 261*, 262*; 361*, 362*) are in particular made of a metal, such as aluminium, of a metal alloy, or of a composite material,

and wherein the reinforcing elements (161, 162; 261, 262; 361, 362; 461, 462; 161*, 162*; 261*, 262*; 361*, 362*) are preferably longitudinal rod elements extending between upper and lower surfaces of the main structural body (100; 200; 300; 400; 100*; 200*; 300*) and of the first and/or second lateral flanges (110, 120; 210, 220; 310, 320; 410, 420; 110*, 120*; 210*, 220*; 310*, 320*).

14. The assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to any one of claims 9 to 13, wherein the securing system (51-54) of each pallet module (10; 20; 30; 40; 10*; 20*; 30*) includes:

- first and second toggle latch components (51, 52) arranged in the vicinity of the first and second lateral sides (101, 102; 201, 202; 301, 302; 401, 402; 101*, 102*; 201*, 202*; 301*, 302*), respectively; and
- third and fourth toggle latch components (53, 54) arranged in the vicinity of the third and fourth lateral sides (103, 104; 203, 204; 303, 304; 403, 404; 103*, 104*; 203*, 204*; 303*, 304*), respectively,

the first and second toggle latch components (51, 52) being each configured to cooperate and interlock with the third and fourth toggle latch components (53, 54), respectively, of another pallet module (10; 20; 30; 40; 10*; 20*; 30*) of the assortment, to form releasable toggle latches (500) allowing the pallet module (10; 20; 30; 40; 10*; 20*; 30*) to be secured to or released from said other pallet module (10; 20; 30; 40; 10*; 20*; 30*), and wherein the first to fourth toggle latch components (51-54) are preferably provided on the upper side (100B; 200B; 300B; 400B; 100B*; 200B*; 300B*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*) at least partly within recesses (151-154; 251-254; 351-354; 451-454; 151*-154*; 251*-254*; 351*-354*) formed below an upper surface of the upper side (100B; 200B; 300B; 400B; 100B*; 200B*; 300B*) of the main structural body (100; 200; 300; 400; 100*; 200*; 300*).

15. A pallet assembly (1000; 1000*) built of multiple pallet modules (10; 20; 30; 40; 10*; 20*; 30*) selected from the assortment of pallet modules (10; 20; 30; 40; 10*; 20*; 30*) according to any one of the preceding claims, which pallet modules (10; 20; 30; 40; 10*; 20*; 30*) are nested within and interlocked with one another.

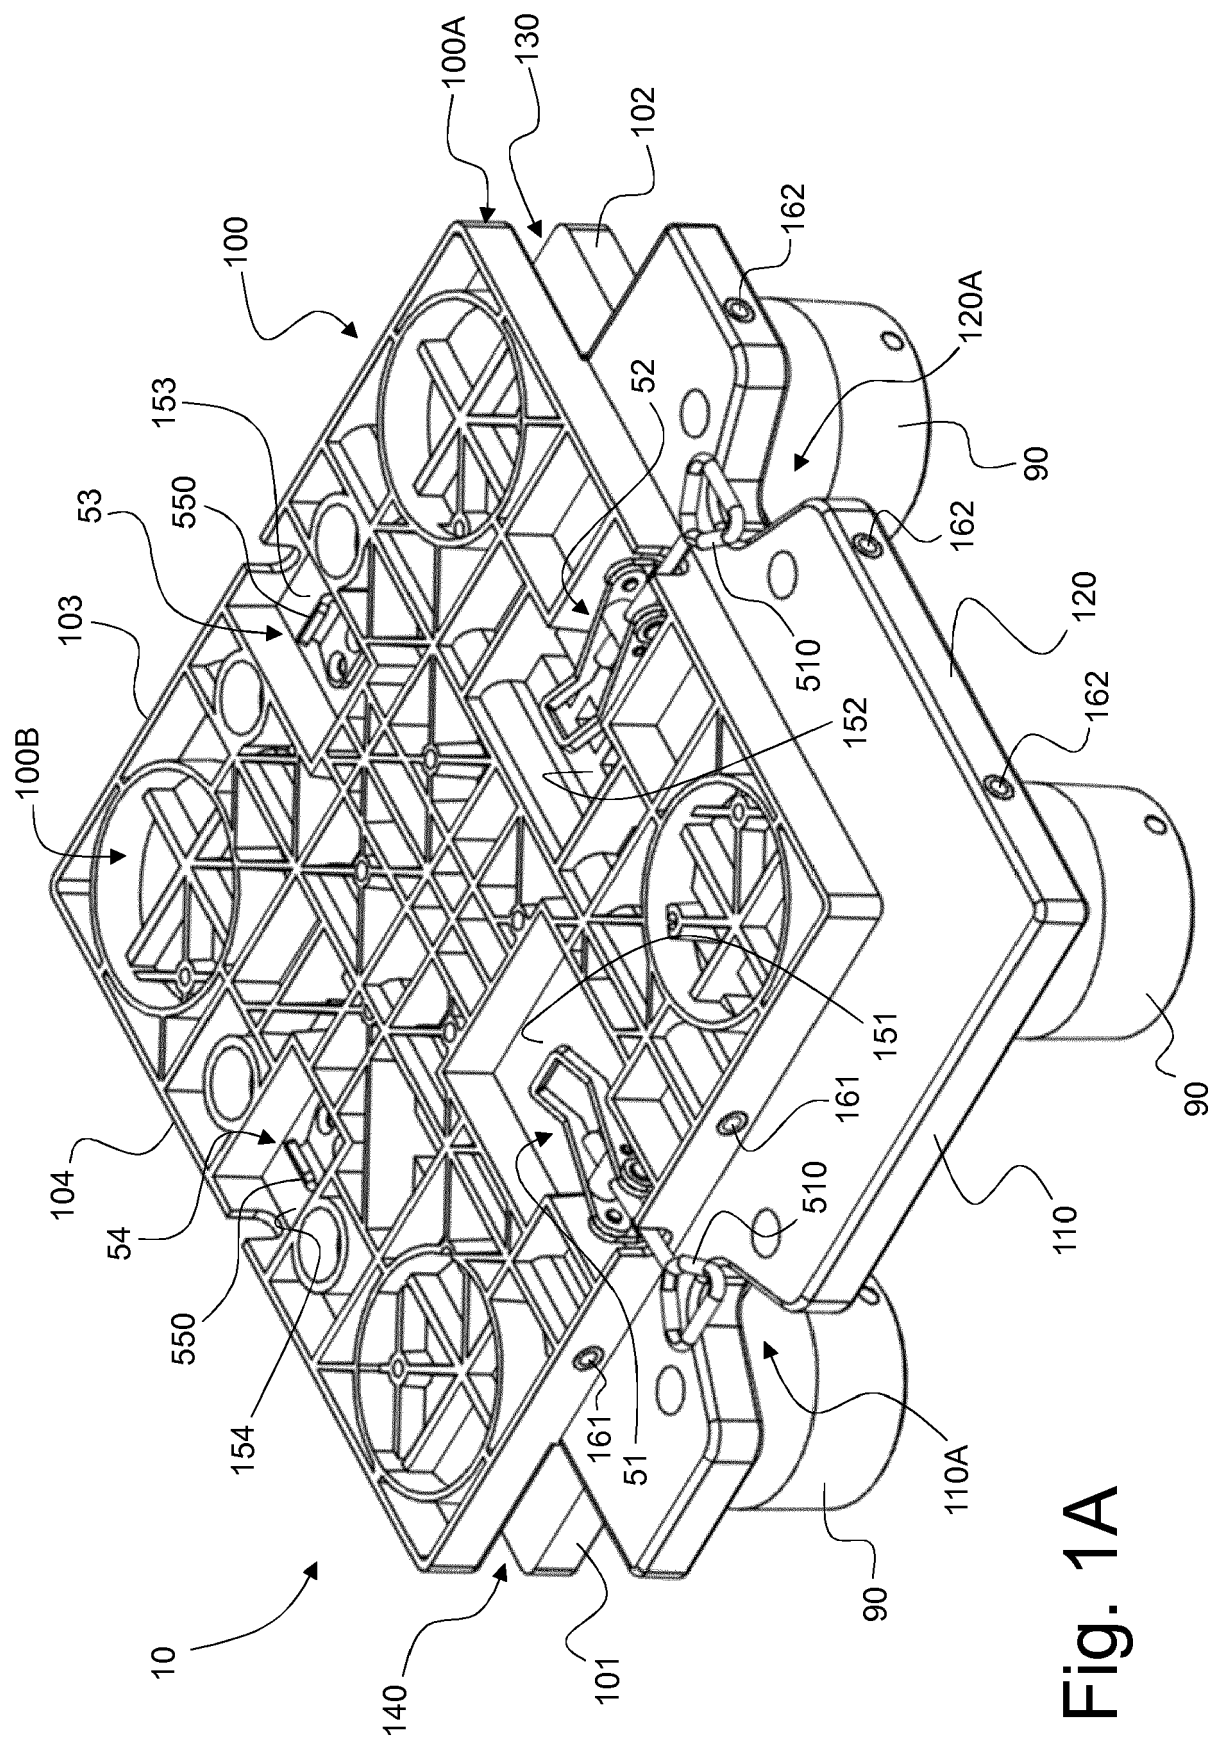


Fig. 1A

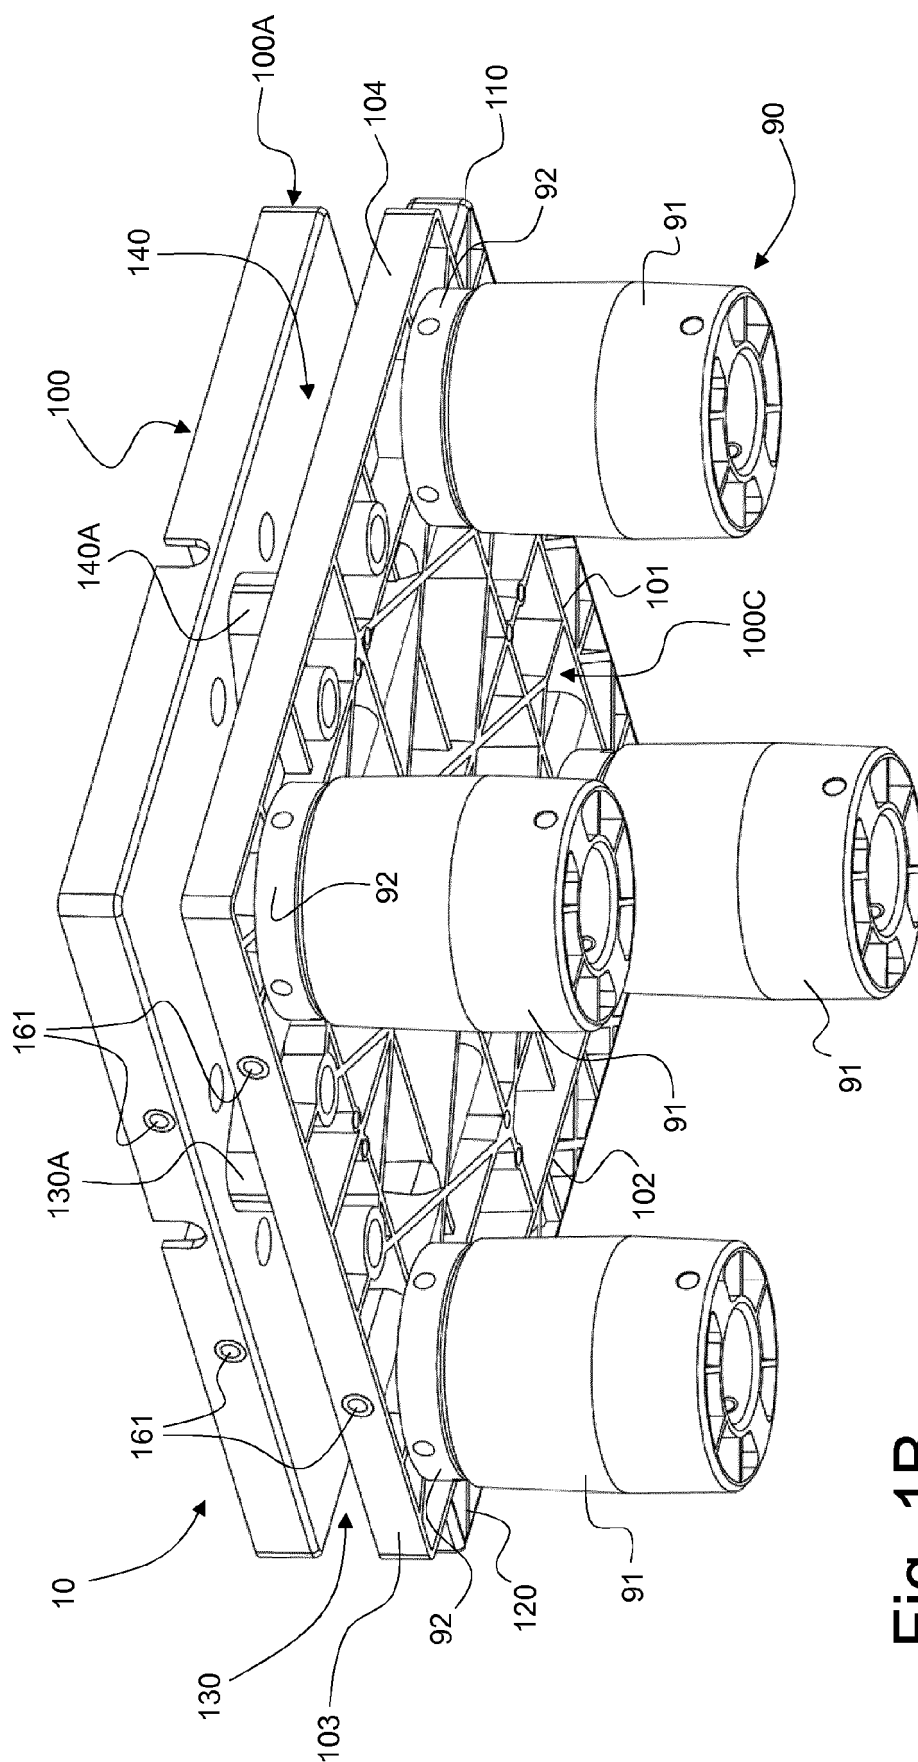


Fig. 1B

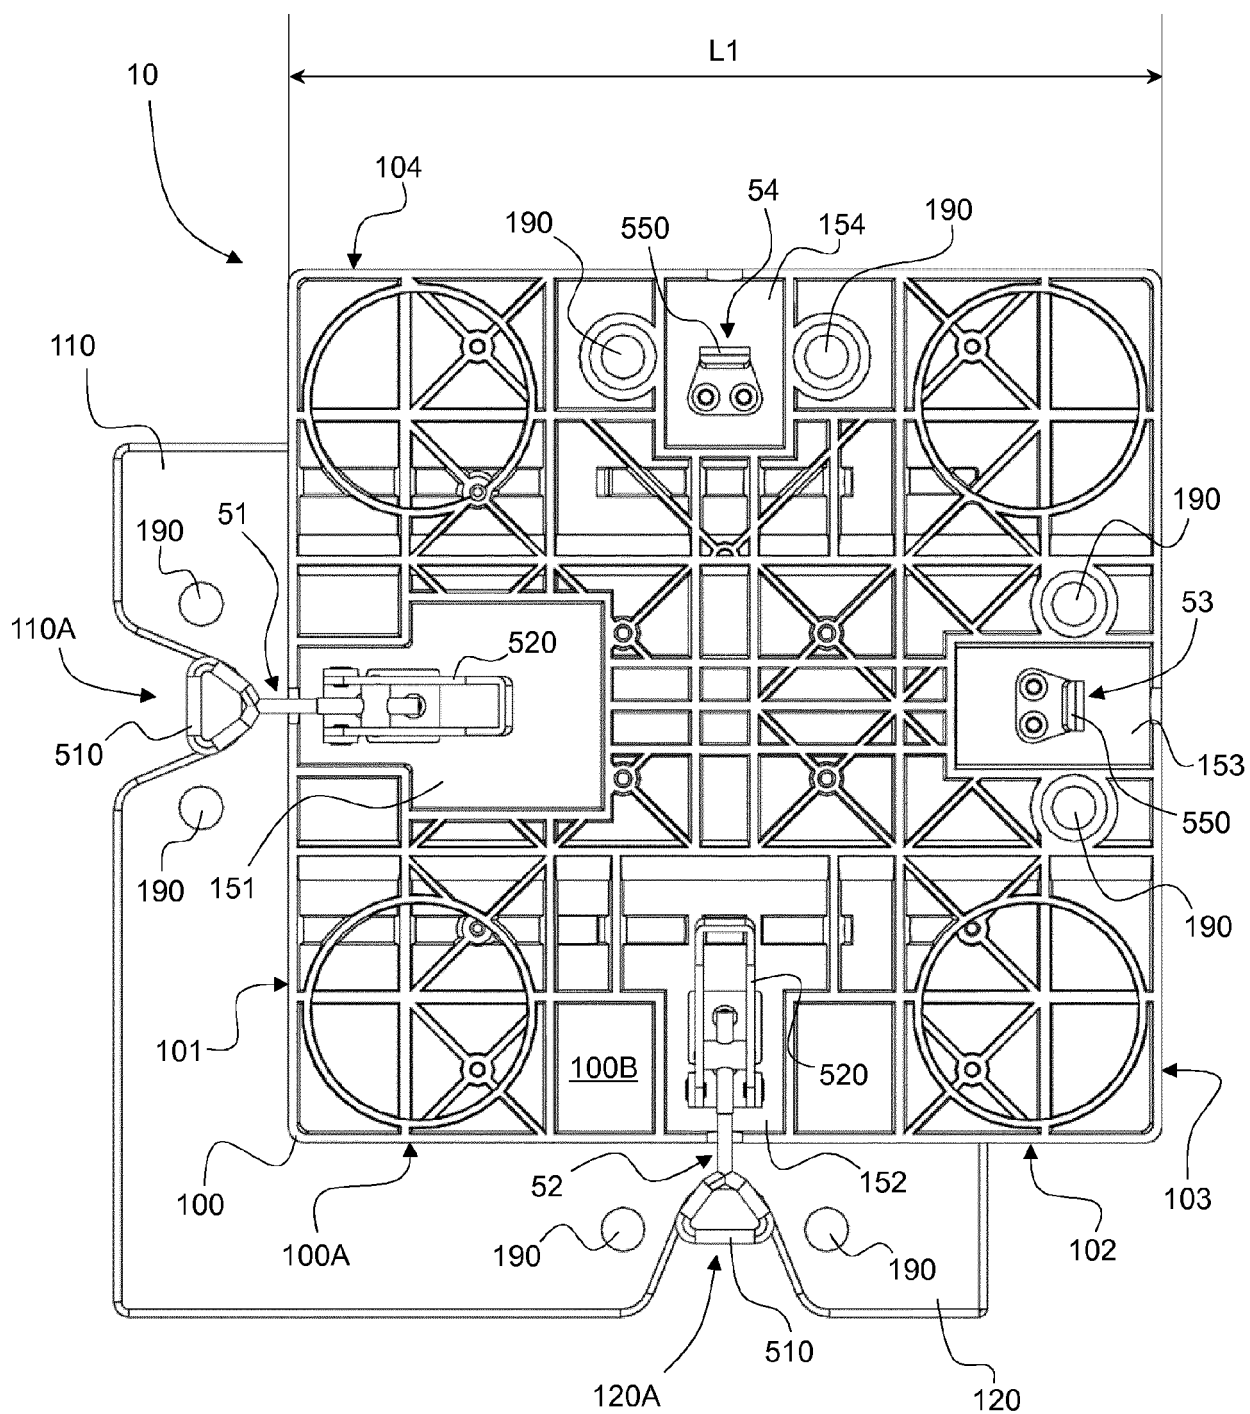


Fig. 1C

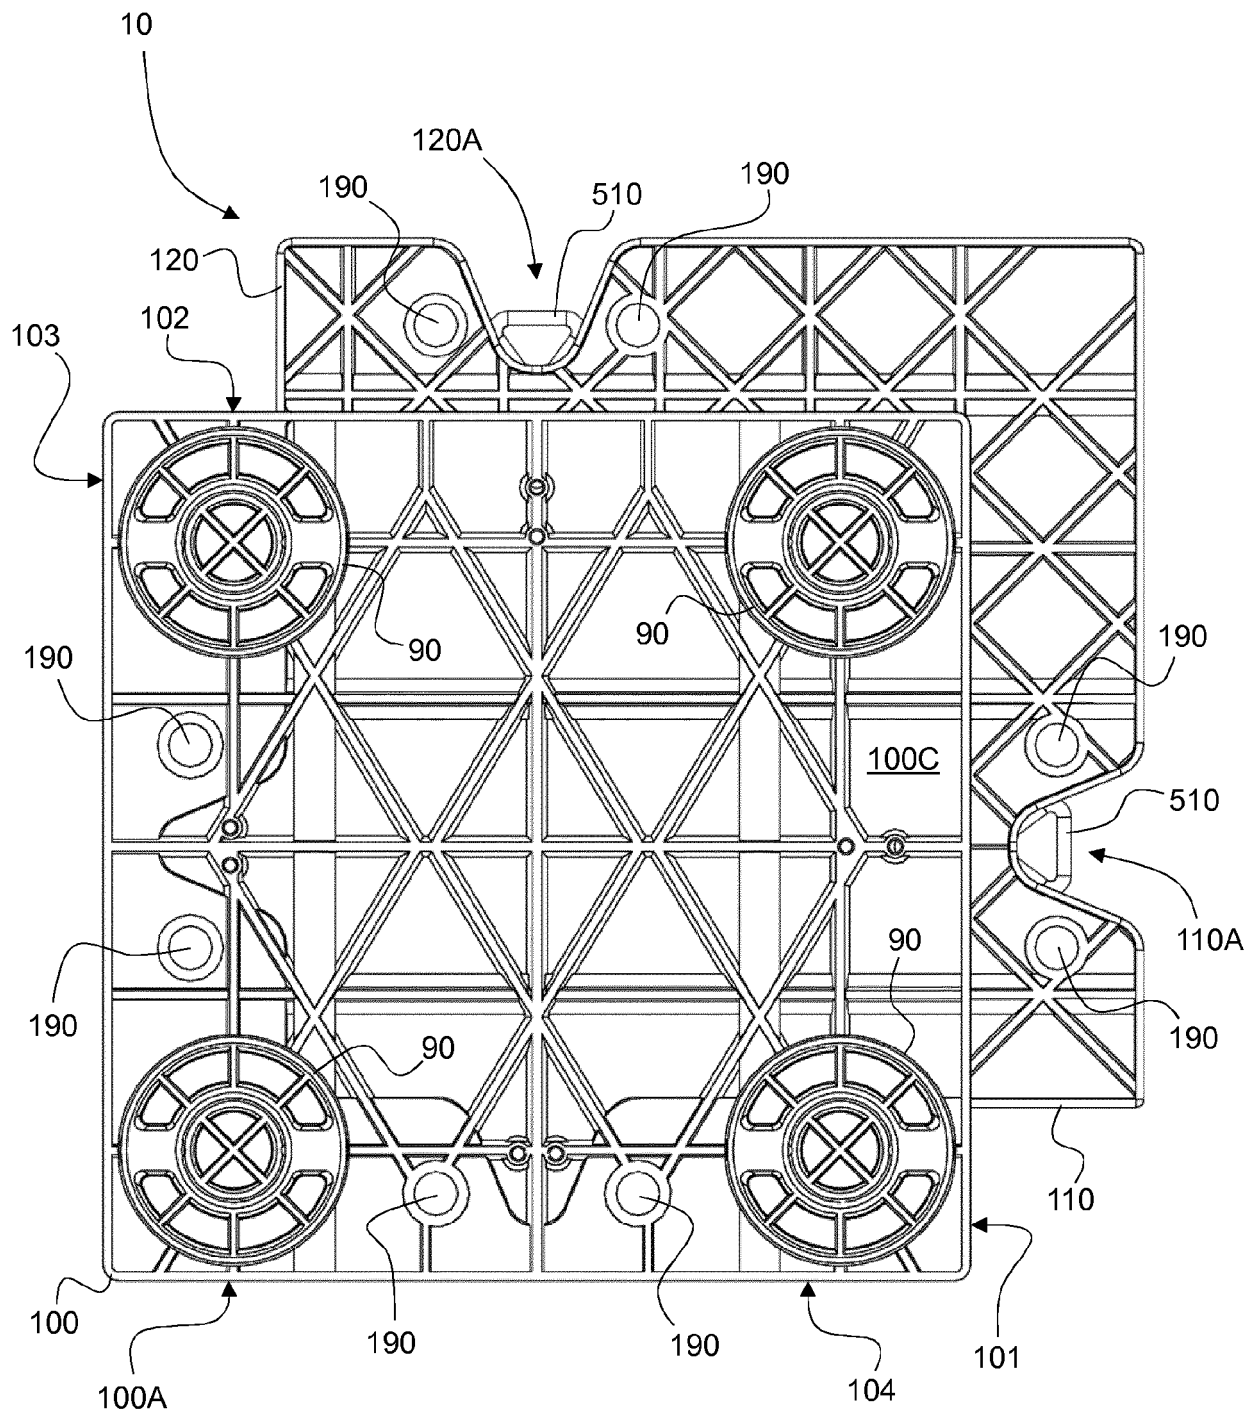


Fig. 1D

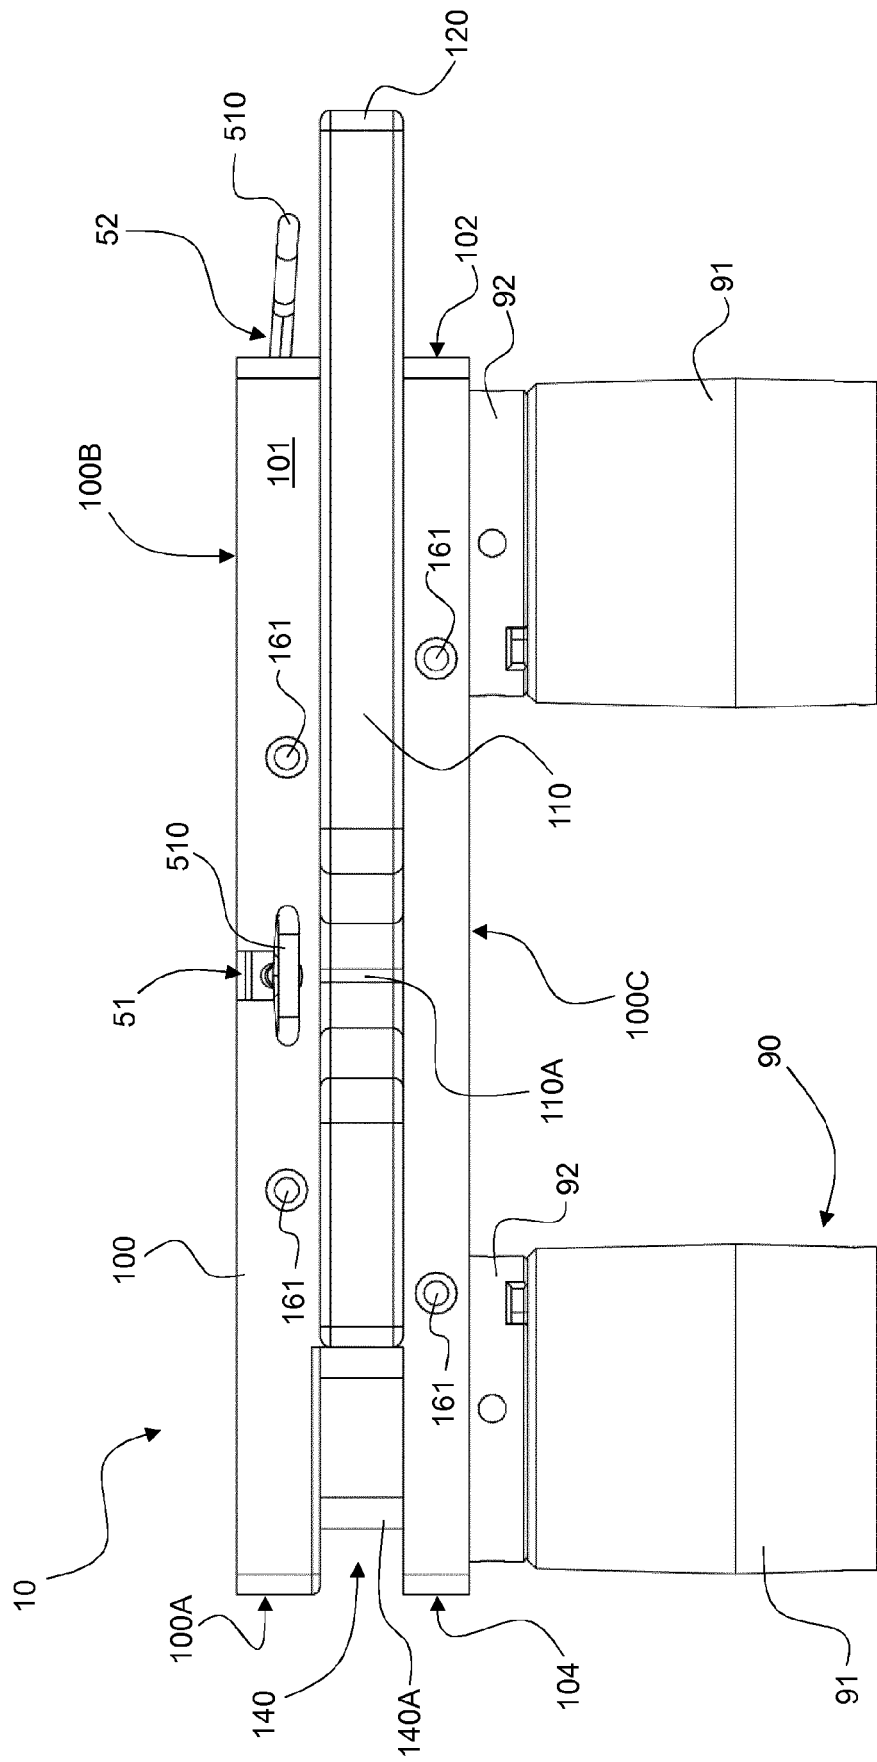


Fig. 1E

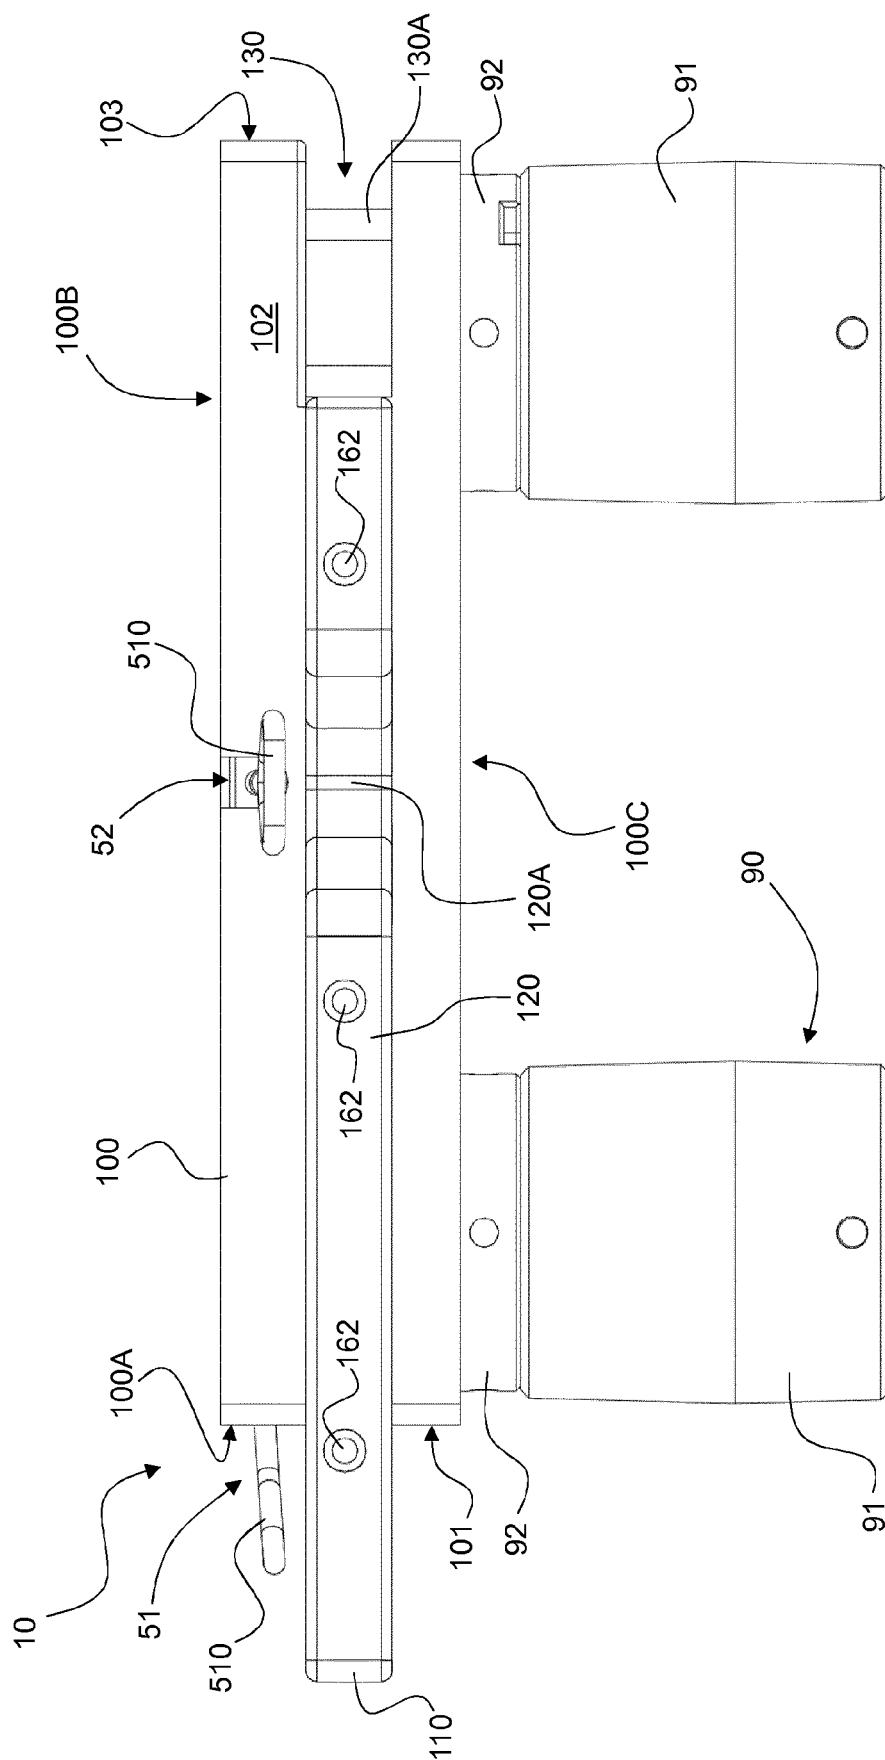


Fig. 1F

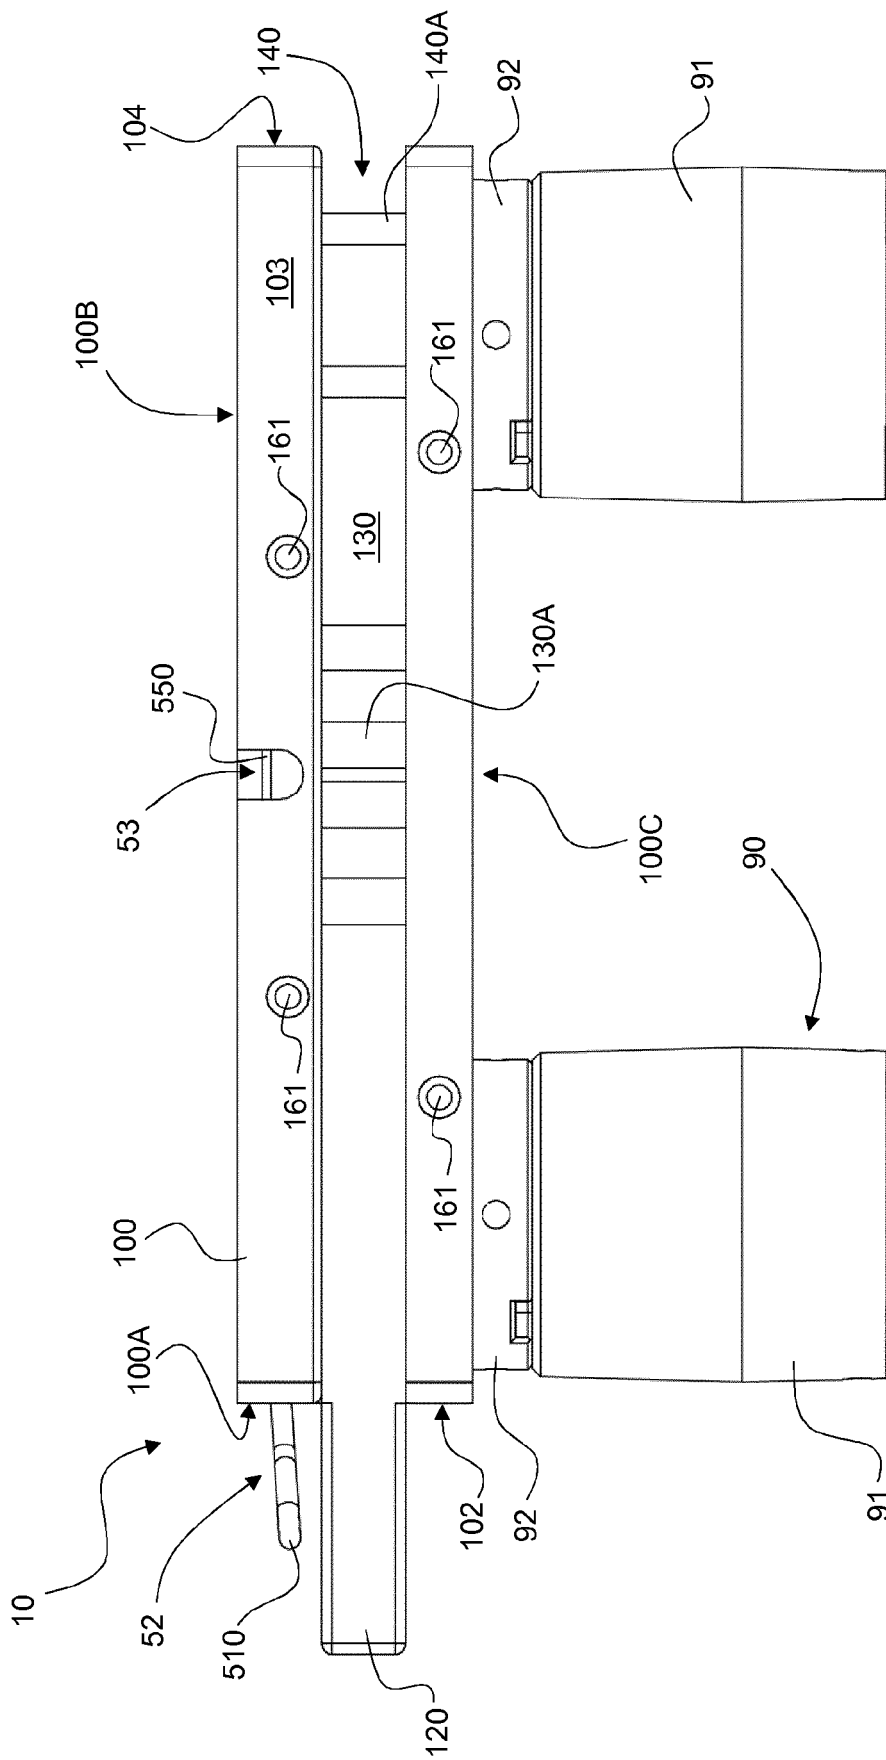


Fig. 1G

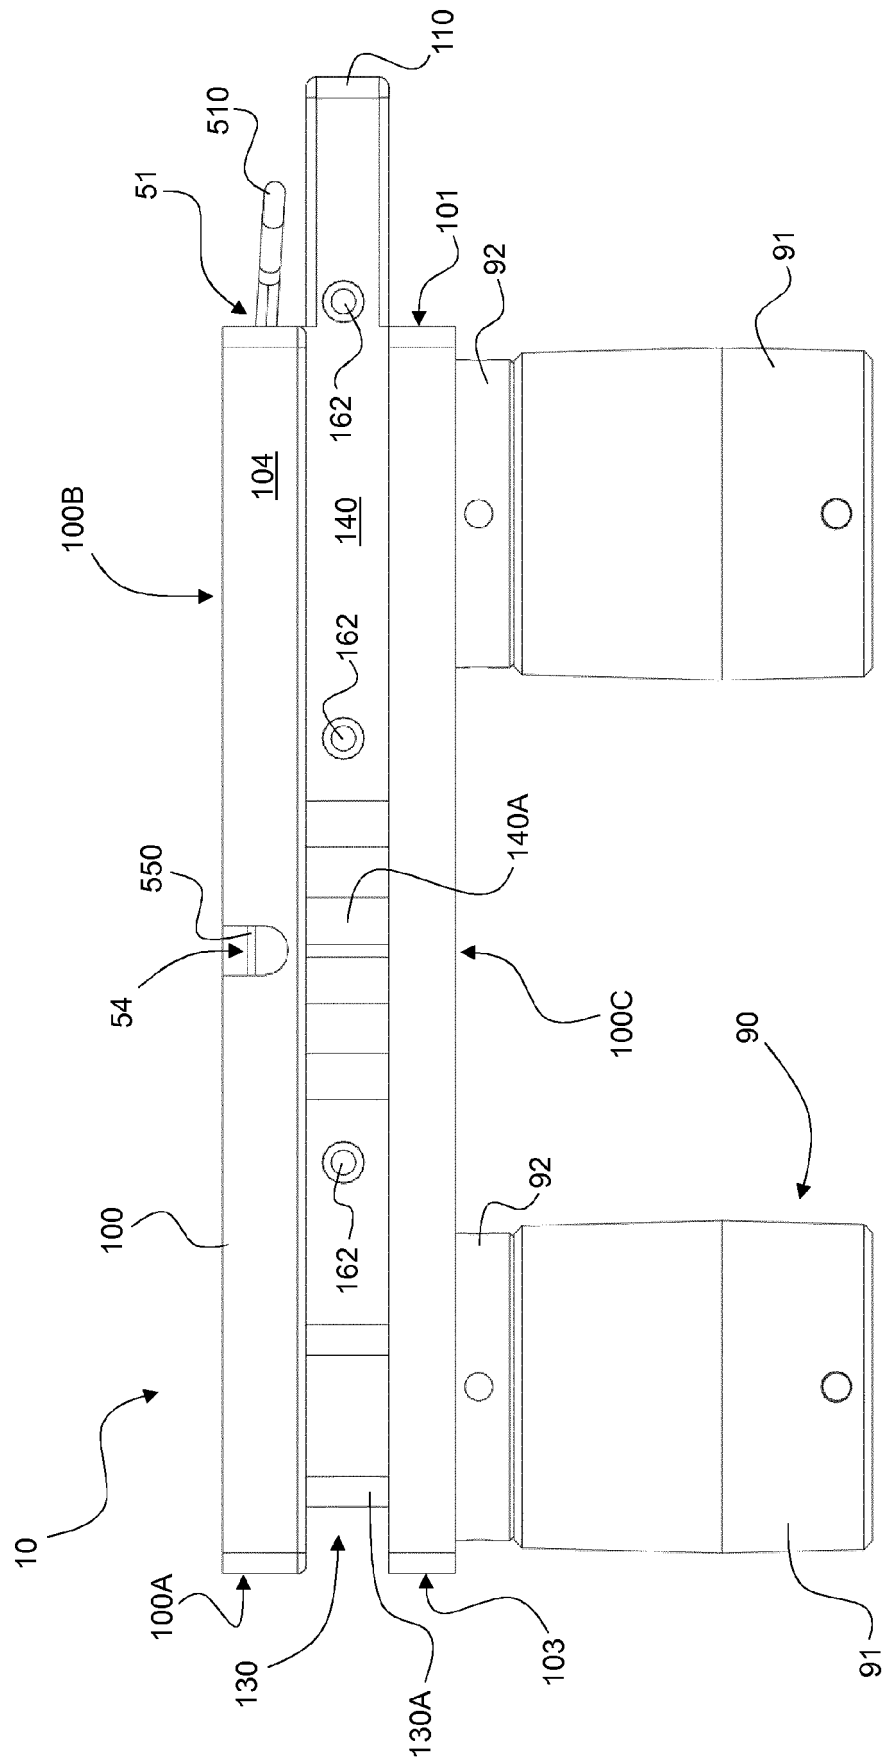
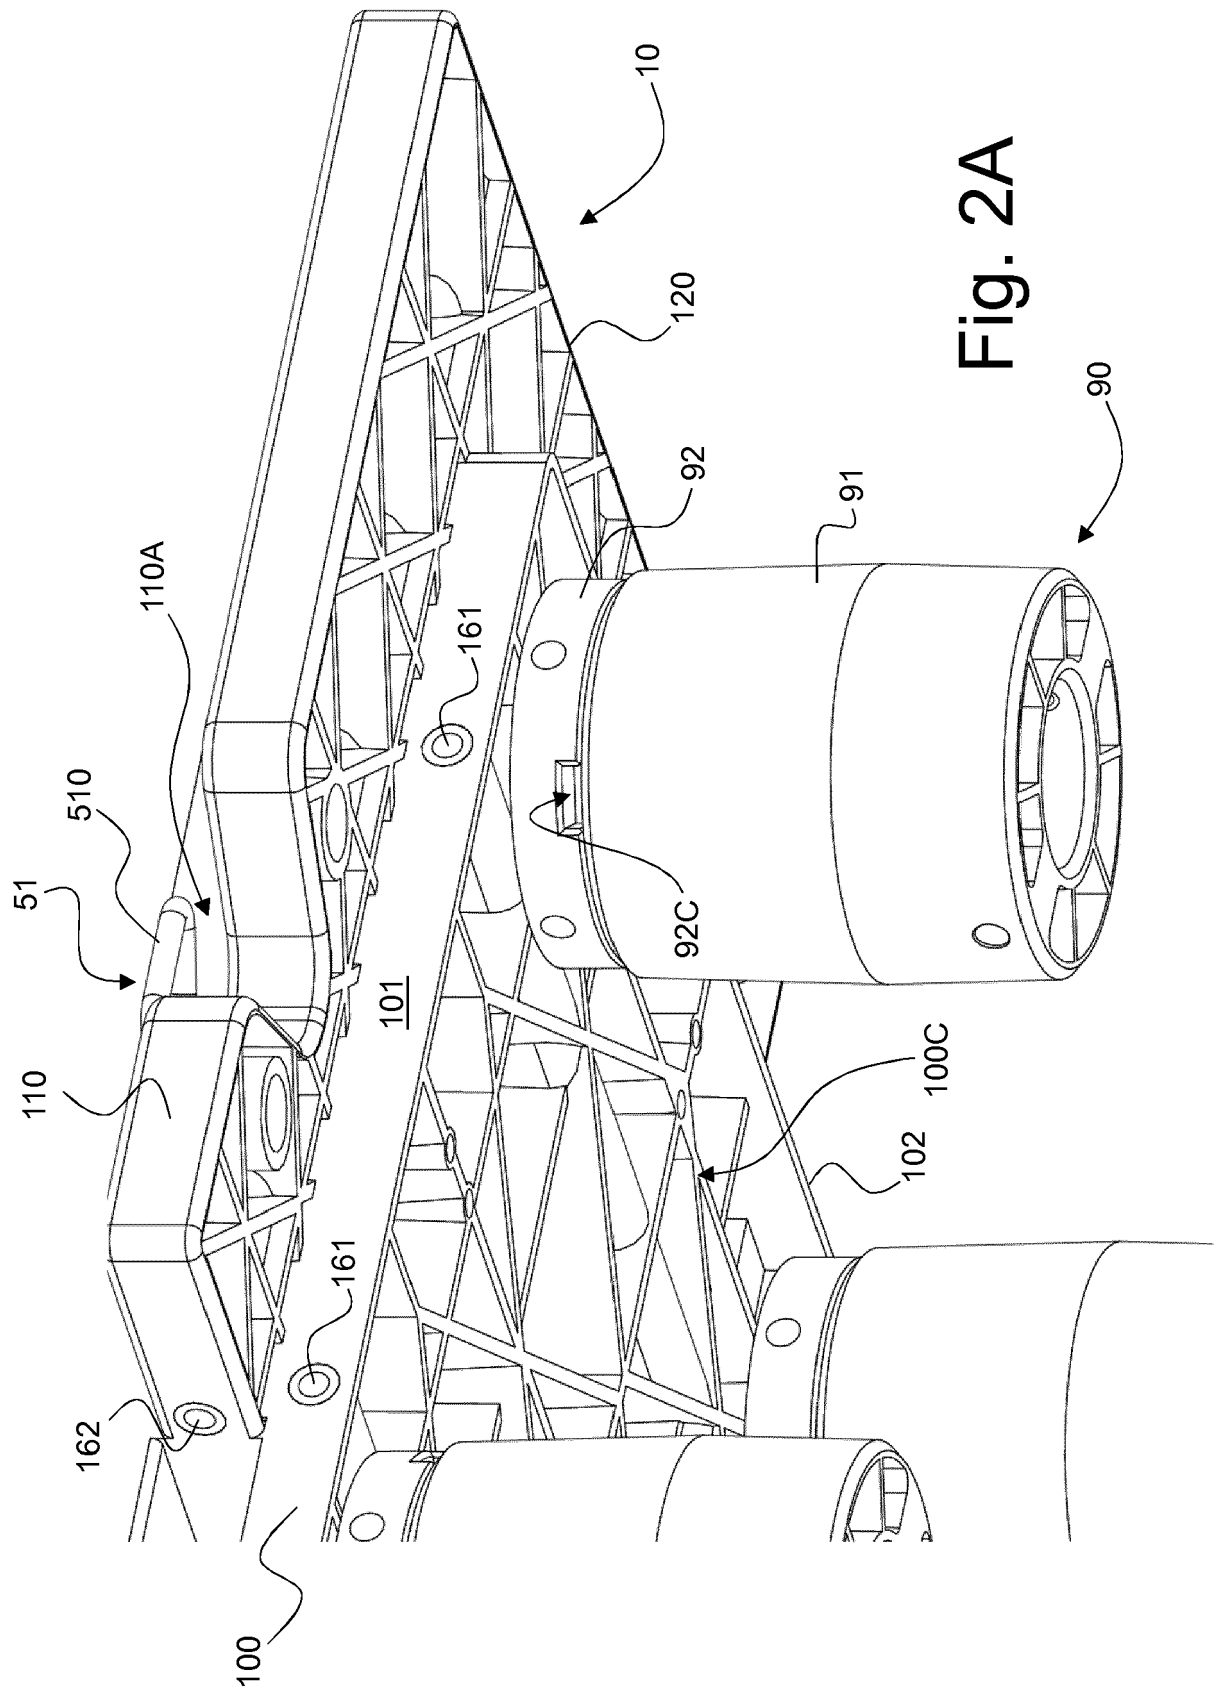


Fig. 1H



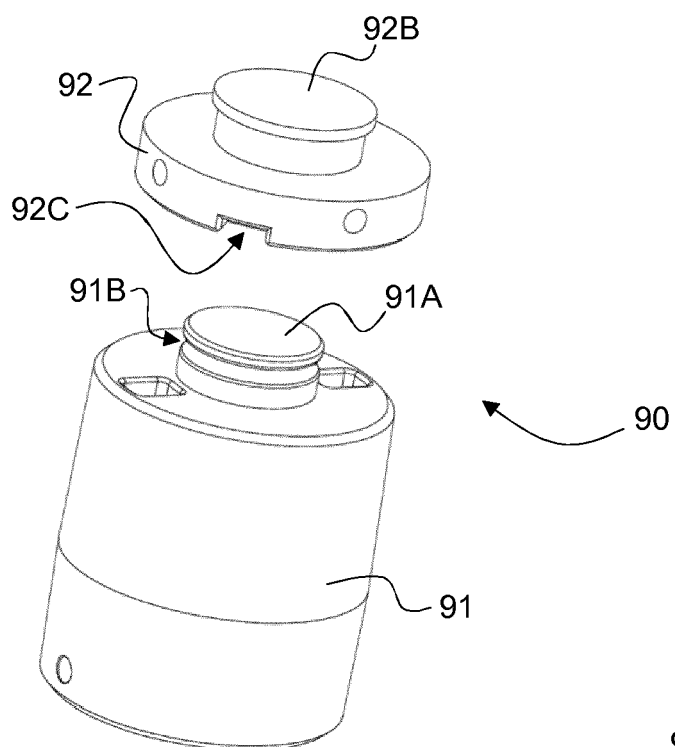


Fig. 2B

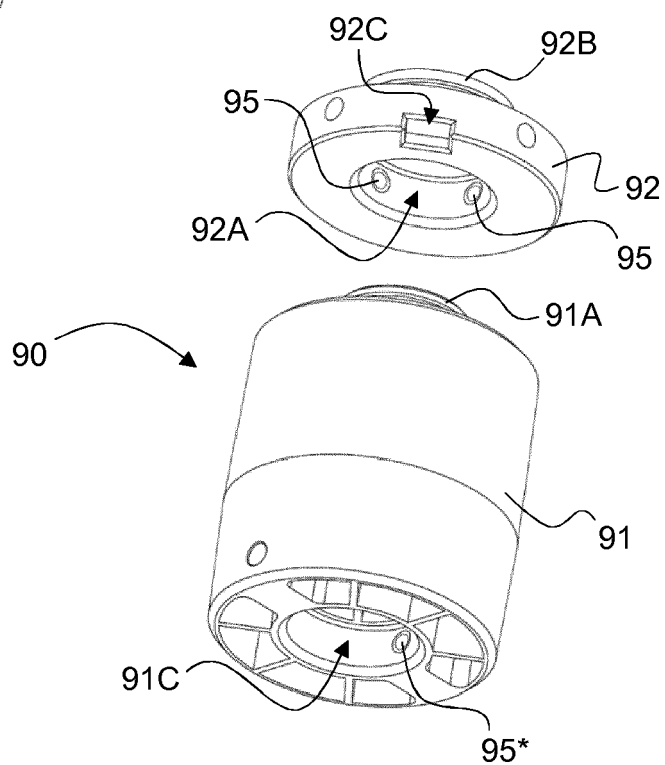


Fig. 2C

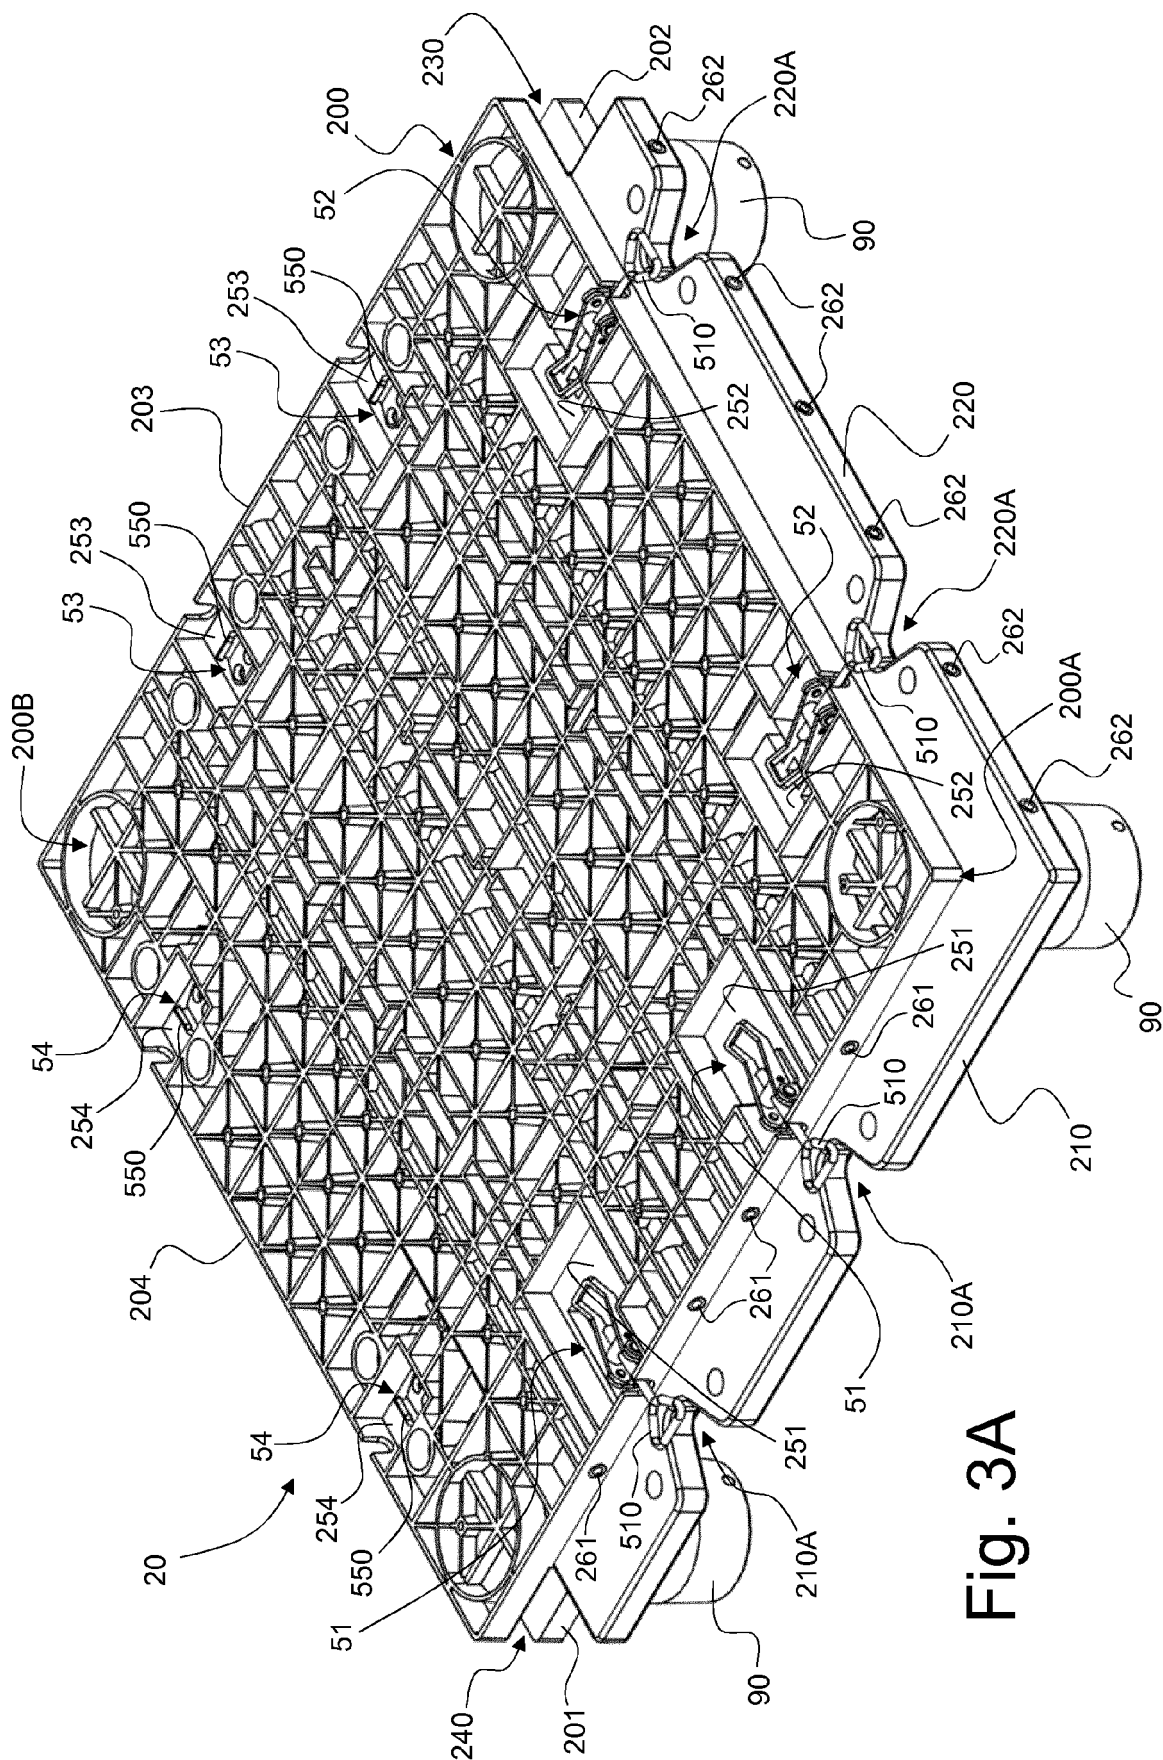


Fig. 3A

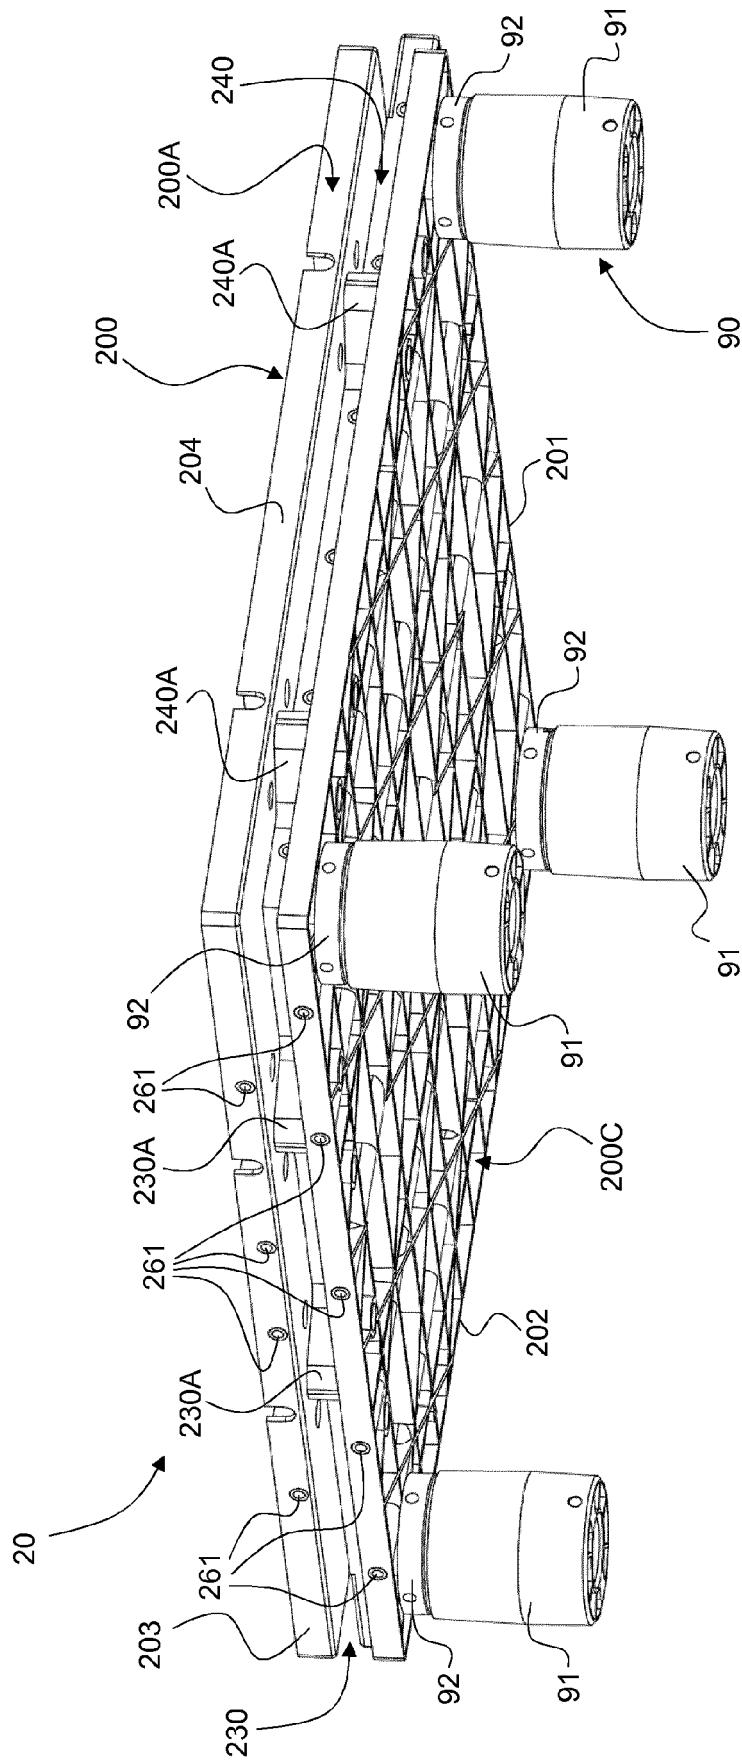


Fig. 3B

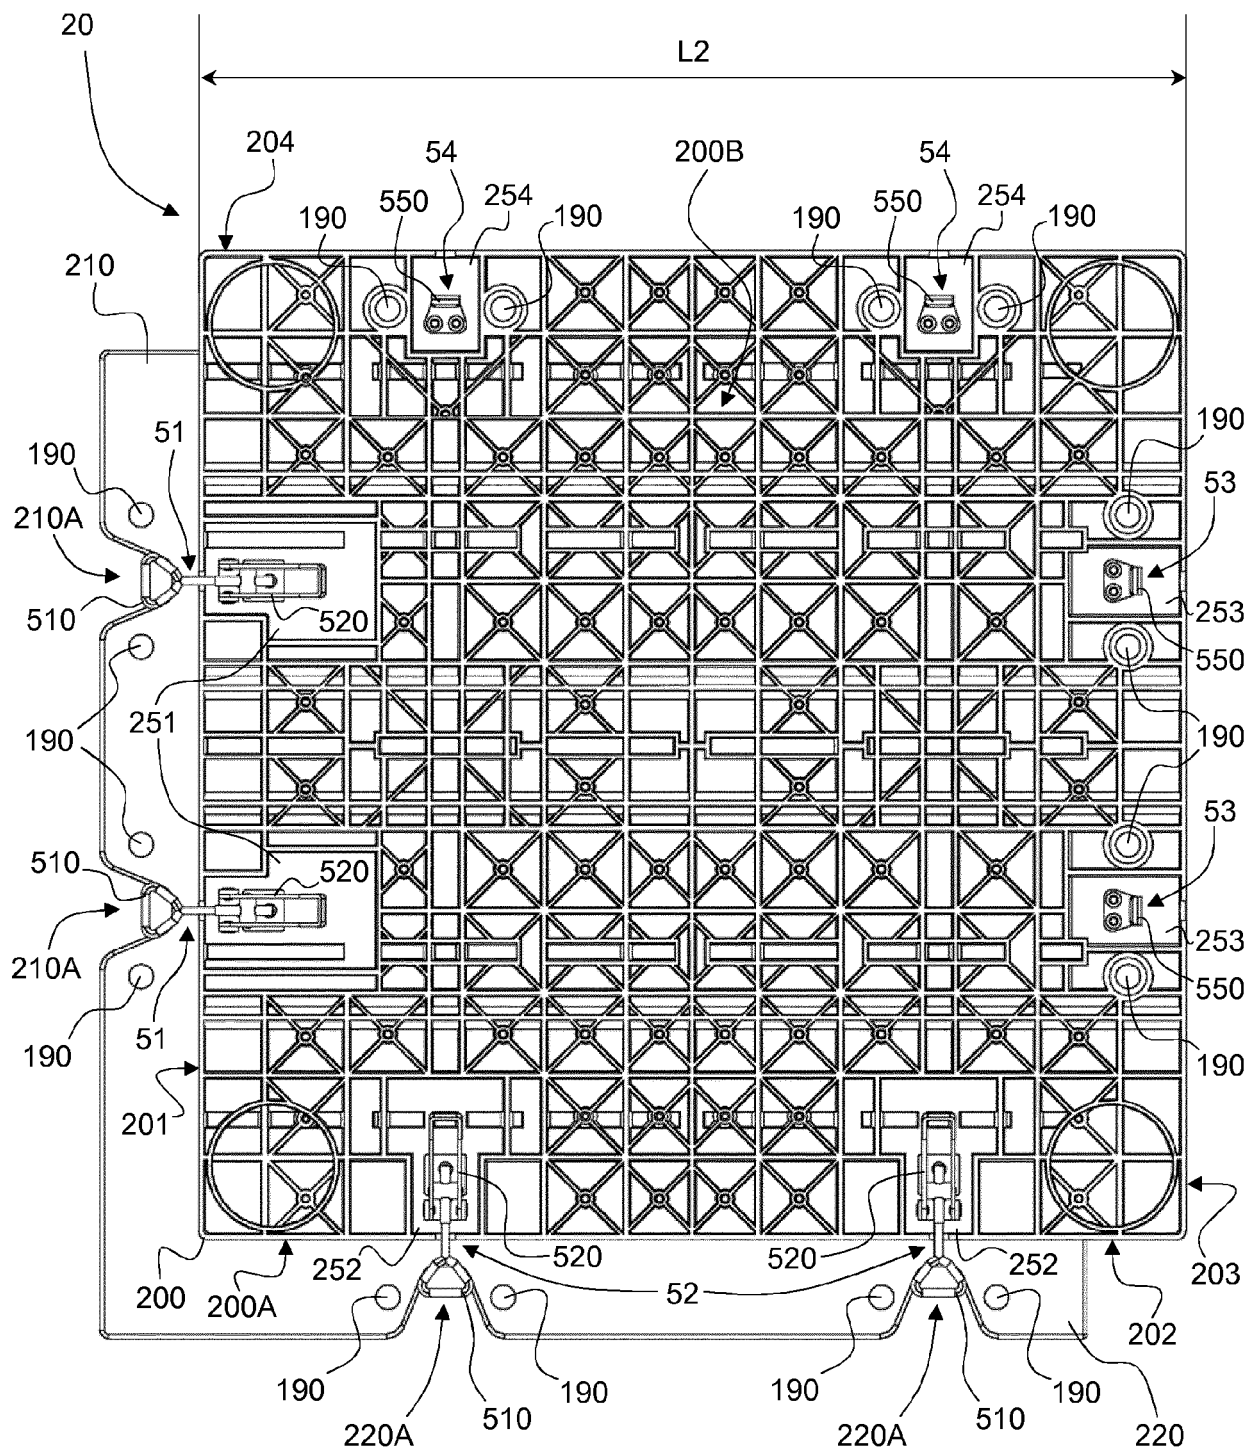


Fig. 3C

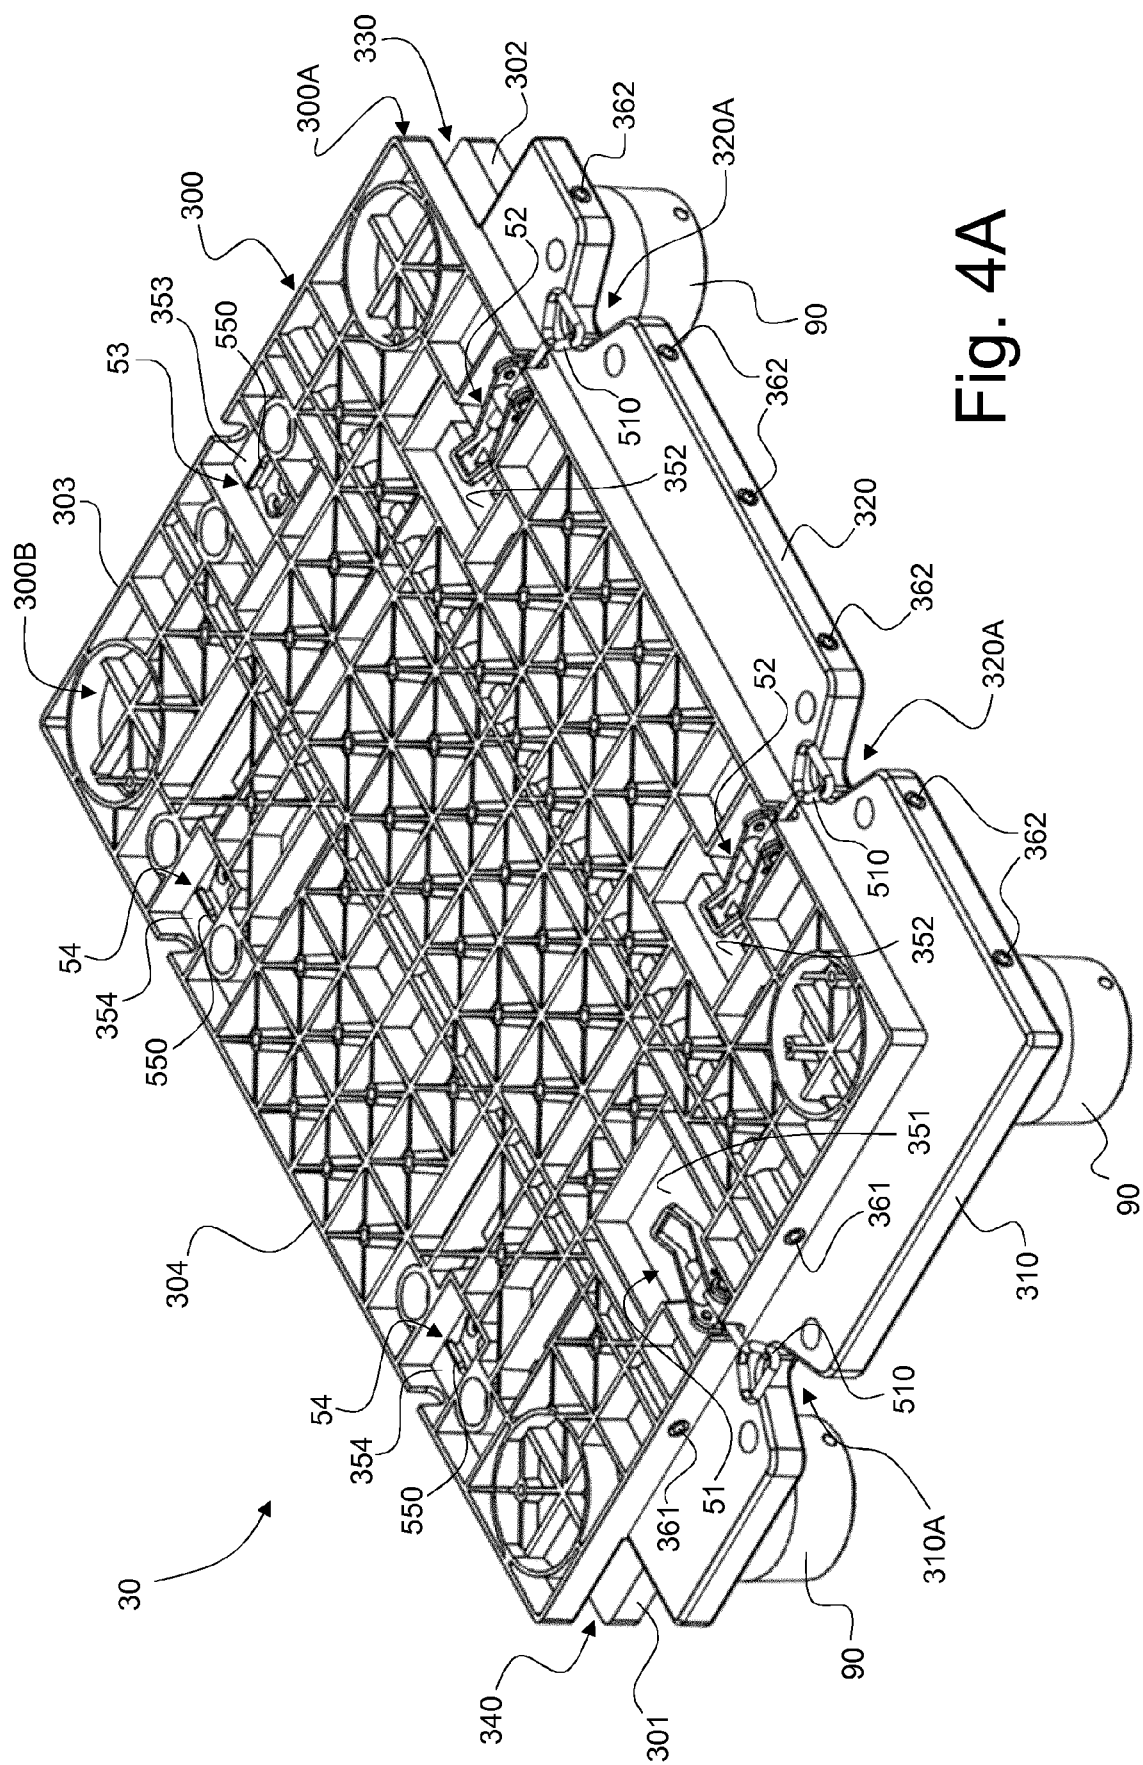


Fig. 4A

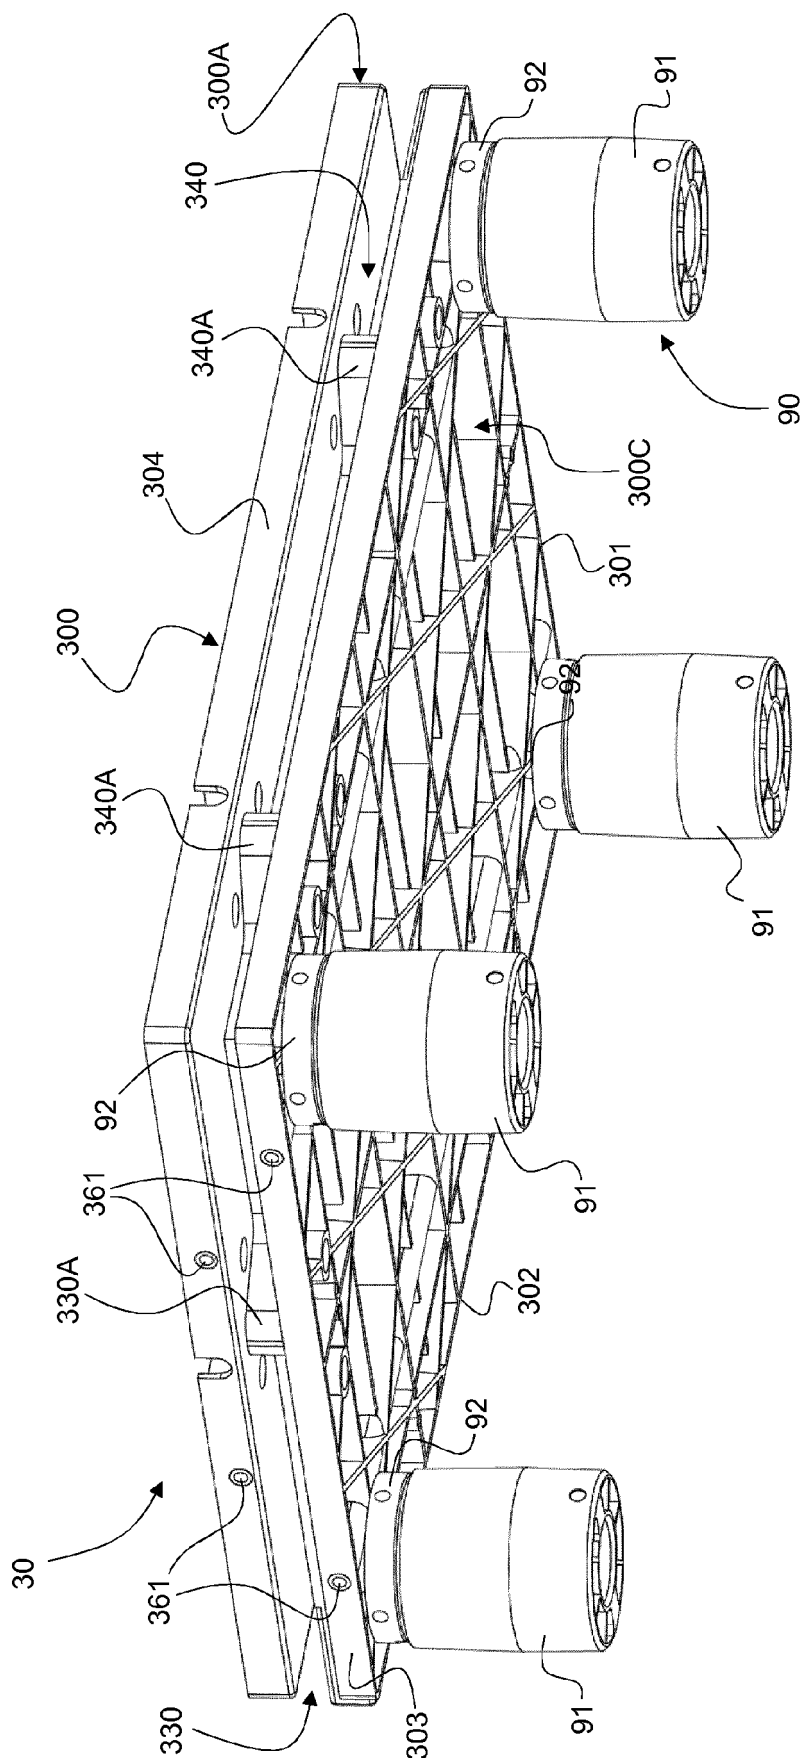


Fig. 4B

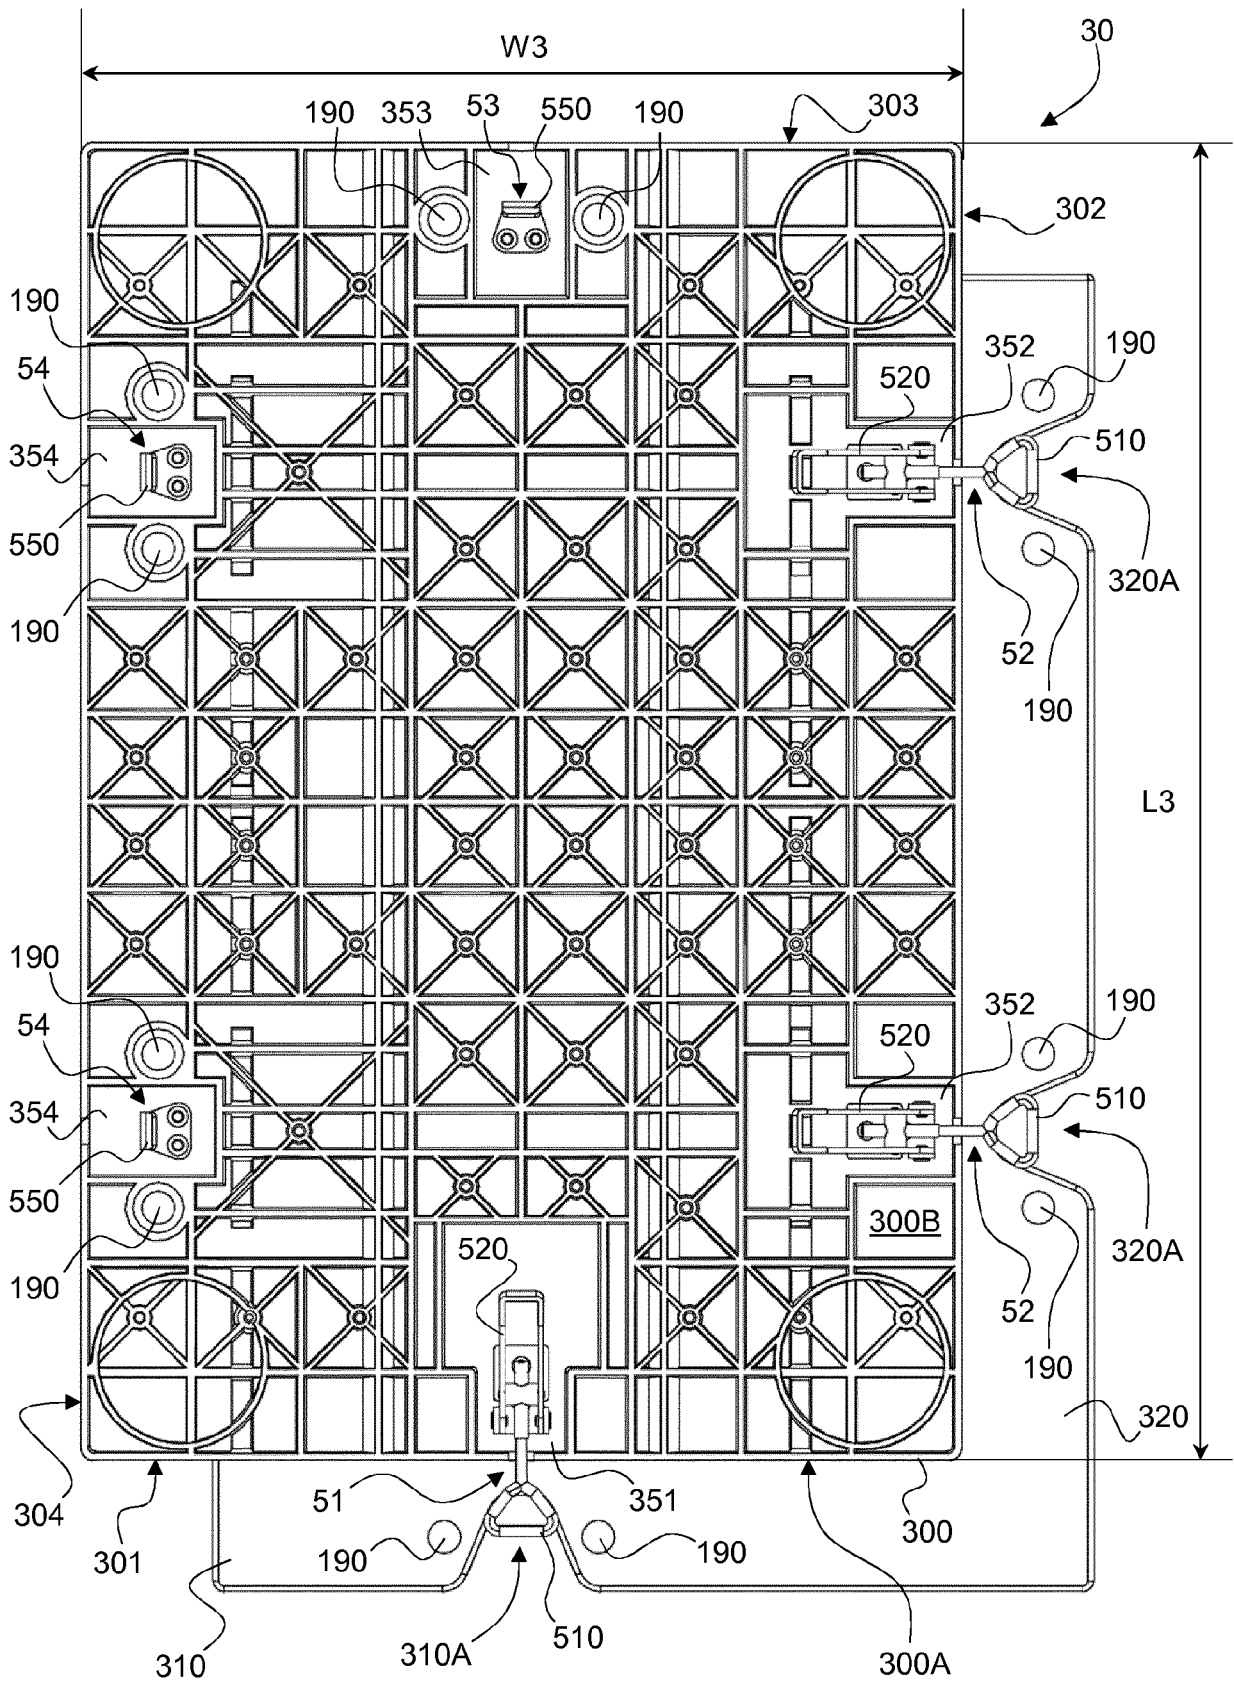


Fig. 4C

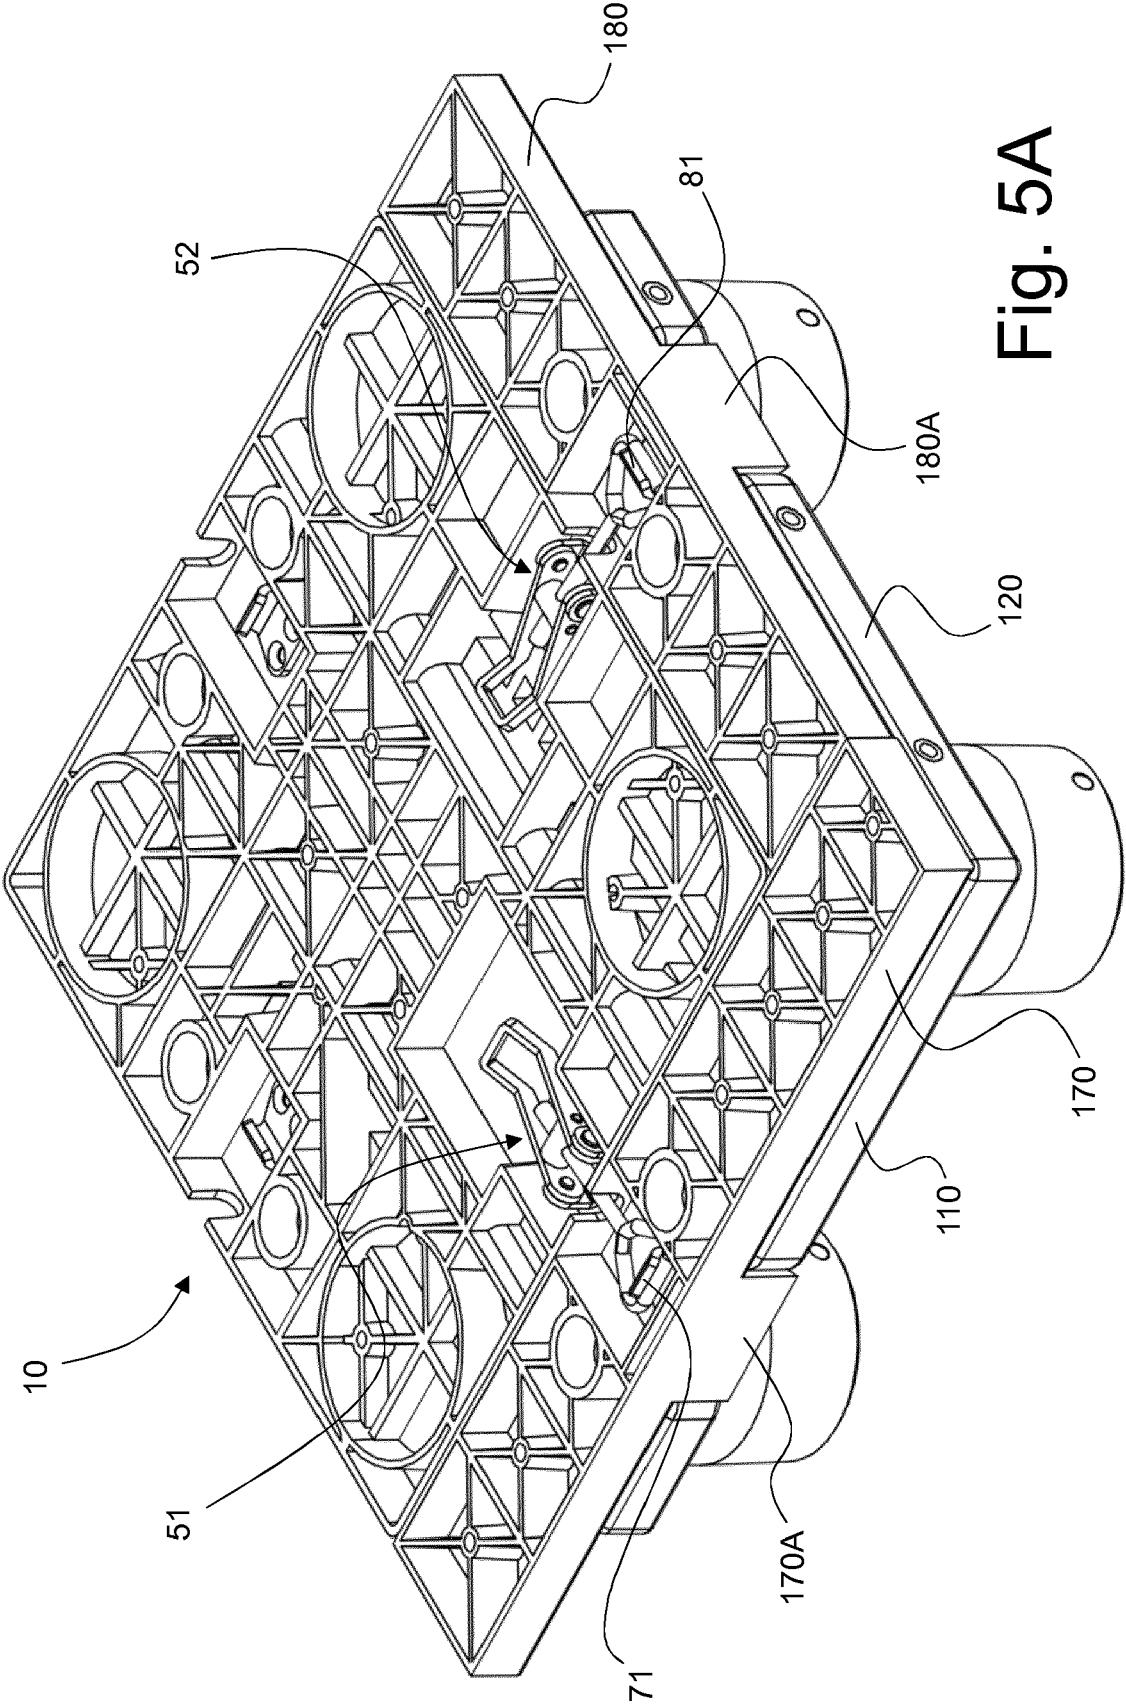


Fig. 5A

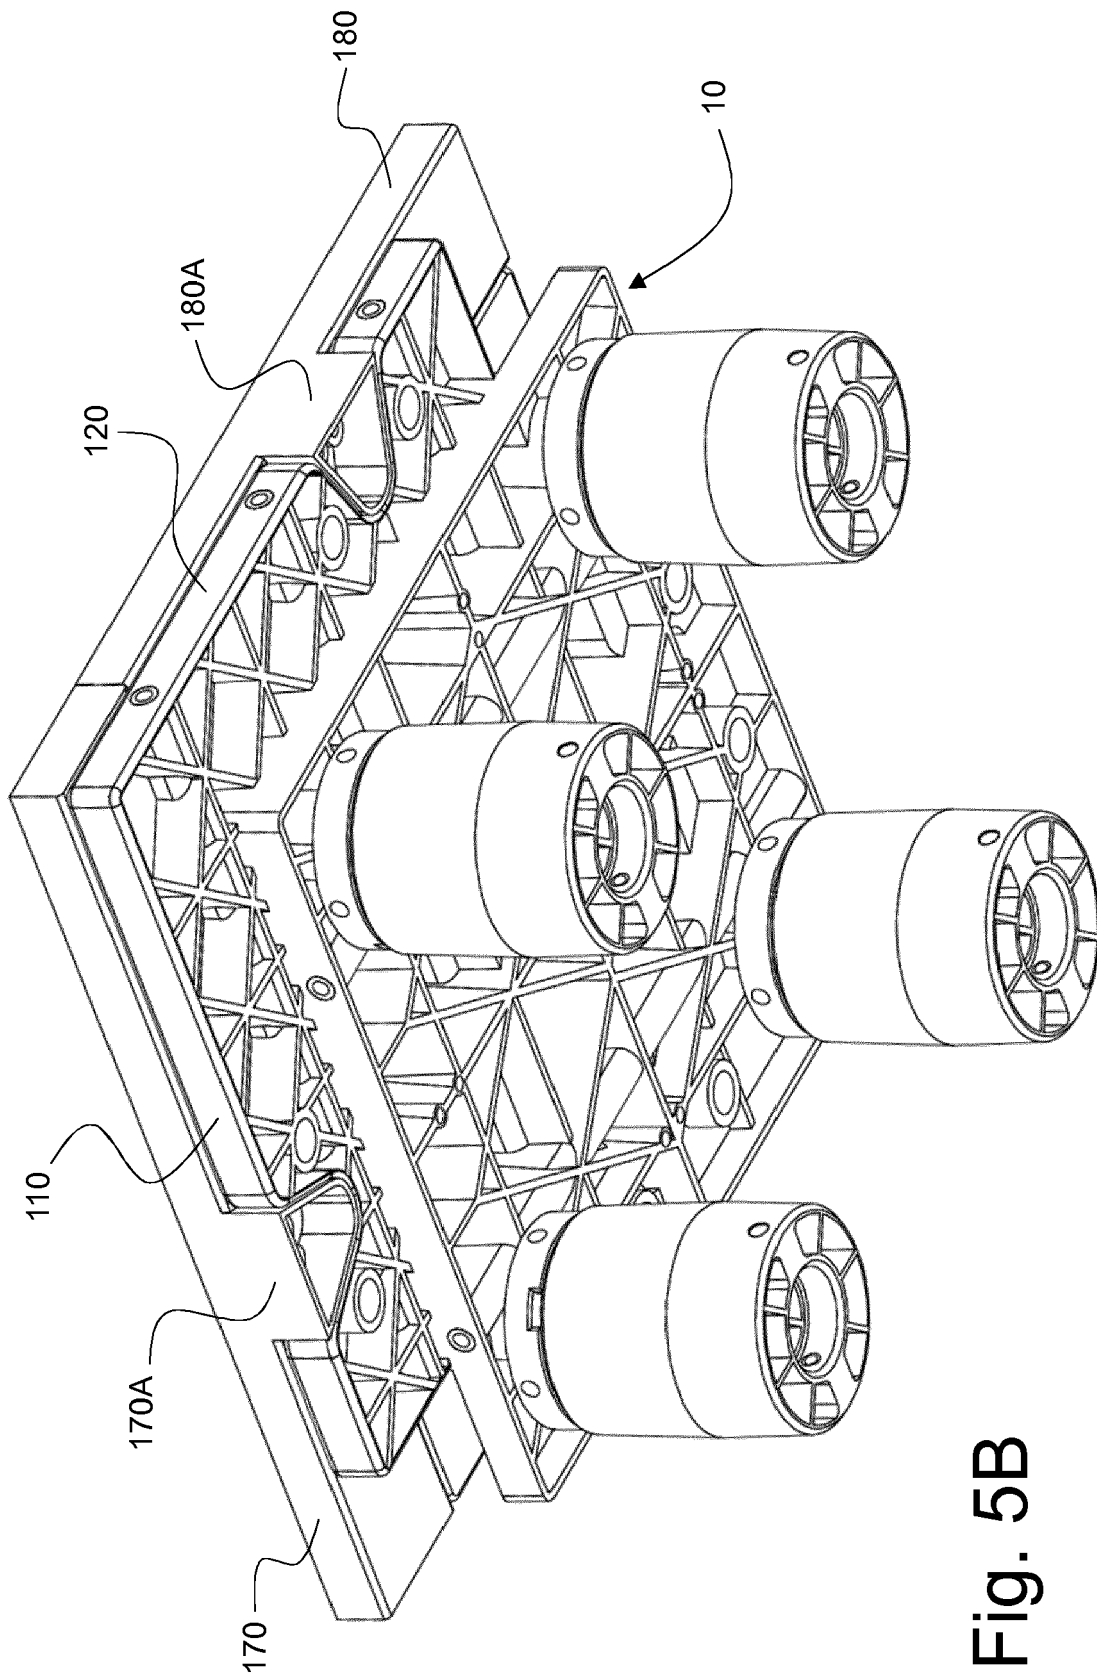
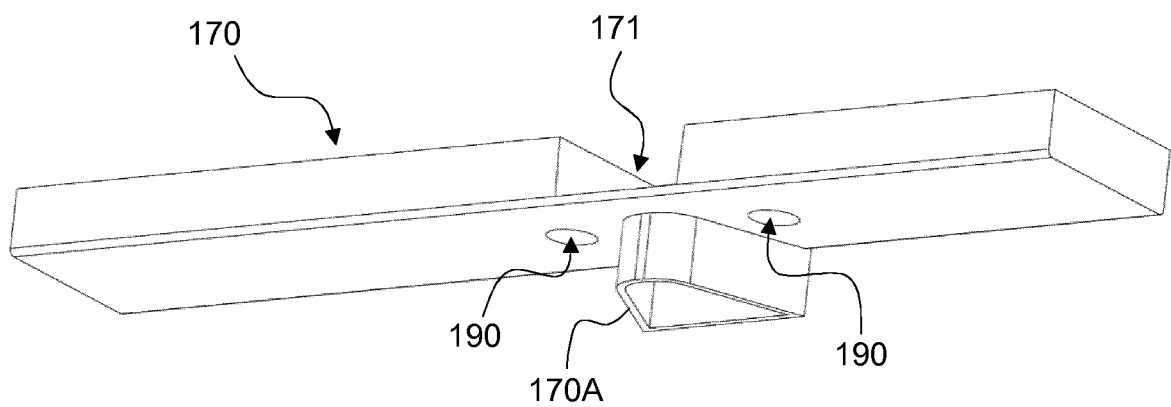
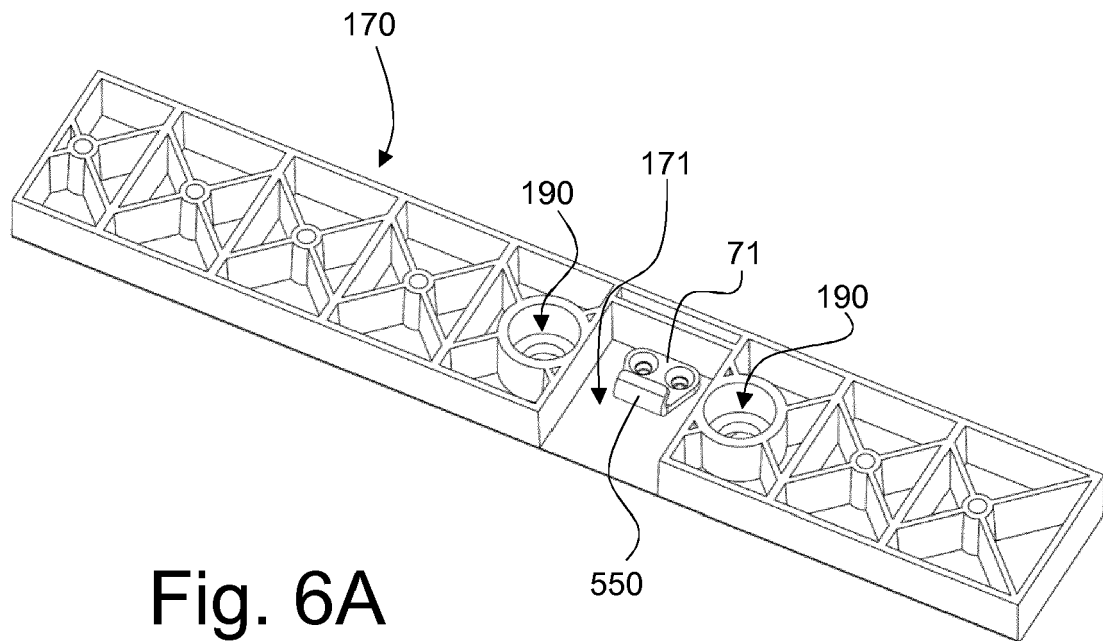
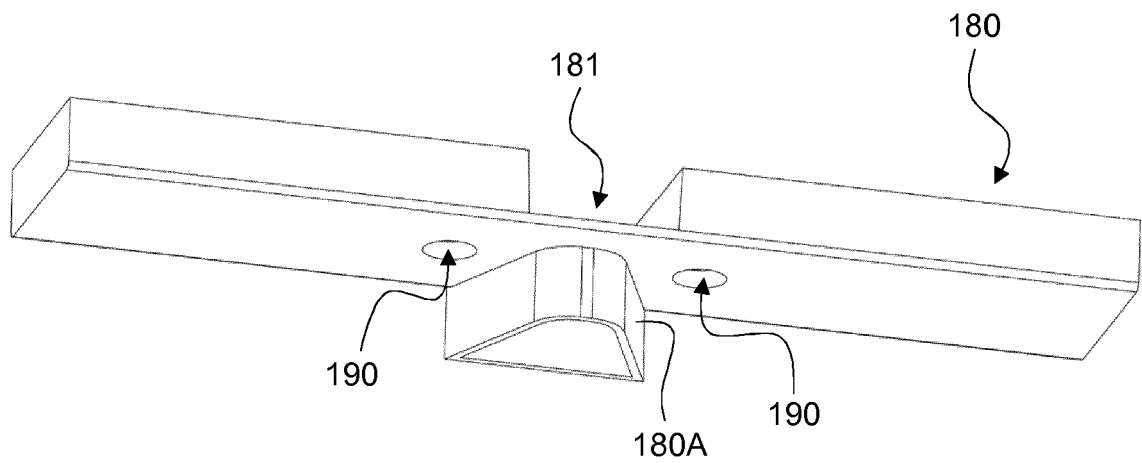
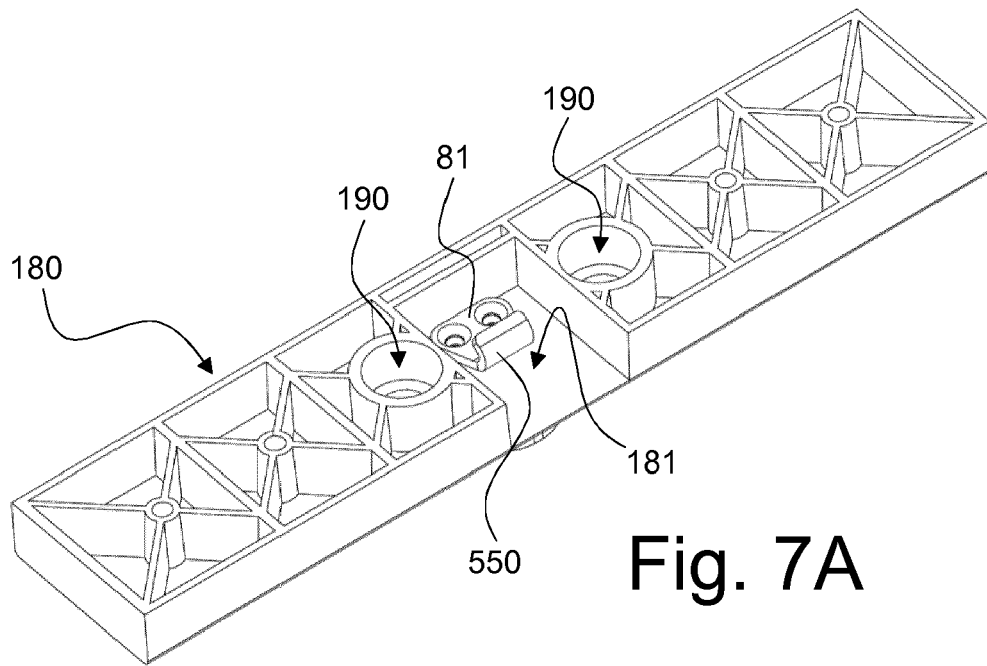


Fig. 5B





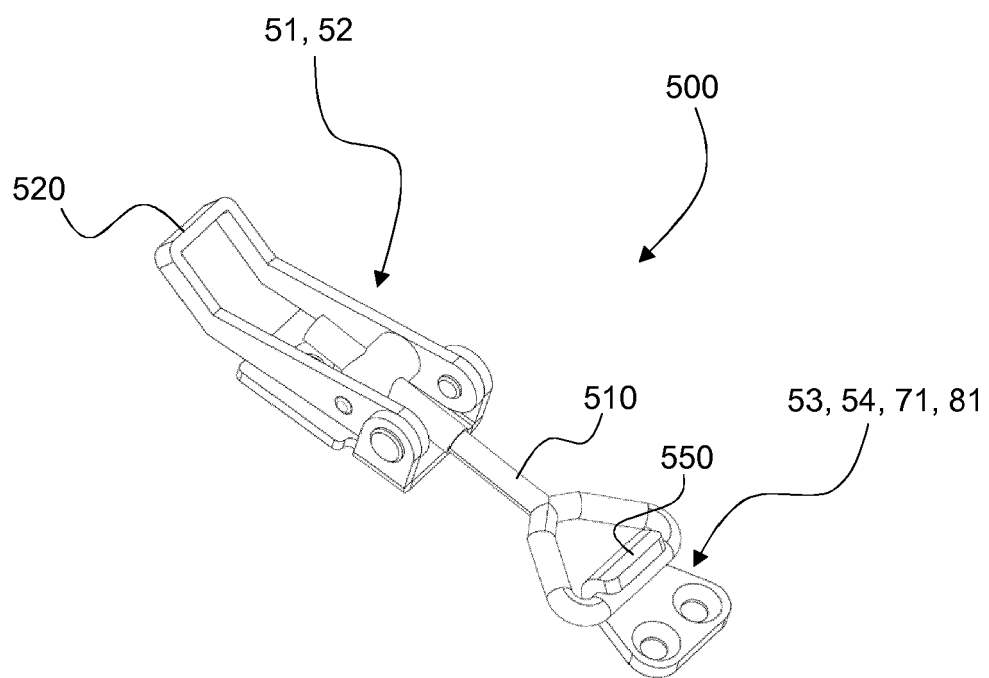


Fig. 8

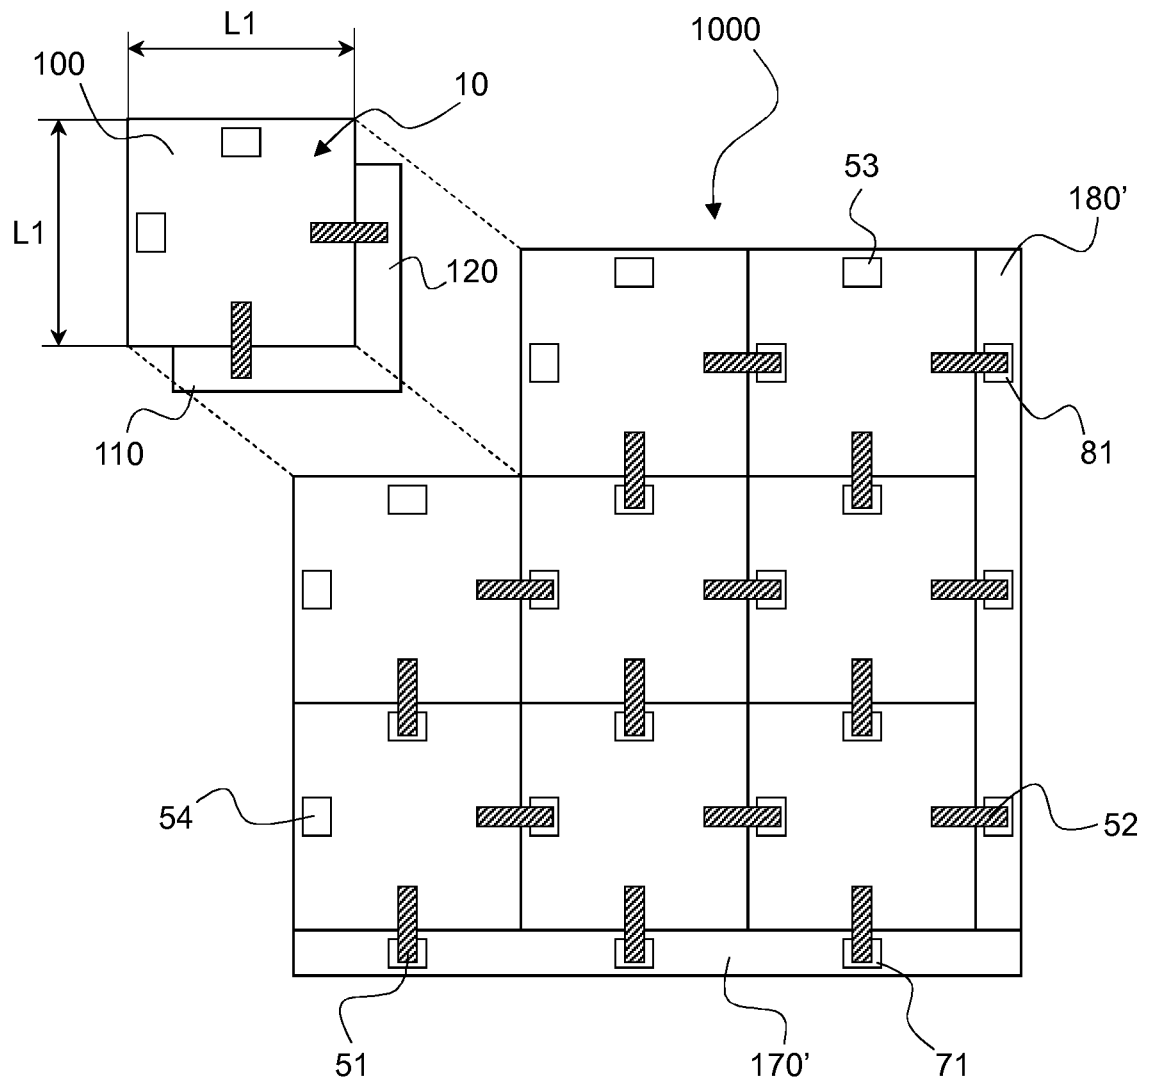


Fig. 9A

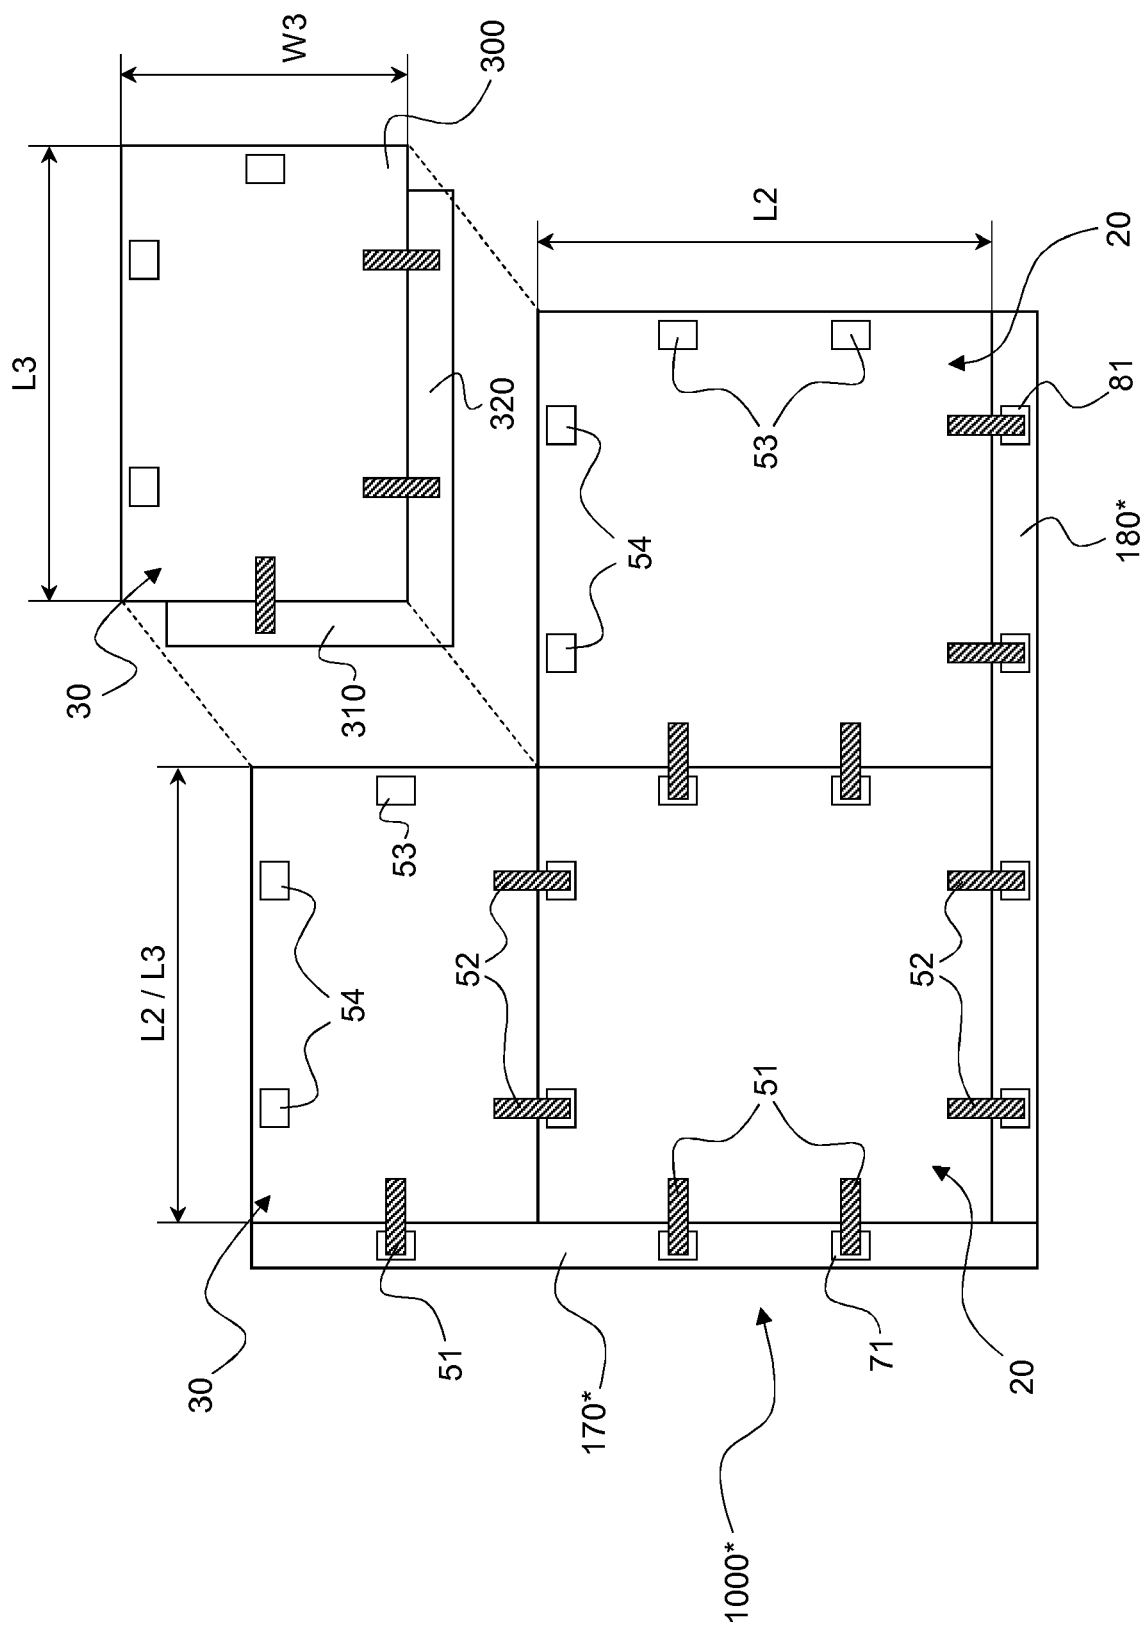


Fig. 9B

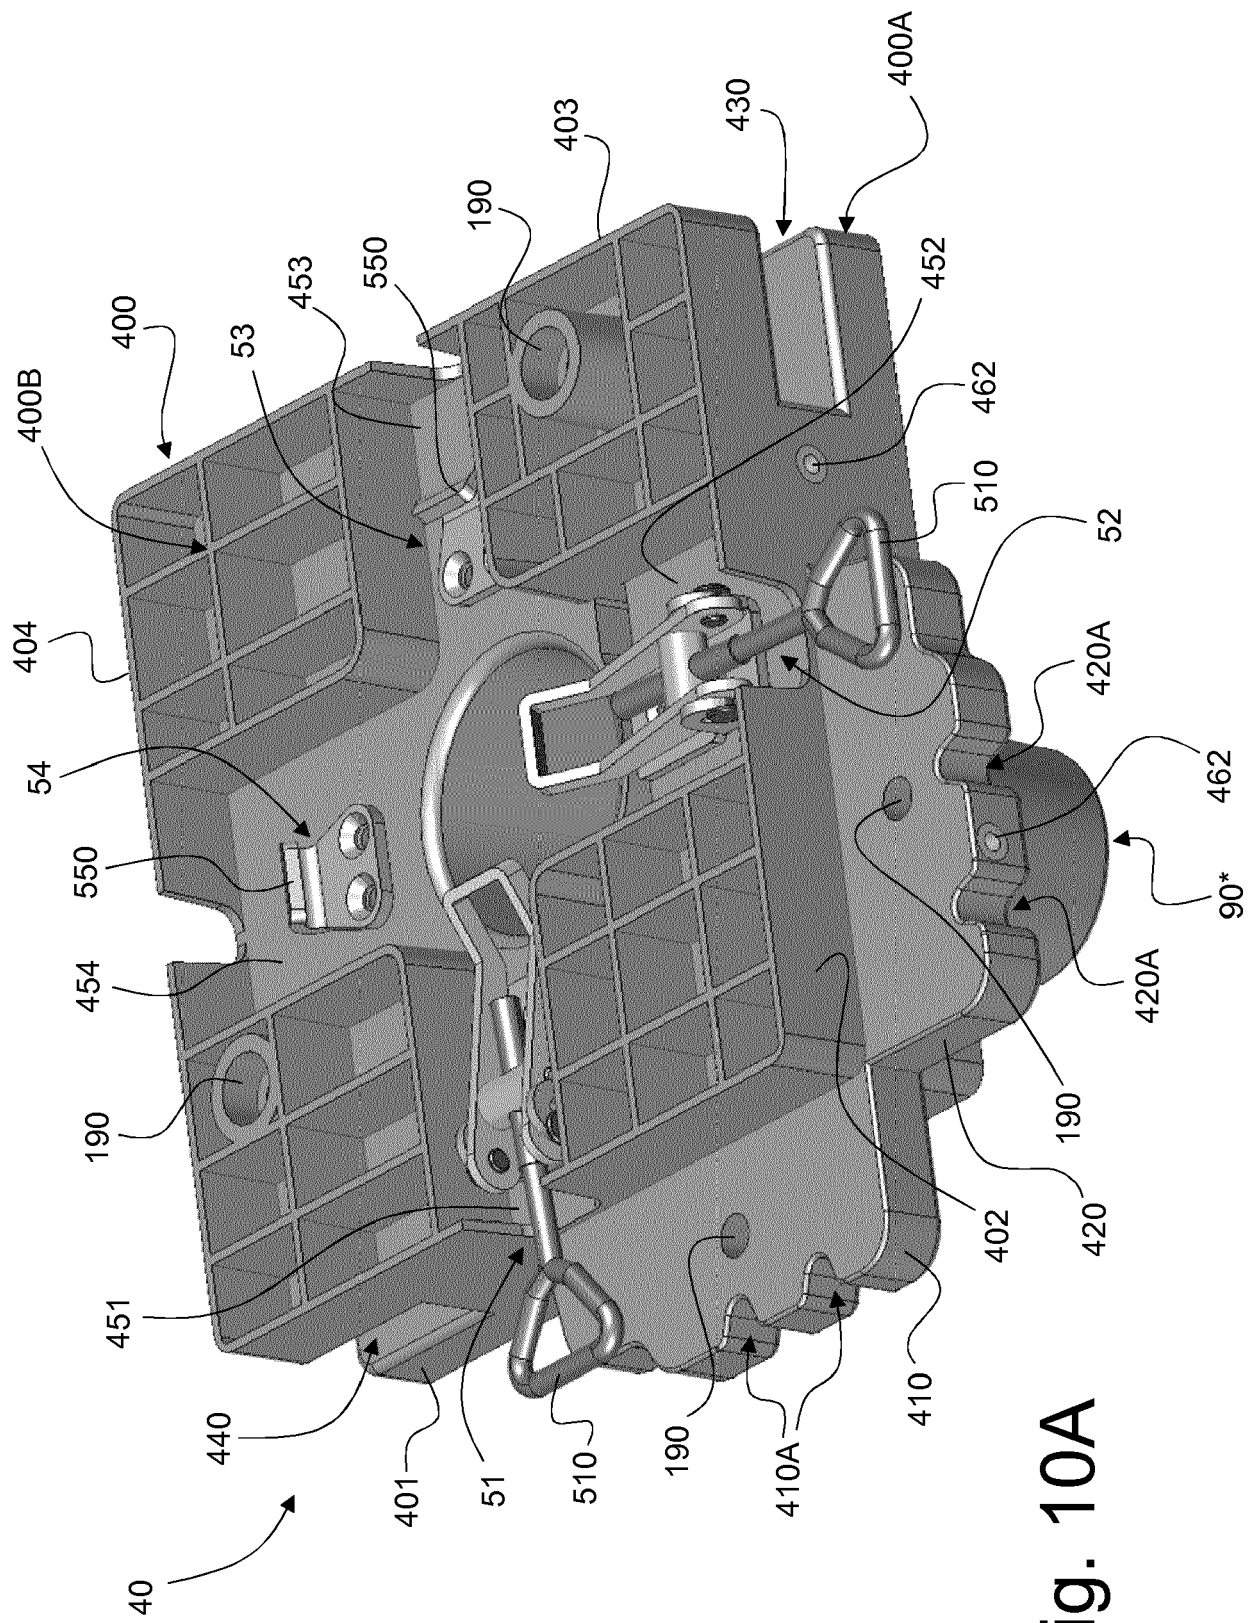


Fig. 10A

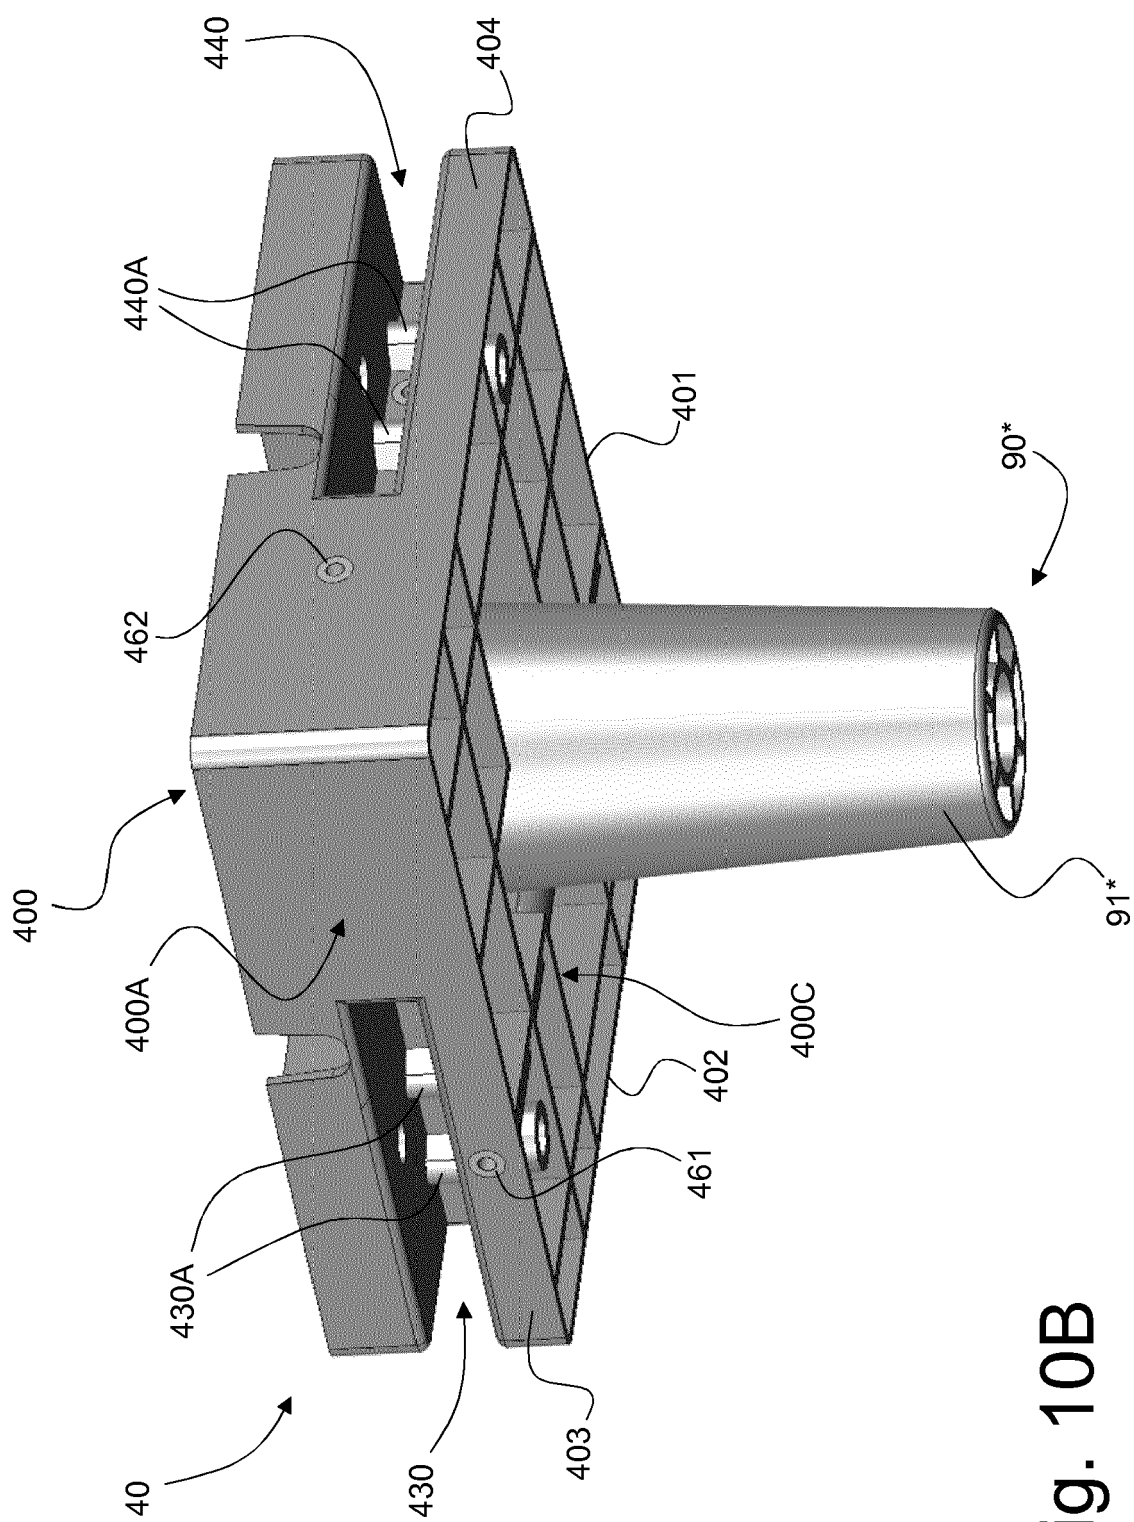
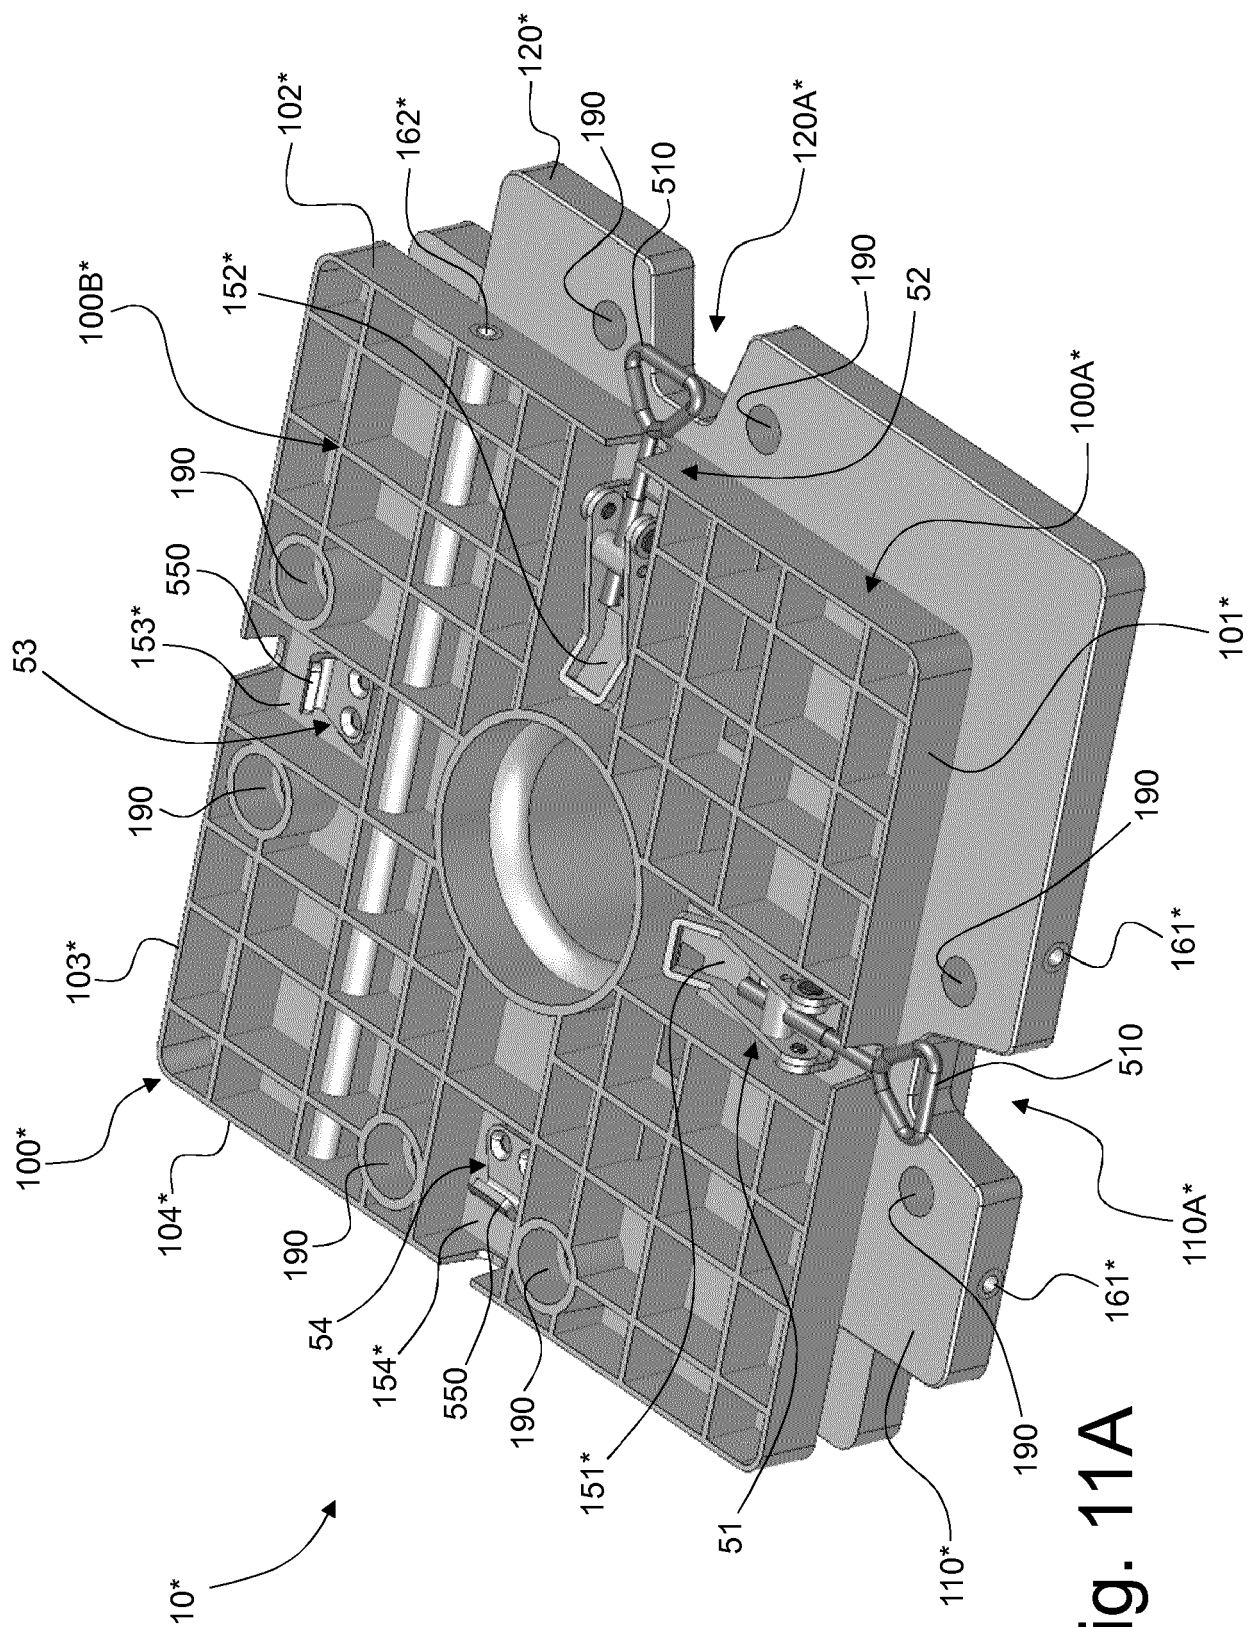


Fig. 10B



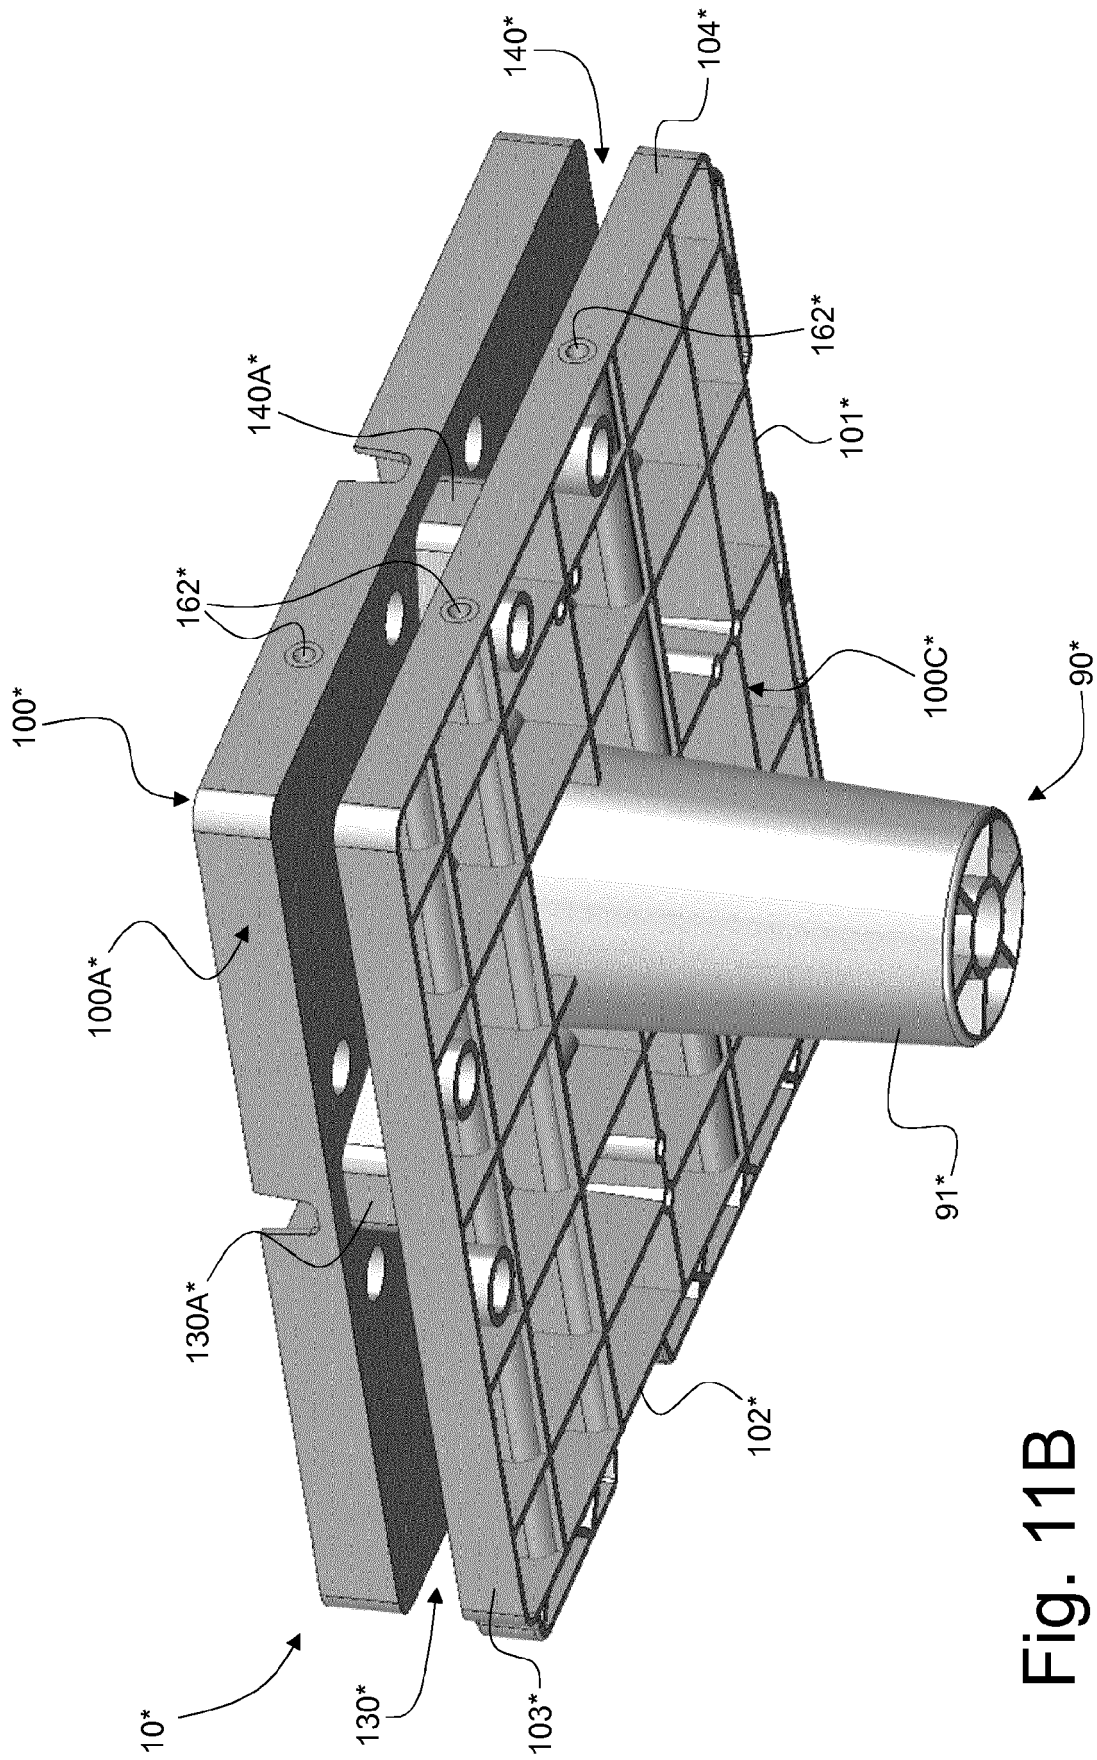


Fig. 11B

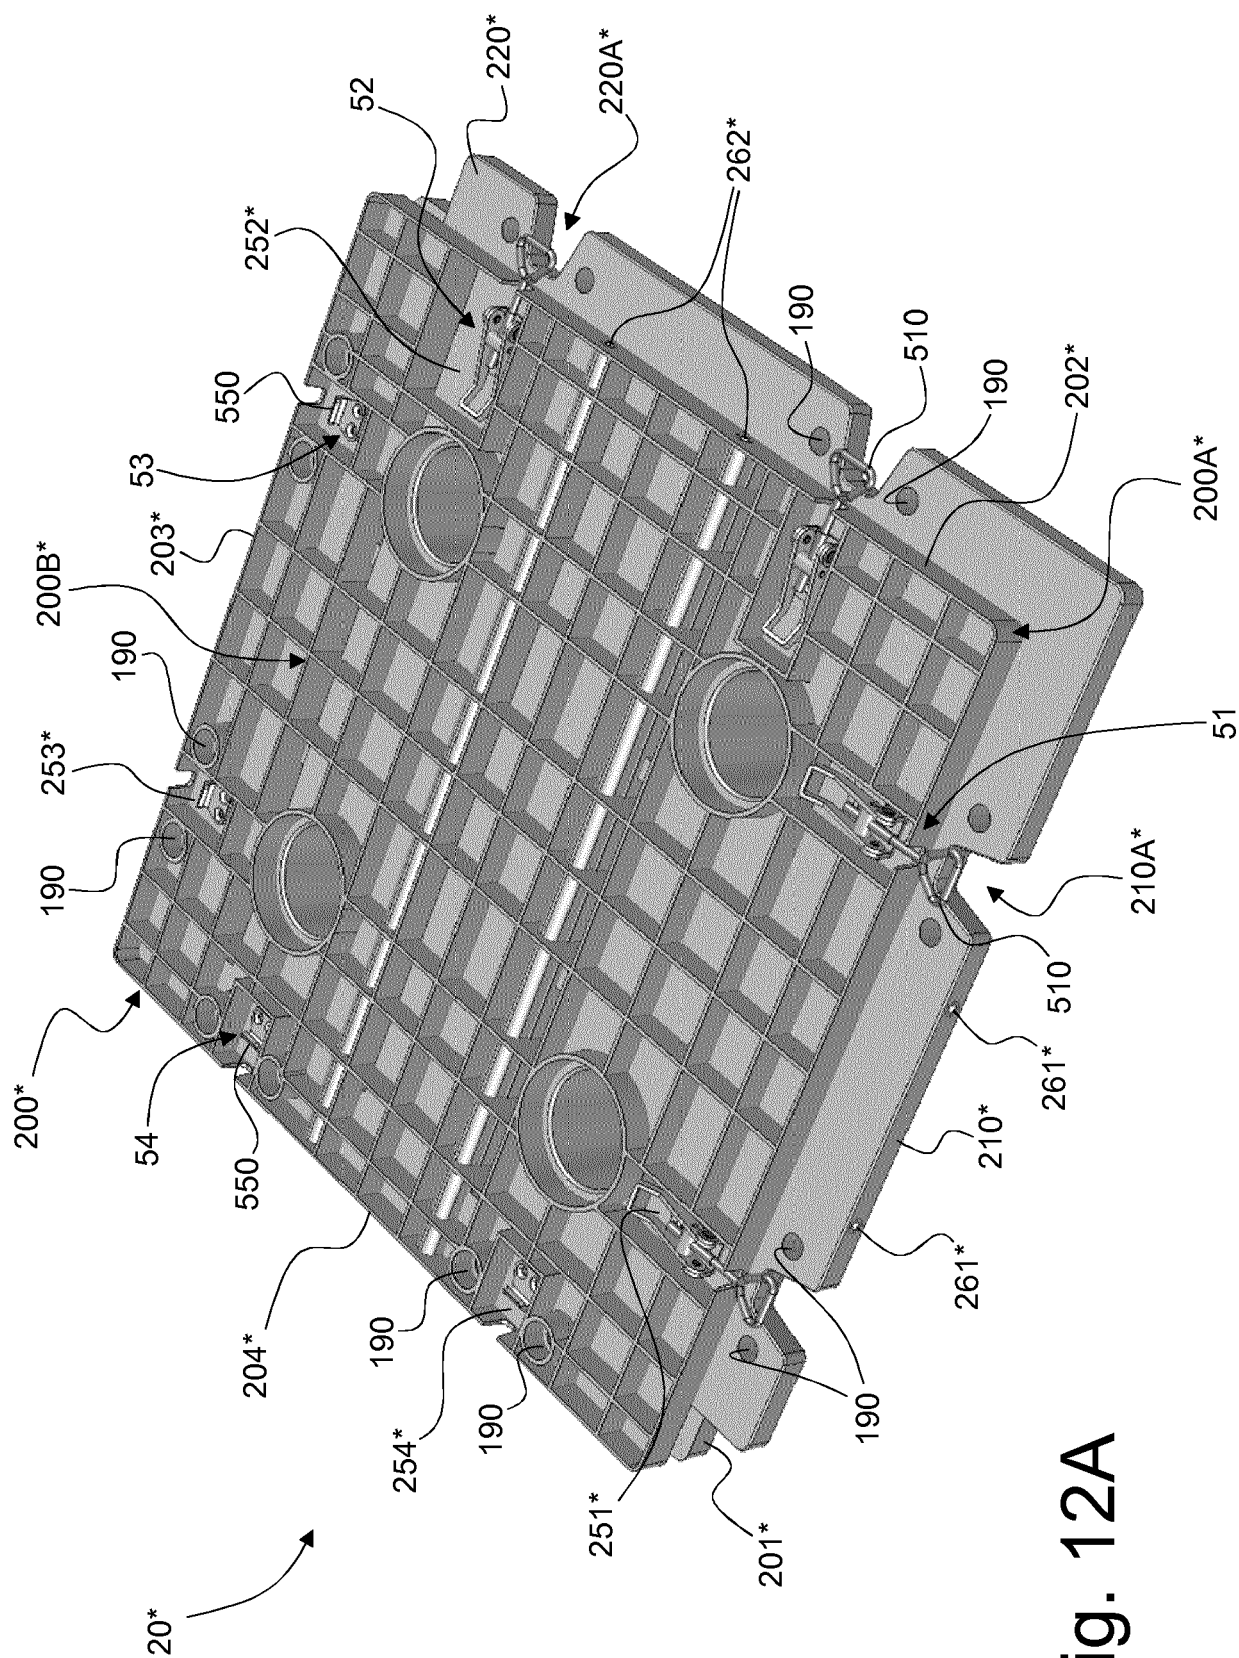


Fig. 12A

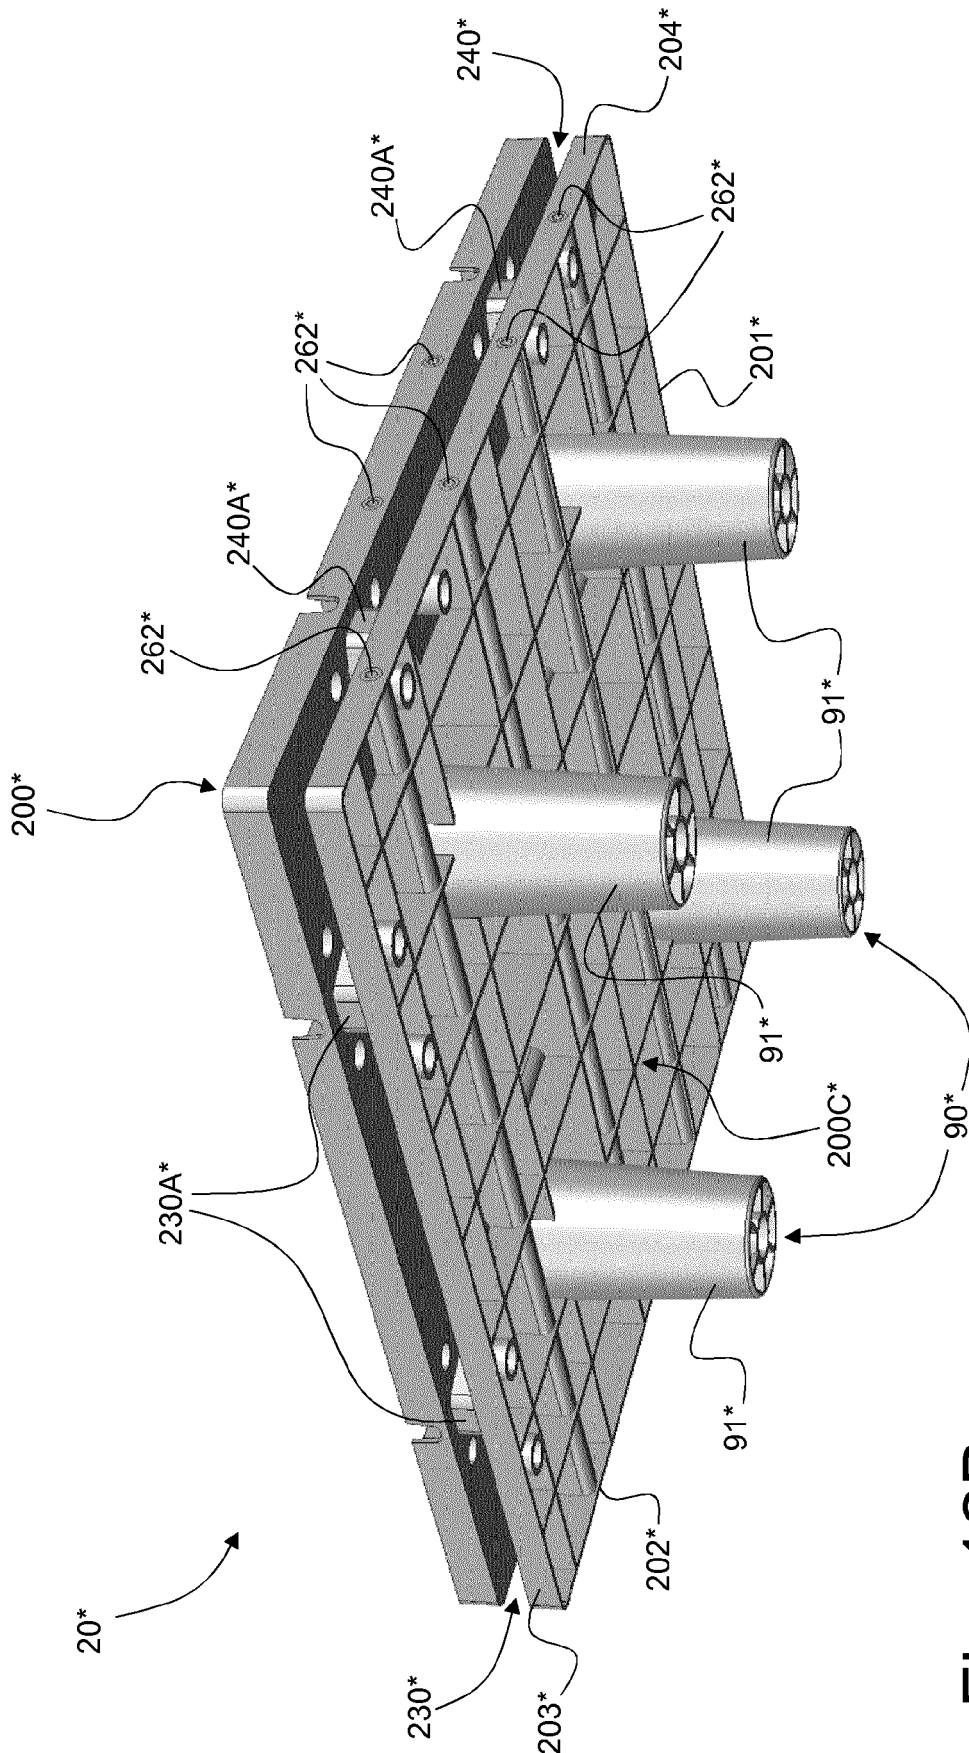


Fig. 12B

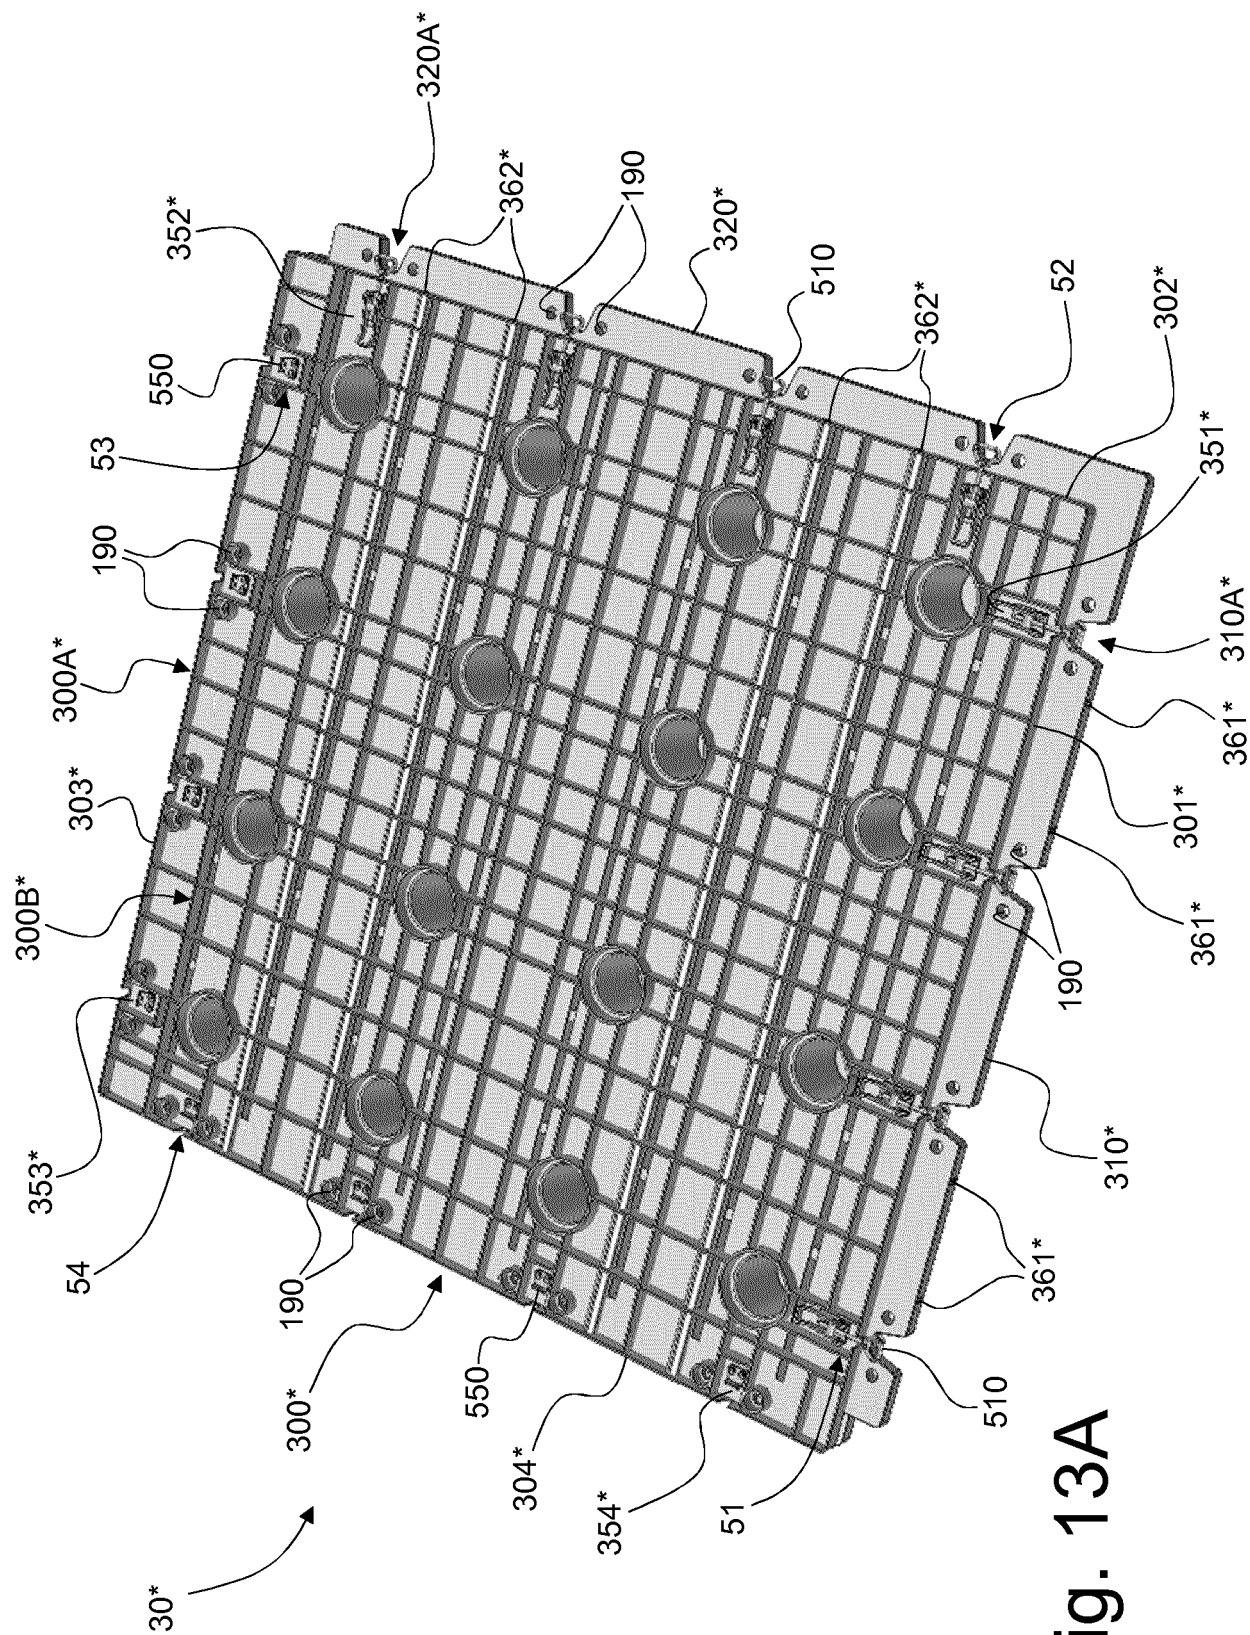


Fig. 13A

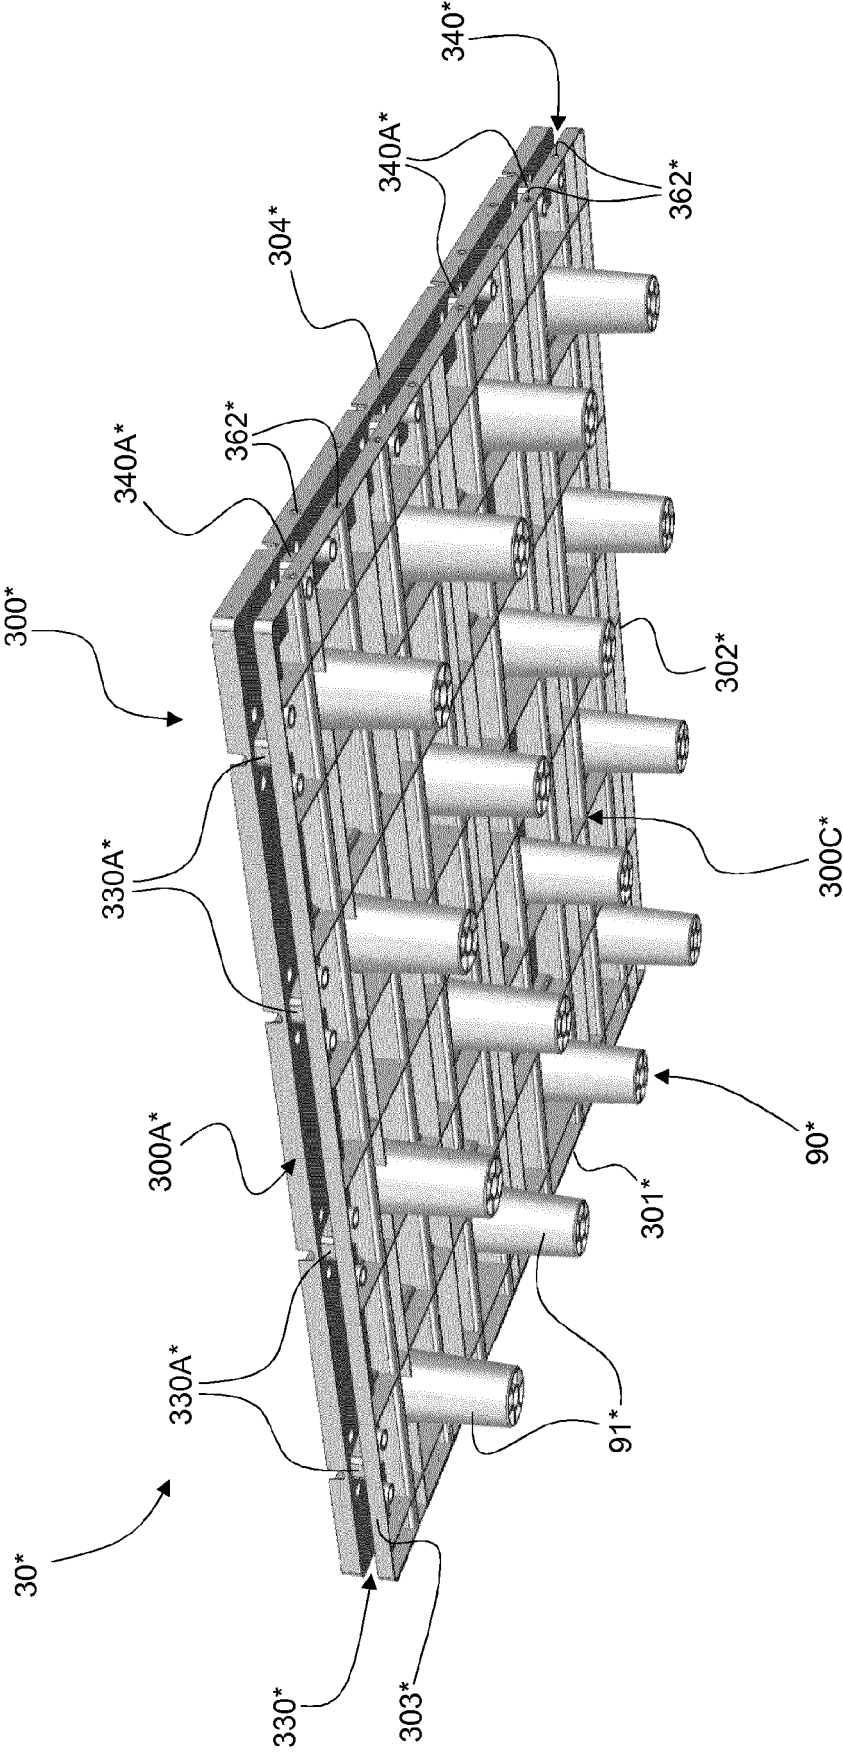


Fig. 13B



EUROPEAN SEARCH REPORT

 Application Number
 EP 19 15 0440

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	CN 206 345 153 U (HUIZHOU ZHIXIANG LOGISTICS TECH CO LTD) 21 July 2017 (2017-07-21) * figures 1-5 *	1-13,15	INV. B65D19/24 B65D19/32
Y	CN 205 023 079 U (PLA ORDNANCE ENGINEERING COLLEGE) 10 February 2016 (2016-02-10) * figures 1-9 *	1-13,15	
Y	US 2005/051061 A1 (SMITH PAUL [US]) 10 March 2005 (2005-03-10) * paragraph [0016] - paragraph [0029] * * figures 1-9 *	1-13,15	
Y	EP 3 075 922 A1 (ZHONG YUGANG [CN]) 5 October 2016 (2016-10-05) * paragraph [0017] - paragraph [0031] * * figures 1-5 *	1-13,15	
Y	US 2012/240500 A1 (BJORKMAN TRAVIS E [US]) 27 September 2012 (2012-09-27) * paragraph [0062] * * figures 1-5,24,25,30,31 *	1-13,15	TECHNICAL FIELDS SEARCHED (IPC)
Y	US 2015/096837 A1 (AGUILAR PETER [US]) 9 April 2015 (2015-04-09) * paragraph [0037] - paragraph [0054] * * figures 1-16 *	1-13,15	B65D E04F
Y	WO 2010/064986 A1 (IPG INTELLIGENT PACKAGING GROU [SE]; JOSEFSSON TOBIAS [SE]) 10 June 2010 (2010-06-10) * page 19, line 17 - line 28 * * claim 1; figures 8,9,16 *	1-13,15	
Y	KR 101 862 662 B1 (OH TAEK SANG [KR]) 31 May 2018 (2018-05-31) * figures 1-4 *	9-12	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 30 April 2019	Examiner Fitterer, Johann
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

 Application Number
 EP 19 15 0440

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 2012/156438 A1 (NAM SEUNG BAIK [KR]) 21 June 2012 (2012-06-21) * paragraph [0038] - paragraph [0046] * * figures 1-4 *	9-12	
Y	DE 22 31 178 A1 (HOECHST AG) 24 January 1974 (1974-01-24) * page 7 - page 8; figures 1-4 *	13	
A	FR 2 157 171 A5 (BOURREAU ALAIN) 1 June 1973 (1973-06-01) * page 2, line 37 - page 4, line 28 * * figures 1-5 *	1-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search Munich		Date of completion of the search 30 April 2019	Examiner Fitterer, Johann
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 15 0440

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-04-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 206345153 U	21-07-2017	NONE	
CN 205023079 U	10-02-2016	NONE	
US 2005051061 A1	10-03-2005	NONE	
EP 3075922 A1	05-10-2016	CA 2967054 A1 EP 3075922 A1 ES 2701001 T3 JP 6193497 B2 JP 2017500461 A KR 20160083105 A LU 92764 A1 PL 3075922 T3 RU 2633840 C1 US 2016290659 A1 WO 2015070657 A1	21-05-2015 05-10-2016 20-02-2019 06-09-2017 05-01-2017 11-07-2016 07-11-2015 29-03-2019 18-10-2017 06-10-2016 21-05-2015
US 2012240500 A1	27-09-2012	CA 2768350 A1 US 2012240500 A1 US 2013036690 A1	21-09-2012 27-09-2012 14-02-2013
US 2015096837 A1	09-04-2015	NONE	
WO 2010064986 A1	10-06-2010	EP 2382138 A1 WO 2010064986 A1	02-11-2011 10-06-2010
KR 101862662 B1	31-05-2018	NONE	
US 2012156438 A1	21-06-2012	CN 102597387 A DE 112010004552 T5 JP 5400216 B2 JP 2012524187 A KR 20110057633 A US 2012156438 A1 WO 2011065713 A2	18-07-2012 13-09-2012 29-01-2014 11-10-2012 01-06-2011 21-06-2012 03-06-2011
DE 2231178 A1	24-01-1974	NONE	
FR 2157171 A5	01-06-1973	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3857342 A [0002] [0003]
- US 5105746 A [0004]
- JP H585546 A [0004]
- WO 9831595A1 A [0004]
- WO 2017023163A1 PCT [0004]
- WO 2017200482A1 PCT [0004]
- WO 2010128261A2 PCT [0004]