



(11) **EP 3 680 545 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
15.07.2020 Bulletin 2020/29

(51) Int Cl.:
F21K 9/64 ^(2016.01) **F21S 2/00** ^(2016.01)
F21V 3/12 ^(2018.01) **F21Y 115/10** ^(2016.01)

(21) Application number: **18853133.9**

(86) International application number:
PCT/KR2018/010336

(22) Date of filing: **05.09.2018**

(87) International publication number:
WO 2019/050260 (14.03.2019 Gazette 2019/11)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **KIM, Byung Soon**
Osan-si
Gyeonggi-do 18145 (KR)
- **PARK, Guen Ryeol**
Hwaseong-si
Gyeonggi-do 18396 (KR)
- **PARK, Eun Mi**
Jeonju-si
Jeollabuk-do 54892 (KR)
- **CHOI, Yong Sun**
Osan-si
Gyeonggi-do 18110 (KR)

(30) Priority: **06.09.2017 KR 20170113643**
04.09.2018 KR 20180105482

(71) Applicant: **Glbtech Co. Ltd.**
Osan-si, Gyeonggi-do 18103 (KR)

(74) Representative: **Mammel und Maser**
Patentanwälte
Tilsiter Straße 3
71065 Sindelfingen (DE)


(72) Inventors:
• **KIM, Han Do**
Yongin-si
Gyeonggi-do 16825 (KR)

(54) **HIGH COLOR RENDERING D50/D65 STANDARD LED ILLUMINANT MODULE AND LIGHTING APPARATUS**

(57) The present invention relates to an LED illuminant module and lighting apparatus and, more specifically, to a high color rendering D50/D65 standard LED illuminant module and lighting apparatus, which has both high color rendering properties and excellent metamerism index characteristics by using a high color rendering LED and an ultraviolet LED. An illuminant module according to an embodiment of the present invention comprises: at least one ultraviolet light-emitting diode (LED) device having a peak emission wavelength of 300nm-400nm; and at least one first white light-emitting diode (LED) device having an average color rendering index of 90% or higher, wherein the first white light-emitting diode (LED) device is a light-emitting diode (LED) device which comprises a first LED chip having an excitation wavelength of 440nm-460nm, and a first phosphor layer excited at the excitation wavelength of the first LED chip to emit light, and the first phosphor layer comprises: a first phosphor having a peak emission wavelength of 440nm-499nm; a second phosphor having a peak emission wavelength of 500nm-580nm; and a third phosphor having a peak emission wavelength of 600nm-699nm.

EP 3 680 545 A1

FIG. 4

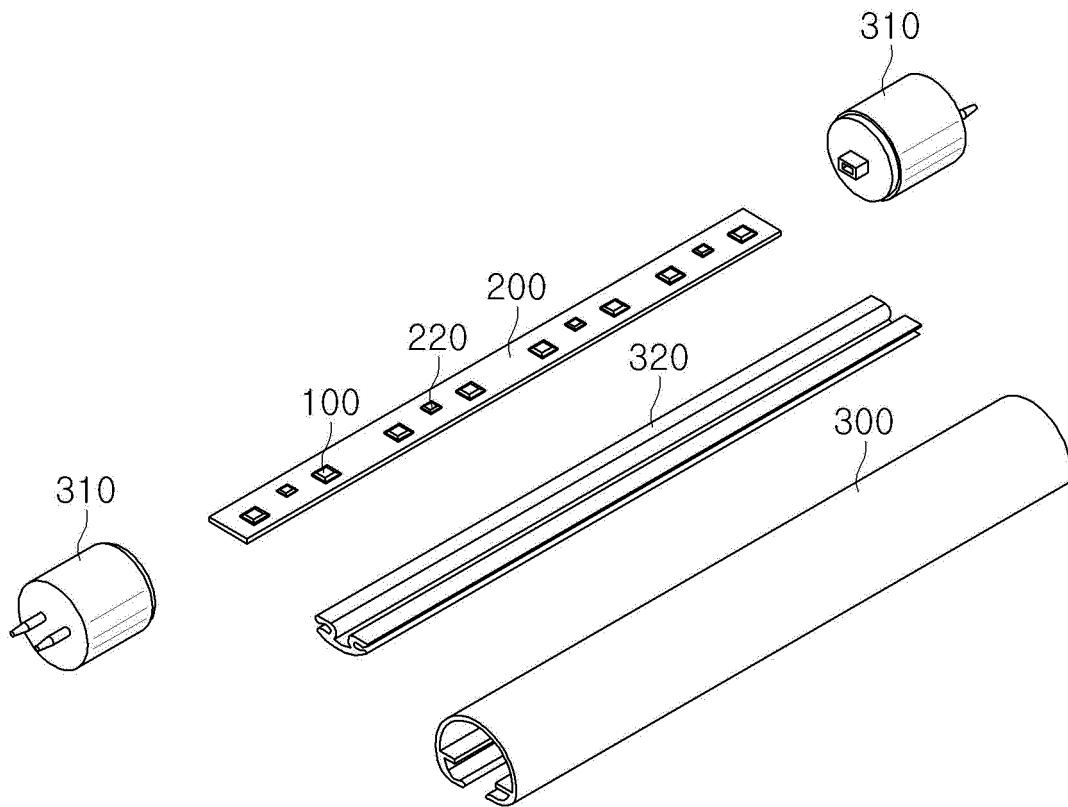

Description

[Technical Field]

[0001] The present invention relates to an LED illuminant module and lighting apparatus and, more specifically, to a high color rendering D50/D65 standard LED illuminant module and a lighting apparatus, which have high color rendering properties and excellent metamerism index characteristics by using a high color rendering LED and an ultraviolet LED.

[Background Art]

[0002] Many people often experience that the color of the clothes they saw at a clothing store looks different when they see the clothes later. This phenomenon occurs because a color of an object perceived by people varies depending on the lighting.

[0003] Therefore, in a case in which it is necessary to accurately inspect colors of woven fabrics, printed matters, or the like, the color needs to be determined under an environment in which inspection lamps, which conform to the predetermined standard lighting specifications, are used, as can be seen in FIG. 1. In this case, in order to satisfy the standard lighting specifications, a color rendering index (CRI) at various wavelengths needs to be a predetermined reference value or higher (e.g., an average color rendering index (Ra) of R1 to R15 is 90 or higher), and a metamerism index (MI), which indicates how differently colors are perceived depending on the lighting, also needs to have a value equal to or smaller than a reference value.

[0004] More specifically, FIG. 2 illustrates the specifications for D65 (6,500K Daylight) and D50 (5,000K Daylight) standard illuminants according to the Japanese Industrial Standards (JIS). Reference values need to be satisfied so that a visible-range metamerism index (Mlvis) is 1.0 or lower, a UV-range metamerism index (Mluv) is 1.5 or lower, an average color rendering index is 95% or higher, and a special color rendering indexes R9 to R15 are 85% or higher. In addition, according to the specifications of the International Standardization Organization (ISO), the respective reference values need to be satisfied so that the visible-range metamerism index (Mlvis) is 1.0 or lower, the UV-range metamerism index (Mluv) is 1.5 or lower, the average color rendering index is 90% or higher, and each of the color rendering indexes including the special color rendering indexes R9 to R15 is 80% or higher.

[0005] In the related art, a mercury or fluorescent lamp has been generally used as a standard illuminant, but the use of the mercury or fluorescent lamp is increasingly restricted worldwide due to problems such as low energy efficiency as well as substances harmful to the environment.

[0006] While there have been various attempts made to implement a standard illuminant using a light-emitting diode (LED) or the like, it is difficult to implement a high color rendering index (CRI) at various wavelengths and it is more difficult to implement characteristics excellent in the visible-range metamerism index (Mlvis) and the UV-range metamerism index (Mluv) because the light-emitting diode (LED) has the property of emitting light having a specific wavelength.

[0007] For this reason, despite efforts to implement the standard illuminant using the light-emitting diode (LED) or the like, the standard illuminant, which uses the light-emitting diode (LED) and has a performance sufficient for the standard illuminant, has not yet been implemented.

[Disclosure]

[Technical Problem]

[0008] The present invention has been made in an effort to solve the above-mentioned problems in the related art, and an object of the present invention is to provide a high color rendering standard LED illuminant module and a lighting apparatus, which have high color rendering properties and excellent metamerism index characteristics by using a light-emitting diode (LED).

[0009] The detailed objects of the present invention will be apparently identified and understood by experts or researchers in this technical field through the specific description disclosed below.

[Technical Solution]

[0010] In order to achieve the above-mentioned object, an illuminant module according to an exemplary embodiment of the present invention includes: one or more ultraviolet light-emitting diode (LED) devices having a peak emission wavelength of 300 nm to 400 nm; and one or more first white light-emitting diode (LED) devices having an average color rendering index of 90% or higher, in which the first white light-emitting diode (LED) device is a light-emitting diode (LED) device including a first LED chip having an excitation wavelength of 440 nm to 460 nm, and a first phosphor layer configured to emit light by being excited at the excitation wavelength of the first LED chip, and the first phosphor layer

includes a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

[0011] In this case, a numerical value of UV content of the illuminant module may be within a range from 60 to 160.

[0012] In addition, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the first white light-emitting diode (LED) devices.

[0013] In addition, the illuminant module may further include a light transmissive member configured to accommodate therein the ultraviolet light-emitting diode (LED) device and the first white light-emitting diode (LED) device, in which the light transmissive member is made of PMMA, glass, or a material that transmits an ultraviolet ray.

[0014] In addition, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the ultraviolet light-emitting diode (LED) devices.

[0015] In addition, the illuminant module may have a light emitting characteristic in which a visible-range metamerism index (M_{vis}) is 1.0 or lower and a UV-range metamerism index (M_{uv}) is 1.5 or lower by the ultraviolet light-emitting diode (LED) device and the first white light-emitting diode (LED) device.

[0016] In this case, the illuminant module may have a light emitting characteristic in which an average color rendering index (Ra) is 90% or higher and a special color rendering indexes (R₉ to R₁₅) is 80% or higher.

[0017] Further, a correlated color temperature CCT may be within a range from 2,000K to 10,000K.

[0018] Furthermore, the illuminant module may further include one or more second white light-emitting diode (LED) devices having an average color rendering index of 90% or higher, in which the second white light-emitting diode (LED) device is a light-emitting diode (LED) device including a second LED chip having an excitation wavelength of 400 nm to 440 nm and a second phosphor layer configured to emit light by being excited at the excitation wavelength of the second LED chip, and the second phosphor layer includes a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

[0019] In this case, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the first white light-emitting diode (LED) device and the second white light-emitting diode (LED) device.

[0020] In addition, the illuminant module may further include one or more blue light-emitting diode (LED) devices having a peak emission wavelength of 400 nm to 470 nm.

[0021] In this case, peak wavelength spectrum intensity of the ultraviolet light-emitting diode (LED) device at a wavelength of 300 nm to 400 nm may be within a range of 60% to 90% of peak wavelength spectrum intensity of the blue light-emitting diode (LED) device at a wavelength of 400 nm to 470 nm.

[0022] In addition, in the first white light-emitting diode (LED) device, the first LED chip may have an excitation wavelength of 400 nm to 440 nm.

[0023] An illuminant module according to another exemplary embodiment of the present invention includes: one or more ultraviolet light-emitting diode (LED) devices having a peak emission wavelength of 300 nm to 400 nm; and one or more second white light-emitting diode (LED) devices having an average color rendering index of 90% or higher, in which the second white light-emitting diode (LED) device is a light-emitting diode (LED) device including a second LED chip having an excitation wavelength of 400 nm to 440 nm, and a second phosphor layer configured to emit light by being excited at the excitation wavelength of the second LED chip, and the second phosphor layer includes a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

[0024] In this case, a numerical value of UV content of the illuminant module may be within a range from 60 to 160.

[0025] In addition, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the second white light-emitting diode (LED) devices.

[0026] In addition, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the ultraviolet light-emitting diode (LED) devices.

[0027] Further, the illuminant module may further include one or more blue light-emitting diode (LED) devices having a peak emission wavelength of 400 nm to 470 nm.

[0028] In this case, peak wavelength spectrum intensity of the ultraviolet light-emitting diode (LED) device at a wavelength of 300 nm to 400 nm may be within a range of 60% to 90% of peak wavelength spectrum intensity of the blue light-emitting diode (LED) device at a wavelength of 400 nm to 470 nm.

[0029] Another aspect of the present invention provides a lighting apparatus including the above-mentioned illuminant module.

[Advantageous Effects]

[0030] According to the present invention, the illuminant module is configured by using the ultraviolet light-emitting diode (LED) device having the peak emission wavelength of 300 nm to 400 nm and the one or more first white light-emitting diode devices having the average color rendering index of 90% or higher and including the first LED chip having

the excitation wavelength of 440 nm to 460 nm and the first phosphor layer configured to emit light at the excitation wavelength of the first LED chip, thereby providing the high color rendering standard LED illuminant module and the lighting apparatus which have high color rendering properties and excellent metamerism index characteristics. The white LED chip according to the present invention has high color rendering properties in respect to special colors such as,

[0031] In addition, according to the present invention, the illuminant module further includes the one or more second white light-emitting diode (LED) devices having the average color rendering index of 90% or higher and including the second LED chip having the excitation wavelength of 400 nm to 440 nm and the second phosphor layer configured to emit light at the excitation wavelength of the second LED chip, or the illuminant module is configured such that the first LED chip has the excitation wavelength of 400 nm to 440 nm, such that the illuminant module may have improved metamerism index characteristics.

[0032] In addition, according to the present invention, the illuminant module is configured to further include the blue light-emitting diode (LED) device having the peak emission wavelength of 400 nm to 470 nm, such that the illuminant module may have improved metamerism index characteristics.

[Description of Drawings]

[0033]

FIG. 1 is a view exemplarily illustrating a color inspection apparatus using typical standard lighting.

FIG. 2 is a view exemplarily illustrating specifications of the typical standard lighting.

FIG. 3 is a perspective view of an illuminant module 10 according to an exemplary embodiment of the present invention.

FIG. 4 is an exploded view of the illuminant module 10 according to the exemplary embodiment of the present invention.

FIG. 5 is a cross-sectional view of a first white light-emitting diode 100 used for the illuminant module 10 according to the exemplary embodiment of the present invention.

FIGS. 6A, 6B, 7A, 7B, 8A, 8B, 9A and 9B are views illustrating experimental performance values and light emitting spectra for respective items in the illuminant module 10 that conforms to the specifications of the illuminant D65 according to the exemplary embodiment of the present invention.

FIGS. 10A and 10B are views illustrating experimental performance values and light emitting spectra for respective items in the illuminant module 10 that conforms to the specifications of the illuminant D50 according to the exemplary embodiment of the present invention.

FIGS. 11A and 11B are views illustrating experimental performance values and light emitting spectra for respective items in an illuminant module using a light-emitting diode ($R_a = 80$) having typical ductility as a comparative example with respect to the present invention.

FIGS. 12 and 13 are views illustrating performance values measured by an integrating sphere in respect to the illuminant module 10 according to the exemplary embodiment of the present invention.

FIG. 14 is a table illustrating experimental performance results for respective items according to the specifications of the illuminant D65 of the illuminant module 10 according to various exemplary embodiments of the present invention.

FIGS. 15A to 15D are views illustrating measured performance values for respective items according to the specifications of the illuminant D65 of the illuminant module 10 according to various exemplary embodiments of the present invention.

FIG. 16 is a table illustrating experimental performance results for respective items according to the specifications of the illuminant D50 of the illuminant module 10 according to various exemplary embodiments of the present invention.

FIGS. 17A to 17D are views illustrating measured performance values for respective items according to the specifications of the illuminant D50 of the illuminant module 10 according to various exemplary embodiments of the present invention.

FIGS. 18A and 18B are views illustrating light emitting spectra according to the specifications of the illuminants D65 and D50 of the illuminant module 10 according to various exemplary embodiments of the present invention.

[Best Mode]

[0034] In order to describe the present invention, the operational advantages of the present invention, and the object achieved by carrying out the present invention, exemplary embodiments of the present invention will be described.

[0035] In the description of the present invention, the specific descriptions of publicly known related configurations or

functions will be omitted when it is determined that the specific descriptions may obscure the subject matter of the present invention.

[0036] Hereinafter, exemplary embodiments of a high color rendering standard LED illuminant module and a lighting apparatus according to the present invention will be described in detail with reference to the accompanying drawings.

[0037] FIG. 3 is a perspective view exemplarily illustrating an illuminant module 10 according to an exemplary embodiment of the present invention, and FIG. 4 is an exploded view exemplarily illustrating the illuminant module 10 according to the exemplary embodiment of the present invention.

[0038] As can be seen from FIGS. 3 and 4, the illuminant module 10 according to the exemplary embodiment of the present invention may include one or more ultraviolet light-emitting diode devices 220 and one or more first white light-emitting diode devices 100.

[0039] In this case, the ultraviolet light-emitting diode device 200 may be a light-emitting diode (LED) having a peak emission wavelength of 300 nm to 400 nm, and the first white light-emitting diode device 100 may be a light-emitting diode (LED) having an average color rendering index (Ra) of 90% or higher.

[0040] More specifically, the first white light-emitting diode device 100 is a light-emitting diode (LED) device including a first LED chip 130 having an excitation wavelength of 440 nm to 460 nm, and a first phosphor layer 150 configured to cover a light emitting surface of the first LED chip 130 and emit light by being excited at the excitation wavelength of the first LED chip 130. In this case, the first phosphor layer 150 may include a first phosphor 152 having a peak emission wavelength of 440 nm to 499 nm, a second phosphor 153 having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor 154 having a peak emission wavelength of 600 nm to 699 nm.

[0041] Further, the illuminant module 10 according to the exemplary embodiment of the present invention may include a board 200 on which the ultraviolet light-emitting diode 220 and the first white light-emitting diode 100 are mounted, a support unit 320 on which the board 200 is seated, a light transmissive member 300 configured to accommodate therein the ultraviolet light-emitting diode 220 and the first white light-emitting diode 100 and transmit the light emitted from the ultraviolet light-emitting diode 220 and the first white light-emitting diode 100, and connecting units 310 electrically connected to the board 200 and configured to supply external power.

[0042] Hereinafter, the respective constituent elements of the illuminant module 10 according to the exemplary embodiment of the present invention will be described in detail.

[0043] First, FIG. 5 exemplarily illustrates the first white light-emitting diode device 100 according to the exemplary embodiment of the present invention.

[0044] Referring to FIG. 5, the first white light-emitting diode device 100 includes the first LED chip 130 mounted on the base board 110. The first white light-emitting diode device 100 may be joined by ball grids 210 by a surface mount technology (SMT) and mounted on various types of boards 200 such as a metal board (metal PCB). Of course, the package structure illustrated in FIG. 5 is an example in which the LED device according to the present invention is applied, and the package structure may also be implemented by other packaging methods.

[0045] A frame 170 having a predetermined shape, e.g., a cylindrical shape is installed on the base board 110 of the first white light-emitting diode device 100, and a reflector configured to efficiently reflect the light emitted from the first LED chip 130 is installed on an inner surface of the frame 170. Although not illustrated, one electrode of the first LED chip 130 may be electrically connected to the frame 170 through a bonding wire. In addition, the other electrode of the first LED chip 130 may be electrically connected to a metal wire on the base board.

[0046] The first LED chip 130 includes a light-emitting diode having a peak wavelength of 440 nm to 460 nm. The InGaN-based light-emitting diode or the GaN-based light-emitting diode may be used as the light-emitting diode. In the present invention, other types of light emitting devices such as laser diodes may be used instead of the first LED chip 130.

[0047] The first LED chip 130 is surrounded by the first phosphor layer 150. The first phosphor layer 150 includes phosphors 152, 153, and 154 that emit light having a predetermined wavelength by being excited at the light emitting wavelength of the first LED chip 130. In the present invention, the phosphor is particularly provided in the form of powder. To this end, the first phosphor layer 150 may include transparent resin that disperses and fixes the phosphors and seals the first LED chip 130.


[0048] In the present invention, typical silicone or epoxy resin may be used as the transparent resin.

[0049] In the present invention, the phosphors 152, 153, and 154 are made of fluorescent materials having different compositions. Particularly, the phosphors include at least three types of fluorescent materials having different light emitting wavelengths. In the present invention, the phosphors 152, 153, and 154 include a first phosphor B configured to emit blue light by being excited by the light emitted from the first LED chip 130, a second phosphor G configured to emit green light, and a third phosphor R configured to emit red light. In the present invention, the first, second, and third phosphors may be oxides or nitrides.



[0050] In the present invention, the first phosphor 152 is excited by the light emitted from the first LED chip 100 and emits light having a peak wavelength of 440 nm to 499 nm. The peak emission wavelength of the first phosphor 152 is larger than the peak wavelength of the light emitted from the first LED chip 130.

[0051] In the present invention, a phosphor, which is expressed by the following Chemical Formula 1 and emits blue

light, may be used as the first phosphor 152.



[0052] In the present invention, the second phosphor 153 is excited by the light emitted from the first LED chip 130 and emits light having a peak wavelength of 500 nm to 580 nm. Phosphors, which are expressed by the following Chemical Formulas 2 to 4 and emit green light, may be used alone or in combination as the second phosphor 153.



[0053] In the present invention, the third phosphor 154 is excited by the light emitted from the first LED chip 130 and emits light having a peak wavelength of 600 nm to 699 nm. Phosphors, which are expressed by the following Chemical Formulas 5 and 6, may be used alone or in combination as the third phosphor 154.



[0054] Further, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the first white light-emitting diode devices 100, thereby improving characteristics, such as the metamerism index, of the illuminant module 10.

[0055] Next, the ultraviolet light-emitting diode 220 may include one or more light-emitting diodes having a peak emission wavelength of 300 nm to 400 nm.

[0056] In this case, the amount of light emitted from the ultraviolet light-emitting diode 220 and having a wavelength of 300 nm to 400 nm may be within a range from 20% to 80% of the total amount of light emitted from the illuminant module 10. Further, a correlated color temperature CCT of the illuminant module 10 may be within a range from 2,000K to 10,000K.

[0057] In addition, the required standard lighting specifications (e.g., the visible-range metamerism index (M_{vis}), the UV-range metamerism index (M_{uv}), the average color rendering index (Ra), and the special color rendering indexes (R₉ to R₁₅)) of the illuminant module 10 may be greatly improved by adjusting a numerical value of UV content, which corresponds to the ultraviolet content of the light emitted from the illuminant module 10, so that the numerical value of UV content is within a range from 60 to 160. This will be described below in more detail with reference to experimental results in respect to the exemplary embodiments.

[0058] In addition, the same type of light-emitting diode (LED) does not necessarily have to be used as the ultraviolet light-emitting diode (LED) device, and two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used. In particular, since the two or more types of ultraviolet light-emitting diode (LED) devices having different peak wavelengths are used together, the visible-range metamerism index (M_{vis}) and the UV-range metamerism index (M_{uv}) may be greatly improved. This will be described below in more detail with reference to experimental results in respect to the exemplary embodiments.

[0059] Further, in the present invention, the ultraviolet light-emitting diode device 220 may have a package structure in which the ultraviolet LED chip is mounted on the base board 110, but the present invention is not necessarily limited thereto. Various structures such as a structure in which the ultraviolet LED chip is mounted directly on the board 200 and emits ultraviolet rays may be applied.

[0060] More specifically, in the case of the illuminant module 10 according to the exemplary embodiment of the present invention, the illuminant is configured by using the one or more ultraviolet light-emitting diode devices 220 having a peak emission wavelength of 300 nm to 400 nm and the one or more first white light-emitting diode (LED) devices having an average color rendering index (Ra) of 90% or higher. As a result, it is possible to achieve the high color rendering index (CRI) and the excellent metamerism index (MI) which are required for the standard illuminant but were hardly implemented by the light-emitting diode (LED) in the related art.

[0061] That is, as can be seen in FIG. 2, according to the specifications of the D65 (6,500K Daylight) standard illuminant according to the Japanese Industrial Standard (JIS), the reference values need to be satisfied so that the visible-range metamerism index (M_{vis}) is 1.0 or lower, the UV-range metamerism index (M_{uv}) is 1.5 or lower, the average color rendering index is 95% or higher, and the special color rendering indexes R₉ to R₁₅ are 85% or higher (in the case of the specifications according to the International Standardization Organization (ISO), the average color rendering index

is 90% or higher and each of the color rendering indexes including the special color rendering indexes R9 to R15 is 80% or higher). However, the average color rendering index is implemented to be about 75% to 80% by the typical light-emitting diode (LED) in the related art, and the special color rendering index significantly deteriorates at a particular wavelength. Further, it is even more difficult to implement excellent characteristics such as the visible-range metamerism index (Mlvis) and the UV-range metamerism index (Mluv).

[0062] In contrast, in the case of the illuminant module 10 according to the exemplary embodiment of the present invention, the illuminant is configured by using the one or more ultraviolet light-emitting diode devices 220 having the peak emission wavelength of 300 nm to 400 nm and the one or more first white light-emitting diode (LED) devices having the average color rendering index (Ra) of 90% or higher. As a result, the respective reference values may be satisfied so that the visible-range metamerism index (Mlvis) is 1.0 or lower, the UV-range metamerism index (Mluv) is 1.5 or lower, the average color rendering index (Ra) is 90% or higher, and each of the color rendering indexes including the special color rendering indexes R9 to R15 is 80% or higher.

[0063] Further, the board 200 may be provided with a pad on which the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220 are mounted, and a circuit pattern configured to operate the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220. The board 200 may be made of a dielectric material such as FR-4. Further, the board 200 may be made of various materials and configured as a metal board (metal PCB) in order to facilitate the dissipation of heat from the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220. In this case, the board 200 may be electrically connected to the connecting units 310 and supplied with external power.

[0064] Further, the illuminant module 10 according to the exemplary embodiment of the present invention may be provided with the support unit 320 on which the board 200 is seated. Further, in order to facilitate the dissipation of heat from the board 200, the support unit 320 may be made of metal or may have a structure advantageous to the dissipation of heat.

[0065] In addition, the illuminant module 10 according to the exemplary embodiment of the present invention may be provided with the light transmissive member 300 that accommodates therein the ultraviolet light-emitting diode 220 and the first white light-emitting diode 100 and transmits the light emitted from the ultraviolet light-emitting diode 220 and the first white light-emitting diode 100. The light transmissive member 300 may be made of PMMA, glass, or the like that may effectively transmit the ultraviolet light emitted from the ultraviolet light-emitting diode 220 and the light emitted from the first white light-emitting diode 100. Further, the light transmissive member 300 may be made of a semi-transparent material in order to reduce light blindness.

[0066] Hereinafter, the present invention will be described in more detail with reference to FIGS. 6A/B to 9A/B based on experimental values of the illuminant module 10 that conforms to the specifications of the illuminant D65 (6,500K) according to the exemplary embodiment of the present invention.

[0067] First, FIGS. 6A, 7A, 8A and 9A illustrate experimental performance values for respective items in the illuminant module 10 according to the exemplary embodiment of the present invention. More specifically, FIGS. 6A, 7A, 8A and 9A sequentially illustrate experimental values when the illuminant module 10 is configured by using the first white light-emitting diode device 100 having the average color rendering index of 90% or higher, the ultraviolet light-emitting diode devices 220 having peak wavelengths of 360 nm, 385 nm, and 405 nm, and the two ultraviolet light-emitting diode devices 220 having peak wavelengths of 360 nm and 405 nm.

[0068] Further, FIGS. 6B, 7B, 8B and 9B illustrate light emitting spectra of the illuminant module 10 according to the exemplary embodiment of the present invention.

[0069] Hereinafter, in the present invention, the measured data including the correlated color temperature CCT, the UV content, the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15) in respect to respective examples and comparative examples are calculated by using SPECTIS 1.0 Touch equipment of GL OPTIC.

[0070] First, it can be seen that in the case illustrated in FIG. 6A (the ultraviolet light-emitting diode device 220 having a wavelength of 360 nm is used), the numerical value of the UV content is gradually increased as an input electric current (IF) is increased, and the reference values of the standard illuminant may be satisfied as the UV-range metamerism index (Mluv) is gradually decreased (6.0 → 1.5).

[0071] More specifically, as can be seen in FIG. 6A, it can be ascertained that the numerical value of the UV content becomes 60 or more when the input electric current (IF) is within a range from 450 mA to 700 mA, such that the illuminant module 10 according to the present invention satisfies all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15).

[0072] Further, FIG. 7A illustrates that in the case in which the ultraviolet light-emitting diode device 220 having a wavelength of 385 nm is used, the numerical value of the UV content is gradually increased as the input electric current (IF) is increased, and the reference values of the standard illuminant may be satisfied as the UV-range metamerism index (Mluv) is gradually decreased (5.9 → 1.5).

[0073] More specifically, as can be seen in FIG. 7A, the numerical value of the UV content is within a range from 60

to 120 when the input electric current (IF) is within a range from 150 mA to 180 mA, such that the illuminant module 10 according to the present invention satisfies all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15).

[0074] In addition, in the case in which the ultraviolet light-emitting diode device 220 having a wavelength of 405 nm is used as illustrated in FIG. 8A, even though the input electric current (IF) is increased, the numerical value of the UV content remains within a range below about 35, and the UV-range metamerism index (Mluv) has a value of 3.5 or more, such that the reference values of the standard illuminant cannot be satisfied.

[0075] However, even in this case, as can be seen in FIG. 9A, the illuminant module 10 is configured by using the ultraviolet light-emitting diode device 220 having the wavelength of 405 nm and the ultraviolet light-emitting diode device 220 having the wavelength of 360 nm, such that all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15) may be satisfied, and more excellent characteristics may be implemented.

[0076] That is, as can be seen in FIG. 9A, it can be ascertained that in the case in which the ultraviolet light-emitting diode device 220 having the wavelength of 405 nm and the ultraviolet light-emitting diode device 220 having the wavelength of 360 nm are used together and the input electric current of the ultraviolet light-emitting diode device 220 having the wavelength of 360 nm is increased to 420 mA or higher, the numerical value of the UV content becomes 60 or more, such that the illuminant module 10 according to the present invention satisfies all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15), the visible-range metamerism index (Mlvis) may be decreased to 0.4, and the UV-range metamerism index (Mluv) may be decreased to 1.2, thereby implementing very excellent metamerism index characteristics.

[0077] Next, FIG. 10A illustrates experimental performance values for respective items in the illuminant module 10 according to the specifications of the illuminant D50 (5,000K) according to the exemplary embodiment of the present invention. More specifically, FIG. 10A illustrates experimental values when the illuminant module 10 is configured by using the first white light-emitting diode device 100 having the average color rendering index of 90% or higher and the ultraviolet light-emitting diode device 220 having the peak wavelength of 385 nm.

[0078] In addition, FIG. 10B illustrates light emitting spectra of the illuminant module 10 according to the exemplary embodiment of the present invention.

[0079] In this case, it can be seen that in the case illustrated in FIG. 10A (when the ultraviolet light-emitting diode device 220 having a wavelength of 385 nm is used), the numerical value of the UV content is gradually increased as the input electric current (IF) is increased, and the reference values of the standard illuminant may be satisfied as the UV-range metamerism index (Mluv) is gradually decreased (4.5 → 0.8).

[0080] More specifically, as can be seen in FIG. 10A, it can be ascertained that the numerical value of the UV content becomes 60 to 130 when the input electric current (IF) is within a range from 65 mA to 110 mA, such that the illuminant module 10 according to the present invention may satisfy all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15).

[0081] Therefore, referring to the experimental values for the specifications of the illuminant D50 (5,000K), it can be ascertained that all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15) may be satisfied as the illuminant module 10 is configured by combining the first white light-emitting diode device 100 having the average color rendering index of 90% or higher and the ultraviolet light-emitting diode device 220 of the wavelength of 300 nm to 400 nm, like the specifications for the illuminant D65 (6,500K).

[0082] In contrast, FIGS. 11A and 11B illustrate experimental performance values and light emitting spectra for respective items in the illuminant module 10 using a light-emitting diode (Ra = 80) having typical ductility as a comparative example with respect to the present invention.

[0083] More specifically, FIG. 11A illustrates experimental values when the illuminant module 10 is configured by using a typical white light-emitting diode device having an average color rendering index of about 80% and the ultraviolet light-emitting diode device 220 having the peak wavelength of 365 nm.

[0084] In addition, FIG. 11B illustrates light emitting spectra of the illuminant module 10 according to the comparative example.

[0085] In this case, it can be seen that in the case illustrated in FIG. 11A (when the white light-emitting diode device having the average color rendering index of about 80% and the ultraviolet light-emitting diode device 220 having the wavelength of 365 nm are used), the reference value of the standard illuminant (Mlvis is 1.0 or lower) cannot be satisfied because the visible-range metamerism index (Mlvis) has a value of 1.2 or more even though the numerical value of the UV content is gradually increased as the input electric current (IF) is increased.

[0086] Further, FIGS. 12 and 13 illustrate performance values measured by an integrating sphere in respect to the

illuminant module 10 according to the exemplary embodiment of the present invention.

[0087] First, FIG. 12 exemplarily illustrates result values obtained by measuring the performance by using the integrating sphere after the illuminant module 10 according to the exemplary embodiment of the present invention is configured by using the first white light-emitting diode device 100 having the average color rendering index of 90% or higher and the ultraviolet light-emitting diode device 220 having the peak wavelength of 365 nm.

[0088] As can be seen in FIG. 12, it can be ascertained that the visible-range metamerism index (Mlvis) is 0.5, the UV-range metamerism index (Mluv) is 1.5, the average color rendering index (Ra) is 96.4%, and all the special color rendering indexes (R9 to R15) are 89.6% or higher, such that the illuminant module 10 according to the exemplary embodiment of the present invention may satisfy all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15).

[0089] In addition, FIG. 13 exemplarily illustrates result values obtained by measuring the performance by using the integrating sphere after the illuminant module 10 according to the exemplary embodiment of the present invention is configured by using the first white light-emitting diode device 100 having the average color rendering index of 90% or higher and the ultraviolet light-emitting diode device 220 having the peak wavelength of 385 nm.

[0090] As can be seen in FIG. 13, it can be ascertained that the visible-range metamerism index (Mlvis) is 0.5, the UV-range metamerism index (Mluv) is 1.5, the average color rendering index (Ra) is 95.9%, and all the special color rendering indexes (R9 to R15) are 88.6% or higher, such that the illuminant module 10 according to the exemplary embodiment of the present invention may satisfy all the specifications in respect to the visible-range metamerism index (Mlvis), the UV-range metamerism index (Mluv), the average color rendering index (Ra), and the special color rendering indexes (R9 to R15).

[Mode for Invention]

[0091] Further, the illuminant module 10 according to the exemplary embodiment of the present invention may further include one or more blue light-emitting diode devices 102 having a peak emission wavelength of 400 nm to 470 nm in addition to the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220.

[0092] In this case, a single-color light-emitting diode having a peak emission wavelength of 400 nm to 470 nm may be used as the blue light-emitting diode 102.

[0093] Therefore, in the present invention, the illuminant module 10 is configured by using the one or more blue light-emitting diode devices 102 having the peak emission wavelength of 400 nm to 470 nm in addition to the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220, such that the illuminant module 10 may have improved metamerism index characteristics.

[0094] Further, peak wavelength spectrum intensity of the ultraviolet light-emitting diode device 220 at the wavelength of 300 nm to 400 nm may be within a range of 60% to 90% of peak wavelength spectrum intensity of the blue light-emitting diode device 102 at the wavelength of 400 nm to 470 nm.

[0095] More specifically, FIG. 14 exemplarily illustrates experimental performance results for respective items according to the specifications of the illuminant D65 of the illuminant module 10 according to the exemplary embodiment of the present invention. Referring to FIG. 14, when making a comparison between experimental performance results of Example 1 (the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220) and Example 2 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the blue light-emitting diode 102), it can be ascertained that in contrast to Example 1 in which the visible-range metamerism index (Mlvis) is 0.7 and the UV-range metamerism index (Mluv) is 1.5, the performance value is greatly improved in Example 2 in which the visible-range metamerism index (Mlvis) is 0.5 and the UV-range metamerism index (Mluv) is 0.8.

[0096] In addition, FIG. 15A exemplarily illustrates performance values measured for respective items according to the specifications of the illuminant D65 in respect to Example 2 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the blue light-emitting diode 102).

[0097] As can be seen in FIG. 15A, it can be seen that as the input electric current (IF) is increased, the numerical value of the UV content is gradually increased, and the UV-range metamerism index (Mluv) is decreased, such that the UV-range metamerism index (Mluv) may be greatly decreased to 1.0 or lower when the input electric current (IF) is within a range from 190 mA to 250 mA.

[0098] Further, the illuminant module 10 according to the exemplary embodiment of the present invention may further include one or more second white light-emitting diode devices 101 having an average color rendering index of 90% or higher in addition to the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220.

[0099] In this case, similar to the structure of the first white light-emitting diode 100 in FIG. 5, the second white light-emitting diode device 101 may be a light-emitting diode (LED) device including a second LED chip 140 having an excitation wavelength of 400 nm to 440 nm and a second phosphor layer 160 configured to emit light by being excited at the excitation wavelength of the second LED chip 140. Here, the second phosphor layer 160 may include a first

phosphor 152 having a peak emission wavelength of 440 nm to 499 nm, a second phosphor 153 having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor 154 having a peak emission wavelength of 600 nm to 699 nm.

[0100] In the exemplary embodiment of the present invention, the first phosphor 152, the second phosphor 153, and the third phosphor 154 included in the second phosphor layer 160 may be identical to the first phosphor 152, the second phosphor 153, and the third phosphor 154 included in the first phosphor layer 150, but the present invention is not necessarily limited thereto.

[0101] Further, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the first white light-emitting diode devices 100 and the second white light-emitting diode devices 101, thereby improving characteristics, such as the metamerism index, of the illuminant module 10.

[0102] Furthermore, in the exemplary embodiment of the present invention, the first white light-emitting diode 100 and the second white light-emitting diode 101 may be configured and used as separate devices, but the present invention is not necessarily limited thereto. The first white light-emitting diode 100 and the second white light-emitting diode 101 may be integrated and used as a single device.

[0103] Therefore, in the present invention, the illuminant module 10 is configured by using the one or more second white light-emitting diode devices 101 each having the average color rendering index of 90% or higher and including the second LED chip 140 having the excitation wavelength of 400 nm to 440 nm and the second phosphor layer 160 configured to emit light at the excitation wavelength of the second LED chip 140 in addition to the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220, such that the illuminant module 10 may have improved metamerism index characteristics.

[0104] More specifically, referring back to FIG. 14, when making a comparison between experimental performance results of Example 1 (the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220) and Example 3 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the second white light-emitting diode 101), it can be ascertained that in contrast to Example 1 in which the visible-range metamerism index (M_{vis}) is 0.7 and the UV-range metamerism index (M_{uv}) is 1.5, the performance value is greatly improved in Example 3 in which the visible-range metamerism index (M_{vis}) is 0.6 and the UV-range metamerism index (M_{uv}) is 0.9.

[0105] In addition, FIG. 15B exemplarily illustrates performance values measured for respective items according to the specifications of the illuminant D65 in respect to Example 3 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the second white light-emitting diode 101).

[0106] As can be seen in FIG. 15B, it can be seen that even in Example 3, as the input electric current (I_F) is increased, the numerical value of the UV content is gradually increased, and the UV-range metamerism index (M_{uv}) is decreased, such that the low UV-range metamerism index (M_{uv}) of 1.0 or lower may be maintained when the input electric current (I_F) is within a range from 270 mA to 310 mA.

[0107] Further, in the exemplary embodiment of the present invention, the illuminant module 10 may be configured by using all of the one or more second white light-emitting diode devices 101 having the average color rendering index of 90% or higher and the one or more blue light-emitting diode devices 102 having the peak emission wavelength of 400 nm to 470 nm in addition to the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220.

[0108] Therefore, referring to FIG. 14, which making a comparison between experimental performance results of Example 1 (the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220) and Example 4 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, the second white light-emitting diode 101, and the blue light-emitting diode 102), it can be ascertained that the performance value is greatly improved even in Example 4 in which the visible-range metamerism index (M_{vis}) is 0.6 and the UV-range metamerism index (M_{uv}) is 0.9 (in Example 1, the visible-range metamerism index (M_{vis}) is 0.7 and the UV-range metamerism index (M_{uv}) is 1.5).

[0109] In addition, as can be seen in FIG. 15C, it can be seen that even in Example 4, as the input electric current (I_F) is increased, the numerical value of the UV content is gradually increased, and the UV-range metamerism index (M_{uv}) is decreased, such that the low UV-range metamerism index (M_{uv}) of 1.0 or lower may be maintained when the input electric current (I_F) is within a range from 250 mA to 280 mA.

[0110] In addition, in the exemplary embodiment of the present invention, the illuminant module 10 includes the one or more ultraviolet light-emitting diode devices 220 having the peak emission wavelength of 300 nm to 400 nm and the one or more second white light-emitting diode devices 101 having the average color rendering index of 90% or higher. The second white light-emitting diode device 101 is a light-emitting diode (LED) device including the second LED chip 140 having the excitation wavelength of 400 nm to 440 nm and the second phosphor layer 160 configured to emit light by being excited at the excitation wavelength of the second LED chip 140. The second phosphor layer 160 may include the first phosphor 152 having the peak emission wavelength of 440 nm to 499 nm, the second phosphor 153 having the peak emission wavelength of 500 nm to 580 nm, and the third phosphor 154 having the peak emission wavelength of 600 nm to 699 nm.

[0111] Further, two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the second white light-emitting diode devices 101, thereby improving characteristics, such as the metamerism index, of the illuminant module 10.

[0112] In addition, the numerical value of the UV content of the illuminant module 10 may be within the range from 60 to 160, and two or more types of light-emitting diode (LED) devices having different peak wavelengths may be used as the ultraviolet light-emitting diode devices 220.

[0113] In addition, the illuminant module 10 may further include the one or more blue light-emitting diode devices 102 having the peak emission wavelength of 400 nm to 470 nm. In this case, the peak wavelength spectrum intensity of the ultraviolet light-emitting diode device 220 at the wavelength of 300 nm to 400 nm may be within the range of 60% to 90% of the peak wavelength spectrum intensity of the blue light-emitting diode device 102 at the wavelength of 400 nm to 470 nm, thereby further improving characteristics, such as the metamerism index, of the illuminant module 10.

[0114] Therefore, referring to FIG. 14, when making a comparison between experimental performance results of Example 1 (the first white light-emitting diode 100 having the excitation wavelength of 440 nm to 460 nm and the ultraviolet light-emitting diode 220) and Example 5 (the first white light-emitting diode 100 having the excitation wavelength of 400 nm to 440 nm and the ultraviolet light-emitting diode 220), it can be ascertained that the performance value is greatly improved even in Example 5 in which the visible-range metamerism index (Mlvis) is 0.4 and the UV-range metamerism index (Mluv) is 1.0 (in Example 1, the visible-range metamerism index (Mlvis) is 0.7 and the UV-range metamerism index (Mluv) is 1.5).

[0115] In addition, as can be seen in FIG. 15D, it can be seen that even in Example 5, as the input electric current (IF) is increased, the numerical value of the UV content is gradually increased, and the UV-range metamerism index (Mluv) is decreased, such that the UV-range metamerism index (Mluv) may be decreased to 1.0 when the input electric current (IF) is 160 mA.

[0116] In addition, FIG. 16 exemplarily illustrates experimental performance results for respective items according to the specifications of the illuminant D50 of the illuminant module 10 according to the exemplary embodiments (Examples 1 to 5) of the present invention.

[0117] As can be seen in FIG. 16, in Example 1 (the first white light-emitting diode 100 and the ultraviolet light-emitting diode 220), the visible-range metamerism index (Mlvis) is 0.5, and the UV-range metamerism index (Mluv) is 0.8. In contrast, it can be ascertained that the performance value is further improved in Example 2 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the blue light-emitting diode 102) in which the visible-range metamerism index (Mlvis) is 0.5 and the UV-range metamerism index (Mluv) is 0.6.

[0118] In addition, in the exemplary embodiments of the present invention, it can be ascertained that the metamerism index characteristics are further improved even in Example 3 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, and the second white light-emitting diode 101) in which the visible-range metamerism index (Mlvis) is 0.4 and the UV-range metamerism index (Mluv) is 0.6, Example 4 (the first white light-emitting diode 100, the ultraviolet light-emitting diode 220, the second white light-emitting diode 101, and the blue light-emitting diode 102) in which the visible-range metamerism index (Mlvis) is 0.5 and the UV-range metamerism index (Mluv) is 0.6, and Example 5 (the first white light-emitting diode 100 having the excitation wavelength of 400 nm to 440 nm and the ultraviolet light-emitting diode 220) in which the visible-range metamerism index (Mlvis) is 0.5 and the UV-range metamerism index (Mluv) is 0.7.

[0119] In this regard, FIGS. 17A to 17D exemplarily illustrate performance measured values for respective items according to the specifications of the illuminant D50 in respect to Examples 2 to 5.

[0120] First, as can be seen in FIG. 17A, it can be seen that even in Example 2, as the input electric current (IF) is increased, the numerical value of the UV content is gradually increased, and the UV-range metamerism index (Mluv) is decreased, such that the UV-range metamerism index (Mluv) may be decreased to about 0.6 and optimized when the input electric current (IF) is within the range of 370 mA to 390 mA.

[0121] In addition, it can be ascertained that the UV-range metamerism index (Mluv) may be optimized to be about 0.6 when the input electric current (IF) is within the range from 260 mA to 280 mA in Example 3 as can be seen in FIG. 17B, the UV-range metamerism index (Mluv) may be optimized to be about 0.6 when the input electric current (IF) is within the range from 320 mA to 330 mA in Example 4 as can be seen in FIG. 17C, and the UV-range metamerism index (Mluv) may be decreased to about 0.7 or lower when the input electric current (IF) is within the range from 120 mA to 130 mA in Example 5 as can be seen in FIG. 17D.

[0122] In addition, FIGS. 18A and 18B exemplarily illustrate light emitting spectra according to the specifications of the illuminants D65 and D50 of the illuminant module 10 according to various exemplary embodiments (Examples 1 to 5) of the present invention.

[0123] Therefore, in the case of the illuminant module 10 according to the exemplary embodiment of the present invention, the illuminant module 10 is configured by using the ultraviolet light-emitting diode (LED) device having the peak emission wavelength of 300 nm to 400 nm and the one or more first white light-emitting diode devices 100 having the average color rendering index of 90% or higher and including the first LED chip 130 having the excitation wavelength of 440 nm to 460 nm and the first phosphor layer 150 configured to emit light at the excitation wavelength of the first LED chip 130, such that the high color rendering standard LED illuminant module having high color rendering properties and excellent metamerism index characteristics may be provided.

[0124] In addition, according to the present invention, the illuminant module 10 further includes the one or more second

white light-emitting diode devices 101 having the average color rendering index of 90% or higher and including the second LED chip 140 having the excitation wavelength of 400 nm to 440 nm and the second phosphor layer 160 configured to emit light at the excitation wavelength of the second LED chip 140, the first white light-emitting diode 100 having the first LED chip 130 having the excitation wavelength of 400 nm to 440 nm is used, or the illuminant module 10 further includes the blue light-emitting diode device 102 having the peak emission wavelength of 400 nm to 470 nm, such that the illuminant module 10 having improved metamerism index characteristics may be implemented.

[0125] Further, as illustrated in FIG. 1, the lighting apparatus according to another exemplary embodiment of the present invention may include the illuminant module 10 and may be implemented as an apparatus for inspecting colors or the like of subjects to be inspected.

[0126] The above-mentioned exemplary embodiments of the present invention are not implemented only by an apparatus and a method. Based on the above-mentioned descriptions of the exemplary embodiments, those skilled in the art to which the present invention pertains may easily realize the exemplary embodiments through programs for realizing functions corresponding to the configuration of the exemplary embodiment of the present invention or recording media on which the programs are recorded.

[0127] Although the exemplary embodiments of the present invention have been described in detail hereinabove, the right scope of the present invention is not limited thereto, and it should be clearly understood that many variations and modifications of those skilled in the art using the basic concept of the present invention, which is defined in the following claims, will also belong to the right scope of the present invention.

Claims

1. An illuminant module comprising:

one or more ultraviolet light-emitting diode (LED) devices having a peak emission wavelength of 300 nm to 400 nm; and
one or more first white light-emitting diode (LED) devices having an average color rendering index of 90% or higher,
wherein the first white light-emitting diode (LED) device is a light-emitting diode (LED) device comprising a first LED chip having an excitation wavelength of 440 nm to 460 nm, and a first phosphor layer configured to emit light by being excited at the excitation wavelength of the first LED chip, and the first phosphor layer comprises a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

2. The illuminant module of claim 1, wherein a numerical value of UV content of the illuminant module is within a range from 60 to 160.

3. The illuminant module of claim 1, wherein two or more types of light-emitting diode (LED) devices having different peak wavelengths are used as the first white light-emitting diode (LED) devices.

4. The illuminant module of claim 1, further comprising:

a light transmissive member configured to accommodate therein the ultraviolet light-emitting diode (LED) device and the first white light-emitting diode (LED) device,
wherein the light transmissive member is made of PMMA, glass, or a material that transmits an ultraviolet ray.

5. The illuminant module of claim 1, wherein two or more types of light-emitting diode (LED) devices having different peak wavelengths are used as the ultraviolet light-emitting diode (LED) devices.

6. The illuminant module of claim 1, wherein the illuminant module has a light emitting characteristic in which a visible-range metamerism index (M_{vis}) is 1.0 or lower and a UV-range metamerism index (M_{uv}) is 1.5 or lower by the ultraviolet light-emitting diode (LED) device and the first white light-emitting diode (LED) device.

7. The illuminant module of claim 6, wherein the illuminant module has a light emitting characteristic in which an average color rendering index (Ra) is 90% or higher and a special color rendering indexes (R₉ to R₁₅) is 80% or higher.

8. The illuminant module of claim 6, wherein a correlated color temperature CCT is within a range from 2,000K to

10,000K.

9. The illuminant module of claim 1, further comprising:

one or more second white light-emitting diode (LED) devices having an average color rendering index of 90% or higher,
wherein the second white light-emitting diode (LED) device is a light-emitting diode (LED) device comprising a second LED chip having an excitation wavelength of 400 nm to 440 nm and a second phosphor layer configured to emit light by being excited at the excitation wavelength of the second LED chip, and the second phosphor layer comprises a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

10. The illuminant module of claim 9, wherein two or more types of light-emitting diode (LED) devices having different peak wavelengths are used as the first white light-emitting diode (LED) device and the second white light-emitting diode (LED) device.

11. The illuminant module of claim 1, further comprising:
one or more blue light-emitting diode (LED) devices having a peak emission wavelength of 400 nm to 470 nm.

12. The illuminant module of claim 11, wherein peak wavelength spectrum intensity of the ultraviolet light-emitting diode (LED) device at a wavelength of 300 nm to 400 nm is within a range of 60% to 90% of peak wavelength spectrum intensity of the blue light-emitting diode (LED) device at a wavelength of 400 nm to 470 nm.

13. An illuminant module comprising:

one or more ultraviolet light-emitting diode (LED) devices having a peak emission wavelength of 300 nm to 400 nm; and
one or more second white light-emitting diode (LED) devices having an average color rendering index of 90% or higher,
wherein the second white light-emitting diode (LED) device is a light-emitting diode (LED) device comprising a second LED chip having an excitation wavelength of 400 nm to 440 nm, and a second phosphor layer configured to emit light by being excited at the excitation wavelength of the second LED chip, and the second phosphor layer comprises a first phosphor having a peak emission wavelength of 440 nm to 499 nm, a second phosphor having a peak emission wavelength of 500 nm to 580 nm, and a third phosphor having a peak emission wavelength of 600 nm to 699 nm.

14. The illuminant module of claim 13, wherein a numerical value of UV content of the illuminant module is within a range from 60 to 160.

15. The illuminant module of claim 13, wherein two or more types of light-emitting diode (LED) devices having different peak wavelengths are used as the second white light-emitting diode (LED) devices.

16. The illuminant module of claim 13, wherein two or more types of light-emitting diode (LED) devices having different peak wavelengths are used as the ultraviolet light-emitting diode (LED) devices.

17. The illuminant module of claim 13, further comprising:
one or more blue light-emitting diode (LED) devices having a peak emission wavelength of 400 nm to 470 nm.

18. The illuminant module of claim 17, wherein peak wavelength spectrum intensity of the ultraviolet light-emitting diode (LED) device at a wavelength of 300 nm to 400 nm is within a range of 60% to 90% of peak wavelength spectrum intensity of the blue light-emitting diode (LED) device at a wavelength of 400 nm to 470 nm.

19. A lighting apparatus comprising the illuminant module according to any one of claims 1 to 18.

FIG. 1



FIG. 2

PERFORMANCE ITEM	REFERENCE VALUE
VISIBLE RANGE METAMERISM INDEX (M _{vis})	1.0 OR LOWER
UV-RANGE METAMERISM INDEX (M _{uv})	1.5 OR LOWER
AVERAGE COLOR RENDERING INDEX (Ra)	95 OR HIGHER
SPECIAL COLOR RENDERING INDEXES (R9 TO R15)	85 OR HIGHER

[TABLE] PERFORMANCE SPECIFICATIONS OF D65 AND D50 STANDARD ILLUMINANTS

FIG. 3

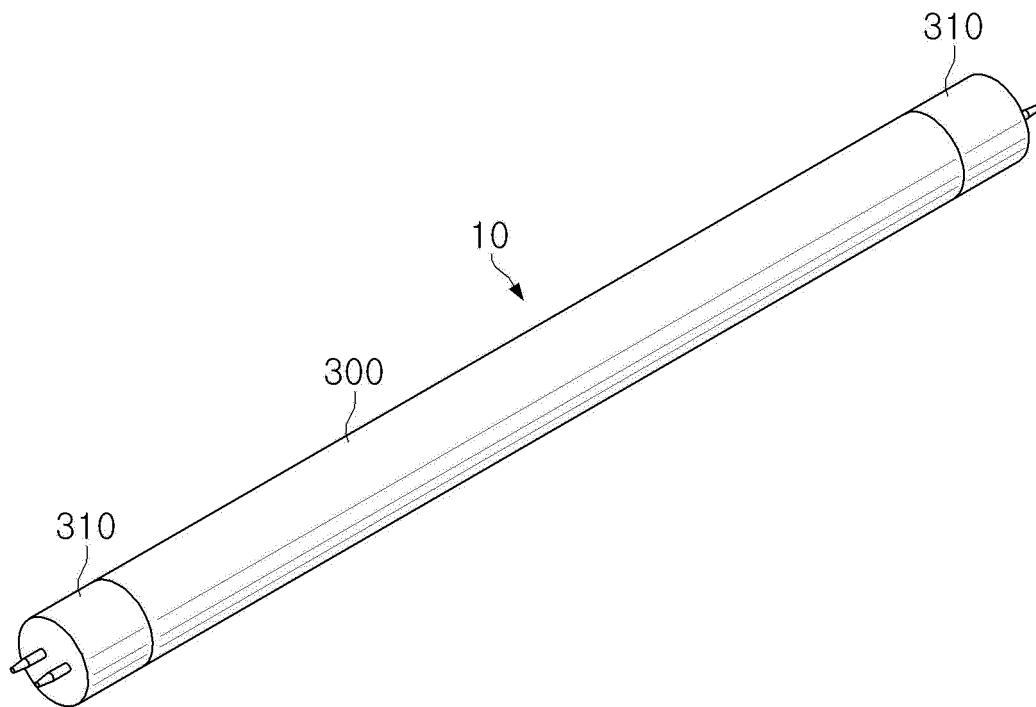


FIG. 4

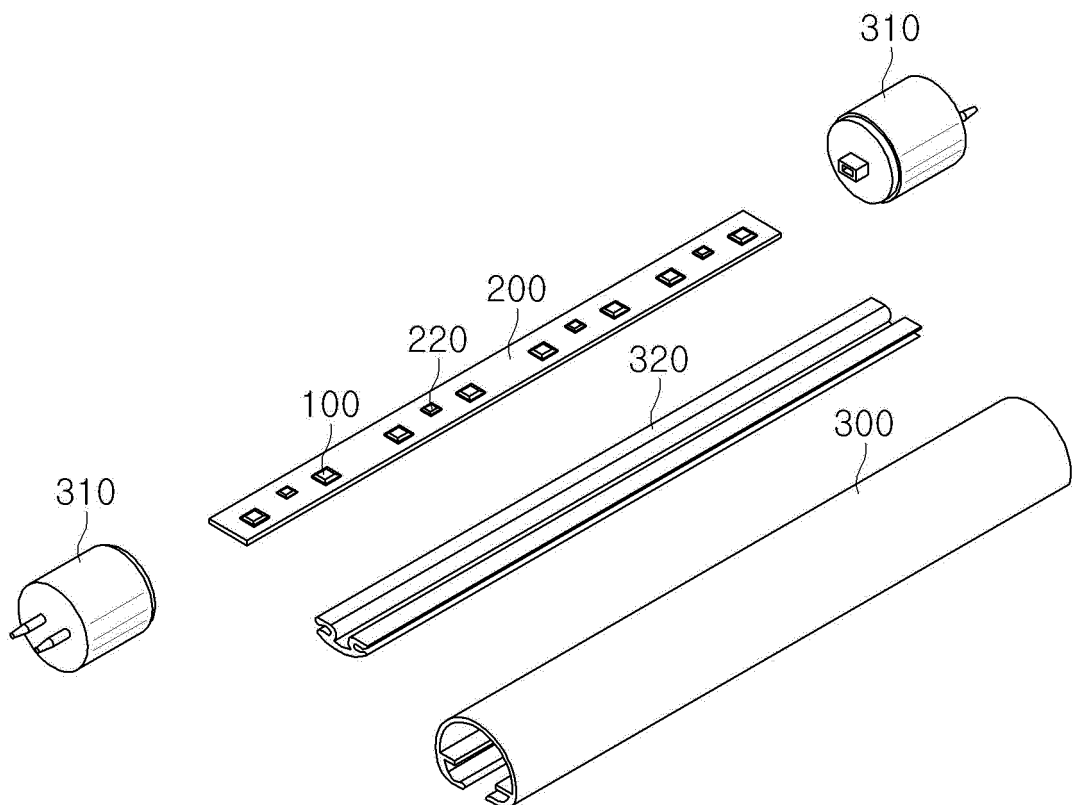


FIG. 5

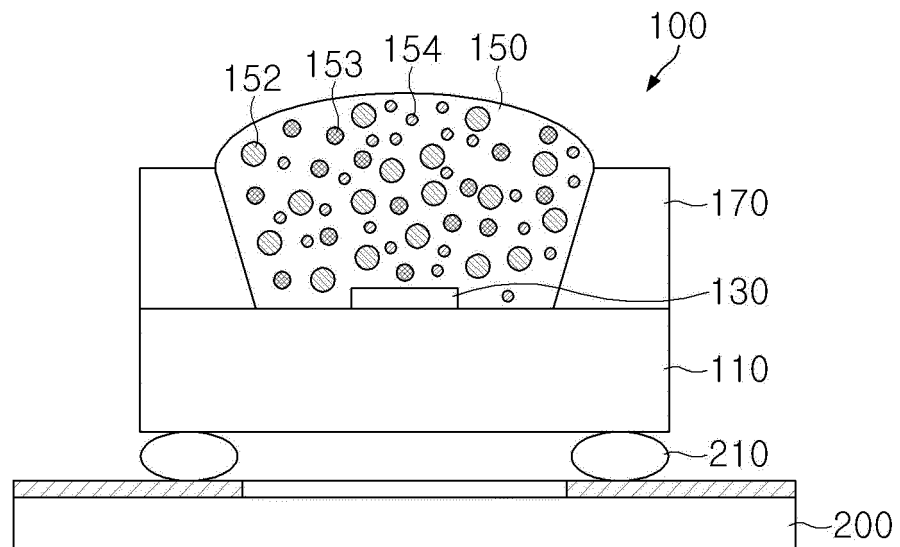


FIG. 6A

IF	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
10	6395	0	0.8	6	98.3	98.6	98.9	98	96	97.7	98.4	99.4	99.3	98.2	95.2	92.1	92.2	98.1	98.2
30	6398	0	0.8	5.8	98.3	98.6	98.9	98.1	96	97.7	98.4	99.4	99.3	98.1	95.1	92.1	92.2	98.1	98.2
60	6400	0	0.8	5.4	98.3	98.6	98.9	98.1	96	97.7	98.4	99.4	99.3	98.1	95.2	92.1	92.2	98.2	98.2
90	6402	0	0.8	5.1	98.3	98.6	98.9	98.1	96	97.7	98.4	99.4	99.3	98.1	95.2	92.1	92.2	98.2	98.2
120	6402	0	0.8	4.8	98.3	98.6	99	98.1	96	97.7	98.4	99.4	99.4	98.2	95.2	92.1	92.2	98.2	98.3
150	6407	0	0.8	4.5	98.3	98.6	99	98.1	96	97.7	98.4	99.4	99.4	98.2	95.2	92.1	92.2	98.2	98.2
180	6405	0	0.7	4.2	98.3	98.5	99	98.1	95.9	97.7	98.4	99.4	99.3	98.1	95.2	92.1	92.3	98.2	98.3
210	6411	0.7	0.7	3.9	98.3	98.6	99	98.1	96	97.7	98.4	99.4	99.4	98.1	95.2	92.1	92.2	98.2	98.3
240	6410	10	0.7	3.7	98.3	98.5	99	98.1	95.9	97.7	98.4	99.4	99.3	98	95.2	92.1	92.2	98.2	98.3
270	6411	18.7	0.7	3.4	98.3	98.5	99	98.1	95.9	97.7	98.4	99.4	99.3	98	95.2	92.1	92.2	98.2	98.3
300	6412	28	0.7	3.1	98.3	98.5	99	98.1	96	97.7	98.4	99.4	99.4	98.1	95.2	92.2	92.2	98.2	98.3
330	6411	36.2	0.7	2.9	98.3	98.5	99	98.2	96	97.7	98.4	99.5	99.4	98.1	95.2	92.2	92.2	98.2	98.3
360	6413	44.3	0.7	2.7	98.3	98.5	99	98.1	96	97.7	98.4	99.5	99.4	98	95.2	92.2	92.2	98.2	98.3
390	6420	50.1	0.7	2.5	98.3	98.4	99	98.2	95.9	97.7	98.3	99.5	99.3	97.8	95.1	92.1	92.2	98.2	98.3
420	6423	59	0.7	2.2	98.3	98.4	99	98.2	96	97.7	98.3	99.5	99.3	97.9	95.1	92.2	92.1	98.2	98.3
450	6425	62.4	0.5	1.5	98.3	98.4	98.9	98.2	95.9	97.7	98.3	99.5	99.2	97.7	95.1	92.2	92.2	98.2	98.3
480	6429	71.9	0.5	1.5	98.3	98.4	99	98.2	95.9	97.7	98.3	99.5	99.3	97.8	95.2	92.2	92.1	98.2	98.3
510	6431	69.3	0.5	1.5	98.2	98.3	98.9	98.2	95.9	97.6	98.2	99.5	99.2	97.6	95	92.2	92.1	98.2	98.3
540	6429	82.8	0.5	1.5	98.3	98.3	99	98.2	95.9	97.7	98.3	99.5	99.2	97.7	95.1	92.2	92.1	98.3	98.3
570	6431	84.3	0.5	1.5	98.2	98.3	98.9	98.2	95.9	97.6	98.2	99.5	99.1	97.5	95.1	92.2	92.1	98.2	98.4
600	6434	70.2	0.5	1.5	98.2	98.2	98.9	98.2	95.9	97.6	98.1	99.6	99.1	97.4	95	92.2	92.1	98.2	98.4
630	6440	80.3	0.5	1.5	98.2	98.1	98.9	98.2	95.9	97.6	98.1	99.6	99	97.2	94.9	92.2	92	98.1	98.4
700	6442	69.3	0.5	1.5	98.2	98.1	98.9	98.2	95.9	97.6	98	99.6	99	97.1	94.9	92.2	92	98.1	98.4
750	6446	53.3	0.7	2.3	98.1	98	98.8	98.2	95.9	97.6	98	99.6	99	97.1	94.9	92.2	92	98.1	98.4
800	6447	43.7	0.7	2.5	98.1	98	98.8	98.2	96	97.6	97.9	99.7	98.9	97	94.8	92.3	92	98	98.4
900	6453	58.3	0.7	2.1	98.1	98	98.8	98.3	95.9	97.5	98	99.7	98.9	97	94.9	92.3	92	98.1	98.4
##	6462	14	0.7	3.3	98	97.8	98.7	98.3	95.9	97.4	97.8	99.7	98.8	96.4	94.6	92.2	92	97.9	98.4

FIG. 6B

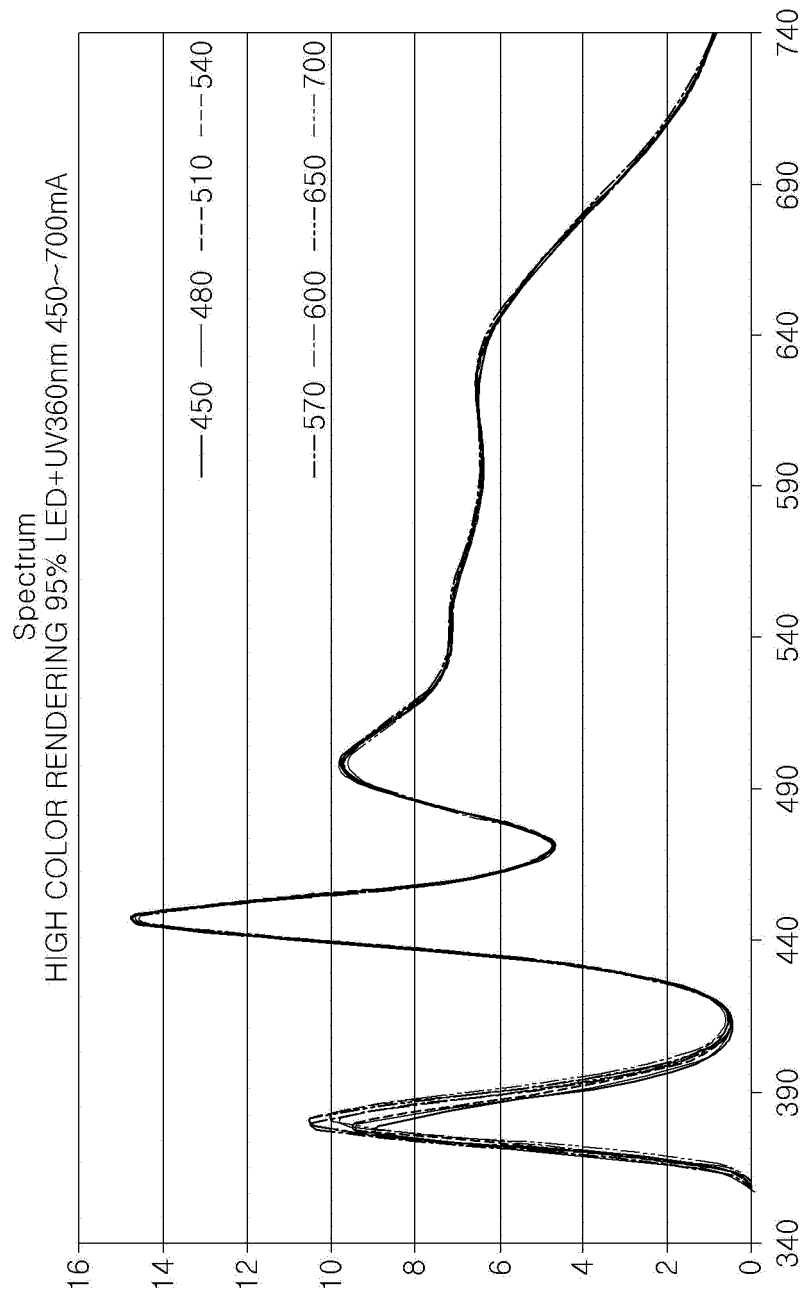


FIG. 7A

IF	UVCont ent	Mivis	Mluv	CCT	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
10	0	0.7	5.9	6368	98.4	98.3	99	98	96	97.8	98.9	99	99.4	98.4	95.9	92.3	93.1	98.4	98.2
20	0	0.7	5.5	6385	98.4	98.9	99	98.1	96.1	97.9	98.6	99.4	99.6	98.3	95.5	92.3	92.6	98.3	98.2
30	0	0.7	5.2	6388	98.4	98.8	99	98.1	96.1	97.8	98.6	99.4	99.6	99	95.4	92.4	92.5	98.3	98.3
50	0	0.7	4.6	6397	98.4	98.8	99.1	98.1	95.9	97.7	98.6	99.3	99.5	98.9	95.5	92.2	92.9	98.4	98.3
60	0	0.7	4.2	6402	98.4	98.7	99.1	98.2	95.9	97.7	98.6	99.3	99.5	98.7	95.5	92.2	92.9	98.5	98.3
90	15.8	0.7	3.3	6413	98.3	98.7	99.2	98.2	95.7	97.6	98.5	99.2	99.4	98.5	95.6	92.1	93.2	98.6	98.4
100	26.4	0.7	3	6420	98.3	98.7	99.2	98.2	95.6	97.6	98.5	99.2	99.3	98.5	95.6	92.1	93.4	98.6	98.4
120	45.1	0.7	2.4	6425	98.2	98.6	99.2	98.3	95.4	97.5	98.5	99.1	99.2	98.1	95.6	91.9	93.6	98.6	98.5
150	74.8	0.5	1.5	6440	98.1	98.5	99.3	98.4	95.3	97.4	98.4	99	99	97.8	95.7	91.9	93.9	98.7	98.5
150	79.8	0.5	1.5	6482	97.9	98.1	99.2	98.4	94.8	97.1	98.2	98.9	98.5	96.3	95.4	91.4	94	98.4	98.6
170	92	0.5	1.5	6484	97.9	98.1	99.2	98.4	94.8	97.1	98.2	98.8	98.5	96.5	95.5	91.4	94	98.5	98.6
180	110.6	0.5	1.5	6453	98.1	98.4	99.4	98.4	95.1	97.3	98.3	98.9	98.8	97.5	95.8	91.8	94.3	98.7	98.6
210	125.9	0.6	2.3	6470	98	98.3	99.4	98.5	94.8	97.2	98.2	98.8	98.6	97.2	95.8	91.6	94.6	98.7	98.7
240	152.1	0.6	2.9	6482	97.9	98.2	99.4	98.5	94.6	97	98.1	98.7	98.4	96.9	95.9	91.5	95	98.7	98.7
270	171.4	0.6	3.4	6503	97.8	98.2	99.5	98.6	94.4	97	98	98.6	98.3	96.6	96	91.4	95.3	98.7	98.8
300	194.2	0.5	4	6515	97.7	98.1	99.5	98.6	94.2	96.8	97.9	98.4	98	96.2	96	91.3	95.7	98.6	98.8
330	215.8	0.5	4.6	6531	97.6	98	99.5	98.6	94	96.7	97.7	98.3	97.8	95.9	96	91.1	96	98.4	98.9
360	232.7	0.5	5	6550	97.5	97.9	99.5	98.6	93.8	96.6	97.6	98.2	97.7	95.6	96.1	91	96.3	98.3	98.9
390	250.3	0.5	5.5	6566	97.4	97.8	99.5	98.6	93.5	96.5	97.5	98.1	97.5	95.2	96.1	90.9	96.7	98.2	98.9
420	256.1	0.4	5.7	6587	97.3	97.7	99.5	98.6	93.3	96.3	97.4	98	97.3	94.8	96.1	90.7	97.1	98.1	99
450	283.7	0.4	6.3	6503	97.1	97.5	99.4	98.6	93.1	96.2	97.3	97.9	97.1	94.3	96.2	90.6	97.4	97.9	99
480	298.3	0.4	6.7	6617	97.1	97.5	99.4	98.6	92.9	96.1	97.2	97.8	96.9	94.2	96.3	90.5	97.6	97.8	99
510	339.6	0.4	7.5	6622	96.9	97.4	99.4	98.5	92.7	96	97	97.7	96.7	93.8	96.3	90.3	97.9	97.7	99
540	297.9	0.4	6.9	6651	96.8	97.2	99.3	98.4	92.4	95.9	97	97.5	96.6	93.2	96.3	90.1	98.4	97.5	99
570	292.8	0.4	6.9	6664	96.7	97.1	99.2	98.4	92.3	95.8	97	97.4	96.5	93.1	96.3	90	98.7	97.4	99
600	298.4	0.4	7.1	6683	96.6	97.1	99.2	98.3	92.1	95.7	97	97.3	96.4	92.7	96.3	89.9	99	97.3	99

FIG. 7B

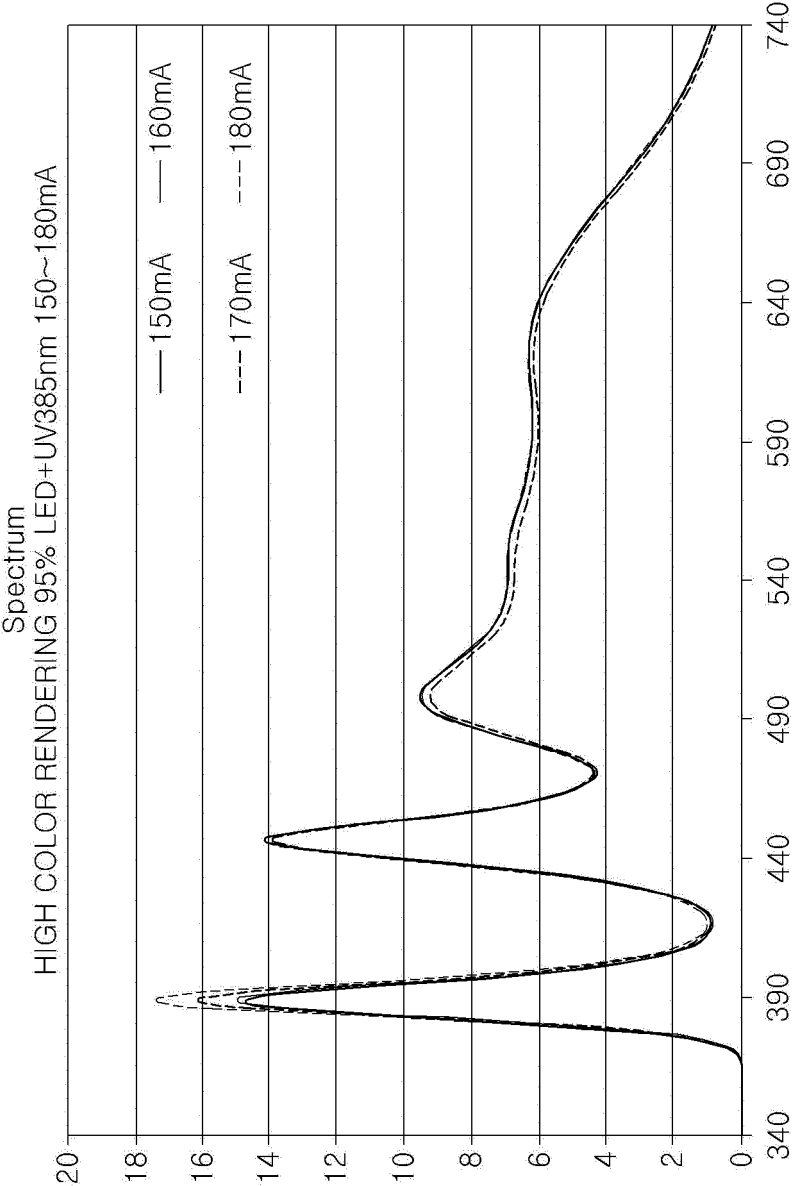


FIG. 8A

IF	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
10	6405	0	0.7	5.9	98	98.3	98.9	98.1	95.3	97.3	98.3	99	98.8	97	95	91.5	93.7	98	98.3
15	6400	0	0.6	5.7	98	98.4	98.2	98.4	95	97.2	98.6	98.6	98.5	97.2	95.7	91.4	94.6	98.3	98.6
20	6451	0	0.5	5.6	97.8	98.2	98.3	98.5	94.5	97	98.6	98.2	98.1	96.3	95.9	91	95.5	98.3	98.7
25	6472	0	0.5	5.6	97.7	98.1	99.4	98.6	94.2	96.8	98.6	98	97.8	95.9	96	90.8	96	98.3	98.8
30	6541	0	0.5	5.5	97.3	97.6	99.3	98.6	93.6	96.4	98.3	97.8	97.3	94.2	95.6	90.2	96.8	98	98.8
60	6755	0	0.6	5	96.3	96.7	99.3	97.9	91.3	95.3	98.4	96.2	95.4	90.7	96.4	88.5	98.8	97.6	98.8
90	6964	0	0.9	4.5	95.2	95.8	98.9	96.7	89.1	94.2	98.4	94.7	93.6	87.3	96.8	86.9	95.3	96.9	98.2
120	7173	0	1.1	4.1	94	94.9	98.4	95.4	87	93.2	98.4	93.3	91.9	83.7	96.8	95.3	92	96.1	97.4
150	7425	0	1.3	3.8	92.8	93.9	97.8	93.9	84.8	92.1	98.3	91.8	90	79.8	96.3	83.6	88.7	95.1	96.5
180	7688	0	1.6	3.5	91.7	93	97.2	92.4	82.8	91.1	98.2	90.5	88.3	76.1	95.6	82	85.8	94.2	95.5
210	7969	0	1.9	3.5	90.6	92.1	96.6	90.9	80.9	90.2	98	89.3	86.6	72.7	94.8	80.4	83.2	93.3	94.6
240	8255	0	2.2	3.7	89.6	91.3	96	89.5	79.1	89.4	97.9	88.1	85.1	69.4	93.8	79	80.9	92.5	93.7
270	8639	0	2.5	3.8	88.3	90.3	95.3	87.8	76.9	88.5	97.6	86.7	83.2	65	92.6	77.2	78.3	91.5	92.6
300	8940	8.4	2.7	4	87.4	89.6	94.8	86.5	75.3	87.8	97.5	85.7	82.1	62.4	91.5	76.1	76.3	90.7	91.8
330	9359	11.3	3	4.1	86.4	88.9	94.1	84.9	73.5	87.1	97.2	84.5	80.6	59.2	90.2	74.7	74.3	89.9	90.8
360	9826	15	3.2	4.2	85.2	88	93.5	83.2	71.6	86.3	96.8	83.3	78.9	55.3	88.8	73.1	72.4	88.9	89.7
390	10226	21.3	3.4	4.4	84.4	87.3	92.9	82	70.2	85.7	96.6	82.4	77.8	52.7	87.7	71.9	70.8	88.1	88.9
420	10759	24.2	3.6	4.5	83.4	86.7	92.3	80.5	68.5	85.1	96.2	81.4	76.5	49.8	86.4	70.6	69.1	87.3	88
450	11251	31.2	3.8	4.6	82.6	86.1	91.7	79.1	67.1	84.6	95.9	80.5	75.4	47.1	85.2	69.5	67.7	86.6	87.2
480	12369	24.4	4	4.7	81.1	84.9	90.7	76.8	64.7	83.8	95	79	73.4	42.2	83	67.4	66.1	85.4	85.7
510	13178	25.8	4.1	4.7	80	84.1	90.1	75.2	63.1	83.1	94.5	78.1	72	38.6	83	66	64.9	84.4	84.7
540	13796	31.7	4.3	4.8	79.4	83.7	89.5	74.1	61.9	82.8	94.2	77.3	71.4	37.1	80.3	65.2	63.6	83.8	84.1
570	15237	28.8	4.4	4.9	78.2	82.9	88.7	72.1	60.1	82.2	93.4	76.2	69.8	33.1	78.3	63.6	62.6	82.8	82.8
600	16232	35	4.6	5	77.4	82.4	88	70.8	58.8	81.8	93	75.4	69	31	76.9	62.6	61.5	82	82.1

FIG. 8B

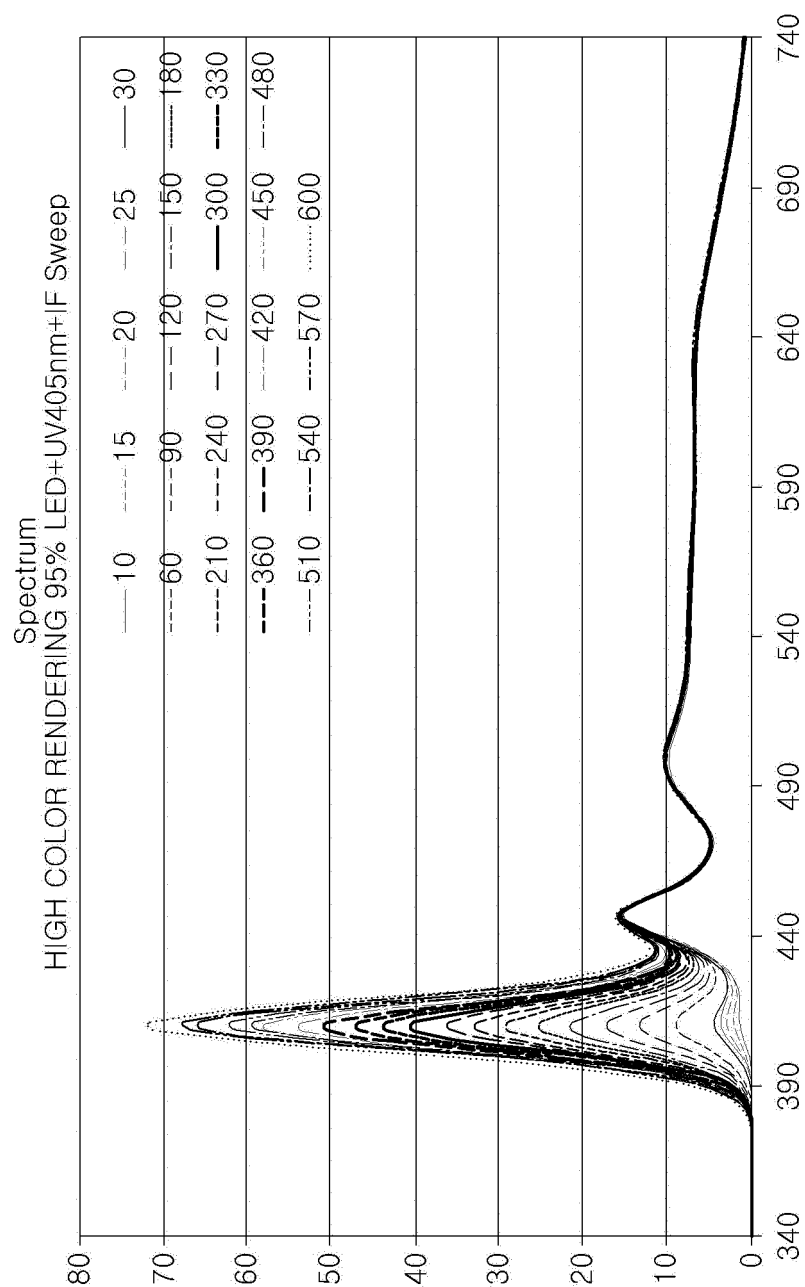


FIG. 9A

IF 405nm (5ea)	IF 365nm (10ea)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
60	10	6598	0	0.5	5.3	97.3	98.1	99.8	98.4	92.8	96.4	99.1	96.8	96.8	95	97.3	89.8	97.2	98.7	99
60	30	6614	0	0.5	5.1	97.3	97.9	99.9	98.4	92.9	96.4	98.9	96.9	96.8	94.4	97	89.8	97.1	98.5	99
60	60	6618	0	0.5	4.8	97.3	97.9	99.8	98.4	92.9	96.4	98.9	96.9	96.9	94.4	97	89.9	97.1	98.5	99
60	90	6619	0	0.5	4.5	97.3	97.8	99.8	98.4	92.9	96.4	98.9	97	96.9	94.3	97	89.9	97.1	98.5	99
60	120	6624	0	0.5	4.2	97.2	97.8	99.8	98.4	92.9	96.4	98.9	97	96.9	94.2	97	89.9	97.1	98.4	99
60	150	6627	0	0.5	3.9	97.2	97.8	99.8	98.4	92.9	96.4	98.8	97	96.9	94.2	96.9	89.9	97.1	98.4	99
60	180	6629	1.4	0.5	3.6	97.2	97.7	99.8	98.4	92.9	96.4	98.8	97	96.9	94.1	96.9	89.9	97.1	98.4	99
60	210	6630	10.1	0.5	3.4	97.2	97.7	99.7	98.4	92.9	96.4	98.8	97.1	96.9	94.1	96.9	89.9	97.1	98.4	99
60	240	6632	19.1	0.5	3.1	97.2	97.7	99.7	98.4	92.9	96.4	98.8	97.1	96.9	94.1	96.9	89.9	97.1	98.3	99
60	270	6635	27.8	0.4	2.8	97.2	97.7	99.7	98.4	92.9	96.4	98.8	97.1	97	94.1	96.9	90	97.1	98.3	99
60	300	6636	36.8	0.4	2.6	97.2	97.7	99.7	98.4	93	96.4	98.8	97.1	96.9	94	96.9	90	97	98.3	99
60	330	6638	44.5	0.4	2.3	97.2	97.6	99.7	98.4	93	96.4	98.7	97.1	97	94	96.9	90	97	98.3	99
60	360	6641	52.7	0.4	2.1	97.2	97.6	99.6	98.4	92.9	96.4	98.7	97.2	97	93.9	96.8	90	97.1	98.2	99
60	390	6647	59.5	0.4	1.9	97.2	97.6	99.6	98.4	92.9	96.3	98.7	97.2	96.9	93.7	96.8	89.9	97	98.2	99
60	420	6647	65.6	0.4	1.5	97.2	97.6	99.6	98.4	93	96.3	98.7	97.2	97	93.8	96.8	90	97	98.2	99
60	450	6650	73.3	0.4	1.5	97.2	97.5	99.6	98.4	93	96.3	98.6	97.2	97	93.8	96.8	90	97	98.2	99
60	480	6658	55.9	0.4	1.5	97.1	97.3	99.4	98.4	92.9	96.2	98.4	97.3	96.9	93	96.5	89.9	97.1	97.9	99
60	510	6659	76.9	0.4	1.4	97.2	97.4	99.4	98.4	93	96.3	98.5	97.3	97	93.4	96.6	90	97	98	99
60	540	6660	83.4	0.4	1.2	97.2	97.4	99.4	98.4	93	96.3	98.5	97.3	97	93.4	96.6	90	97	98	99
60	570	6662	85.3	0.4	1.2	97.1	97.3	99.4	98.4	93	96.3	98.5	97.3	97	93.4	96.6	90	97	98	99
60	600	6667	87.9	0.4	1.2	97.1	97.3	99.4	98.4	92.9	96.3	98.4	97.3	97	93.2	96.6	90	97	97.9	99
60	630	6665	99.2	0.4	1.2	97.1	97.3	99.4	98.4	92.9	96.2	98.4	97.3	96.9	93.1	96.6	90	97	97.9	99
60	660	6670	103.4	0.4	1.2	97.1	97.3	99.3	98.4	92.9	96.2	98.4	97.3	97	93.2	96.6	90	97	97.9	99
60	700	6672	115.6	0.4	1.4	97.1	97.3	99.4	98.4	92.9	96.2	98.4	97.3	97	93.2	96.6	90	97.1	97.9	99

FIG. 9B

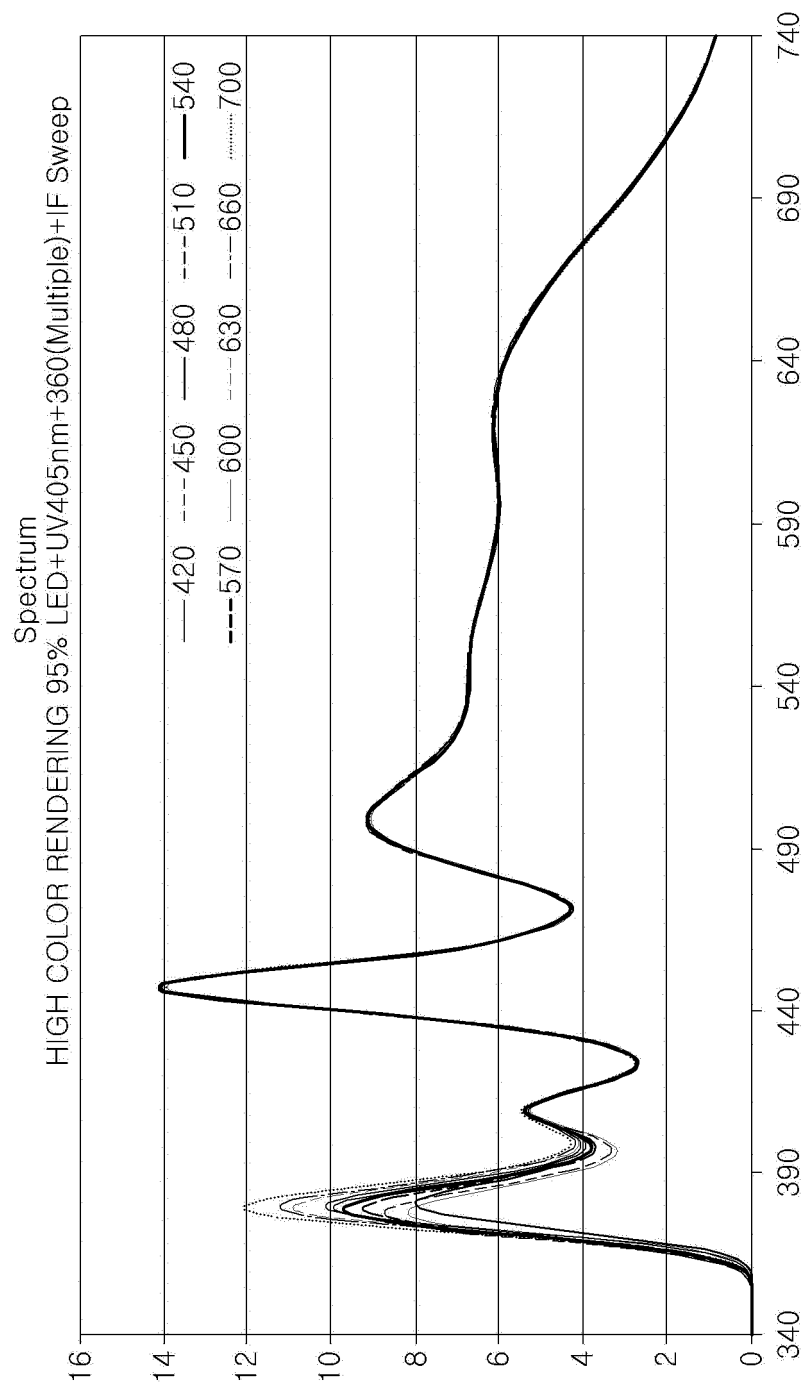


FIG. 10A

IF	UVCont	CCT	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
(mA)	ent																	
10	0	4996	0.5	4.2	98.5	98.7	98.8	98.5	98.3	98.8	99.1	98.8	97.5	96.4	93.5	89.9	97.9	98.8
30	10.1	4999	0.5	3.3	98.5	98.6	98.8	98.5	98.3	98.8	99.1	98.7	97.3	96.5	93.4	90.2	98	98.9
60	55.4	5008	0.5	1.9	97.8	98.2	99.6	98.9	94.3	98.3	97.9	98.5	97.8	96.8	91.2	97	98.6	99.2
65	64.5	5010	0.5	1.5	97.8	98.1	99.6	98.9	94.2	96.9	97.8	98.4	97.8	96.9	91.1	97	98.6	99.2
70	73.7	5012	0.5	1.3	97.7	98.1	99.6	98.9	94.1	96.8	97.8	98.4	97.6	96.9	91.1	97.1	98.6	99.2
75	81.8	5014	0.5	1.1	97.7	98.1	99.6	98.9	94	96.8	97.7	98.4	97.5	96.9	91	97.2	98.5	99.2
80	88.1	5015	0.5	0.9	97.7	98.1	99.6	98.9	94	96.8	97.7	98.4	97.6	96.9	91.1	97.3	98.5	99.2
85	96.4	5016	0.5	0.8	97.7	98	99.5	98.9	94	96.7	97.7	98.4	97.4	96.9	91	97.4	98.5	99.2
90	102.2	5019	0.5	0.9	97.7	98	99.5	98.9	93.9	96.7	97.7	98.3	97.4	96.9	91	97.4	98.5	99.2
95	109.6	5018	0.5	1.1	97.7	98	99.5	98.9	93.9	96.7	97.7	98.4	97.4	96.9	91	97.5	98.5	99.2
100	115.6	5019	0.5	1.2	97.6	98	99.5	98.9	93.8	96.7	97.6	98.3	97.3	96.9	90.9	97.5	98.5	99.2
105	124	5021	0.5	1.4	97.6	98	99.5	98.9	93.8	96.7	97.6	98.3	97.2	96.9	90.9	97.6	98.5	99.2
110	129.8	5023	0.5	1.5	97.6	98	99.5	98.9	93.8	96.6	97.6	98.3	97.1	96.9	90.9	97.7	98.4	99.2
115	138.6	5026	0.5	1.8	97.6	97.9	99.5	98.8	93.7	96.6	97.6	98.3	97.1	96.9	90.9	97.8	98.4	99.2
120	141.6	5023	0.5	1.8	97.6	98	99.5	98.9	93.8	96.6	97.7	98.4	97.2	96.8	90.9	97.9	98.5	99.2
150	186	5034	0.5	2.9	97.5	97.9	99.5	98.8	93.6	96.5	97.6	98.3	97	96.8	90.8	98.3	98.4	99.2
180	226.4	5042	0.5	3.8	97.4	97.8	99.4	98.8	93.3	96.3	97.5	98.2	96.7	96.8	90.7	98.7	98.3	99.2
210	264.7	5050	0.5	4.7	97.3	97.7	99.4	98.7	93.1	96.2	97.4	98.1	96.4	96.8	90.5	99.1	98.1	99.2
240	302.3	5061	0.5	5.6	97.2	97.6	99.3	98.6	92.9	96.1	97.2	97.9	96.1	96.9	90.4	99.4	98	99.2
270	331.7	5069	0.5	6.3	97	97.5	99.2	98.6	92.6	96.9	97.1	97.7	96.7	96.8	90.2	99.4	97.8	99.1
300	367.6	5078	0.5	7.1	96.9	97.4	99.2	98.5	92.4	96.8	97	97.6	95.5	96.8	90.1	99.1	97.7	99.1
330	396.3	5089	0.6	7.7	96.8	97.3	99.1	98.4	92.1	95.6	96.8	97.3	95	96.9	89.9	98.7	97.5	99.1
360	425.9	5097	0.6	8.5	96.6	97.3	99	98.3	91.9	95.5	96.7	97.2	94.8	96.9	89.8	98.4	97.4	99
390	450.1	5105	0.6	9.1	96.5	97.1	99	98.2	91.7	95.4	96.6	97	94.4	96.8	89.7	97.8	97.2	99
420	473.4	5112	0.7	9.8	96.4	97	98.9	98.1	91.4	95.2	96.5	96.8	94	96.8	89.5	97.4	97	98.9
450	494.4	5126	0.7	10.3	96.2	96.9	98.8	98	91.2	95.1	96.4	96.6	93.7	96.7	89.3	96.9	96.9	98.8
480	494.3	5136	0.7	10.4	96.1	96.8	98.7	97.9	90.9	95	96.7	96.2	93.5	96.8	89.2	96.5	96.7	98.8
510	529.5	5143	0.7	11.2	96	96.8	98.7	97.8	90.7	94.8	96.5	96.1	93.3	96.8	89.1	96.1	96.6	98.7
540	542.4	5153	0.8	11.6	95.9	96.7	98.6	97.7	90.7	94.8	96	96.2	93	96.8	89	95.7	96.5	98.6
570	541.7	5159	0.8	11.7	95.7	96.6	98.6	97.6	90.3	94.6	95.8	96.1	92.8	96.8	88.9	95.2	96.3	98.6
600	510.8	5169	0.8	11	95.6	96.5	98.5	97.4	90.1	94.5	95.7	95.9	92.2	96.7	88.7	94.9	96.2	98.5

FIG. 10B

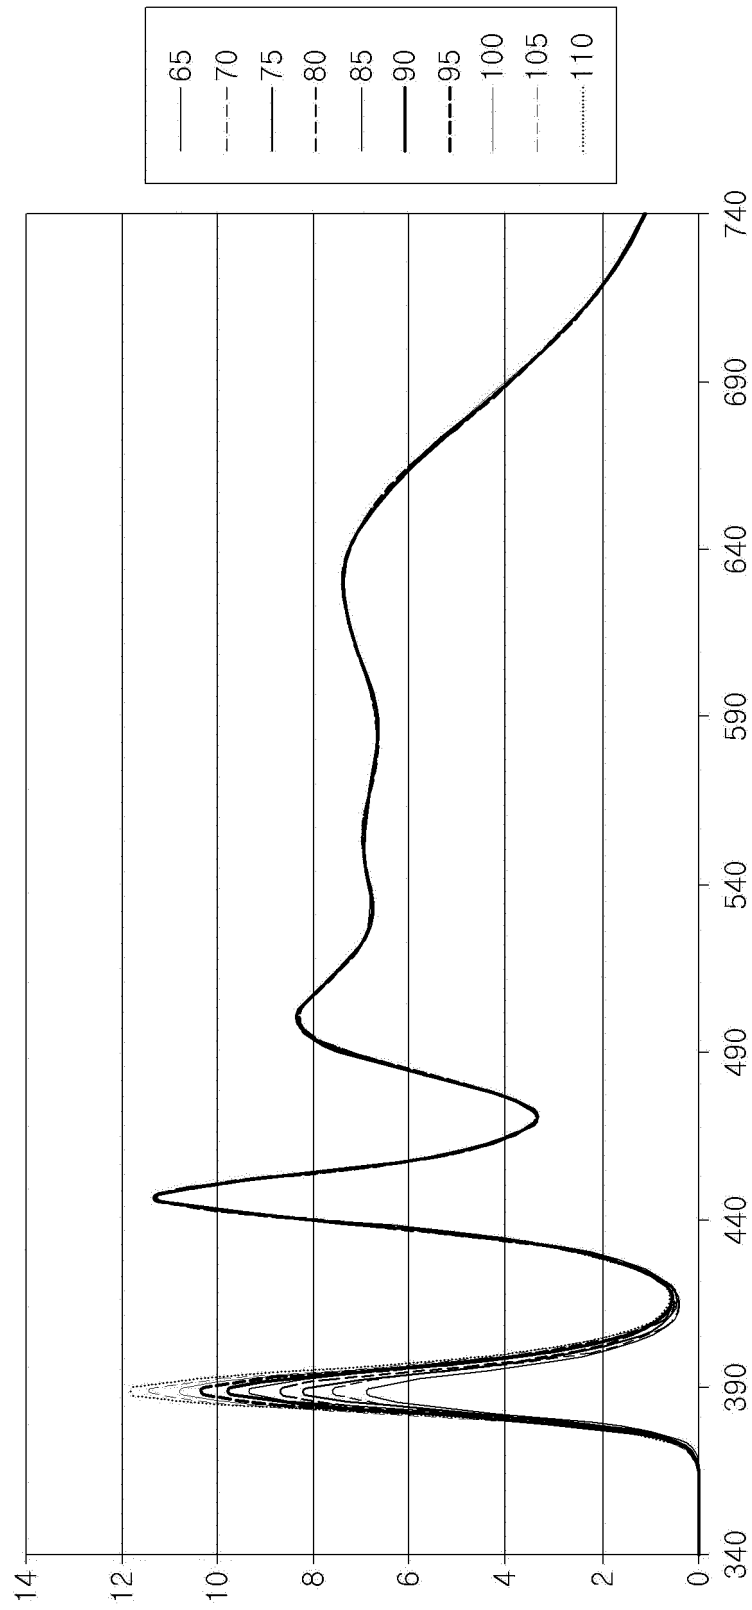


FIG. 11A

IF(mA)	UVCont ent	CCT	Mlvs	Mlsv	Pa	R1	R2	R3	R4	P5	R6	R7	R8	R9	R10	R11	R12	R13	R14
10	0	5703	1.3	5.3	80.7	78.1	83.4	87.8	81.6	79.5	78.1	87.2	70.1	7.1	61.5	80.5	59.8	78.8	93.4
20	0	5709	1.3	4.9	80.7	78.1	83.4	87.8	81.5	79.4	78.1	87.1	70	6.9	61.4	80.5	59.7	78.8	93.4
30	0	5709	1.3	4.4	80.7	78.1	83.4	87.8	81.6	79.5	78.1	87.2	70.1	7	61.4	80.5	59.8	78.8	93.4
40	0	5711	1.3	4	80.7	78.2	83.4	87.8	81.6	79.5	78.2	87.2	70.1	7.2	61.4	80.5	59.8	78.8	93.4
50	13	5715	1.3	3.5	80.7	78.2	83.4	87.8	81.6	79.5	78.2	87.2	70.2	7.2	61.4	80.6	59.9	78.8	93.3
60	27.7	5714	1.3	3	80.7	78.2	83.4	87.8	81.6	79.5	78.2	87.2	70.2	7.3	61.4	80.6	59.9	78.8	93.3
70	42	5720	1.3	2.7	80.7	78.2	83.4	87.8	81.6	79.5	78.2	87.2	70.2	7.2	61.4	80.6	59.9	78.8	93.3
80	56.9	5720	1.3	2.3	80.7	78.2	83.3	87.7	81.6	79.5	78.2	87.2	70.2	7.2	61.4	80.6	60	78.8	93.3
90	70.4	5723	1.3	1.9	80.8	78.2	83.4	87.7	81.6	79.6	78.3	87.2	70.3	7.5	61.4	80.6	60	78.8	93.3
100	83.5	5724	1.3	1.5	80.8	78.2	83.4	87.7	81.6	79.6	78.3	87.2	70.3	7.5	61.4	80.7	60	78.8	93.3
110	95.8	5727	1.3	1.2	80.8	78.2	83.3	87.7	81.6	79.6	78.3	87.2	70.3	7.4	61.4	80.7	60	78.8	93.3
120	108.5	5729	1.3	1	80.8	78.3	83.4	87.7	81.6	79.6	78.3	87.2	70.3	7.5	61.4	80.7	60.1	78.8	93.3
130	120.3	5731	1.3	1	80.8	78.2	83.3	87.7	81.6	79.6	78.3	87.2	70.3	7.4	61.4	80.7	60.1	78.8	93.3
140	132.4	5733	1.3	0.9	80.8	78.3	83.4	87.7	81.7	79.7	78.4	87.2	70.4	7.6	61.4	80.7	60.2	78.8	93.3
150	143.4	5733	1.3	1	80.9	78.3	83.4	87.7	81.7	79.7	78.4	87.2	70.4	7.7	61.5	80.8	60.3	78.9	93.3
160	154.7	5736	1.3	1.2	80.9	78.3	83.4	87.7	81.7	79.7	78.4	87.2	70.5	7.7	61.4	80.8	60.3	78.9	93.3
170	165.9	5742	1.3	1.4	80.9	78.3	83.4	87.6	81.7	79.7	78.4	87.2	70.5	7.8	61.4	80.8	60.2	78.9	93.2
180	174.6	5740	1.3	1.6	80.9	78.4	83.4	87.6	81.7	79.7	78.5	87.2	70.5	7.8	61.4	80.8	60.3	78.9	93.3
190	182.8	5745	1.3	1.7	80.9	78.3	83.4	87.6	81.7	79.7	78.5	87.2	70.5	7.7	61.4	80.8	60.3	78.9	93.2
200	191.1	5745	1.3	1.9	80.9	78.4	83.4	87.6	81.7	79.8	78.5	87.2	70.6	8	61.4	80.8	60.4	78.9	93.2
210	198.9	5747	1.3	2.1	80.9	78.4	83.4	87.6	81.7	79.7	78.5	87.2	70.6	7.9	61.4	80.8	60.4	78.9	93.2
220	206.7	5749	1.3	2.2	80.9	78.4	83.4	87.6	81.7	79.8	78.6	87.2	70.6	8	61.4	80.8	60.4	78.9	93.2
230	213.5	5749	1.3	2.4	80.9	78.4	83.4	87.6	81.7	79.8	78.6	87.2	70.6	7.9	61.4	80.9	60.4	78.9	93.2
240	220	5754	1.3	2.5	80.9	78.4	83.3	87.6	81.7	79.8	78.6	87.2	70.6	7.9	61.4	80.9	60.4	78.9	93.2
240	225.6	5754	1.3	2.6	80.9	78.4	83.4	87.5	81.8	79.8	78.6	87.2	70.7	8.1	61.4	80.9	60.5	78.9	93.2
260	230.7	5754	1.3	2.7	81	78.5	83.4	87.5	81.8	79.9	78.7	87.2	70.8	8.4	61.5	81	60.6	79	93.2
270	231.8	5758	1.3	2.8	81	78.5	83.4	87.5	81.8	79.8	78.7	87.2	70.7	8.2	61.4	80.9	60.6	78.9	93.2
280	240	5759	1.3	2.9	81	78.5	83.4	87.5	81.8	79.9	78.7	87.2	70.8	8.3	61.4	80.9	60.6	78.9	93.2
290	239.7	5759	1.3	3	81	78.5	83.4	87.5	81.8	79.9	78.7	87.2	70.8	8.4	61.4	81	60.6	78.9	93.2
300	242.4	5763	1.3	3	81	78.5	83.4	87.5	81.8	79.9	78.7	87.2	70.8	8.4	61.5	81	60.7	79	93.2
310	242.7	5764	1.3	3.1	81	78.5	83.4	87.5	81.8	79.9	78.8	87.2	70.8	8.5	61.5	81	60.7	79	93.2
320	251.2	5769	1.3	3.2	81	78.5	83.4	87.5	81.8	79.9	78.8	87.2	70.8	8.4	61.4	81	60.7	78.9	93.1
330	245.3	5767	1.3	3.2	81	78.5	83.4	87.5	81.8	79.9	78.8	87.2	70.8	8.4	61.4	81	60.7	78.9	93.1
340	243.5	5767	1.3	3.2	81	78.6	83.4	87.5	81.8	79.9	78.8	87.2	70.9	8.5	61.5	81	60.8	79	93.1
350	247.5	5768	1.3	3.2	81	78.6	83.4	87.5	81.9	80	78.8	87.2	70.9	8.6	61.5	81.1	60.8	79	93.1
360	249.4	5772	1.3	3.3	81	78.6	83.4	87.4	81.9	80	78.8	87.2	70.9	8.6	61.5	81.1	60.8	79	93.1
370	241.2	5774	1.3	3.2	81	78.6	83.4	87.5	81.9	80	78.8	87.2	71	8.7	61.5	81.1	60.9	79	93.1
380	237.1	5772	1.3	3.2	81.1	78.6	83.4	87.4	81.9	80	78.9	87.2	71	8.8	61.5	81.1	60.9	79	93.1
390	238.7	5773	1.3	3.2	81	78.6	83.4	87.5	81.9	80	78.9	87.2	71	8.7	61.5	81.1	61	79	93.1
400	233.7	5772	1.3	3.1	81.1	78.6	83.4	87.5	81.9	80	78.9	87.2	71	8.8	61.5	81.1	61	79	93.1
410	230.9	5771	1.3	3.1	81.1	78.6	83.4	87.5	81.9	80	78.9	87.2	71	8.7	61.5	81.1	61	79	93.1
420	226.7	5775	1.3	3.1	81.1	78.7	83.4	87.4	81.9	80	78.9	87.2	71	8.9	61.5	81.1	61	79	93.1
430	223	5779	1.3	3	81.1	78.7	83.4	87.4	81.9	80	78.9	87.2	71	8.8	61.5	81.1	61	79	93.1
440	218.5	5776	1.3	3	81.1	78.7	83.4	87.4	81.9	80	78.9	87.2	71	8.8	61.5	81.1	61.1	79	93.1
450	214	5778	1.3	2.9	81.1	78.7	83.4	87.4	81.9	80.1	78.9	87.2	71.1	9	61.5	81.1	61.1	79	93.1
460	208.4	5782	1.3	2.8	81.1	78.7	83.4	87.4	81.9	80.1	78.9	87.2	71.1	8.9	61.5	81.1	61.1	79	93.1
470	201.5	5779	1.3	2.7	81.1	78.7	83.4	87.4	81.9	80.1	78.9	87.2	71.1	9	61.5	81.2	61.2	79	93.1
480	178.1	5774	1.3	2.3	81.1	78.7	83.5	87.4	82	80.1	78.9	87.2	71.1	9.2	61.6	81.2	61.2	79.1	93.1
490	184.9	5776	1.3	2.4	81.1	78.7	83.4	87.4	81.9	80.1	78.9	87.2	71.1	9	61.6	81.2	61.2	79.1	93.1
500	174.7	5776	1.3	2.3	81.1	78.7	83.5	87.5	81.9	80.1	78.9	87.2	71.1	9.1	61.6	81.2	61.2	79.1	93.1
510	146.1	5773	1.3	1.8	81.1	78.7	83.5	87.5	82	80.1	78.9	87.2	71.1	9.1	61.6	81.2	61.2	79.1	93.1
520	186.5	5779	1.2	2.5	81.2	78.8	83.5	87.5	82	80.2	79	87.2	71.2	9.3	61.7	81.2	61.3	79.2	93.1
530	194.6	5782	1.2	2.7	81.2	78.8	83.5	87.4	82	80.2	79	87.2	71.2	9.4	61.7	81.2	61.4	79.2	93.1
540	177.1	5779	1.2	2.4	81.2	78.8	83.5	87.4	82	80.2	79	87.2	71.2	9.3	61.6	81.2	61.3	79.1	93.1
550	165	5779	1.2	2.3	81.1	78.8	83.5	87.4	82	80.1	79	87.2	71.1	9.2	61.6	81.2	61.3	79.1	93.1
560	153	5778	1.2	1.9	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.2	9.3	61.6	81.2	61.3	79.1	93.1
570	153.1	5779	1.2	1.9	81.2	78.8	83.5	87.4	82	80.2	79	87.2	71.2	9.3	61.6	81.2	61.4	79.1	93.1
580	139.1	5778	1.2	1.7	81.2	78.8	83.5	87.4	82	80.2	79	87.2	71.2	9.4	61.7	81.3	61.4	79.2	93.1
590	131.5	5770	1.2	1.5	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.1	9.3	61.6	81.2	61.3	79.1	93.1
600	127.5	5778	1.2	1.5	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.1	9.3	61.6	81.2	61.3	79.1	93.1
610	115	5778	1.2	1.3	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.1	9.2	61.6	81.2	61.3	79.1	93.1
620	108.6	5778	1.2	1.2	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.1	9.2	61.6	81.2	61.3	79.1	93.1
630	105.9	5778	1.2	1.1	81.1	78.8	83.5	87.4	82	80.1	78.9	87.2	71.1	9.2	61.6	81.2	61.3	79.1	93.1
640	98.8	5776	1.2	1.1	81.1	78.7	83.5	87.5	81.9	80.1	78.9	87.1	71.1	9.1	61.6	81.2	61.3	79.1	93.1
650	88.3	5778	1.2	1.2	81.1	78.7	83.5	87.4	82	80.1	78.8	87.1	71.1	9.1	61.6	81.2	61.3	79.1	93.1
660	73.5	5764	1.2	1.6	81.1	78.7	83.5	87.5	82	80.1	78.8	87.1	71	9.1	61.6	81.2	61.3	79.1	93.1
670	72.1	5772	1.2	1.6	81.1	78.8	83.5	87.4	82	80.1	78.8	87.2	71.1	9.4	61.6	81.2	61.3	79.2	93.1
680	65.2	5772	1.2	1.8	81.1	78.7	83.5	87.5	82	80.1	78.8	87.1	71	9.1	61.6	81.2	61.3	79.1	93.1

FIG. 11B

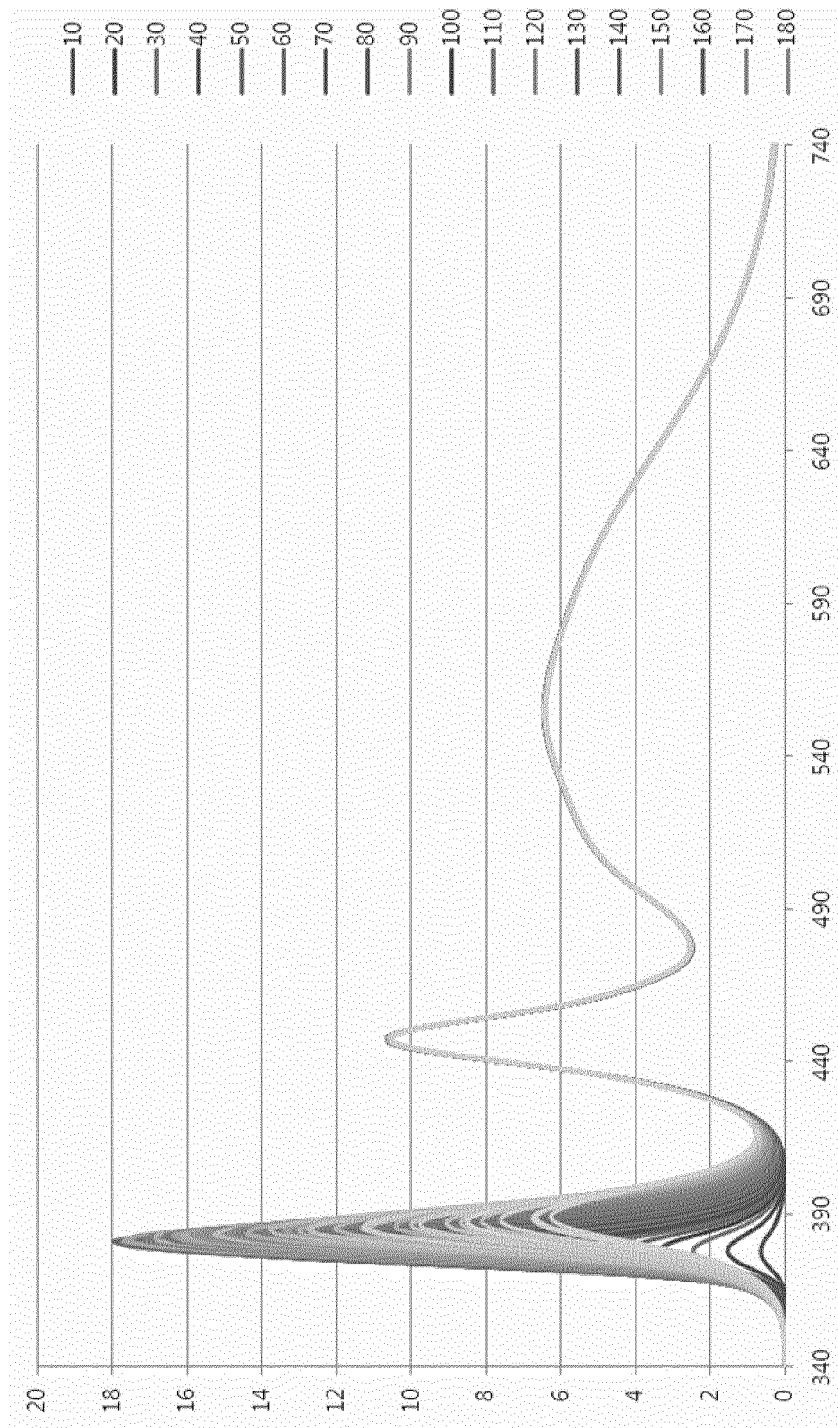


FIG. 12

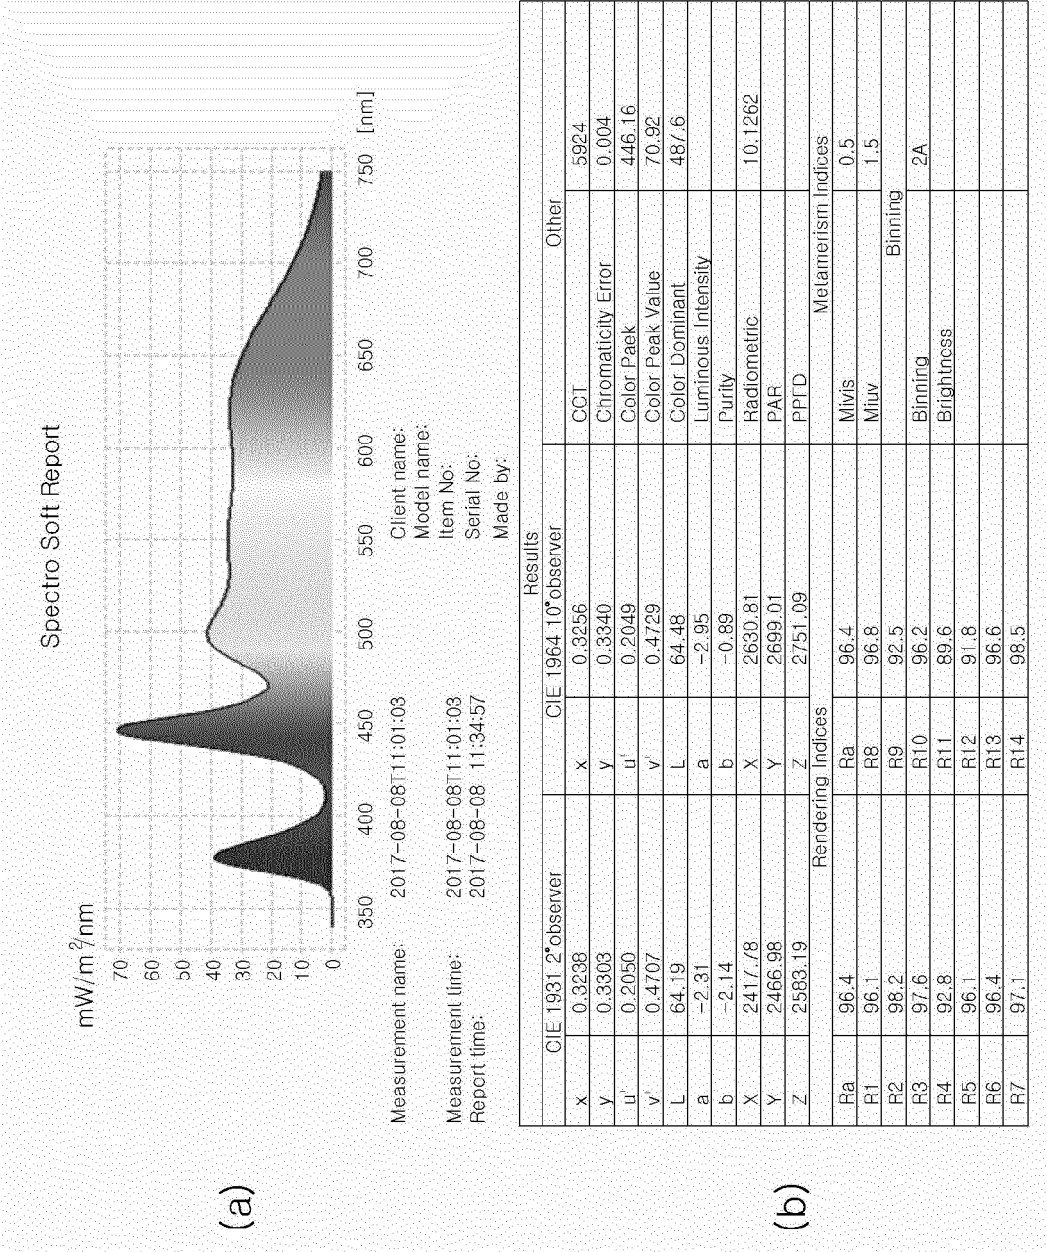


FIG. 13

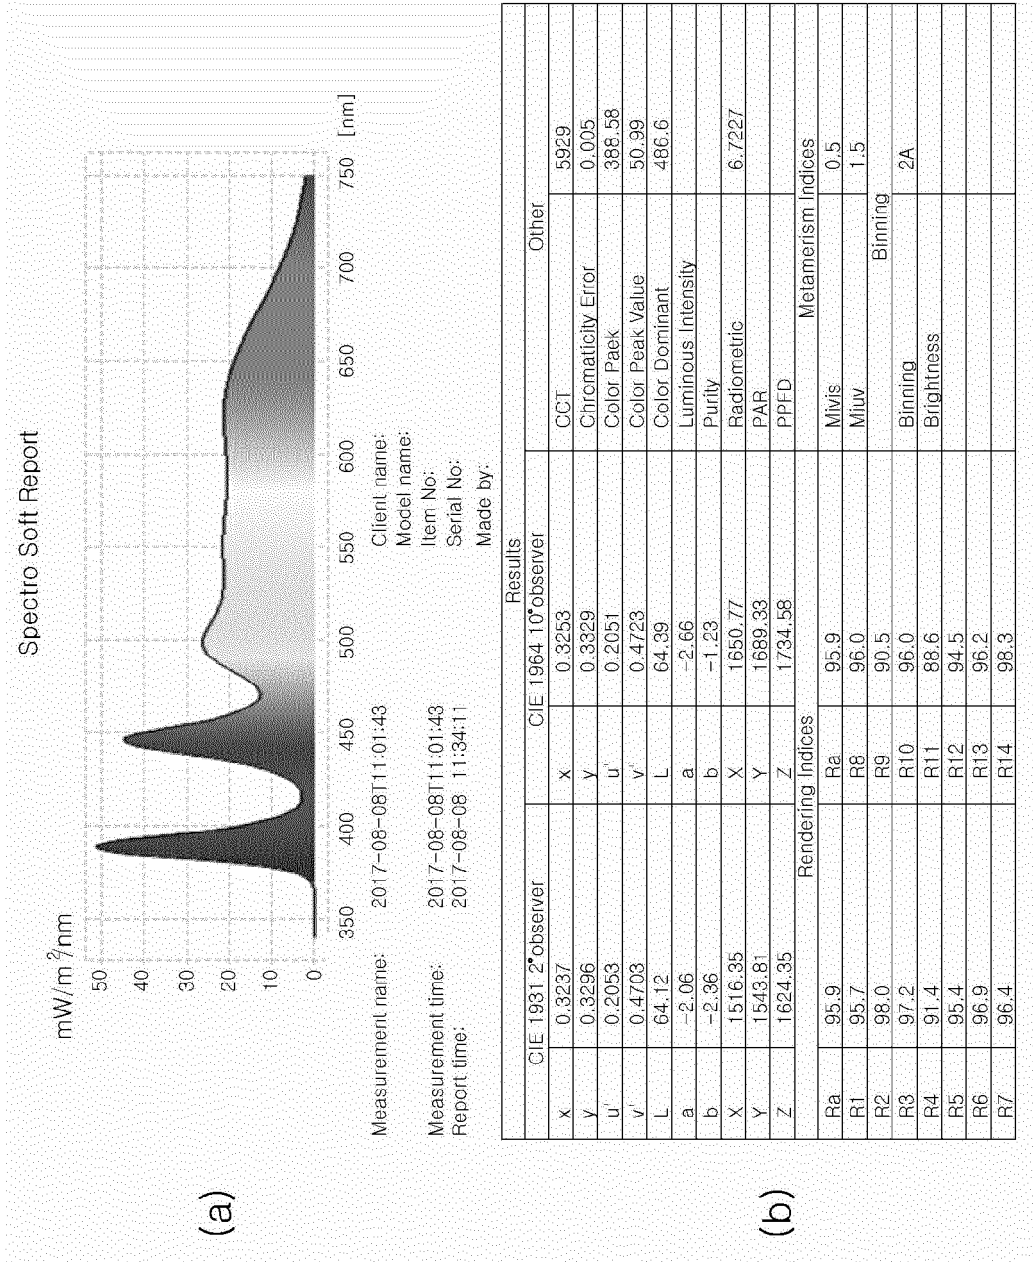


FIG. 14

NO.	HIGH COLOR RENDERING WHITE LIGHT-EMITTING DIODE (LED) DEVICE		ULTRAVIOLET LIGHT-EMITTING DIODE (LED) DEVICE	BLUE LIGHT-EMITTING DIODE (LED) DEVICE	METAMERISM INDEX		CRI																
	400nm ~ 440nm	440nm ~ 460nm	300nm ~ 400nm	400nm ~ 470nm	MI-Vis	MI-UV	UVC content	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	
WD																							
EXAMPLE 1	X	O	O	X	0.7	1.5	82.8	98.3	98.3	99	98.2	95.9	97.7	98.3	99.5	99.2	97.7	95.1	92.2	92.1	98.3	98.3	
EXAMPLE 2	X	O	O	O	0.5	0.8	129.5	95.7	95.3	98	97.8	91	94.9	96.7	96.6	95.4	88.9	94.9	87.5	95.4	96	96.6	
EXAMPLE 3	O	O	O	X	0.6	0.9	144.8	97	96.7	98.8	98.6	93.1	96.4	97.4	97.7	97.5	93.9	95.8	89.4	92.4	97.3	98.9	
EXAMPLE 4	O	O	O	O	0.6	0.9	129.6	94.6	93.7	97.2	96.9	89.5	93.7	95.8	95.9	93.7	83.6	93.9	85.7	94.3	94.5	98.1	
EXAMPLE 5	O	X	O	X	0.4	1.0	95.1	97.6	97.2	97.8	98.2	97.6	97.6	96.8	97.7	97.8	98.2	94.7	95.9	93.7	97	98.8	

FIG. 15A

IF(mA)	CCT	UVContent	MIvis	MIuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
170	6300	82.5	0.5	1.4	95.8	95.4	98.2	97.8	91	94.9	96.8	96.5	95.4	89.1	95.1	87.5	95.6	96.1	98.6
180	6303	91	0.5	1.2	95.7	95.4	98.1	97.8	91	94.9	96.8	96.5	95.4	89	95	87.5	95.5	96.1	98.6
190	6305	98.3	0.5	1	95.7	95.3	98.1	97.8	91	94.9	96.8	96.5	95.4	88.9	95	87.5	95.5	96	98.6
200	6305	105.6	0.5	0.9	95.8	95.4	98.1	97.8	91.1	94.9	96.8	96.5	95.4	89.1	95	87.6	95.4	96.1	98.6
210	6303	113.5	0.5	0.8	95.7	95.3	98.1	97.8	91	94.9	96.7	96.5	95.4	89	95	87.5	95.4	96	98.6
220	6306	129.5	0.5	0.8	95.7	95.3	98	97.8	91	94.9	96.7	96.6	95.4	88.9	94.9	87.5	95.4	96	98.6
230	6312	136.5	0.5	0.9	95.7	95.3	98	97.8	91	94.9	96.7	96.6	95.4	88.8	94.9	87.5	95.4	96	98.6
240	6322	139.2	0.5	0.9	95.7	95.2	98	97.8	91.1	94.8	96.6	96.7	95.4	88.6	94.8	87.5	95.2	95.9	98.6
250	6312	143.5	0.5	1	95.8	95.3	98.1	97.8	91.1	94.9	96.7	96.6	95.5	89	95	87.6	95.3	96	98.6
260	6310	151.5	0.5	1.2	95.7	95.3	98	97.8	91.1	94.9	96.7	96.6	95.5	88.9	94.9	87.6	95.3	96	98.6

FIG. 15B

IF(mA)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
250	6571	113.7	0.6	1.1	97	96.8	98.9	98.6	93.1	96.4	97.5	97.5	97.4	94.1	96	89.4	92.6	97.4	98.9
260	9574	120.4	0.6	1.1	97	96.8	98.9	98.6	93.1	96.4	97.4	97.6	97.4	94	95.9	89.4	92.5	97.4	98.9
270	6577	126.2	0.6	1	97	96.8	98.9	98.6	93.1	96.4	97.4	97.6	97.5	94	95.9	89.4	92.5	97.4	98.9
280	6577	133.2	0.6	1	97	96.7	98.8	98.6	93.1	96.4	97.4	97.6	97.5	94	95.9	89.4	92.5	97.3	98.9
290	6580	138.2	0.6	1	97	96.7	98.8	98.6	93.1	96.4	97.4	97.6	97.4	93.8	95.8	89.4	92.5	97.3	98.9
300	6580	144.8	0.6	0.9	97	96.7	98.8	98.6	93.1	96.4	97.4	97.7	97.5	93.9	95.8	89.4	92.4	97.3	98.9
310	6580	151.8	0.6	1	97	96.7	98.8	98.6	93.1	96.4	97.3	97.7	97.5	93.9	95.8	89.4	92.4	97.3	98.9
320	6579	158.5	0.6	1.1	97	96.7	98.8	98.6	93.2	96.4	97.3	97.7	97.5	93.8	95.8	89.5	92.4	97.3	98.9
330	6583	165.1	0.6	1.2	97	96.7	98.8	98.6	93.2	96.4	97.3	97.7	97.5	93.9	95.8	89.5	92.4	97.2	98.9

FIG. 15C

IF(mA)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
150	6689	43	0.6	2.7	94.5	93.8	97.3	96.9	89.4	93.8	95.9	95.7	93.6	83.7	94	85.6	94.6	94.7	98.1
170	6695	58	0.6	2.3	94.5	93.7	97.3	96.9	89.4	93.7	95.8	95.8	93.6	83.6	93.9	85.6	94.5	94.6	98.1
200	6695	79.1	0.6	1.7	94.5	93.7	97.2	96.9	89.4	93.7	95.8	95.9	93.6	83.4	93.8	85.6	94.4	94.5	98.1
230	6700	101.6	0.6	1.1	94.5	93.7	97.2	96.9	89.4	93.7	95.8	95.9	93.6	83.4	93.8	85.6	94.4	94.5	98.1
250	6702	115.9	0.6	1	94.5	93.7	97.2	96.9	89.4	93.7	95.8	95.9	93.6	83.4	93.8	85.7	94.4	94.5	98.1
260	6702	122.3	0.6	0.9	94.5	93.7	97.2	96.9	89.4	93.7	95.7	95.9	93.6	83.4	93.8	85.7	94.3	94.5	98.1
270	6701	129.6	0.6	0.9	94.6	93.7	97.2	96.9	89.5	93.7	95.8	95.9	93.7	83.6	93.9	85.7	94.3	94.5	98.1
280	6703	135.7	0.6	1	94.5	93.7	97.2	96.9	89.5	93.7	95.7	96	93.7	83.5	93.8	85.7	94.3	94.5	98.1
290	6701	143.7	0.6	1.1	94.5	93.6	97.2	96.9	89.4	93.6	95.7	96	93.6	83.3	93.8	85.7	94.3	94.4	98
300	6703	148.8	0.6	1.2	94.5	93.6	97.2	96.9	89.4	93.7	95.7	96	93.6	83.4	93.8	85.7	94.2	94.4	98.1

FIG. 15D

IF(mA)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
130	6954	72	0.4	1.3	97.5	97.1	97.7	98.2	97.6	97.5	96.7	97.7	97.7	98.1	94.6	95.8	93.7	96.9	98.8
140	6937	77	0.4	1.2	97.6	97.2	97.7	98.2	97.6	97.6	96.8	97.6	97.8	98.2	94.7	95.9	93.6	97	98.8
150	6938	84.2	0.4	1.1	97.6	97.2	97.8	98.1	97.6	97.6	96.8	97.6	97.8	98.3	94.7	96	93.6	97	98.8
160	6944	95.1	0.4	1	97.6	97.2	97.8	98.2	97.6	97.6	96.8	97.7	97.8	98.2	94.7	95.9	93.7	97	98.8
170	6952	103.7	0.4	1.1	97.6	97.2	97.8	98.2	97.6	97.6	96.8	97.7	97.8	98.3	94.8	95.9	93.7	97	98.8
180	6944	112.3	0.4	1.2	97.6	97.1	97.8	98.2	97.6	97.5	96.8	97.7	97.8	98.2	94.7	95.9	93.8	97	98.8
190	6959	120.7	0.4	1.3	97.6	97.2	97.8	98.2	97.6	97.6	96.8	97.7	97.8	98.3	94.8	95.9	93.8	97	98.8

FIG. 16

NO	HIGH COLOR RENDERING WHITE LIGHT-EMITTING DIODE (LED) DEVICE		ULTRAVIOLET LIGHT- EMITTING DIODE (LED) DEVICE	BLUE LIGHT- EMITTING DIODE (LED) DEVICE	METAMERISM INDEX			CRI														
	400nm ~ 440nm	440nm ~ 460nm	300nm ~ 400nm	400nm ~ 470nm	MI-Vis	MI-UV	UVCo n tent	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
WD	X	O	O	X	0.5	0.8	96.4	97.7	98	99.5	98.9	94	96.7	98.3	97.7	98.4	97.4	96.9	91	97.4	98.5	99.2
EXAMPLE 1																						
EXAMPLE 2	X	O	O	O	0.5	0.6	114.9	95.7	95.3	98	97.8	91	94.9	96.7	96.6	95.4	88.9	94.9	87.5	95.4	96	98.6
EXAMPLE 3	O	O	O	X	0.4	0.6	114.2	97.4	98.2	99	97.2	94	97.7	98	97	98.1	98.7	98.5	91.8	95.2	98.5	98.3
EXAMPLE 4	O	O	O	O	0.5	0.6	110.4	94.6	93.7	97.2	96.9	89.5	93.7	95.8	95.9	93.7	83.6	93.9	85.7	94.3	94.5	98.1
EXAMPLE 5	O	X	O	X	0.5	0.7	110.6	96.5	95.1	97.8	97.2	96.5	96.8	98	97.3	93.6	82	97	95.9	91	95.4	97.7

FIG. 17A

IF(mA)	CCT	UVCont ent	Mlvis	Mluv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
200	5073	48.1	0.5	2.3	96.5	96.5	98.7	98.5	91.8	95.4	97.5	96.8	96.5	92.8	95.4	88.4	97.5	97.1	98.9
250	5076	70.7	0.5	1.6	96.5	96.4	98.7	98.5	91.9	95.4	97.4	96.9	96.6	92.7	95.3	88.5	97.2	97	98.9
270	5080	79.2	0.5	1.4	96.4	96.4	98.6	98.5	91.9	95.4	97.3	96.9	96.6	92.6	95.2	88.4	97.2	97	98.9
280	5082	83.9	0.5	1.3	96.5	96.4	98.6	98.5	91.9	95.4	97.3	96.9	96.6	92.7	95.3	88.5	97.1	97	98.9
290	5085	88.5	0.5	1.1	96.4	96.3	98.5	98.5	91.9	95.4	97.2	97	96.6	92.5	95.1	88.5	96.9	96.9	98.9
300	5082	93	0.5	1	96.4	96.3	98.6	98.5	91.9	95.4	97.3	96.9	96.6	92.7	95.2	88.5	97.1	96.9	98.9
310	5089	96.3	0.5	0.9	96.4	96.2	98.5	98.5	92	95.4	97.2	97	96.6	92.5	95.1	88.5	96.8	96.8	98.9
320	5086	98.7	0.5	0.9	96.4	96.3	98.5	98.5	91.9	95.4	97.2	97	96.6	92.5	95.1	88.5	96.9	96.8	98.9
330	5087	101.8	0.5	0.8	96.4	96.2	98.5	98.5	91.9	95.4	97.2	97	96.6	92.5	95.1	88.5	96.8	96.8	98.9
340	5091	102.8	0.5	0.8	96.4	96.2	98.4	98.5	92	95.4	97.1	97.1	96.6	92.3	95	88.5	96.7	96.7	98.9
350	5092	102.4	0.5	0.8	96.4	96.1	98.4	98.5	92	95.3	97.1	97.1	96.6	92.3	95	88.5	96.6	96.7	98.9
360	5093	110.2	0.5	0.7	96.4	96.1	98.4	98.5	92	95.4	97.1	97.1	96.7	92.3	95	88.6	96.6	96.7	98.9
370	5095	110.9	0.5	0.6	96.4	96.1	98.3	98.5	92	95.3	97	97.2	96.6	92.2	94.9	88.6	96.5	96.6	98.9
380	5103	114.9	0.5	0.6	96.4	96	98.3	98.5	92	95.3	97	97.2	96.6	92.1	94.9	88.5	96.5	96.6	98.9
390	5097	116	0.5	0.6	96.4	96.1	98.4	98.5	92	95.4	97	97.2	96.7	92.2	95	88.6	96.4	96.6	98.9
400	5096	118.4	0.5	0.8	96.4	96	98.3	98.5	92	95.3	97	97.2	96.7	92.1	94.9	88.6	96.4	96.6	98.9
410	5099	120.5	0.5	0.8	96.4	96	98.3	98.6	92	95.3	97	97.2	96.7	92.1	94.9	88.6	96.4	96.6	98.9
420	5099	122.8	0.5	0.9	96.4	96	98.3	98.6	92	95.3	97	97.2	96.7	92.1	94.8	88.6	96.3	96.6	98.9
430	5098	125	0.5	0.9	96.4	96	98.3	98.6	92.1	95.3	97	97.2	96.7	92.1	94.8	88.6	96.3	96.6	98.9

FIG. 17B

IF(mA)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
200	5024	73.4	0.4	1.4	97.4	98.3	99	97.3	94	97.7	98.1	97	98.1	98.7	98.6	91.8	95.2	98.7	98.4
210	5025	79.3	0.4	1.2	97.4	98.3	99	97.2	94	97.7	98.1	97	98.1	98.6	98.6	91.8	95.2	98.6	98.4
220	5028	83.8	0.4	1.1	97.4	98.2	99	97.3	94.1	97.7	98.1	97	98.1	98.7	98.6	91.8	95.2	98.6	98.4
230	5028	89.6	0.4	1	97.4	98.2	99	97.2	94	97.7	98	97	98.1	98.7	98.6	91.8	95.2	98.6	98.3
240	5028	94.6	0.4	0.8	97.4	98.2	99	97.2	94.1	97.7	98	97	98.1	98.6	98.6	91.9	95.2	98.6	98.3
250	5021	96	0.4	0.8	97.4	98.3	99	97.3	94	97.7	98.2	96.9	98.1	98.8	98.7	91.8	95.4	98.7	98.4
260	5028	104	0.4	0.6	97.4	98.2	99	97.2	94.1	97.7	98	97	98.1	98.6	98.5	91.9	95.1	98.6	98.3
270	5030	109	0.4	0.6	97.4	98.2	99	97.2	94	97.7	98	97	98.1	98.7	98.5	91.8	95.2	98.5	98.3
280	5029	114.2	0.4	0.6	97.4	98.2	98.9	97.2	94.1	97.7	98	97	98.2	98.6	98.5	91.9	95.1	98.5	98.3
290	5034	118.4	0.4	0.7	97.4	98.2	98.9	97.2	94.1	97.7	98	97	98.2	98.6	98.5	91.9	95.1	98.6	98.3
300	5031	124.2	0.4	0.8	97.4	98.2	98.9	97.2	94	97.7	98	97	98.2	98.7	98.5	91.9	95.2	98.5	98.3
310	5032	129.1	0.4	0.9	97.4	98.2	98.9	97.2	94	97.7	98	97	98.2	98.6	98.5	91.9	95.1	98.5	98.3
320	5036	133.9	0.4	0.9	97.4	98.2	98.9	97.2	94.1	97.7	98.1	97	98.2	98.6	98.5	91.9	95.1	98.5	98.3
330	5036	138.4	0.4	1	97.4	98.2	98.9	97.2	94.1	97.7	98.1	97	98.2	98.6	98.5	91.9	95.1	98.5	98.3

FIG. 17C

IF(mA)	CCT	UVCont ent	Mlvis	Mluv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
140	5074	24.4	0.5	2.9	96.1	95.8	98.1	96.7	92.6	96	96.6	96.9	96.5	92.4	96.8	89.8	93.6	96.3	97.9
200	5077	52.3	0.5	2.1	96.1	95.7	98.1	96.7	92.6	95.9	96.6	96.9	96.5	92.2	96.8	89.8	93.6	96.2	97.9
250	5082	74.4	0.5	1.5	96.1	95.7	98	96.6	92.6	95.9	96.6	96.9	96.5	92.2	96.8	89.8	93.6	96.2	97.8
290	5087	92.2	0.5	1	96.1	95.7	98	96.6	92.6	95.9	96.5	97	96.5	92.3	96.7	89.8	93.6	96.2	97.8
300	5086	97.5	0.5	0.9	96.1	95.7	98	96.6	92.6	95.9	96.6	96.9	96.5	92.3	96.8	89.8	93.6	96.2	97.8
310	5089	101.7	0.5	0.8	96.1	95.6	98	96.6	92.6	95.9	96.5	97	96.6	92.3	96.7	89.9	93.5	96.2	97.8
320	5094	105.6	0.5	0.6	96.1	95.6	98	96.6	92.6	95.9	96.5	97	96.6	92.2	96.7	89.8	93.5	96.1	97.8
330	5092	110.4	0.5	0.6	96.1	95.6	98	96.6	92.6	95.9	96.5	97	96.6	92.2	96.7	89.9	93.5	96.1	97.8
340	5095	113.9	0.5	0.7	96.1	95.6	97.9	96.6	92.6	95.9	96.5	97	96.6	92.2	96.7	89.9	93.5	96.1	97.8
350	5096	118.9	0.5	0.8	96.1	95.6	97.9	96.6	92.6	95.9	96.5	97	96.6	92.2	96.7	89.9	93.4	96.1	97.8
360	5096	122.2	0.5	0.8	96.1	95.6	97.9	96.6	92.6	95.9	96.5	97	96.6	92.2	96.6	89.9	93.4	96.1	97.8
370	5098	125.5	0.5	0.9	96.1	95.5	97.9	96.6	92.6	95.9	96.4	97	96.6	92.1	96.6	89.9	93.4	96	97.8
380	5098	131.6	0.5	0.9	96.1	95.6	97.9	96.6	92.6	95.9	96.4	97	96.6	92.2	96.6	89.9	93.4	96.1	97.8
390	5100	134.1	0.5	1	96.1	95.5	97.9	96.6	92.6	95.9	96.4	97	96.6	92.1	96.6	89.9	93.4	96	97.8
400	5104	135.5	0.5	1.1	96.1	95.5	97.9	96.6	92.6	95.9	96.4	97	96.6	92.1	96.6	89.9	93.4	96	97.8

FIG. 17D

IF(mA)	CCT	UVCont ent	Mivis	Miuv	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
95	5042	77.9	0.5	1.3	96.4	94.9	97.6	97.3	96.5	96.7	97.9	97.1	93.3	81.1	96.5	95.9	90.5	95.1	97.8
100	5136	83.1	0.5	1.1	96.4	95	97.6	97.3	96.5	96.7	97.9	97.1	93.3	81.3	96.6	95.9	90.6	95.2	97.8
103	5119	87.5	0.5	1	96.5	95	97.7	97.2	96.5	96.7	98	97.3	93.5	81.7	96.9	95.9	90.9	95.3	97.8
105	5128	90.1	0.5	0.9	96.5	95	97.7	97.3	96.5	96.7	98	97.2	93.4	81.6	96.8	95.9	90.7	95.3	97.8
110	5132	95.6	0.5	0.8	96.4	95	97.6	97.3	96.5	96.7	98	97.2	93.4	81.4	96.7	95.9	90.7	95.2	97.8
115	5114	102.6	0.5	0.8	96.5	95	97.7	97.2	96.5	96.7	98	97.3	93.5	81.8	96.9	95.9	90.9	95.3	97.8
120	5110	110.6	0.5	0.7	96.5	95.1	97.8	97.2	96.5	96.8	98	97.3	93.6	82	97	95.9	91	95.4	97.7
123	5107	114.2	0.5	0.8	96.5	95.1	97.8	97.1	96.6	96.8	98.1	97.4	93.6	82.1	97.1	95.9	91.1	95.4	97.7
125	5105	116.3	0.5	0.9	96.6	95.1	97.8	97.1	96.6	96.8	98.1	97.4	93.6	82.1	97.1	95.9	91.1	95.4	97.7
127	5103	118.8	0.5	1	96.5	95.1	97.8	97.1	96.5	96.8	98.1	97.4	93.6	82.1	97.1	95.9	91.1	95.4	97.7
130	5101	123	0.5	1	96.6	95.1	97.8	97.1	96.5	96.8	98.1	97.4	93.6	82.2	97.1	95.9	91.2	95.4	97.7
135	5101	129	0.5	1.1	96.6	95.1	97.8	97.1	96.5	96.8	98.1	97.4	93.6	82.2	97.2	95.8	91.2	95.4	97.7

FIG. 18A

D65-Sum Spectrum





FIG. 18B

D50-Sum Spectrum

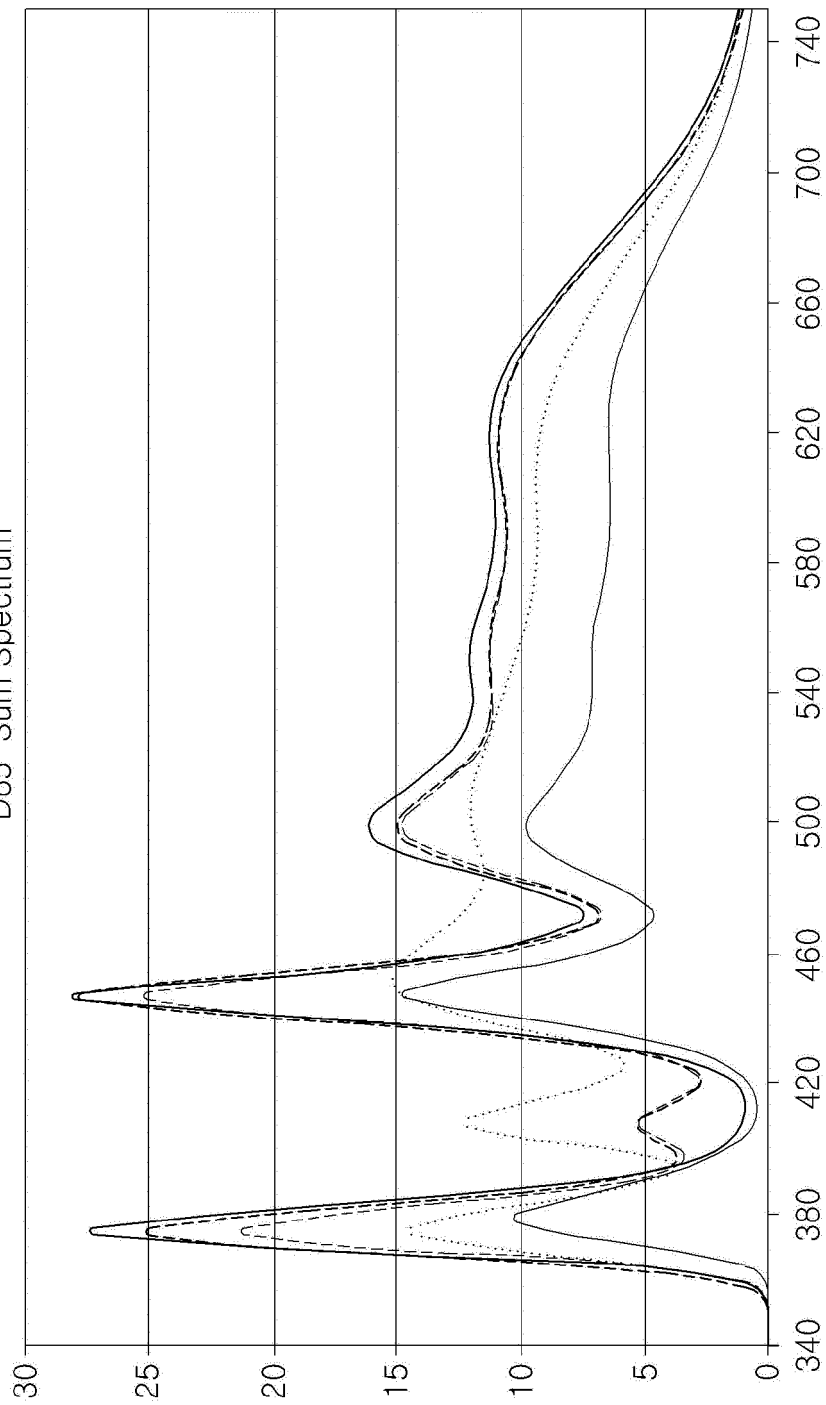

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2018/010336

A. CLASSIFICATION OF SUBJECT MATTER

F21K 9/64(2016.01)i, F21S 2/00(2006.01)i, F21V 3/12(2018.01)i, F21Y 115/10(2016.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F21K 9/64; C09K 11/08; C09K 11/73; F21K 99/00; F21L 4/02; F21S 2/00; H01L 33/48; H01L 33/50; F21V 3/12; F21Y 115/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models: IPC as above

Japanese Utility models and applications for Utility models: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS (KIPO internal) & Keywords: ultraviolet rays, white color, LED, reference light source, color rendering, phosphor, lighting, strength, wavelength

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KR 10-2017-0061919 A (LG INNOTEK CO., LTD.) 07 June 2017 See paragraphs [0021], [0058], [0070]-[0075]; claim 1; and figures 1, 8-9.	1-19
Y	KR 10-1417874 B1 (GLBTECH CO., LTD.) 09 July 2014 See paragraph [0061]; table 2; and claim 1.	1-19
Y	US 2005-0040773 A1 (LEBENS, Gary A. et al.) 24 February 2005 See paragraph [0054].	12, 18
A	KR 10-2007-0101856 A (KABUSHIKI KAISHA TOSHIBA et al.) 17 October 2007 See paragraphs [0004]-[0008], [0020]-[0022], [0157]; claim 1; and figure 1.	1-19
A	WO 2013-015597 A2 (KIM, Byung Chun et al.) 31 January 2013 See paragraphs [0049]-[0051]; tables 1, 3; claims 1-3; and figure 1.	1-19

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 NOVEMBER 2018 (28.11.2018)

Date of mailing of the international search report

28 NOVEMBER 2018 (28.11.2018)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 Government Complex Daejeon Building 4, 189, Cheongsa-ro, Seo-gu,
 Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2018/010336

Patent document cited in search report	Publication date	Patent family member	Publication date
KR 10-2017-0061919 A	07/06/2017	US 2018-0259166 A1 WO 2017-090956 A1	13/09/2018 01/06/2017
KR 10-1417874 B1	09/07/2014	CN 105814699 A EP 3054490 A1 EP 3054490 A4 JP 2016-515770 A JP 2017-059854 A JP 6148395 B2 JP 6407243 B2 KR 10-1652258 B1 KR 10-1706600 B1 KR 10-1855391 B1 KR 10-2015-0143916 A KR 10-2018-0021748 A US 10020428 B2 US 2016-0218255 A1 WO 2015-050317 A1	27/07/2016 10/08/2016 19/07/2017 30/05/2016 23/03/2017 14/06/2017 17/10/2018 31/08/2016 16/02/2017 09/05/2018 24/12/2015 05/03/2018 10/07/2018 28/07/2016 09/04/2015
US 2005-0040773 A1	24/02/2005	US 2003-0095406 A1 US 2007-0133199 A1 US 2013-0141635 A1 US 6095661 A US 6305818 B1 US 6488390 B1 US 6808287 B2 US 7186000 B2 US 7393119 B2 US 7740371 B1 US 8159146 B1 US 8362712 B1 US 8643305 B2 US 8829808 B1 US 9119266 B1 US 9907137 B1	22/05/2003 14/06/2007 06/06/2013 01/08/2000 23/10/2001 03/12/2002 26/10/2004 06/03/2007 01/07/2008 22/06/2010 17/04/2012 29/01/2013 04/02/2014 09/09/2014 25/08/2015 27/02/2018
KR 10-2007-0101856 A	17/10/2007	CN 100547815 C CN 101124682 A EP 1830415 A1 EP 1830415 A4 EP 1830415 B1 JP 5134820 B2 KR 10-0893348 B1 TW 200627678 A TW 1287306 B US 2008-0106186 A1 US 7649310 B2 WO 2006-068141 A1	07/10/2009 13/02/2008 05/09/2007 11/11/2009 25/01/2017 30/01/2013 15/04/2009 01/08/2006 21/09/2007 08/05/2008 19/01/2010 29/06/2006

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR2018/010336

Patent document cited in search report	Publication date	Patent family member	Publication date
WO 2013-015597 A2	31/01/2013	KR 10-1395432 B1	14/05/2014
		KR 10-2013-0014333 A	07/02/2013
		US 2014-0209944 A1	31/07/2014
		WO 2013-015597 A3	21/03/2013

Form PCT/ISA/210 (patent family annex) (January 2015)