



(11) **EP 3 686 543 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**05.07.2023 Bulletin 2023/27**

(21) Application number: **17925621.9**

(22) Date of filing: **22.09.2017**

(51) International Patent Classification (IPC):

**F41B 11/71** <sup>(2013.01)</sup> **F41B 11/70** <sup>(2013.01)</sup>  
**F41A 17/36** <sup>(2006.01)</sup> **F41B 11/55** <sup>(2013.01)</sup>  
**F41B 11/646** <sup>(2013.01)</sup> **F41B 11/643** <sup>(2013.01)</sup>  
**F41A 9/67** <sup>(2006.01)</sup>

(52) Cooperative Patent Classification (CPC):

**F41B 11/646; F41A 17/36; F41B 11/55;**  
**F41B 11/70; F41B 11/71; F41A 9/67; F41B 11/643**

(86) International application number:

**PCT/JP2017/034363**

(87) International publication number:

**WO 2019/058526 (28.03.2019 Gazette 2019/13)**

(54) **ELECTRIC GUN WITH EMPTY SHOOTING SAFETY SUPPRESSION DEVICE**

ELEKTRISCHE WAFFE MIT VORRICHTUNG ZUM UNTERDRÜCKEN DER  
LEERSCHUSSSICHERUNG

ARME ÉLECTRIQUE AVEC DISPOSITIF DE SUPPRESSION DE LA SÉCURITÉ DE TIR À VIDE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:

**29.07.2020 Bulletin 2020/31**

(73) Proprietor: **TOKYO MARUI Co., Ltd.**

**Tokyo 120-0005 (JP)**

(72) Inventor: **IWASAWA, Iwao**

**Tokyo 120-0005 (JP)**

(74) Representative: **Becker, Eberhard**

**Becker Kurig & Partner**  
**Patentanwälte mbB**  
**Bavariastraße 7**  
**80336 München (DE)**

(56) References cited:

**EP-A1- 2 390 614 EP-A1- 3 015 812**  
**EP-A2- 2 388 548 WO-A1-2005/066574**  
**WO-A1-2016/181507 JP-A- H10 197 200**  
**JP-A- 2010 025 501 JP-A- 2010 025 501**  
**US-A1- 2015 059 723**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### Technical Field

**[0001]** The present invention relates to an empty shooting prevention function stopping device which can stop a function for preventing empty shooting in an electric gun.

### Background Art

**[0002]** In a so-called electric gun which uses a rotation of a motor to drive a piston in a cylinder, air in the cylinder is injected by a driving force of the piston to fire a bullet, and a trigger turns on an electric switch to drive the motor.

**[0003]** Therefore, while the trigger is kept being pulled, a state where the electric switch is turned on is maintained, and thus, the motor continues to be driven. Therefore, a movement of the piston does not stop, and even in a case where there is no bullet in a magazine, the air in the cylinder continues to be injected, and thus, so-called empty shooting is continued.

**[0004]** Therefore, Japanese Patent Application Laid-Open No. 2010-25501 filed by the present applicant discloses a mechanical power supply stopping device in an electric gun. The device is a device for cutting off a circuit of a drive portion for firing a bullet to stop power supply when there is no bullet in a bullet supply path leading to a bullet loading section in a rear section of a gun cavity. The device is configured to include a ball pushing member which is movably disposed in a bullet supply path and is biased to feed the bullet to the bullet loading section, a follower member which engages at an end portion with a portion of the ball pushing member side and is interlocked with a movement of the ball pushing member, a cut-off member which is movable from a position at the time of the power supply to a position at the time of power cut-off according to a movement of the follower member, engages with a tappet member in a process of moving to the position at the time of the power cut-off, and turns off a switch according to a movement of the tappet member, the tappet member which includes a portion which moves rearward according to a movement of a piston of the drive portion to open a bullet supply port of the bullet supply path leading to the bullet loading section and moves the cut-off member by a biasing force in a direction in which the bullet supply port is closed, and the switch which is moved by the engagement with the cut-off member to open a contact and closes the contact by a reset operation.

**[0005]** As described above, a bullet detection device which detects that the bullet runs out is disclosed as a portion of the mechanical power supply stopping device in the electric gun. The bullet detection device includes the ball pushing member which is movably disposed in the bullet supply path and is biased to feed the bullet to the bullet loading section, the follower member which engages at the end portion with a portion of the ball pushing

member side and is interlocked with the movement of the ball pushing member, and the cut-off member which is movable from the position at the time of the power supply to the position at the time of the power cut-off according to the movement of the follower member, engages with the tappet member in the process of moving to the position at the time of the power cut-off, and turns off the switch according to the movement of the tappet member.

**[0006]** Moreover, in the electric gun, there is a demand that a user wants to perform a so-called empty shooting in a case where the bullet runs out or in a state where there is no bullet. That is, there are many such requests in order to obtain feeling at the time of trial shooting or to experience recoil shock.

**[0007]** However, in the mechanical power supply stopping device of the related art, empty shooting is automatically prevented, and thus, the mechanical power supply stopping device does not meet a user's request.

**[0008]** EP 2390614 A1 discloses an electric toy gun having therein a power break control mechanism consisting of an actuator, a power break control set, and a swinging block for breaking off power supply upon triggering of the trigger when the clip is empty. When the clip is empty and when the trigger is pressed, the actuator is forced by a spring-loaded push rod at the bullet outlet of the clip to move the swinging block and the power break control set, causing a power break holder to be moved away from a power contact holder, and therefore power supply is disconnected.

### Summary of Invention

#### Technical Problem

**[0009]** The present invention is made in view of the above-described circumstances, and an object thereof is to provide an empty shooting prevention function stopping device capable of stopping a function of preventing empty shooting according to any request of a user.

**[0010]** The invention is provided in the appended claims. Dependent claims are directed to some beneficial embodiments. The rest of the disclosure serves a better understanding of the claimed invention.

#### Advantageous Effects of Invention

**[0011]** According to the present invention, it is possible to provide an empty shooting prevention function stopping device capable of stopping a function of preventing empty shooting according to any request of a user.

#### Brief Description of Drawings

**[0012]**

Fig. 1 is a side view of an electric gun in a state where a muzzle faces left.

Fig. 2 is a side view of the electric gun with a muzzle facing right.

Fig. 3 is a left-side view of a magazine portion having a plurality of bullets in a magazine.

Fig. 4 is a left-side view of the magazine portion in a state where there is no bullet in the magazine.

Fig. 5A is a left-side view of the magazine portion in a state where there is no bullet in the magazine and an empty shooting prevention function stopping device is moved in a -X direction.

Fig. 5B is a right-side view of Fig. 5A.

Fig. 6 is a left-side view of the magazine portion in a state where there is no bullet in the magazine.

Fig. 7 is a left-side view of the magazine portion in a state where there is no bullet in the magazine and a second empty shooting prevention function stopping device is moved in the -X direction.

Fig. 8 is a left-side view of the magazine portion in the state where there is no bullet in the magazine.

Fig. 9 is a left-side view of the magazine portion in which there is no bullet in the magazine and the empty shooting prevention function stopping device is moved in the -X direction.

Fig. 10 is a right-side view of the magazine portion in the state where there is no bullet in the magazine.

Fig. 11 is a right-side view of the magazine portion in which there is no bullet in the magazine and the empty shooting prevention function stopping device is moved in the -X direction.

Fig. 12 is a side view of the electric gun in the state where the muzzle faces left.

Fig. 13A is an enlarged view of Fig. 12.

Fig. 13B is a conceptual view of Fig. 13A.

Fig. 14A is an enlarged bottom view of Fig. 12.

Fig. 14B is a conceptual view of Fig. 14A.

Fig. 15 is an enlarged side view of the electric gun in the state where the muzzle faces right.

Fig. 16A is an enlarged bottom view of the electric gun with the muzzle facing left in a state where power supply to the motor is stopped.

Fig. 16B is a conceptual view of Fig. 16A.

Fig. 17 is a side view of the electric gun with the muzzle facing right in the state where the power supply to the motor is stopped.

Fig. 18 is a side view of the electric gun with the muzzle facing right in a state where the power is supplied to the motor again.

Fig. 19 is an enlarged bottom view of the electric gun with the muzzle facing left in the state where the power is supplied to the motor again.

#### Description of Embodiments

**[0013]** A bullet detection device 300 according to the present embodiment is suitable for an empty shooting prevention device 200 disposed in an electric gun 10 described below. Before the bullet detection device 300 is described, an electric gun 10 having the empty shooting

prevention device 200 will be described. In the electric gun 10, separately from a first contact 21 which comes into contact with a trigger 20 described later to supply power when the trigger 20 is pulled, a switch 201 is provided outside a housing 16 in a mechanical box described later, a power supply stop portion 202 is disposed to prevent so-called empty shooting when there is no bullet G in a magazine portion 500, and the power supply stop portion 202 disconnects the switch 201 (refer to Figs. 1 and 2).

**[0014]** The first contact 21 and the switch 201 are connected to each other in series by a wire S. When power is supplied to any one of the first contact 21 and the switch 201, a bullet G is fired. Moreover, in a case where there is no bullet G, it is possible to prevent the empty shooting by one or both of the power supply stop portion 202 stopping power supply to the switch 201 and returning the pulled trigger 20 (refer to Figs. 1 and 2).

**[0015]** First, a structure of an engine portion 15 for firing the bullet G in the electric gun 10 will be described. The engine portion 15 is disposed in the housing 16. In addition, the engine portion 15 includes the trigger 20, the first contact 21, a motor 22, a motor gear 23, a bevel gear 24, a gear 25, a sector gear 26, a piston 30, a rack portion 31 of the piston 30, and a spring 32 which biases the piston 30 in a -X direction. Here, the housing 16 having the engine portion 15 may be referred to the mechanical box.

**[0016]** When a user (not illustrated) pulls the trigger 20, the first contact 21 comes into contact with the trigger 20 and electricity from the battery 100 flows to the motor 22. Therefore, the motor 22 rotates. The motor gear 23 disposed in an output shaft of the motor 22 is rotated by the rotation of the motor 22, the bevel gear 24 meshing with the motor gear 23 is rotated, the gear 25 meshing with the bevel gear 24 is rotated, and the sector gear 26 meshing with the gear 25 is rotated.

**[0017]** When the sector gear 26 meshes with the rack portion 31 of the piston 30, the piston 30 moves in a +X direction. Accordingly, the piston 30 compresses the spring 32.

**[0018]** The sector gear 26 has a toothless portion which does not partially include gear teeth. Accordingly, when the toothless portion of the sector gear 26 rotates to a position facing the rack portion 31, the rack portion 31 and the sector gear 26 disengage with each other, and a force of the spring 32 to return to a natural length of the spring 32 causes the piston 30 disposed in the cylinder 40 to rapidly move in the -X direction. Therefore, the air in the cylinder 40 is injected to the bullet G which is disposed in advance at a tip of a nozzle 33, and the bullet G is fired by the air.

**[0019]** Further, the electric gun 10 includes a recoil shock generating mechanism 50 for generating a so-called recoil shock for simulating an impact generated by a reaction at the time of firing a bullet in an actual gun. Therefore, this will also be described. The recoil shock generating mechanism 50 includes a piston engagement

portion 51 of the piston 30 and a recoil weight 52 which engages with the piston engagement portion 51. The recoil weight 52 is biased in the -X direction by a recoil spring 53. Preferably, the recoil weight 52 has a predetermined mass in order to simulate the impact.

**[0020]** As described above, the piston 30 disposed in the cylinder 40 rapidly moves in the -X direction, and the air in the cylinder 40 is injected to the bullet G which is disposed in advance at the tip of the nozzle 33. Accordingly, the bullet G is fired by the air. In this case, the piston engagement portion 51 of the piston 30 and the recoil weight 52 engaging with the piston engagement portion 51 rapidly move in the -X direction in the same manner as the piston 30 by a force of the compressed recoil spring 53 to return to the natural length of the recoil spring 53. Accordingly, the recoil spring 52 collides with a tip portion 54 to generate an impact, and thus, a so-called recoil shock is obtained.

**[0021]** Thereafter, as the piston 30 moves in the +X direction again, the recoil weight 52 engaging with the piston engagement portion 51 of the piston 30 also moves in the +X direction, and compresses the recoil spring 53.

**[0022]** Thereafter, again, in the same manner as described above, the piston 30 disposed in the cylinder 40 rapidly moves in the -X direction, and the recoil shock is obtained by the force of the compressed recoil spring 53 to return to the natural length of the recoil spring 53. Accordingly, when the trigger 20 is pulled, the so-called recoil shock is obtained every time the bullet G is fired. Further, a recoil bar 60 connected to the recoil weight 52 is provided. Moreover, the electric gun 10 has the recoil weight 52, the recoil bar 60, and the recoil plate 61 which is connected to the recoil bar 60. The recoil weight 52, the recoil bar 60, and the recoil plate 61 may be collectively referred to as a piston interlocking portion 250. The piston interlocking portion 250 is literally interlocked with the movement of the piston 30, and reciprocates in the -X direction and the +X direction according to the firing of the bullet G.

**[0023]** As described above, the empty shooting prevention device 200 has the switch 201, which is connected to the first contact 21 in series by the wire S and is separated from the first contact 21, outside the housing 16 of the mechanical box as described above. Moreover, the bullet detection device 300 of the present embodiment detects that the shooting of the bullet G ends and the bullet G in the magazine portion 500 runs out, the switch 201 is disconnected by a switch disconnecting portion 270 of the power supply stop portion 202, and thus, the power supply to the motor 22 stops. Moreover, the switch disconnecting portion 270 is disconnected by the piston interlocking portion 250 which is driven by the movement of the piston 30. Therefore, as described above, even in a state where the trigger 20 is pulled and the first contact 21 is in contact with the trigger 20, the switch 201 which is connected to the first contact 21 in series is disconnected. Accordingly, it is possible to prevent the empty shooting.

**[0024]** Accordingly, the bullet detection device 300 according to the present embodiment which detects that the bullet G in the magazine portion 500 runs out will be described. Preferably, the bullet detection device 300 is disposed in the magazine portion 500. Therefore, first, a configuration of the magazine portion 500 will be described, and thereafter, the bullet detection device 300 will be described.

**[0025]** The magazine portion 500 has a magazine body portion 501 which constitutes an outer shell as a so-called magazine for supplying the bullet G to the electric gun 10. In addition, a bullet disposition portion 502 is a passage in which a plurality of the bullets G is disposed and through which the bullet G is fed into the electric gun 10. A width of the bullet disposition portion 502 is set to be equal to a width of the bullet G. The bullet disposition portion 502 includes a magazine spring 505 for pushing up the plurality of bullets G in a direction (+Y direction) of an opening 503 and a follower portion 510 biased by the magazine spring 505.

**[0026]** Accordingly, the follower portion 510 includes a first follower 511 which is biased by the magazine spring 505, a second follower 512 which is biased by the first follower 511, and a third follower 513 which is biased by the second follower 512, and the bullet G is always biased in the direction (+Y direction) of the opening 503 as described above. That is, the magazine spring 505 presses the first follower 511 in the follower portion 510. In addition, any one of the second follower 512 and the first follower 511 has a shaft portion, the other thereof has a bearing portion, and the shaft portion and the bearing portion are fitted and connected to each other. Therefore, in a case where the bullet disposition portion 502 is curved, the second follower 512 and the first follower 511 are connected to each other in a bendable manner so that the bullet disposition portion 502 can follow the curved shape. Moreover, the third follower 513 is in contact with the second follower 512, and thus, is pressed by the second follower 512.

**[0027]** In addition, a lower end portion 505a of the magazine spring 505 is disposed at an end portion 502a of the bullet disposition portion 502, and a spring upper end portion 505b of the magazine spring 505 is connected to the first follower 511 of the follower portion 510. Further, a bullet locking portion 515 is disposed to prevent the bullet G from jumping out when the magazine portion 500 is removed from the electric gun 10 (not illustrated) and is biased in the +X direction by a bullet locking spring 516.

**[0028]** That is, when the plurality of bullets G are packed in the magazine portion 500 having the above-described configuration, the magazine spring 505 is compressed by the plurality of bullets G, and the bullet G disposed at an uppermost position out of the plurality of bullets G is prevented from jumping out by the bullet locking portion 515 biased in the +X direction by the bullet locking spring 516. Accordingly, the plurality of bullets G are disposed in the magazine portion 500. In addition, when the magazine portion 500 is set to the electric gun

10, the bullet locking portion 515 is pressed in the -X direction by a chamber 34 (refer to Fig. 1), and the bullet locking portion 515 is pressed. Accordingly, the engagement between the bullet locking portion 515 and the bullet G is released. As a result, the bullet G is loaded into the electric gun 10. Moreover, in Figs. 3, 4, and 5A, the engagement between the bullet locking portion 515 and the bullet G is released.

**[0029]** In the present embodiment, the bullet detection device 300 is disposed in the magazine portion 500 and includes the detection engagement portion 301 which is disposed in the first follower 511 of the follower portion 510 and a detection movement portion 310 which protrudes to detect that there is no bullet in response to rise of the detection engagement portion 301. Moreover, when the detection engagement portion 301 and the detection movement portion 310 are engaged, the detection movement portion 310 moves and protrudes.

**[0030]** That is, the detection movement portion 310 includes a detection engaged portion 311, a detection push portion 312 which is disposed at a predetermined angle with respect to the detection engaged portion 311, that is, at an angle of approximately 90° in the present embodiment, a detection shaft portion 313, and a first main body portion 330 which is disposed between the detection push portion 312 and the detection shaft portion 313 and is a thin-plate shaped triangular. Therefore, the detection engaged portion 311, the detection push portion 312, the detection shaft portion 313, and the first main body portion 330 are integrated with each other, and constitute the detection movement portion 310. The detection movement portion 310 rotates so as to oscillate about the detection shaft portion 313 (refer to Fig. 3).

**[0031]** When all the bullets G disposed in the magazine portion 500 have been shot, there is no bullet G disposed in the magazine portion 500, and a length of the magazine spring 505 is returned to a natural length sufficiently longer than a length of the bullet disposition portion 502. Accordingly, the first follower 511 of the follower portion 510 is pushed up in the direction of the opening 503.

**[0032]** At the same time, the first follower 511 connected to the spring upper end portion 505b of the magazine spring 505 rises to a predetermined position, the detection engagement portion 301 disposed in the first follower 511 rotates the detection engaged portion 311 of the detection movement portion 310 counterclockwise and rotates the detection push portion 312 integrated with the detection engaged portion 311 counterclockwise. Accordingly, the detection push portion 311 protrudes to jump out from an inside of the magazine portion 500. When all the bullets G disposed in the magazine portion 500 are shot out in this way, the detection push portion 312 protrudes from the inside of the magazine portion 500, and thus, it is detected that there is no bullet G (refer to Fig. 4). In this case, an upper end portion 513a of the third follower 513 protrudes from the opening 503. In the present embodiment, a position at which the detection push portion 312 protrudes so as to jump out from the

inside of the magazine portion 500 is a position (in the -X direction) opposite to the housing 16 in the mechanical box with respect to the bullet disposition portion 502 (refer to Fig. 1). That is, the position of the housing 16 in the mechanical box is located in a direction (the +X direction) of the trigger 20 with respect to the bullet disposition portion 502. Meanwhile, the detection push portion 312 of the bullet detection device 300 detects the presence or absence of a bullet in order to disconnect the switch 201 disposed outside the housing 16. Accordingly, the detection push portion 312 is disposed at a position (in the -X direction) opposite to the position of the trigger 20 with respect to the bullet disposition portion 502. Moreover, the above-described predetermined position means a position at which when there is no bullet G in the bullet disposition portion 502, the follower portion 510 is moved by a biasing force of the magazine spring 505 and the detection engagement portion 301 disposed in the first follower 511 of the follower portion 510 and the detection engaged portion 311 of the detection movement portion 310 engage with each other. Therefore, in the present embodiment, as described above, the follower portion 510 includes the first follower 511, the second follower 512, and the third follower 513, and the detection engagement portion 301 is disposed in the first follower 511. However, for example, the detection engagement portion 301 can be disposed in the second follower 512 or the third follower 513.

**[0033]** In addition, there is provided an empty shooting prevention function stopping device 360 in order to stop a function of the bullet detection device 300. In the bullet detection device 300, a detection protrusion 350 which is disposed in the detection engaged portion 311 of the detection movement portion 310 and a function stop engagement portion 361 of the empty shooting prevention function stopping device 360 engage with each other, and the detection push portion 312 of the detection movement portion 310 substantially stays in the magazine portion 500 without performing an operation of protruding too much outside the magazine portion 500. As a result, the function of the empty shooting prevention device 200 described later can be stopped, and so-called empty shooting can be performed even in a state where there is no bullet G in the bullet disposition portion 502 and the bullet disposition portion 502 is empty. This is particularly suitable for a user who wants to experience only the recoil shock because an operation check of the electric gun having the recoil shock can be performed in a state where the magazine portion 500 is not filled with the bullets G, which contributes safety.

**[0034]** That is, the empty shooting prevention function stopping device 360 slides in the -X direction from the state of Fig. 4. Figs. 5A and 5B illustrate a state where the empty shooting prevention function stopping device 360 slides in the -X direction. In this state, the position engagement portion 365 of the empty shooting prevention function stopping device 360 disengages from a first groove portion 551 of the magazine portion 500 and en-

gages with a second groove portion 552. In this case, the function stop engagement portion 361 of the empty shooting prevention function stopping device 360 engages with the detection protrusion 350 disposed in the detection engaged portion 311 of the detection movement portion 310. As described above, the detection movement portion 310 is pushed down clockwise on an XY plane in Fig. 5A by the empty shooting prevention function stopping device 360, and the detection push portion 312 integrated with the detection engaged portion 311 stays in the magazine body portion 501 without protruding too much outside the magazine body portion 501.

**[0035]** In this state, in a case where the bullet G is hit and the bullet G in the bullet disposition portion 502 runs out, as described above, the follower portion 510 rises and the detection engagement portion 301 disposed in the first follower 511 of the follower portion 510 engages with the detection engaged portion 311 of the detection movement portion 310. However, the rotation (counterclockwise rotation in Fig. 5A) of the detection movement portion 310 is prevented by the empty shooting prevention function stopping device 360, and the detection push portion 312 of the detection movement portion 310 substantially stays in the magazine body portion 501 of the magazine portion 500 without protruding too much outside the magazine portion 500. In this case, the upper end portion 513a of the third follower 513 does not protrude from the opening 503, and the upper end portion 513a stays in the opening 503.

**[0036]** In addition, the empty shooting prevention function stopping device 360 slides in the +X direction from the states of Figs. 5A and 5B. When the empty shooting prevention function stopping device 360 slides in the +X direction, the position engagement portion 365 of the empty shooting prevention function stopping device 360 disengages from the second groove portion 552 of the magazine portion 500 and engages with the first groove portion 551. In this case, the function stop engagement portion 361 of the empty shooting prevention function stopping device 360 disengages from the detection protrusion 350 disposed in the detection engaged portion 311 of the detection movement portion 310. As described above, the empty shooting prevention function stopping device 360 moves, and thus, the function stop engagement portion 361 of the empty shooting prevention function stopping device 360 is disposed so as to engage with or disengage from the detection engaged portion 311 of the detection movement portion 310. In addition, the empty shooting prevention function stopping device 360 has a groove portion 366. Accordingly, since the position engagement portion 365 is elastically deformable so as to be restorable, the position engagement portion 365 is suitable for engaging with the first groove portion 551 and the second groove portion 552, or disengaging therefrom. (refer to Fig. 4).

**[0037]** Moreover, in Fig. 5B, the detection protrusion 350 is configured to protrude toward a front of the drawing, and when the position engagement portion 365 of

the empty shooting prevention function stopping device 360 engages with the first groove portion 551 of the magazine portion 500, the detection protrusion 350 does not stop the function of the bullet detection device 300, and when the position engagement portion 365 engages with the second groove portion 552, the detection protrusion 350 stops the function of the bullet detection device 300 (refer to Figs. 4, 5A, and 5B). Further, in the present embodiment, the bullet detection device 300 is disposed in the magazine portion 500. However, for example, as long as respective components of the magazine portion 500 are disposed in the electric gun 10, the bullet detection device 300 can be disposed in the electric gun 10. In this manner, it is possible to provide the bullet detection device 300 detects that the bullet G runs out, which is suitable for the empty shooting prevention device 200 described later capable of stopping the rotation of the motor in the case where there is no bullet G without changing a mechanical box of the related art.

**[0038]** Further, only differences between a second bullet detection device 300A in a second embodiment and the bullet detection device 300 will be described. Moreover, only symbols are assigned to common portions therebetween, and descriptions thereof are omitted. The second bullet detection device 300A is different from the bullet detection device 300 in that a second detection engagement portion 302 is disposed in the first follower 511 of the follower portion 510. Further, the second detection movement portion 310A is different from the detection movement portion 310 in that the second detection movement portion 310A does not include the detection protrusion 350. Moreover, a second empty shooting prevention function stopping device 360A is different from the empty shooting prevention function stopping device 360 in that the second empty shooting prevention function stopping device 360A has a second function stop engagement portion 367 for engaging with the second detection engagement portion 302 (refer to Fig. 6).

**[0039]** The second detection engagement portion 302 is disposed so as to protrude horizontally in the first follower 511, and is disposed on an opposite side of the detection engagement portion 301 so that the first follower 511 is interposed therebetween. Further, the first follower 511, the detection engagement portion 301, and the second detection engagement portion 302 are configured to be integrated with each other.

**[0040]** Further, the second function stop engagement portion 367 disposed in the second empty shooting prevention function stopping device 360A engages with the second detection engagement portion 302, and a lower end portion of the second function stop engagement portion 367 having substantially trapezoidal shape protruding downward includes a second function stop engagement end portion 367a and engages with the second detection engagement portion 302.

**[0041]** That is, in a case where the bullet G is shot and the bullet G in the bullet disposition portion 502 runs out, as described above, the follower portion 510 rises and

the detection engagement portion 301 disposed in the first follower 511 of the follower portion 510 engages with the detection engaged portion 311 of the second detection movement portion 310A. In this case, the second empty shooting prevention function stopping device 360A slides in the -X direction in advance. In this state, the position engagement portion 365 of the second empty shooting prevention function stopping device 360A disengages from the first groove portion 551 of the magazine portion 500 and engages with the second groove portion 552.

**[0042]** In the second function stop engagement end portion 367a protruding downward, the second function stop engagement end portion 367a protruding downward when moving in the -X direction and the second detection engagement portion 302 engage with each other. Accordingly, the movement of the follower portion 510 which tends to rise by the biasing force of the magazine spring 505 is prevented. The movement of the follower portion 510 is prevented. Therefore, a state is maintained, in which the detection engagement portion 301 disposed in the first follower 511 of the follower portion 510 does not engage with the detection engaged portion 311 of the second detection movement portion 310A and the second detection movement portion 310A of the second bullet detection device 300A does not protrude. Thus, a protruding operation of the second detection movement portion 310A is prevented (refer to Fig. 7). In addition, it is needless to say that the second bullet detection device 300A and the second empty shooting prevention function stopping device 360A in the second embodiment can be disposed in the magazine portion 500, and it is also needless to say that the magazine portion 500 can be disposed in the electric gun 10. Further, it is needless to say that the second bullet detection device 300A and the second empty shooting prevention function stopping device 360A in the second embodiment can be directly disposed in the electric gun 10.

**[0043]** In addition, a third bullet detection device 300B according to the third embodiment will be described. The third bullet detection device 300B has the detection engagement portion 301 and a third detection movement portion 310B. The detection engagement portion 301 is as described above, and in the present embodiment, there is no change in function from the detection engagement portion 301 of the bullet detection device 300 (refer to Fig. 8). Accordingly, size, length, dimensions, and shape can be changed.

**[0044]** The third detection movement portion 310B includes a follower link portion 351 which moves obliquely up and down and a follower link disposition portion 352 which defines a trajectory on which the follower link portion 351 moves up and down. The follower link disposition portion 352 is formed in an elongated protrusion shape protruding toward a front side of the drawing in Fig. 9, and is slidably fitted with an elongated groove portion (not illustrated). If +Y in Fig. 9 is defined as the upper side, the follower link disposition portion 352 defines a

trajectory which moves diagonally left and up. In addition, a third detection protrusion 350B is provided in the vicinity of a lower end portion of the follower link portion 351.

**[0045]** That is, in a case where the bullet G is hit and the bullet G in the bullet disposition portion 502 runs out, as described above, the follower portion 510 rises and the detection engagement portion 301 disposed in the first follower 511 of the follower portion 510 pushes up the follower link portion 351 diagonally upward along the follower link disposition portion 352. Accordingly, the follower link portion 351 moves, and a tip portion of the follower link portion 351 projects from the magazine portion 500 (refer to Fig. 8).

**[0046]** In addition, the empty shooting prevention function stopping device 360 is provided in order to stop the function of the third bullet detection device 300B. That is, the empty shooting prevention function stopping device 360 is slid in the -X direction (refer to Fig. 9). In this state, the position engagement portion 365 of the empty shooting prevention function stopping device 360 disengages from a first groove portion 551 of the magazine portion 500 and engages with a second groove portion 552. In this case, the function stop engagement portion 361 of the empty shooting prevention function stopping device 360 engages with the third detection protrusion 350B of the follower link portion 351. Thus, the follower link portion 351 can substantially stay in the magazine portion 500 without the follower link portion 351 protruding too much from the inside of the magazine portion 500 to the outside thereof. (refer to Figs. 9, 10, and 11). Moreover, the follower link portion 351 may completely stay in the magazine portion 500 without the follower link portion 351 protruding from the inside of the magazine portion 500 to the outside thereof. Further, it is needless to say that the third bullet detection device 300B and the empty shooting prevention function stopping device 360 in the third embodiment can be disposed in the magazine portion 500, and it is also needless to say that the magazine portion 500 can be disposed in the electric gun 10. Moreover, it is needless to say that the third bullet detection device 300B and the empty shooting prevention function stopping device 360 in the third embodiment can be directly disposed in the electric gun 10.

**[0047]** Next, the empty shooting prevention device 200 in the electric gun 10 will be described. As described above, in the empty shooting prevention device 200, the switch 201 is provided outside the housing 16, and in order to prevent the so-called empty shooting when there is no bullet G in the magazine portion 500, the power supply stop portion 202 described later disconnects the contact with the switch 201. Therefore, the power supply stop portion 202 is operated in response to the protrusion of the detection push portion 312 to disconnect the contact with the switch 201.

**[0048]** The power supply stop portion 202 includes a detection receiving portion 210 for receiving the protrusion operation of the detection push portion 312 from the magazine portion 500, the piston interlocking portion 250

which is interlocked with the movement of the piston 30, and the switch disconnecting portion 270 for separating the contact of the switch 201 (refer to Fig. 12). The detection receiving portion 210 has a first detection receiving portion 211 and a second detection receiving portion 212, and receives a movement operation of the detection push portion 312 in the -X direction. The first detection receiving portion 211 receives the movement of the detection push portion 312 in the -X direction and moves in the -X direction (refer to Figs. 12, 13A, and 13B).

**[0049]** The second detection receiving portion 212 is rotatably supported by a shaft portion 213. The protruding portion 212a of the second detection receiving portion 212 is further pressed by a tip portion 211a of the first detection receiving portion 211 pressed by a tip portion 312a of the detection push portion 312. According to Figs. 14A and 14B which are bottom views, the second detection receiving portion 212 rotates clockwise on an XZ plane. Accordingly, the other end portion 212b of the second detection receiving portion 212 also rotates clockwise on the XZ plane, and thus, the other end portion 212b protrudes in the trajectory of the recoil plate 61 which reciprocates from the -X direction to the +X direction. That is, the piston 30 reciprocates from the -X direction in the +X direction, and thus, the recoil plate 61 in the piston interlocking portion 250 which is interlocked with the reciprocation of the piston 30 also reciprocates from the -X direction in the +X direction. Moreover, as described above, the other end portion 212b protrudes in the trajectory. That is, in Figs. 14A and 14B, the second detection receiving portion 212 is pressed by the first detection receiving portion 211, and thus, the second detection receiving portion 212 is in a state where the other end portion 212b is located upward in the drawing, that is, the other end portion 212b stands uprightly, and the other end portion 212b protrudes in the trajectory along the recoil plate 61 reciprocates (-X direction and +X direction).

**[0050]** Fig. 15 is an enlarged side view of the state where a muzzle of the electric gun 10 faces right in the states of Figs. 14A and 14B. This state is a state where a stop plate 280 of the switch disconnecting portion 270 described below does not engage with a switch lever 290.

**[0051]** In this state, the piston 30 still reciprocates. Accordingly, the other end portion 212b of the second detection receiving portion 212 standing uprightly in Figs. 14A and 14B engages with the recoil plate 61 of the piston interlocking portion 250 in Figs. 16A and 16B thereafter. As described above, the recoil plate 61 reciprocates from the -X direction to the +X direction. Accordingly, the second detection receiving portion 212 engages with the recoil plate 61 and the other end portion 212b of the second detection receiving portion 212 is operated so as to rotate clockwise on the XZ plane. That is, the motor 22 rotates and the piston 30 continuously reciprocates since the power supply is not disconnected yet. However, the other end portion 212b of the second detection receiving portion 212 is further rotated clockwise on the XZ plane by

the piston interlocking portion 250 which follows the reciprocation of the piston 30. Moreover, the spring 214 biases the second detection receiving portion 212 counterclockwise (refer to Figs. 16A and 16B).

**[0052]** Accordingly, one end portion 212c of the second detection receiving portion 212 also rotates clockwise on the XZ plane. Further, the one end portion 212c of the second detection receiving portion 212 of the detection receiving portion 210 rotated clockwise engages with the switch disconnecting portion 270 to operate the switch disconnecting portion 270. Further, according to the operation of the switch disconnecting portion 270, the switch disconnecting portion 270 disconnects the contact of the switch 201, that is, disconnects the switch 201 (refer to Figs. 14A, 15, 16A, 16B, and 17).

**[0053]** To further describe this, first, the switch disconnecting portion 270 has a latch 271, the stop plate 280, and a switch lever 290. Moreover, a latch spring 272 biases the latch 271 clockwise. According to the configuration, the one end portion 212c of the second detection receiving portion 212 engages with the latch 271 of the switch disconnecting portion 270, and the one end portion 212c rotates the latch 271 counterclockwise against a clockwise biasing force of the latch spring 272. (refer to Figs. 14A, 15, 16A, 16B, and 17).

**[0054]** The latch 271 has a latch convex portion 271a, and the stop plate 280 engaging with the latch convex portion 271a is biased in the -X direction by a stop plate spring 281. Therefore, the latch 271 is rotated counterclockwise, and the stop plate 280 disengaged from the latch convex portion 271a of the latch 271 moves in the -X direction. Fig. 17 is a side view illustrating a state where the muzzle of the electric gun 10 faces right in the states of Figs. 16A and 16B. By comparing Fig. 15 with Fig. 17, it can be understood that the stop plate 280 moves in the -X direction.

**[0055]** The stop plate 280 moves in the -X direction. Accordingly, the switch lever one end portion 291 of the switch lever 290 is pushed down, and the switch lever other end portion 292 is pulled up in the +Y direction about the switch lever shaft portion 293. In this case, a convex portion 294 attached to the switch lever shaft portion 293 rotates to lift a first contact portion 201a of the switch 201 and disconnects a contact with a second contact portion 201b of the switch 201. Accordingly, power supply of the motor 22 is prevented, and it is possible to prevent the empty shooting (refer to Fig. 17). That is, the detection receiving portion 210 operates the switch disconnecting portion 270, and the switch disconnecting portion 270 disconnects the switch 201. In addition, the switch lever 290 includes the switch lever one end portion 291 and the switch lever other end portion 292, and has a substantially isosceles triangular shape in which an apex angle therebetween is an obtuse angle. In addition, the switch lever spring 290a biases the switch lever 290 counterclockwise in Fig. 17. Thereby, in a state where the bullet G is disposed in the magazine portion 500 or in a case where the empty shooting prevention function



stopping device 360 is operated, the first contact portion 201a of the switch 201 is pushed down, and the contact with the second contact portion 201b of the switch 201 is ensured.

**[0056]** As described above, in the related art, it is necessary to use a mechanical box having a mechanical power supply stopping device for a dedicated electric gun. However, the empty shooting prevention device can be installed as an independent device from a so-called mechanical box, and thus, this device is installed in a portion where there is a space regardless of an external shape of the electric gun. Accordingly, it is possible to use the existing mechanical box. Therefore, even if the user keeps pulling the trigger 20 in a state where there is no bullet G in the magazine after the shooting of the bullet G ends, an effect of preventing so-called empty shooting can be achieved. Moreover, in the case of an electric gun having no magazine portion, an effect of preventing the empty shooting can be obtained by having the same configuration as that of the bullet detection device in the main body of the electric gun.

**[0057]** Moreover, in this state, the first contact portion 201a of the switch 201 is lifted by the above-described effects of the stop plate 280 and the switch lever 290, and the contact with the second contact portion 201b of the switch 201 is disconnected (refer to Fig. 17). Therefore, in order to cause the first contact portion 201a and the second contact portion 201b of the switch 201 to come into contact with each other again, a bolt portion 295 is pulled in the +X direction. If a user (not illustrated) pulls the bolt portion 295, the bolt portion 295 engages with the stop plate 280 according to a certain stroke. The stop plate 280 engaging with the bolt portion 295 is biased in the -X direction by the stop plate spring 281. Accordingly, the bolt portion 295 is pulled in the +X direction against this biasing force (refer to Fig. 18).

**[0058]** Fig. 19 is an enlarged bottom view in a state where the muzzle faces left in the state of Fig. 18. In addition, when the magazine portion 500 filled with the bullets G in advance is set to the electric gun 10 and the bolt portion 295 is pulled in the +X direction as described above, the stop plate 280 also moves in the +X direction and engages with the latch 271 again. The stop plate 280 stays at this position against the stop plate spring 281. The first contact portion 201a of the switch 201 is pushed down to come into contact with the second contact portion 201b of the switch 201 (refer to Figs. 18 and 19). Thereafter, when the trigger 20 is pulled, the bullet G can be fired again. Moreover, in the present embodiment, the recoil shock generating mechanism 50 is provided. However, even in a case where the recoil shock generating mechanism 50 is not provided, the piston interlocking portion 250 which follows the reciprocating motion of the piston 30 may be disposed or the piston 30 itself may be implemented as the piston interlocking portion 250.

## Reference Signs List

### [0059]

5	10: electric gun
	15: engine portion
	16: housing
	20: trigger
	21: first contact
10	22: motor
	23: motor gear
	24: bevel gear
	25: gear
	26: sector gear
15	30: piston
	31: rack portion
	32: spring
	50: recoil shock generating mechanism
	51: piston engagement portion
20	52: recoil weight
	53: recoil spring
	54: tip portion
	60: recoil bar
	61: recoil plate
25	200: empty shooting prevention device
	201: switch
	202: power supply stop portion
	250: piston interlocking portion
	270: switch disconnecting portion
30	300: bullet detection device
	300A: second bullet detection device
	300B: third bullet detection device
	301: detection engagement portion
	302: second detection engagement portion
35	310: detection movement portion
	310A: second detection movement portion
	310B: third detection movement portion
	311: detection engaged portion
	312: detection push portion
40	313: detection shaft portion
	320: detection spring
	350: detection protrusion
	350B: third detection protrusion
	351: follower link portion
45	352: follower link disposition portion
	360: empty shooting prevention function stopping device
	360A: second empty shooting prevention function stopping device
50	361: function stop engagement portion
	365: position engagement portion
	367: second function stop engagement portion
	500: magazine portion
	501: magazine body portion
55	502: bullet disposition portion
	503: opening
	505: magazine spring
	510: follower portion

511: first follower  
 512: second follower  
 513: third follower  
 G: bullet

## Claims

### 1. An electric gun (10) comprising:

a bullet detection device (300, 300B) suitable for an empty shooting prevention device (200) of the electric gun (10) and an empty shooting prevention function stopping device (360), wherein the bullet detection device (300, 300B) comprises:

a detection engagement portion (301) which is provided in a follower portion (510) disposed to be movable in a bullet disposition portion (502) serving as a passage for discharging a bullet biased by a spring (505); and

a detection movement portion (310, 310B) which, in response to the rise of the detection engagement portion (301), protrudes to detect that there is no bullet, and is operated to engage with the detection engagement portion (301), so that, when the detection engagement portion (301) moves to a predetermined position of the bullet disposition portion (302), the detection engagement portion (301) and the detection movement portion (310) are engaged, and the detection movement portion (310) moves and protrudes,

**characterized in that** the empty shooting prevention function stopping device (360) comprises a function stop engagement portion (361) configured to slide according to a movement of the empty shooting prevention function stopping device (360) between a first state and a second state, for preventing or allowing an operation of the detection movement portion (310, 310B), wherein, in the first state, the function stop engagement portion (361) engages with the detection movement portion (310, 310B), and, through preventing the operation of the detection movement portion (310, 310B), a protruding operation of the detection movement portion (310) is prevented, and in the second state, the function stop engagement portion (361) disengages from the detection movement portion (310, 310B), and, through allowing the operation of the detection movement portion (310, 310B), a protruding operation of the detection movement portion (310,

310B) is allowed.

### 2. The electric gun (10) according to claim 1,

wherein the detection movement portion (310) includes

a detection engaged portion (311) which engages with the detection engagement portion (301),

a detection push portion (312) which is integrated with the detection engaged portion (311), and

a detection protrusion (350) which engages with the function stop engagement portion (361),

wherein, in the first state, the detection protrusion (350) of the detection movement portion (310) engages with the function stop engagement portion (361), and, through preventing the operation of the detection movement portion (310), the protruding operation of the detection movement portion (310) is prevented.

### 3. The electric gun (10) according to claim 1,

wherein the detection movement portion (310B) includes a follower link portion (351) capable of moving up and down, and a third detection protrusion (350B) which engages with the function stop engagement portion (361) in the follower link portion, and

wherein when the function stop engagement portion (361) engages with the third detection protrusion (350B), through preventing an upward movement of the follower link portion, a protruding operation of the follower link portion (351) is prevented.

### 4. An electric gun (10) comprising:

a bullet detection device (300A) suitable for an empty shooting prevention device (200) of the electric gun (10) and an empty shooting prevention function stopping device (360A), wherein the bullet detection device (300A) comprises:

a detection engagement portion (301) which is provided in a follower portion (510) disposed to be movable in a bullet disposition portion (502) serving as a passage for discharging a bullet biased by a spring (505); and

a detection movement portion (310A) which, in response to the rise of the detection engagement portion (301), protrudes to

detect that there is no bullet, and is operated to engage with the detection engagement portion (301), so that, when the detection engagement portion (301) moves to a predetermined position of the bullet disposition portion (302), the detection engagement portion (301) and the detection movement portion (310) are engaged, and the detection movement portion (310) moves and protrudes,

**characterized in that** the empty shooting prevention function stopping device (360) comprises a function stop engagement portion (367) configured to slide according to a movement of the empty shooting prevention function stopping device (360) between a first state and a second state, for preventing an operation of the detection movement portion (310A), wherein the follower portion (510) further includes a second detection engagement portion (302), and in the first state, the second detection engagement portion (302) engages with the second function stop engagement portion (367), and, through preventing an operation of the follower portion (510), a protruding operation of the detection movement portion (310A) is prevented, and in the second state, the second detection engagement portion (302) is disengaged from the second function stop engagement portion (367), and, through allowing an operation of the follower portion (510), a protruding operation of the detection movement portion (310A) is allowed.

5. The electric gun (10) according to any one of claims 1 to 4, wherein the bullet detection device (300, 300A, 300B) and the empty shooting prevention function stopping device (360, 360A, 360B) are disposed in a magazine portion (500).

## Patentansprüche

1. Elektrische Waffe (10), umfassend:

eine Geschosserkennungsvorrichtung (300, 300B), die für eine Leerschussverhinderungsvorrichtung (200) der elektrischen Waffe (10) geeignet ist, und eine Leerschussverhinderungsfunktions-Stoppvorrichtung (360), wobei die Geschosserkennungsvorrichtung (300, 300B) umfasst:

einen Erfassungseingriffsabschnitt (301), der in einem Mitnehmerabschnitt (510) bereitgestellt ist, der so angeordnet ist, dass

er in einem Geschossanordnungsabschnitt (502) beweglich ist, der als ein Durchgang zum Ausstoßen eines Geschosses, vorgespannt durch eine Feder (505), dient; und einen Erfassungsbewegungsabschnitt (310, 310B), der als Antwort auf das Anheben des Erfassungseingriffsabschnitts (301) hervorsteht, um zu erfassen, dass dort kein Geschoss ist, und betätigt wird, um mit dem Erfassungseingriffsabschnitt (301) einzugreifen, so dass, wenn sich der Erfassungseingriffsabschnitt (301) zu einer vorbestimmten Position des Geschossanordnungsabschnitts (302) bewegt, der Erfassungseingriffsabschnitt (301) und der Erfassungsbewegungsabschnitt (310) in Eingriff sind, und der Erfassungsbewegungsabschnitt (310) sich bewegt und vorsteht,

**dadurch gekennzeichnet, dass** die Leerschussverhinderungsfunktions-Stoppvorrichtung (360) einen Funktionsstopp-Eingriffsabschnitt (361) umfasst, der konfiguriert ist, um entsprechend einer Bewegung der Leerschussverhinderungsfunktions-Stoppvorrichtung (360) zwischen einem ersten Zustand und einem zweiten Zustand zu gleiten, um eine Betätigung des Erfassungsbewegungsabschnitts (310, 310B) zu verhindern oder zu ermöglichen, wobei in dem ersten Zustand der Funktionsstopp-Eingriffsabschnitt (361) in den Erfassungsbewegungsabschnitt (310, 310B) eingreift und durch Verhindern der Betätigung des Erfassungsbewegungsabschnitts (310, 310B) eine vorstehende Betätigung des Erfassungsbewegungsabschnitts (310) verhindert wird, und in dem zweiten Zustand sich der Funktionsstopp-Eingriffsabschnitt (361) von dem Erfassungsbewegungsabschnitt (310, 310B) löst, und durch Ermöglichen der Betätigung des Erfassungsbewegungsabschnitts (310, 310B) eine vorstehende Betätigung des Erfassungsbewegungsabschnitts (310, 310B) ermöglicht wird.

2. Elektrische Waffe (10) gemäß Anspruch 1, wobei der Erfassungsbewegungsabschnitt (310) enthält

einen eingegriffenen Erfassungsabschnitt (311), der mit dem Erfassungseingriffsabschnitt (301) eingreift, einen Erfassungsstoßabschnitt (312), der mit dem eingegriffenen Erfassungsabschnitt (311) integriert ist, und einen Erfassungsvorsprung (350), der mit dem

Funktionsstopp-Eingriffsabschnitt (361) eingreift,  
wobei in dem ersten Zustand der Erfassungsvorsprung (350) des Erfassungsbewegungsabschnitts (310) in den Funktionsstopp-Eingriffsabschnitt (361) eingreift und durch Verhindern der Betätigung des Erfassungsbewegungsabschnitts (310) die vorstehende Betätigung des Erfassungsbewegungsabschnitts (310) verhindert wird.

3. Elektrische Waffe (10) gemäß Anspruch 1,

wobei der Erfassungsbewegungsabschnitt (310B) einen Mitnehmerverbindungsabschnitt (351), der in der Lage ist, sich nach oben und unten zu bewegen, und einen dritten Erfassungsvorsprung (350B) enthält, der mit dem Funktionsstopp-Eingriffsabschnitt (361) in dem Mitnehmerverbindungsabschnitt eingreift, und wobei, wenn der Funktionsstopp-Eingriffsabschnitt (361) in den dritten Erfassungsvorsprung (350B) eingreift, durch Verhindern einer Aufwärtsbewegung des Mitnehmerverbindungsabschnitts eine vorstehende Betätigung des Mitnehmerverbindungsabschnitts (351) verhindert wird.

4. Elektrische Waffe (10), umfassend:

eine Geschosserfassungsvorrichtung (300A), die für eine Leerschussverhinderungsvorrichtung (200) der elektrischen Waffe (10) geeignet ist, und eine Leerschussverhinderungsfunktions-Stoppvorrichtung (360A), wobei die Geschosserfassungsvorrichtung (300A) umfasst:

einen Erfassungseingriffsabschnitt (301), der in einem Mitnehmerabschnitt (510) bereitgestellt ist, der so angeordnet ist, dass er in einem Geschossanordnungsabschnitt (502) beweglich ist, der als ein Durchgang zum Ausstoßen eines Geschosses, vorgespannt durch eine Feder (505), dient; und einen Erfassungsbewegungsabschnitt (310A), der als Antwort auf das Anheben des Erfassungseingriffsabschnitts (301) vorsteht, um zu erfassen, dass dort kein Geschoss ist, und betätigt wird, um mit dem Erfassungseingriffsabschnitt (301) einzugreifen, so dass, wenn sich der Erfassungseingriffsabschnitt (301) zu einer vorbestimmten Position des Geschossanordnungsabschnitts (302) bewegt, der Erfassungseingriffsabschnitt (301) und der Erfassungsbewegungsabschnitt (310) in Eingriff sind, und der Erfassungsbewegungs-

abschnitt (310) sich bewegt und vorsteht, **dadurch gekennzeichnet, dass** die Leerschussverhinderungsfunktions-Stoppvorrichtung (360) einen Funktionsstopp-Eingriffsabschnitt (367) umfasst, der so konfiguriert ist, dass er entsprechend einer Bewegung der Leerschussverhinderungsfunktions-Stoppvorrichtung (360) zwischen einem ersten Zustand und einem zweiten Zustand gleitet, um eine Betätigung des Erfassungsbewegungsabschnitts (310A) zu verhindern, wobei der Mitnehmerabschnitt (510) ferner einen zweiten Erfassungseingriffsabschnitt (302) aufweist, und in dem ersten Zustand der zweite Erfassungseingriffsabschnitt (302) in den zweiten Funktionsstopp-Eingriffsabschnitt (367) eingreift und durch Verhindern einer Betätigung des Mitnehmerabschnitts (510) eine vorstehende Betätigung des Erfassungsbewegungsabschnitts (310A) verhindert wird, und in dem zweiten Zustand der zweite Erfassungseingriffsabschnitt (302) von dem zweiten Funktionsstopp-Eingriffsabschnitt (367) gelöst ist, und durch Ermöglichen einer Betätigung des Mitnehmerabschnitts (510) eine vorstehende Betätigung des Erfassungsbewegungsabschnitts (310A) ermöglicht wird.

5. Elektrische Waffe (10) gemäß einem der Ansprüche 1 bis 4, wobei die Geschosserfassungsvorrichtung (300, 300A, 300B) und die Leerschussverhinderungsfunktions-Stoppvorrichtung (360, 360A, 360B) in einem Magazinabschnitt (500) angeordnet sind.

## Revendications

1. Arme électrique (10) comprenant :

un dispositif de détection de balle (300, 300B) adapté à un dispositif de prévention de tir à vide (200) de l'arme électrique (10) et un dispositif d'arrêt de la fonction de prévention de tir à vide (360), dans laquelle le dispositif de détection de balle (300, 300B) comprend :

une portion d'engagement de détection (301) qui est pourvue dans une portion suivante (510) disposée pour être déplaçable dans une portion de disposition de balle (502) servant de passage pour décharger une balle contrainte par un ressort (505) ; et une portion de déplacement de détection

(310, 310B) qui, en réponse à la montée de la portion d'engagement de détection (301), fait saillie pour détecter qu'il n'y a pas de balle, et est actionnée pour s'engager avec la portion d'engagement de détection (301), de telle sorte que, quand la portion d'engagement de détection (301) se déplace jusqu'à une position prédéterminée de la portion de disposition de balle (302), la portion d'engagement de détection (301) et la portion de déplacement de détection (310) sont engagées, et la portion de déplacement de détection (310) se déplace et fait saillie,

**caractérisée en ce que** le dispositif d'arrêt de la fonction de prévention de tir à vide (360) comprend une portion d'engagement d'arrêt de fonction (361) configurée pour coulisser conformément à un déplacement du dispositif d'arrêt de la fonction de prévention de tir à vide (360) entre un premier état et un deuxième état, pour prévenir ou permettre un actionnement de la portion de déplacement de détection (310, 310B), dans laquelle, dans le premier état, la portion d'engagement d'arrêt de fonction (361) s'engage avec la portion de déplacement de détection (310, 310B), et, en prévenant l'actionnement de la portion de déplacement de détection (310, 310B), un actionnement en saillie de la portion de déplacement de détection (310) est prévenu, et dans le deuxième état, la portion d'engagement d'arrêt de fonction (361) se désengage de la portion de déplacement de détection (310, 310B), et, en autorisant l'actionnement de la portion de déplacement de détection (310, 310B), un actionnement en saillie de la portion de déplacement de détection (310, 310B) est permis.

## 2. Arme électrique (10) selon la revendication 1,

dans laquelle la portion de déplacement de détection (310) comprend

une portion engagée de détection (311) qui s'engage avec la portion d'engagement de détection (301),  
une portion de poussée de détection (312) qui est intégrée à la portion engagée de détection (311), et  
une protubérance de détection (350) qui s'engage avec la portion d'engagement d'arrêt de fonction (361),

dans laquelle, dans le premier état, la protubérance de détection (350) de la portion de déplacement de détection (310) s'engage avec la portion d'engagement d'arrêt de fonction (361), et,

en prévenant l'actionnement de la portion de déplacement de détection (310), l'actionnement en saillie de la portion de déplacement de détection (310) est prévenu.

## 3. Arme électrique (10) selon la revendication 1,

dans laquelle la portion de déplacement de détection (310B) comprend une portion de liaison suiveuse (351) capable de se déplacer vers le haut et vers le bas, et une troisième protubérance de détection (350B) qui s'engage avec la portion d'engagement d'arrêt de fonction (361) dans la portion de liaison suiveuse, et dans laquelle, quand la portion d'engagement d'arrêt de fonction (361) s'engage avec la troisième protubérance de détection (350B), en prévenant un déplacement vers le haut de la portion de liaison suiveuse, un actionnement en saillie de la portion de liaison suiveuse (351) est prévenu.

## 4. Arme électrique (10) comprenant :

un dispositif de détection de balle (300A) adapté à un dispositif de prévention de tir à vide (200) de l'arme électrique (10) et un dispositif d'arrêt de la fonction de prévention de tir à vide (360A), dans laquelle le dispositif de détection de balle (300A) comprend :

une portion d'engagement de détection (301) qui est pourvue dans une portion suiveuse (510) disposée pour être déplaçable dans une portion de disposition de balle (502) servant de passage pour décharger une balle contrainte par un ressort (505) ; et une portion de déplacement de détection (310A) qui, en réponse à la montée de la portion d'engagement de détection (301), fait saillie pour détecter qu'il n'y a pas de balle, et est actionnée pour s'engager avec la portion d'engagement de détection (301), de telle sorte que, quand la portion d'engagement de détection (301) se déplace jusqu'à une position prédéterminée de la portion de disposition de balle (302), la portion d'engagement de détection (301) et la portion de déplacement de détection (310) sont engagées, et la portion de déplacement de détection (310) se déplace et fait saillie,

**caractérisée en ce que** le dispositif d'arrêt de la fonction de prévention de tir à vide (360) comprend une portion d'engagement d'arrêt de fonction (367) configurée pour coulisser conformément à un déplacement du dispositif d'arrêt de la fonction de prévention de tir à vide (360) entre

un premier état et un deuxième état, pour prévenir un actionnement de la portion de déplacement de détection (310A),  
dans laquelle la portion suiveuse (510) comprend en outre une deuxième portion d'engagement de détection (302), et 5  
dans le premier état, la deuxième portion d'engagement de détection (302) s'engage avec la deuxième portion d'engagement d'arrêt de fonction (367), et, en prévenant un actionnement de la portion suiveuse (510), un actionnement en saillie de la portion de déplacement de détection (310A) est prévenu, et 10  
dans le deuxième état, la deuxième portion d'engagement de détection (302) est désengagée de la deuxième portion d'engagement d'arrêt de fonction (367), et, en autorisant un actionnement de la portion suiveuse (510), un actionnement en saillie de la portion de déplacement de détection (310A) est permis. 15 20

5. Arme électrique (10) selon l'une quelconque des revendications 1 à 4, dans laquelle le dispositif de détection de balle (300, 300A, 300B) et le dispositif d'arrêt de la fonction de prévention de tir à vide (360, 360A, 360B) sont disposés dans une portion de magasin (500). 25

30

35

40

45

50

55

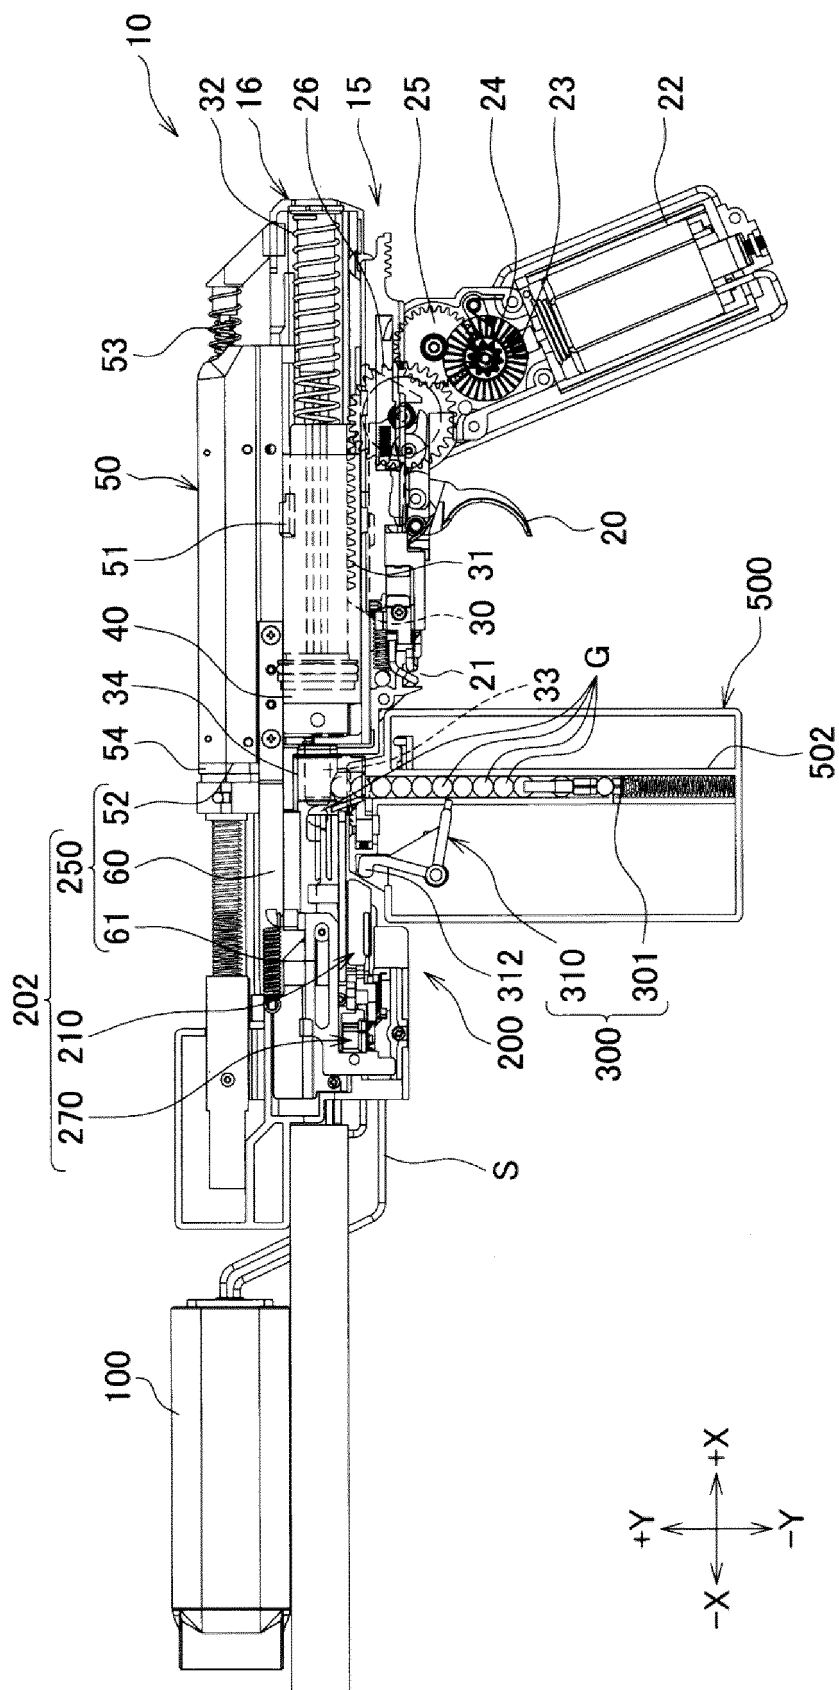


FIG. 1

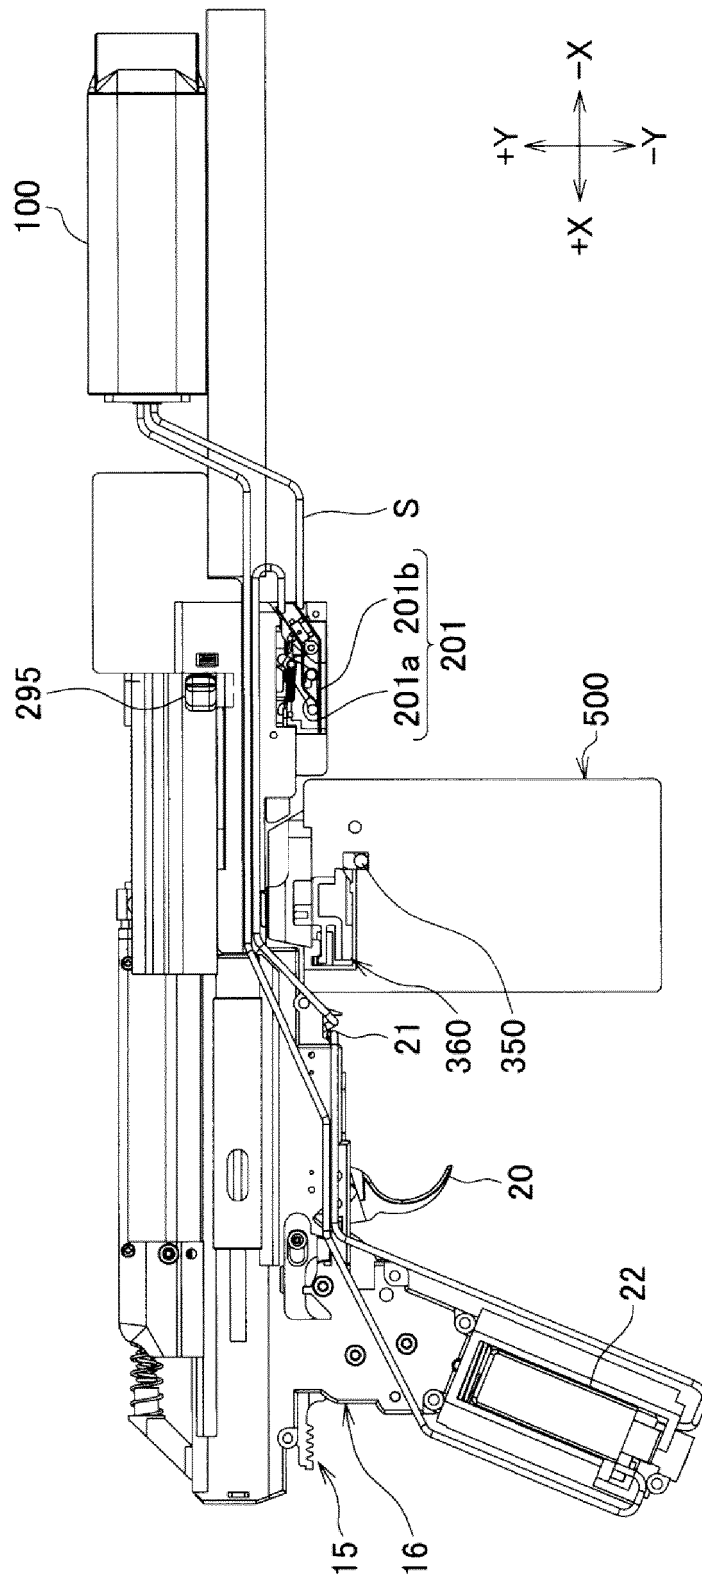


FIG. 2



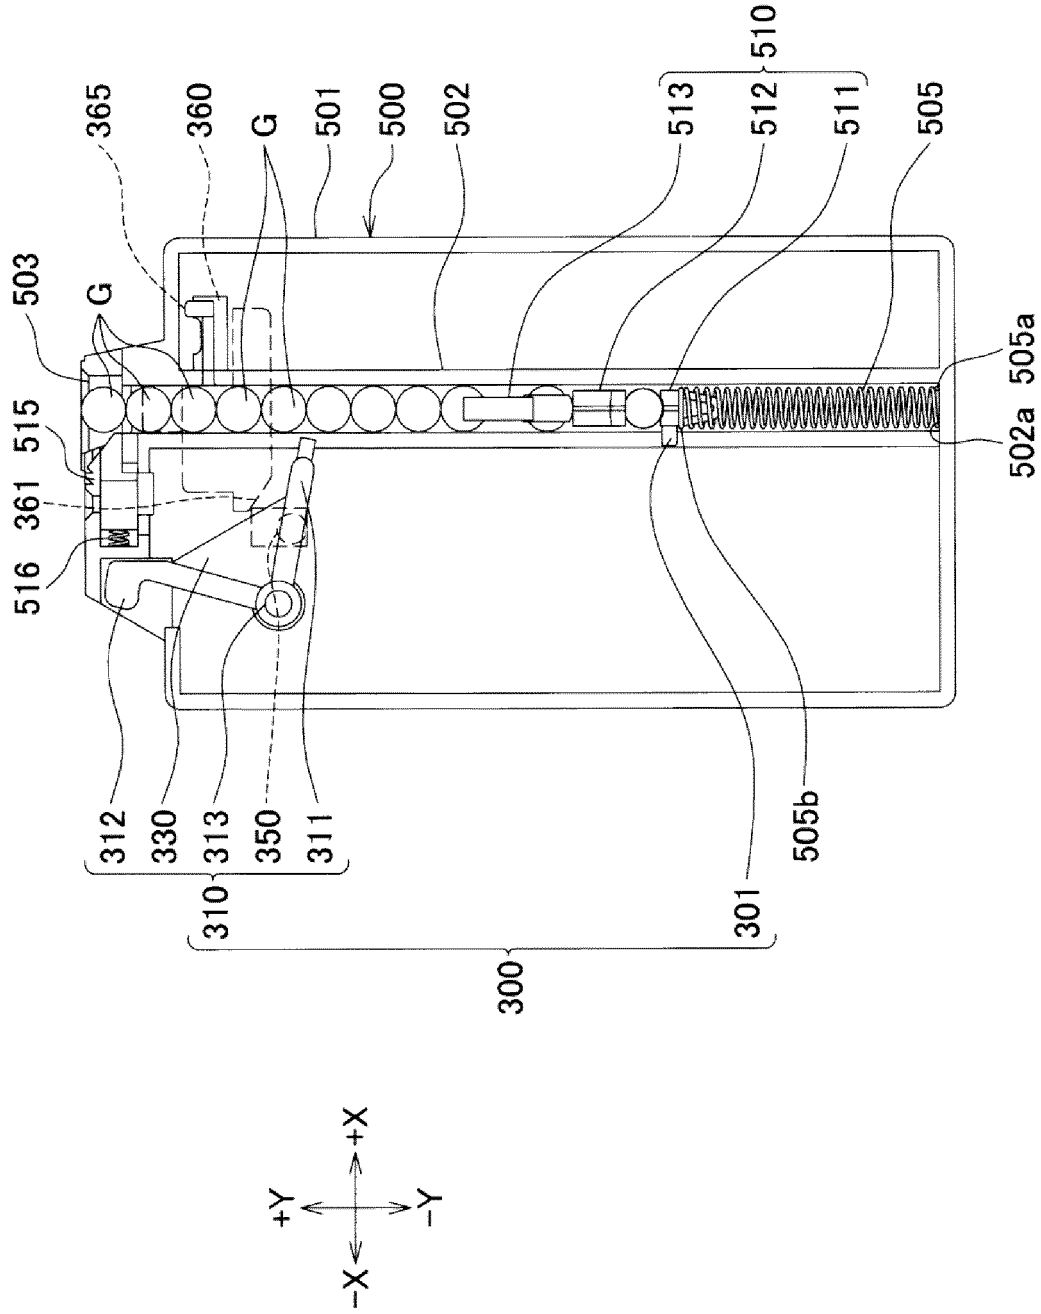


FIG. 3

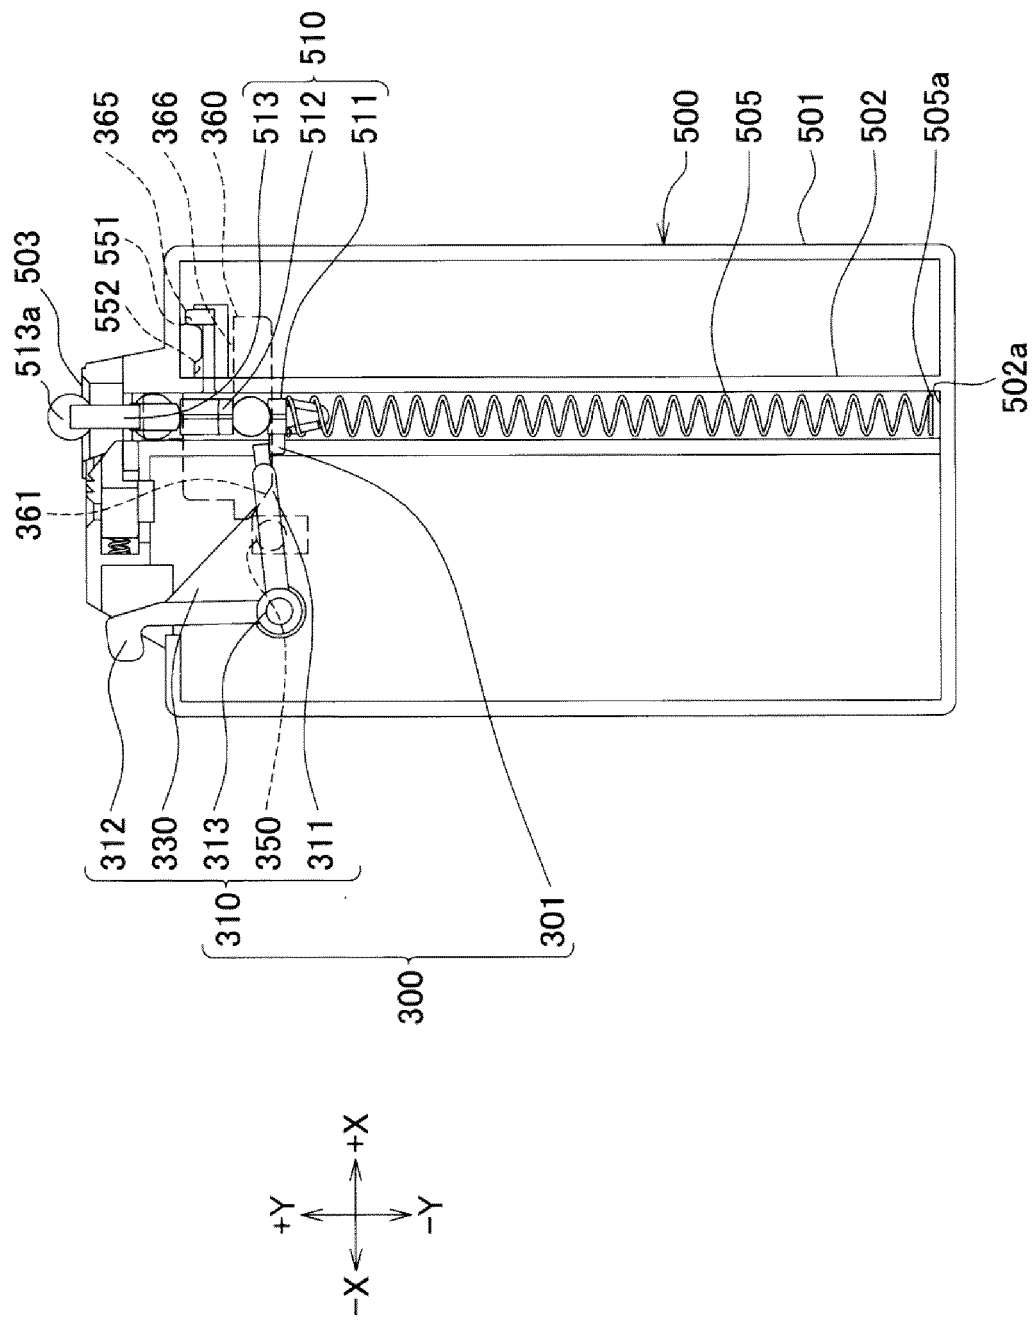


FIG. 4

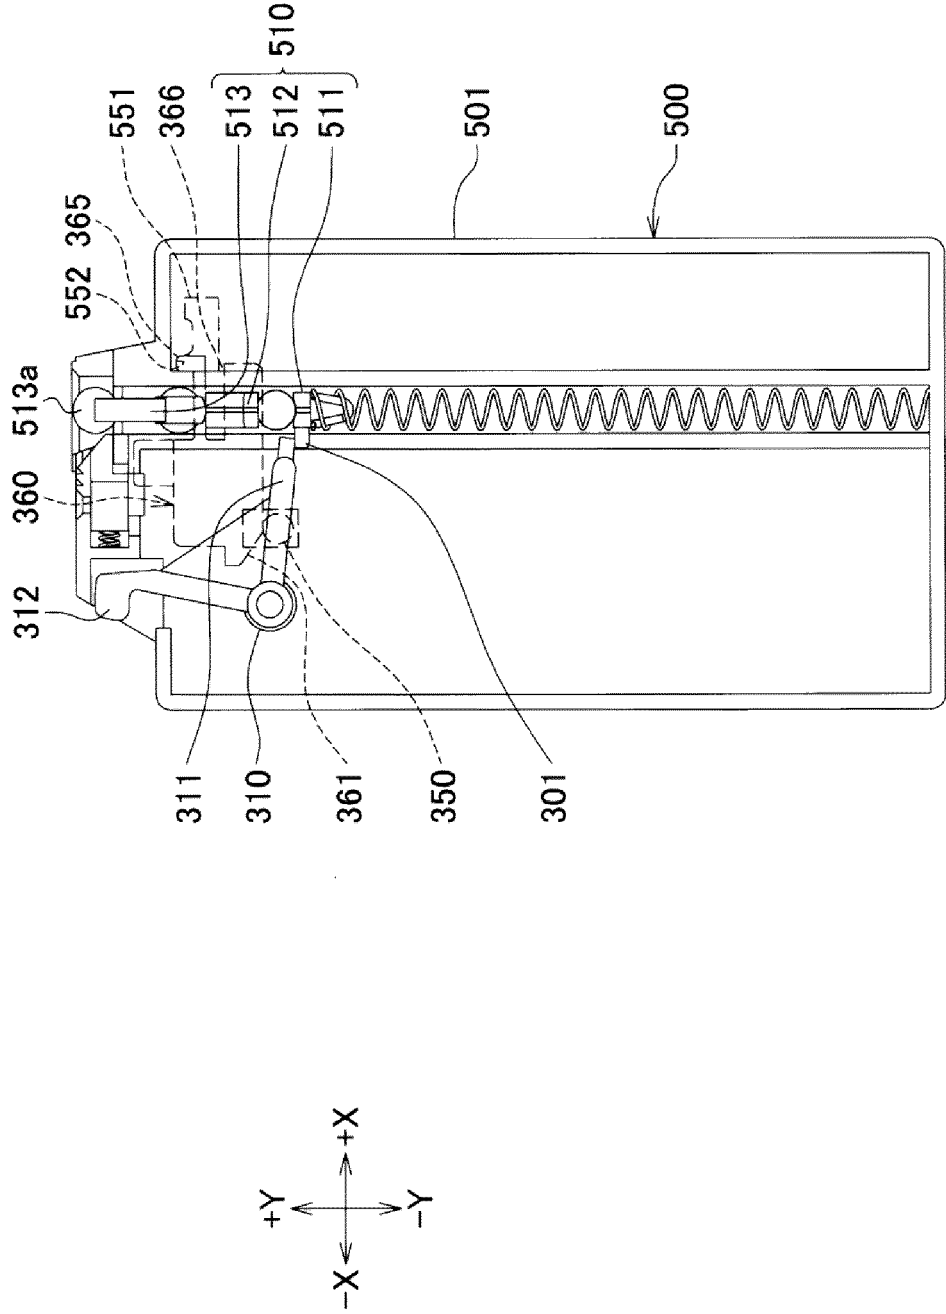


FIG. 5A

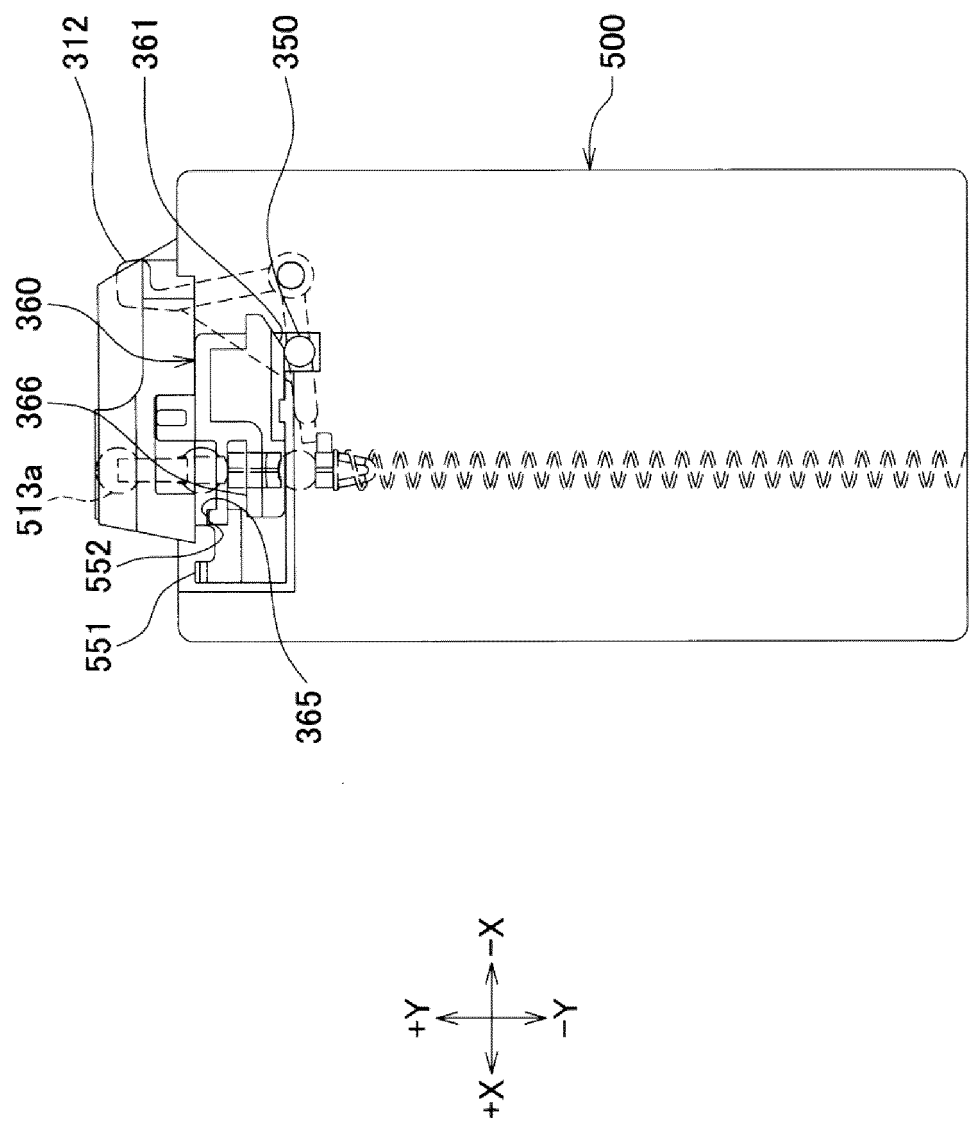


FIG. 5B

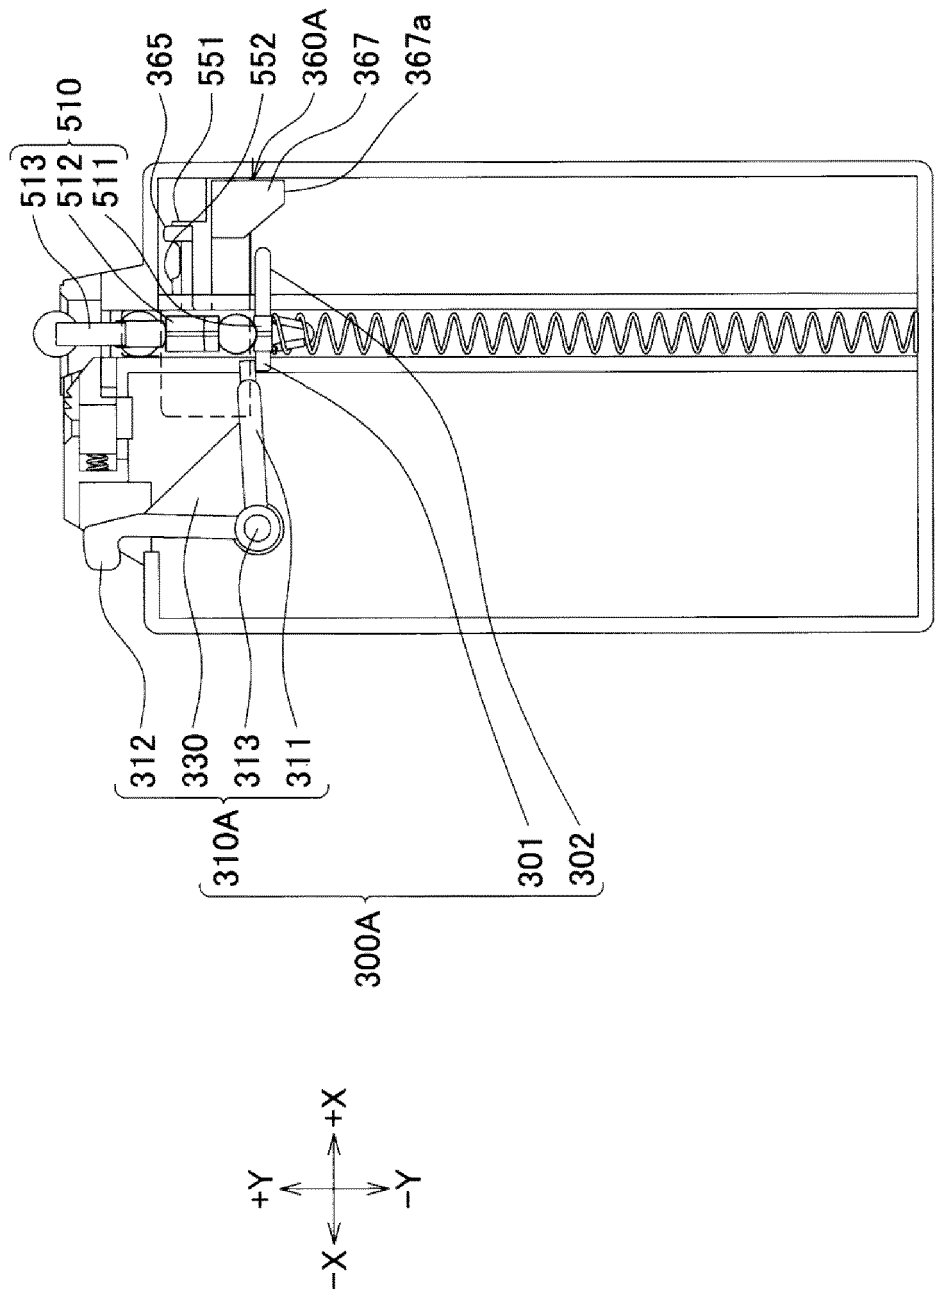


FIG. 6

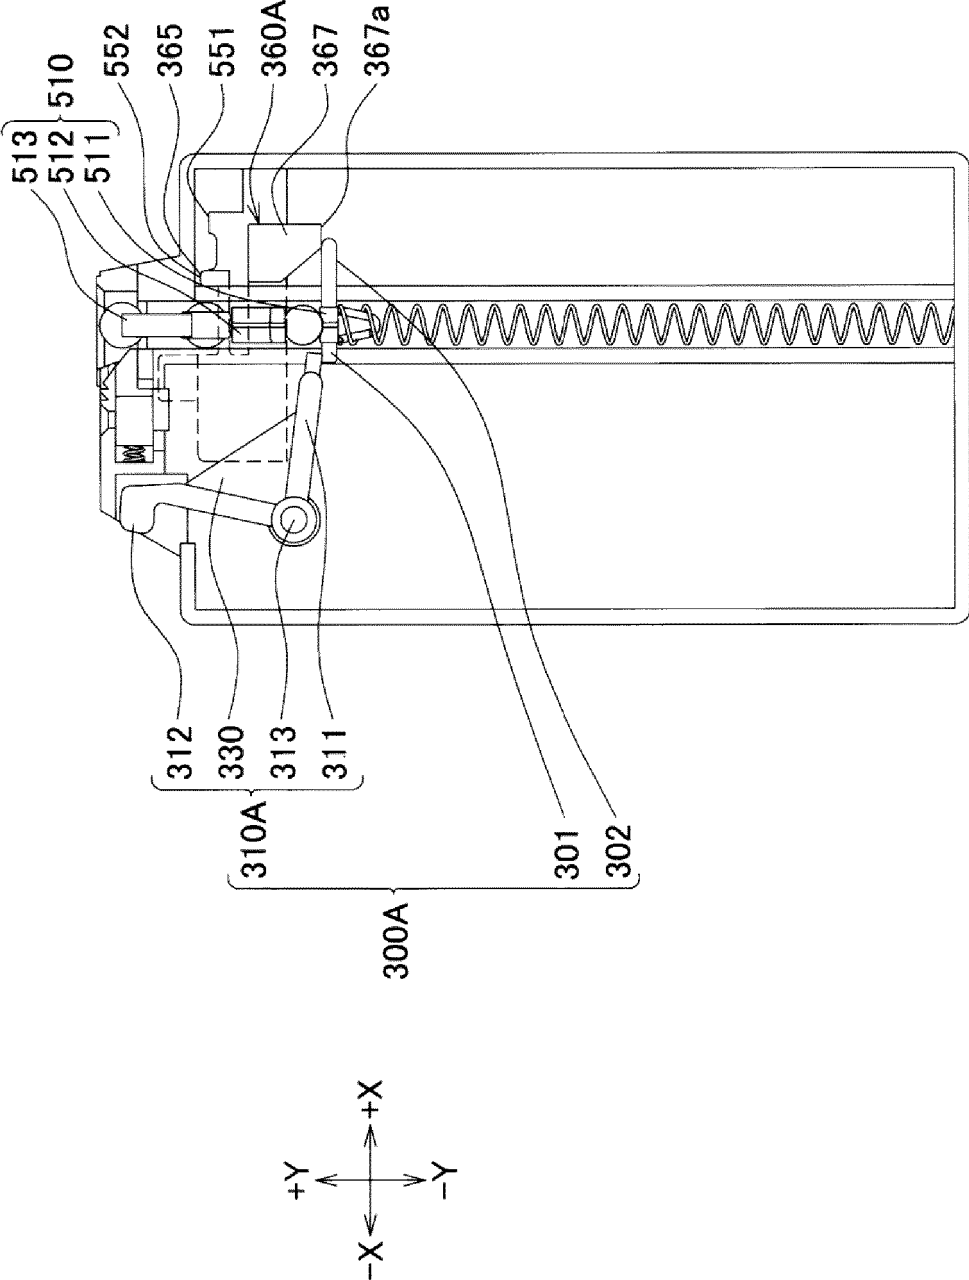
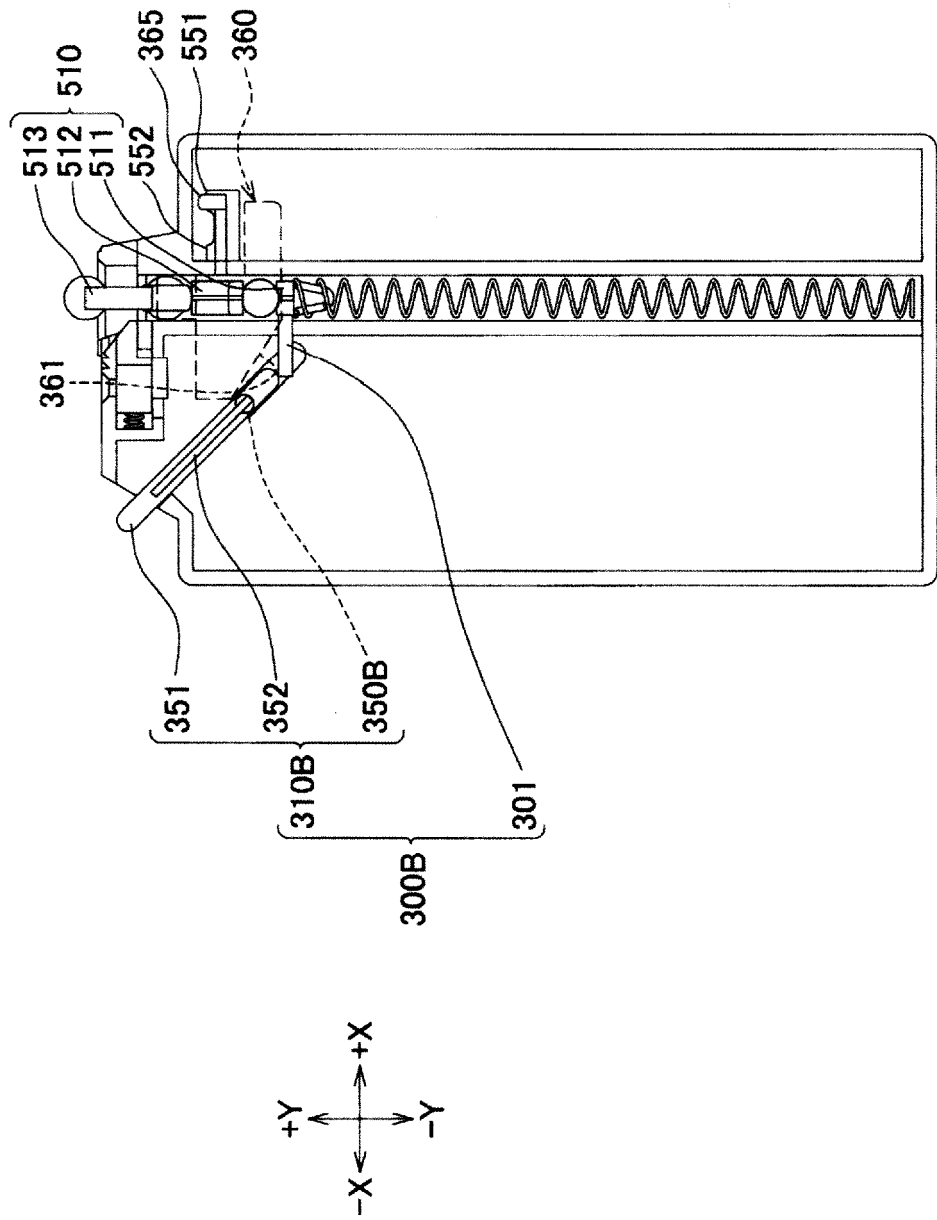


FIG. 7



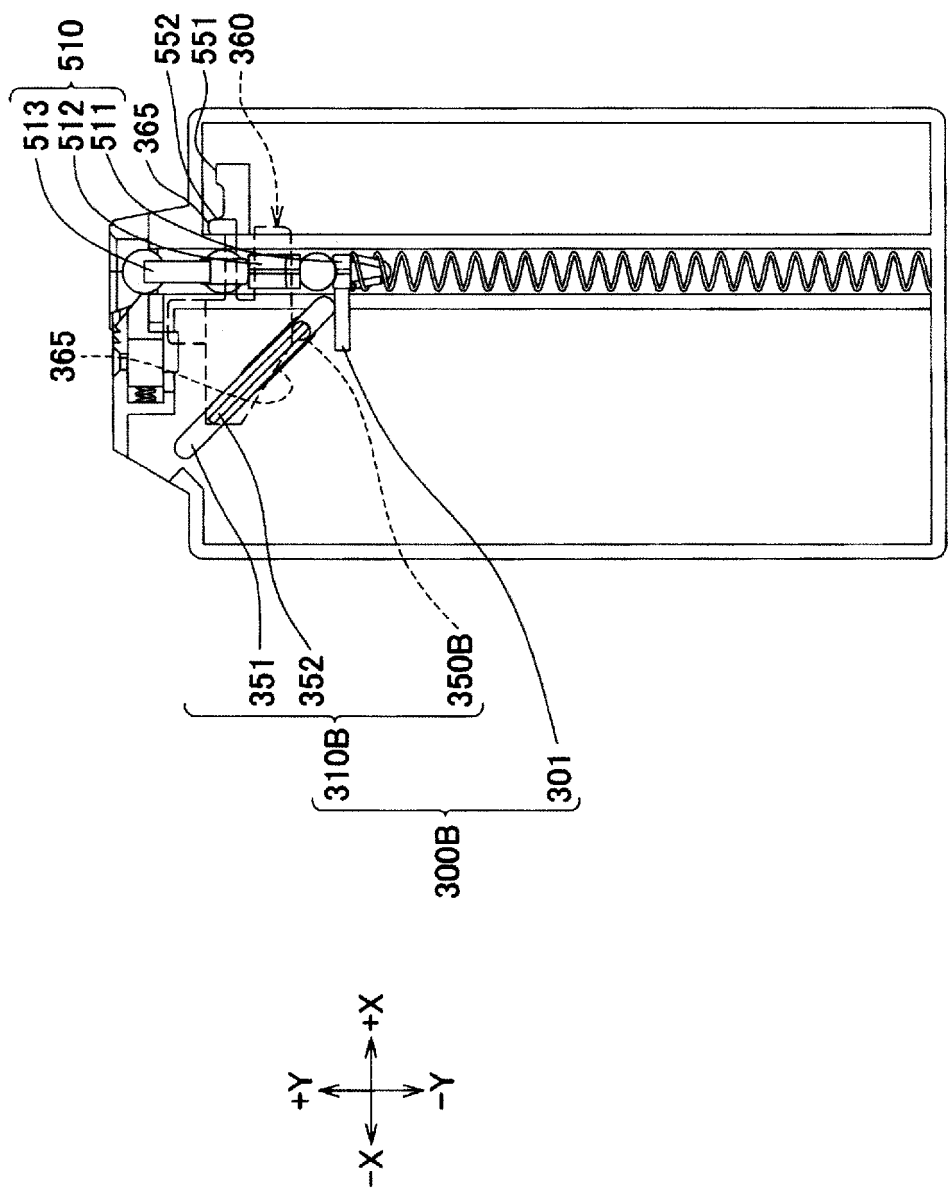


FIG. 9



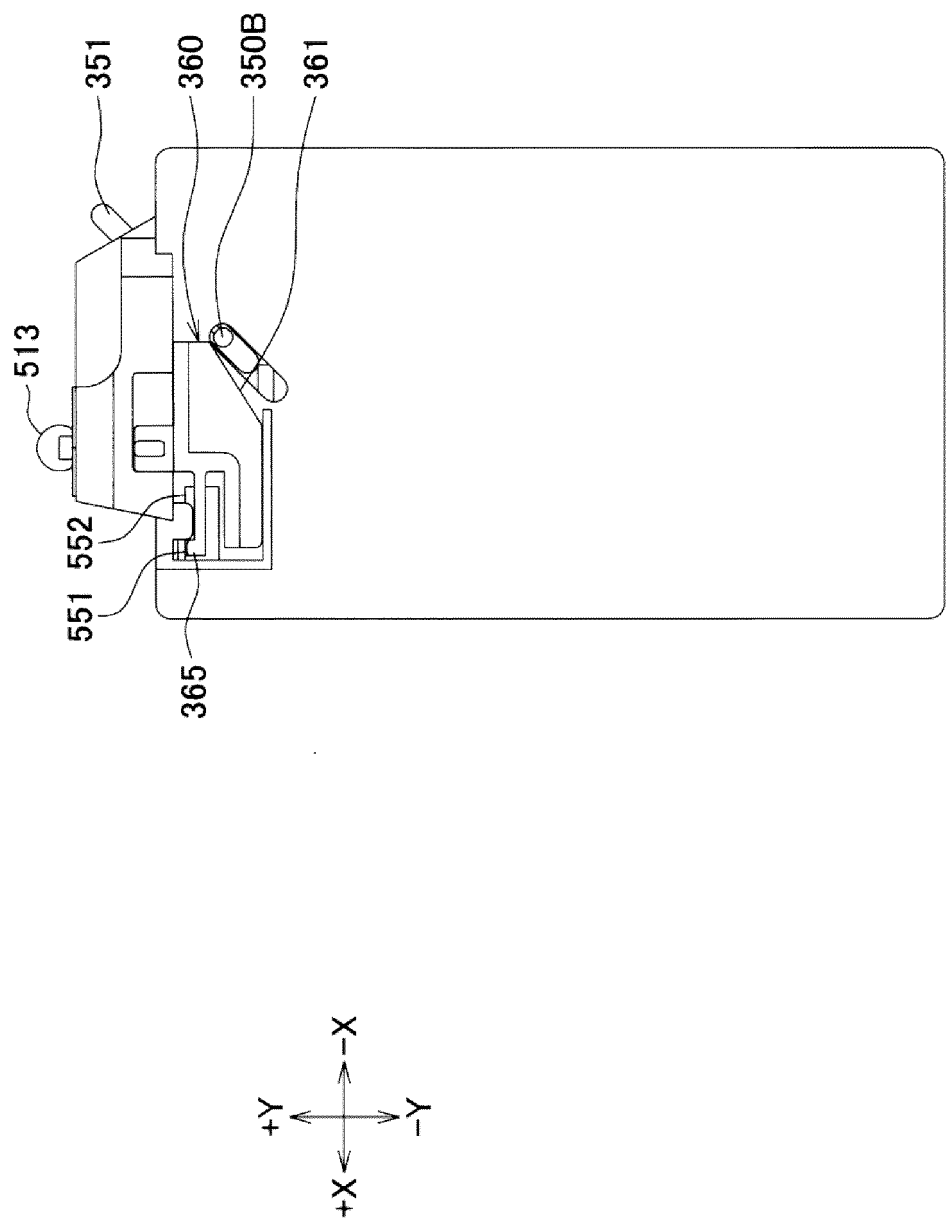


FIG. 10

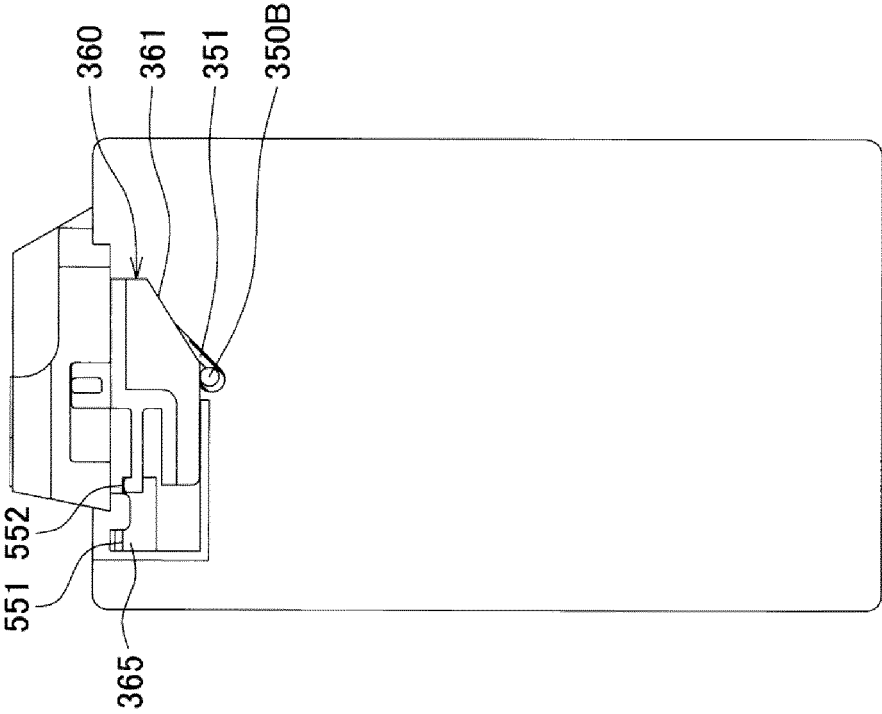


FIG. 11

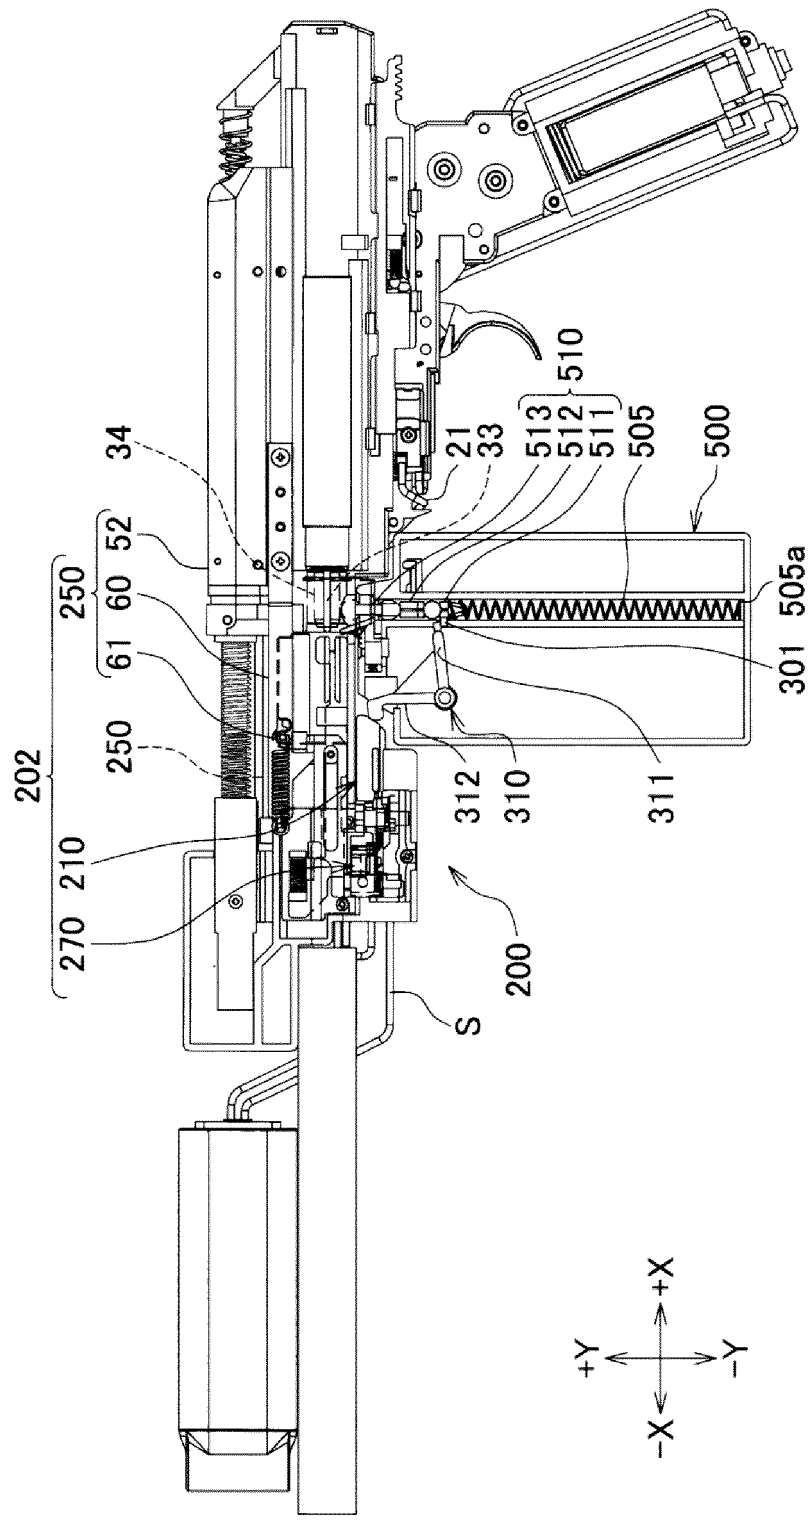


FIG. 12

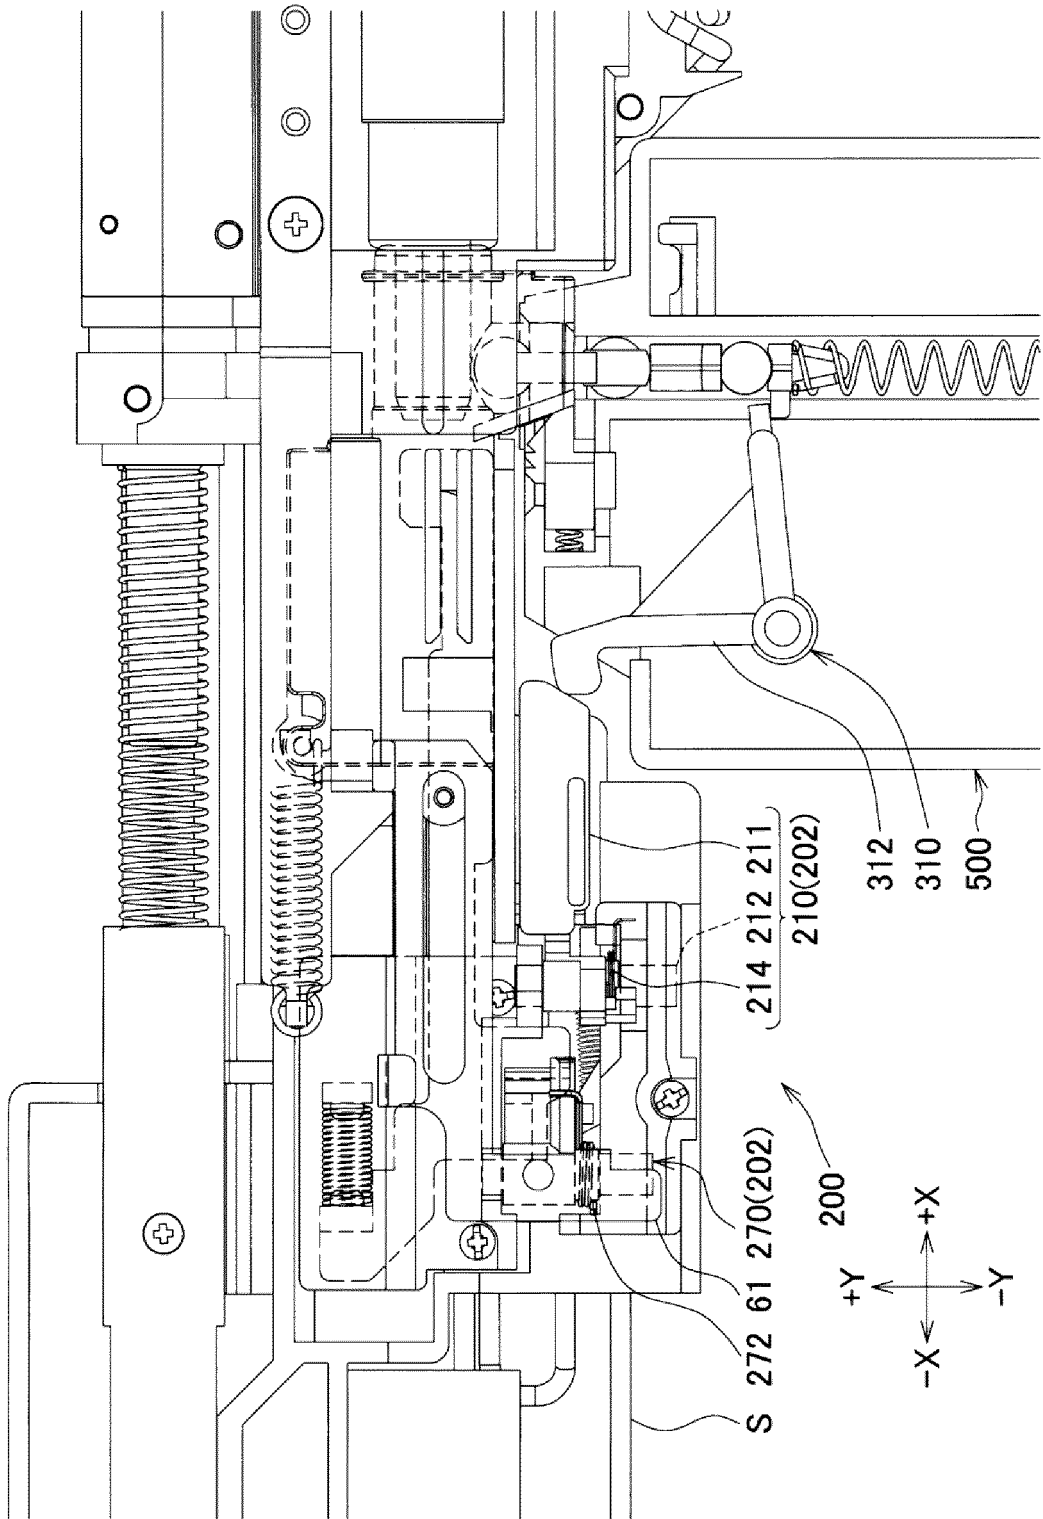
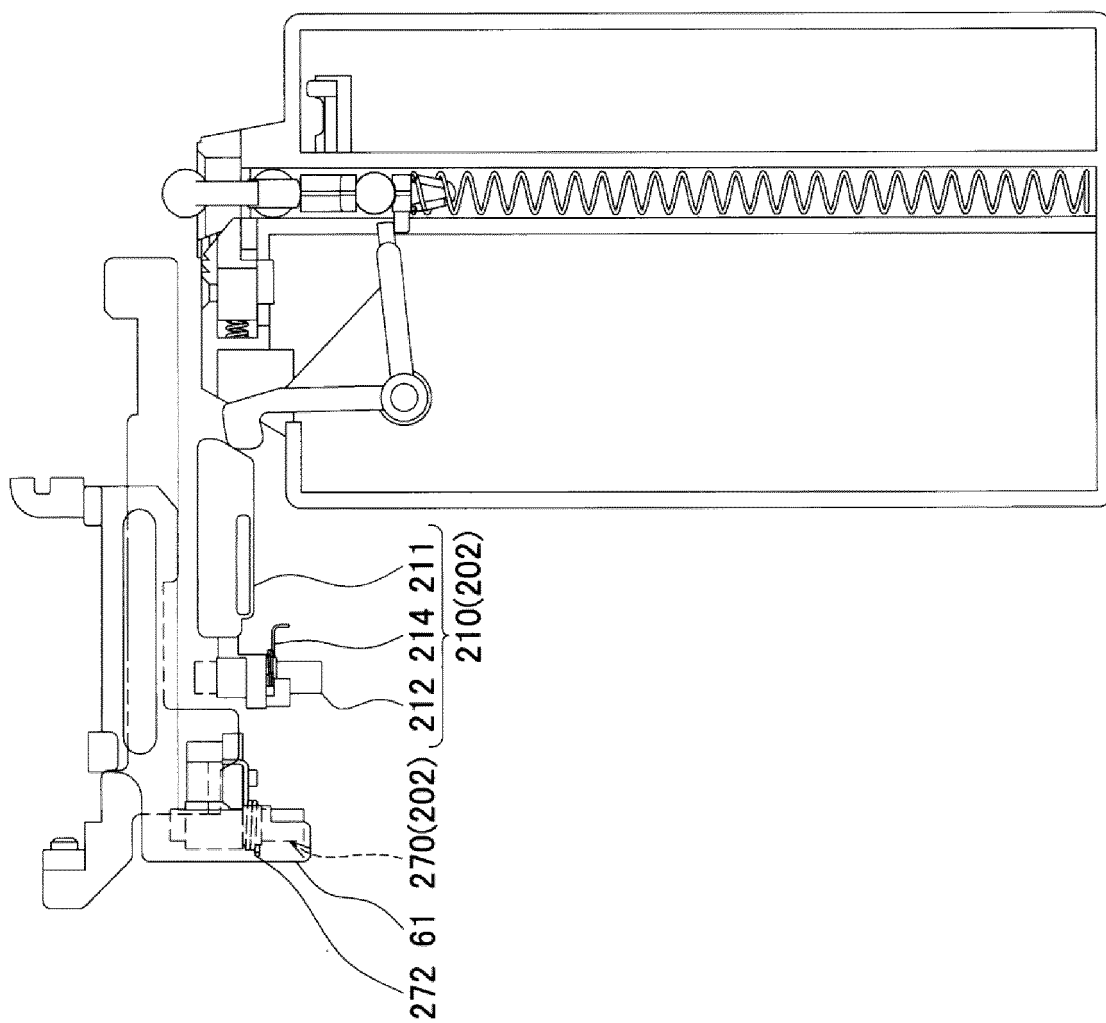



FIG. 13A



**FIG. 13B**



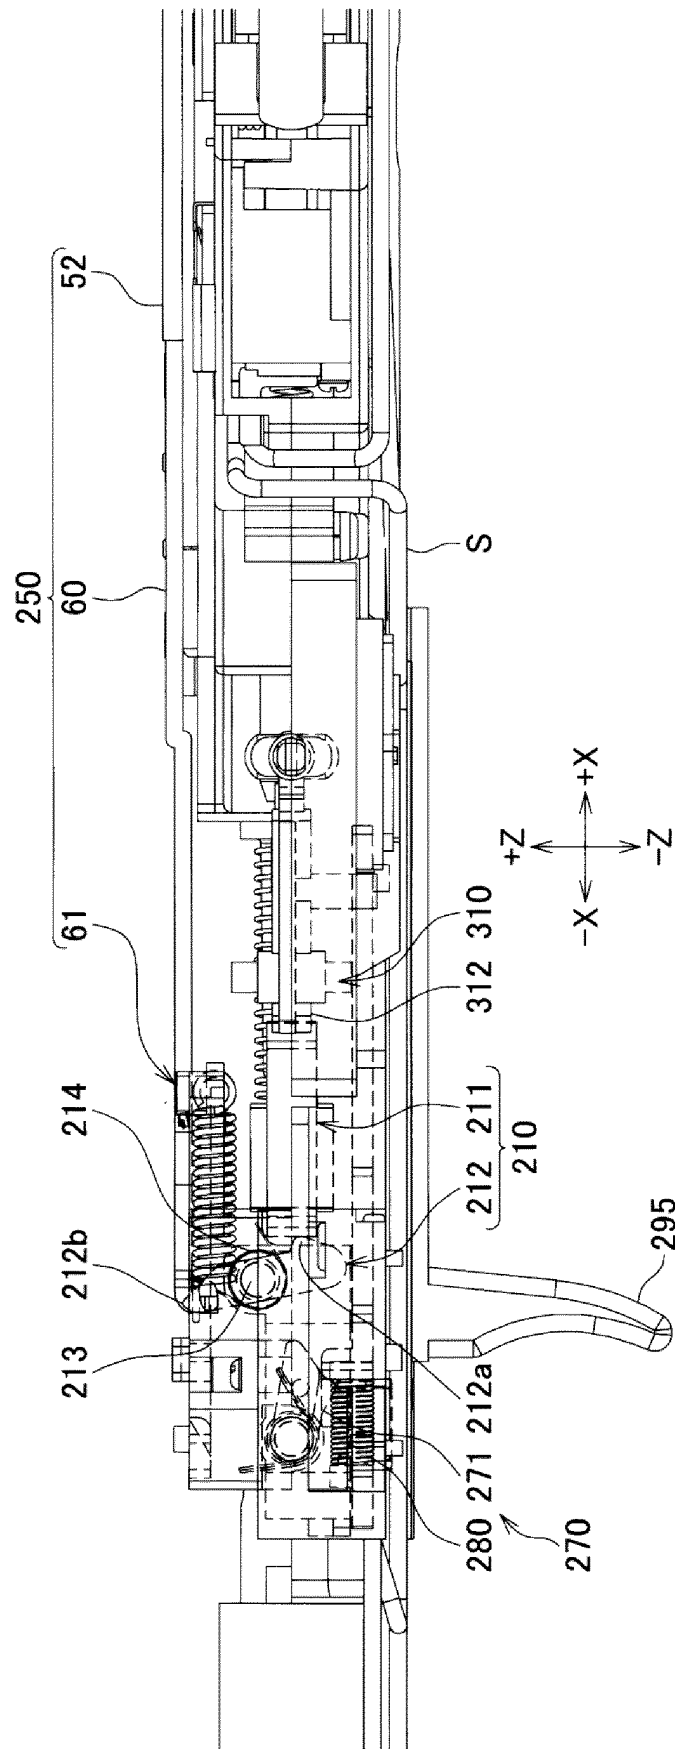


FIG. 14A

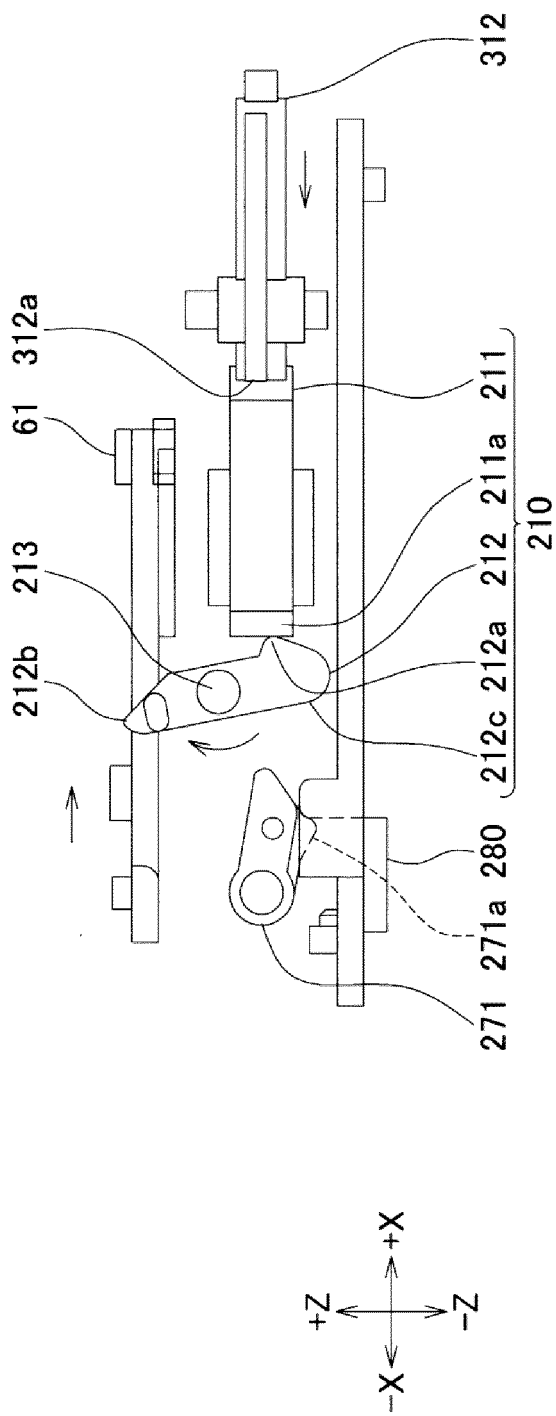


FIG. 14B

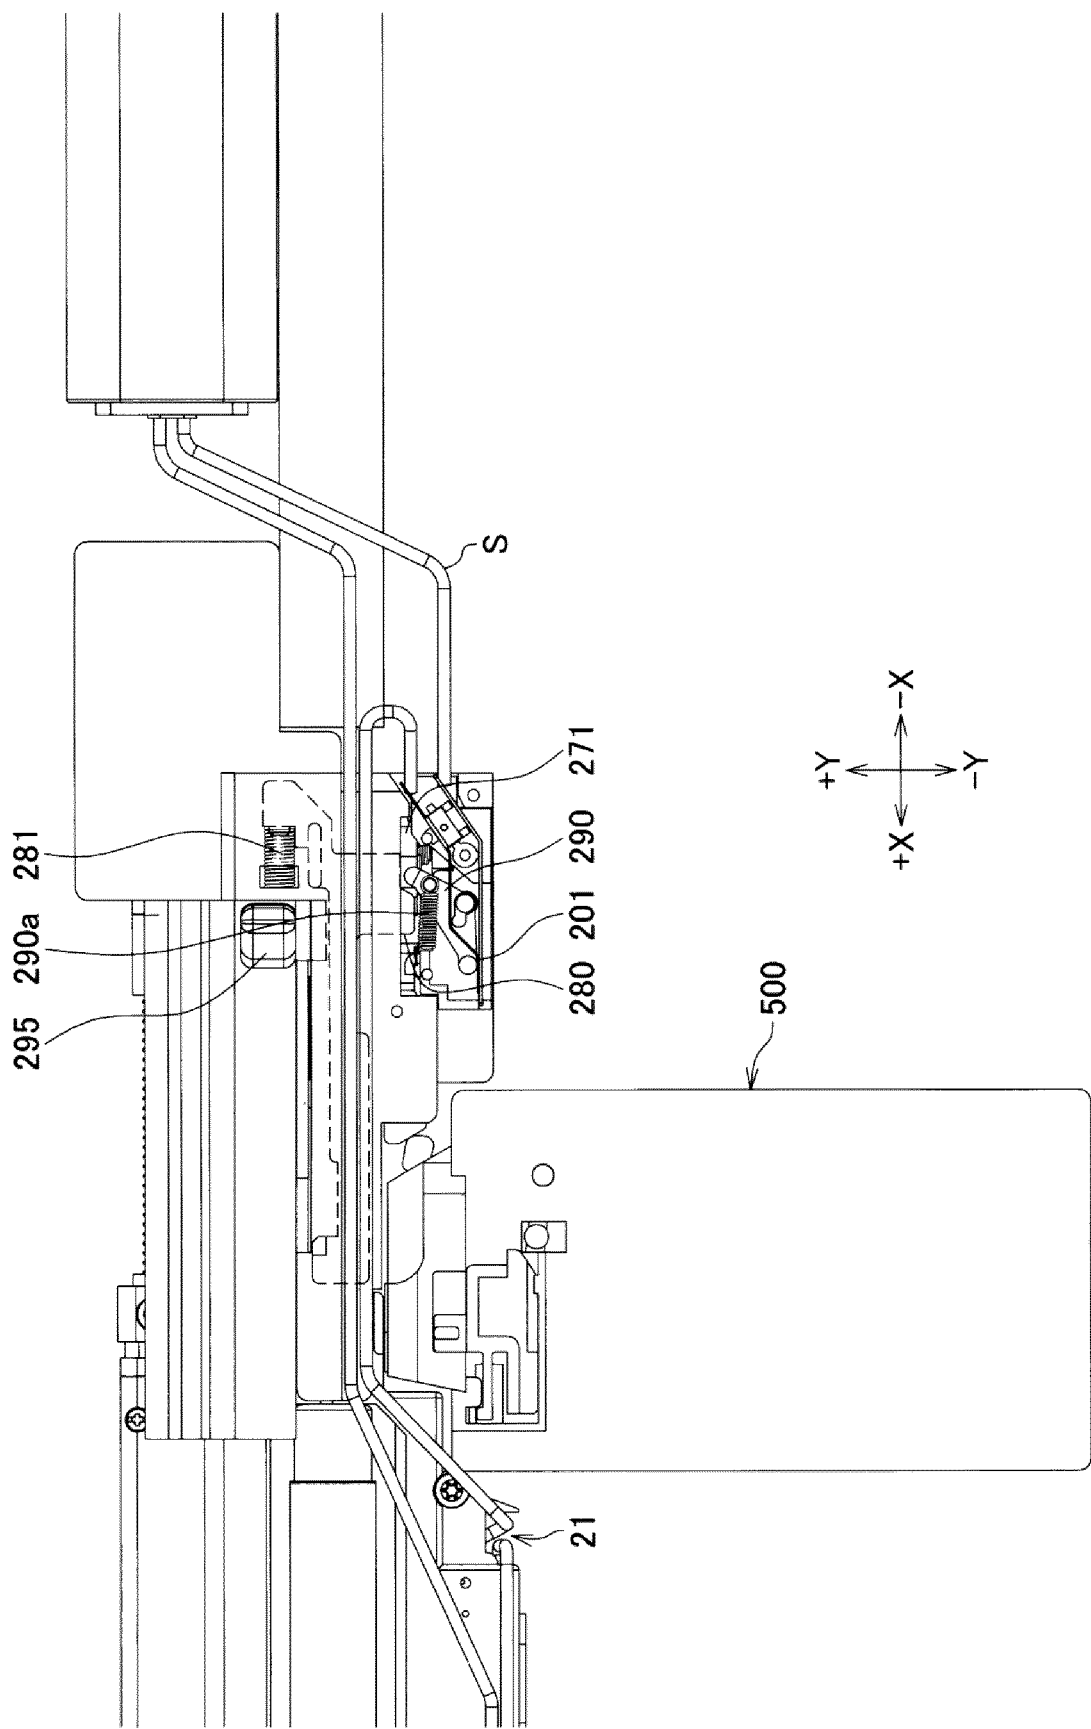


FIG. 15



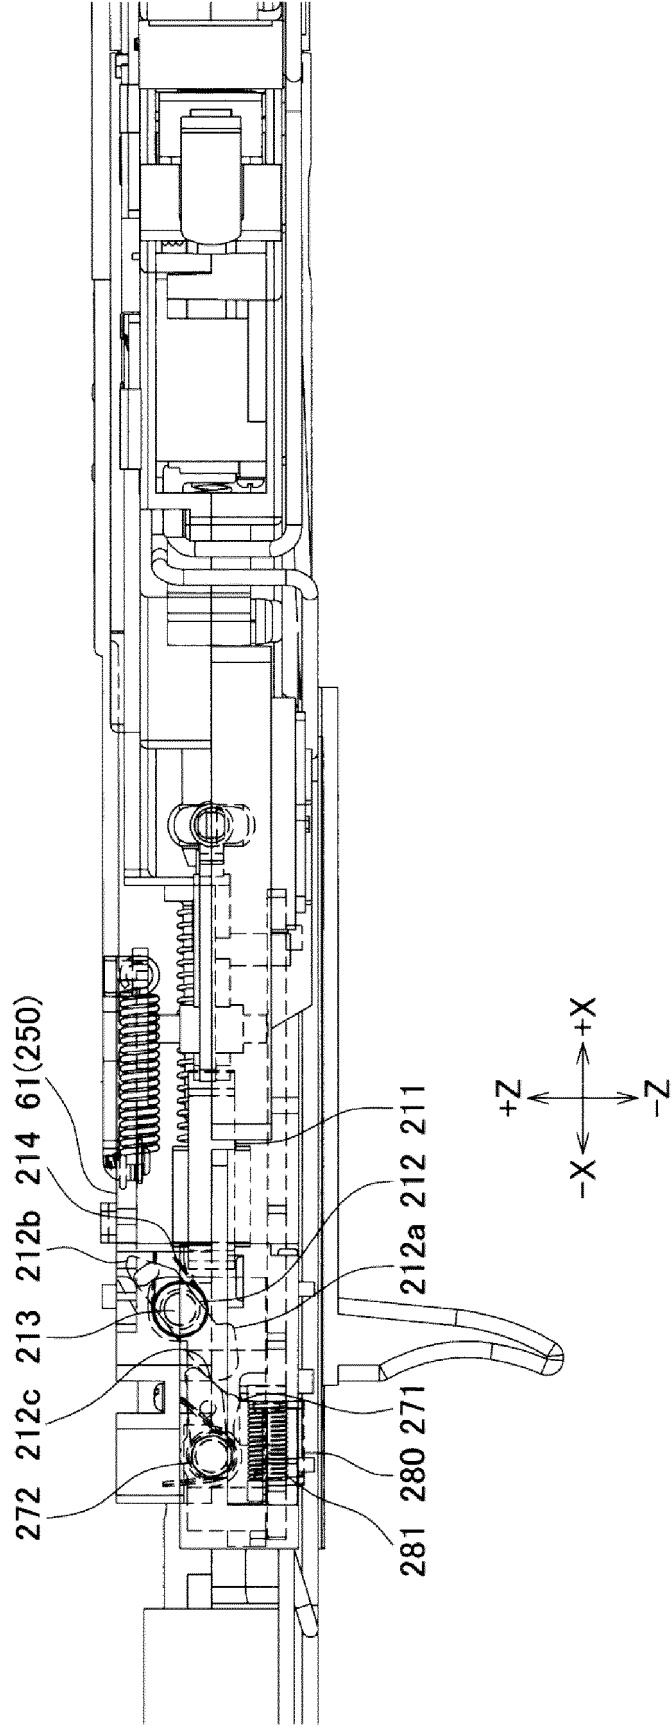


FIG. 16A

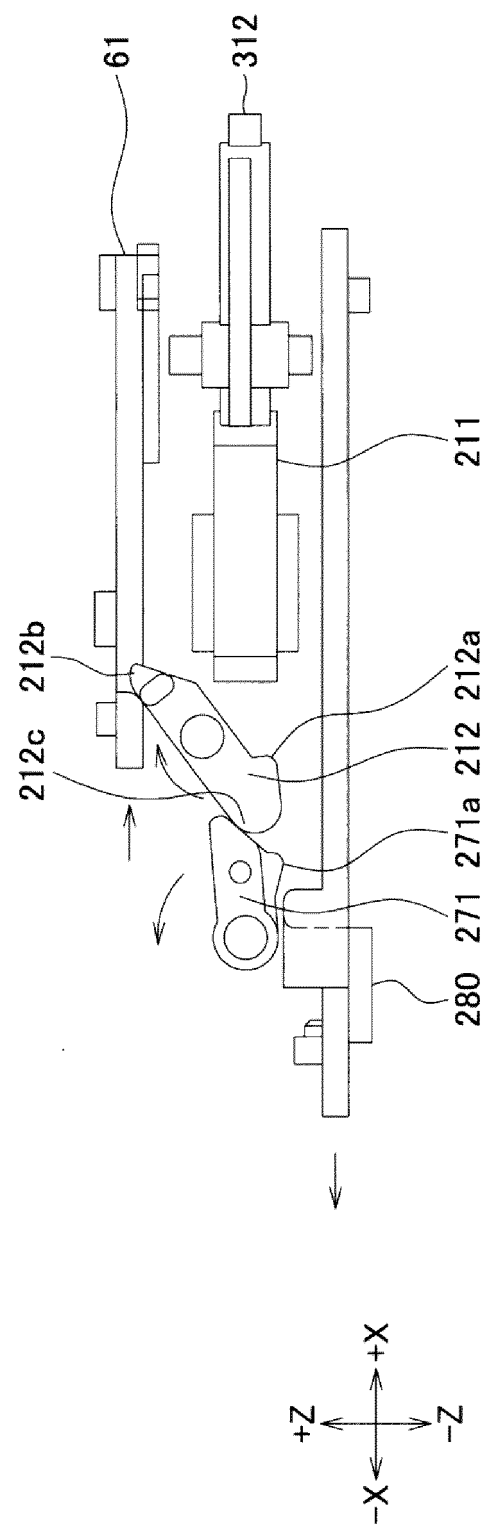


FIG. 16B

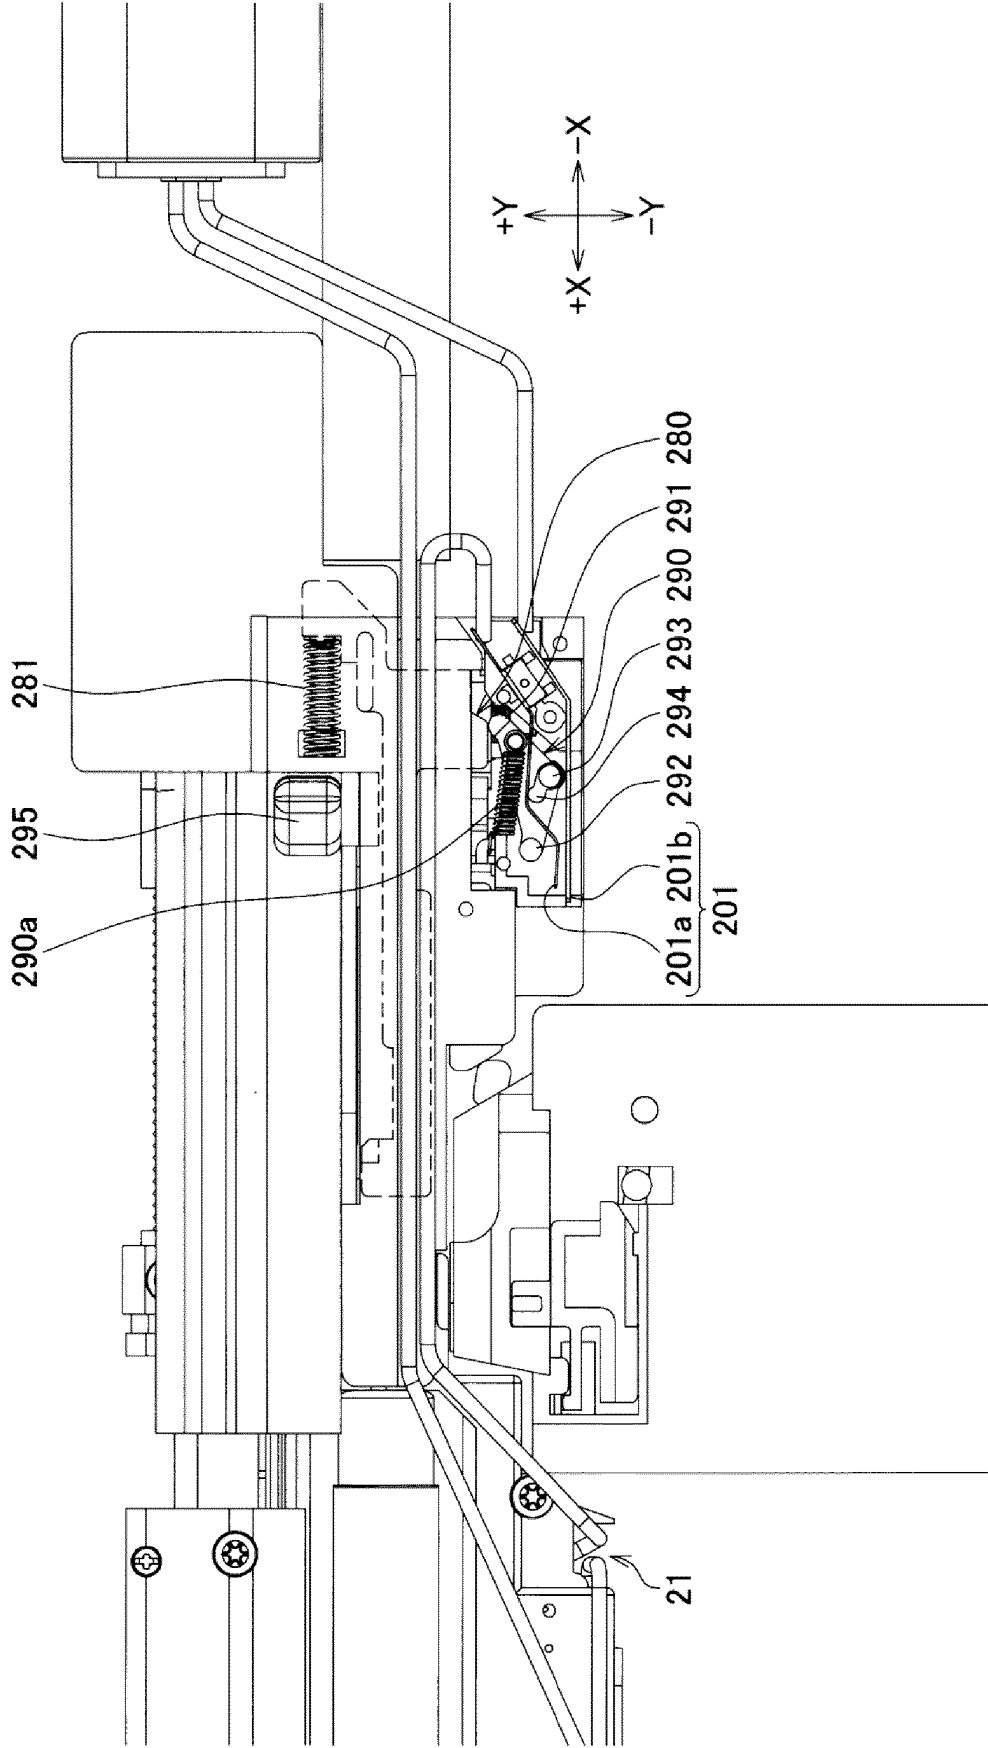


FIG. 17

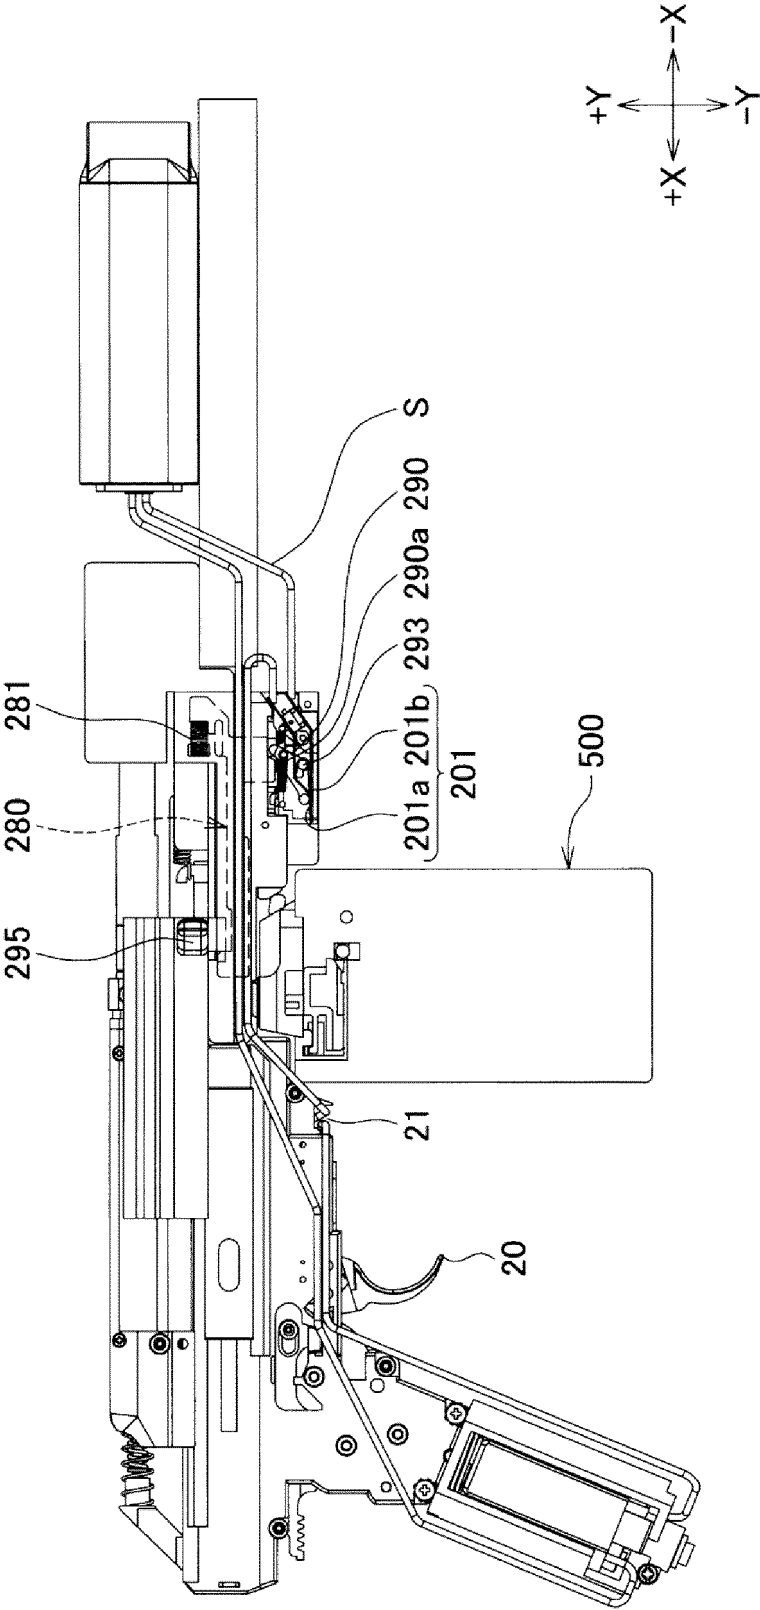


FIG. 18

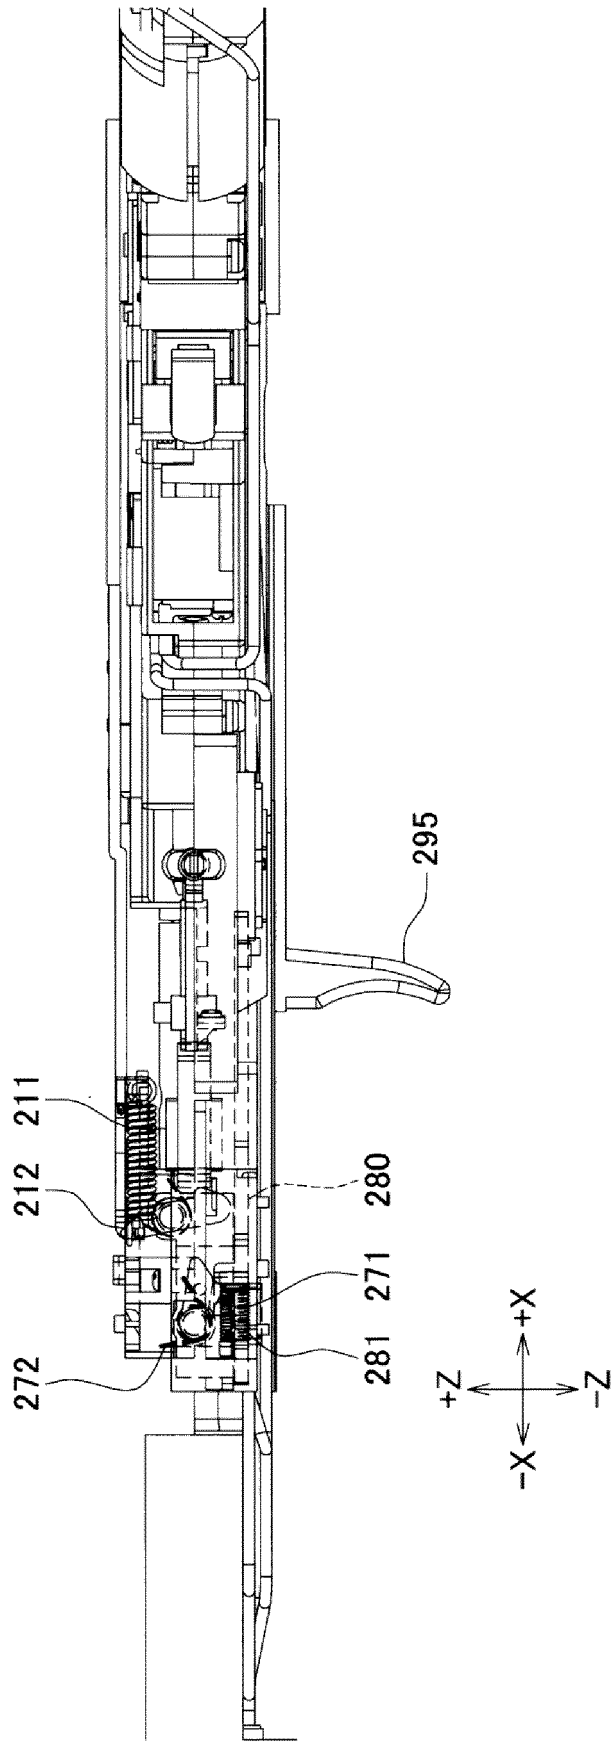


FIG. 19

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2010025501 A [0004]
- EP 2390614 A1 [0008]