



(11)

**EP 3 689 122 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**05.08.2020 Bulletin 2020/32**

(51) Int Cl.:  
**A01C 7/08 (2006.01)**

(21) Application number: **19155198.5**

(22) Date of filing: **04.02.2019**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

- **Syrovatka, Pavel**  
**41301 Klenec - Roudnice nad Labem (CZ)**
- **Prislinger, Marek**  
**54701 Nachod (CZ)**
- **Bednar, Vojtech,**  
**19017 Praha (CZ)**

(71) Applicant: **Bednar FMT s.r.o.**  
**190 17 Praha 9 (CZ)**

(74) Representative: **Dadej, Leopold**  
**Na Valtické 339/6**  
**691 41 Breclav 4 (CZ)**

(72) Inventors:

- **Peterac, Jiri**  
**506 01 Jicin (CZ)**

Remarks:

Amended claims in accordance with Rule 137(2) EPC.

(54) **DISTRIBUTION HEAD FOR AGRICULTURAL DEVICE**

(57) A distributor head (1) of a distribution agricultural device comprising an outer hoop (5) provided with at least four outlets (2) of the same size, arranged evenly along the circumference of the outer hoop (5), a movably positioned ring (6), a main inlet (102), and a driving mechanism (9) connected with the ring (6) through a ring attachment (8), wherein the ring (6) is provided with a number of evenly arranged openings (7, 8A) of the same size, number of which corresponds to half of the number of outlets (2). The ring (6) can be in three operating positions (11A, 11), wherein in the first position (11), the ring (6) is located in the same plane as the outer hoop (5) and therefore covers every other outlet (2), in the second position (11) it is not located in the same plane as the outer hoop (5) and thus does not cover any outlet (2), and in the third position (11) it is located in the same plane as the outer hoop (5) and thus covers every other outlet (2), wherein the outlets (2) covered in the third position (11) are different from the outlets (2) covered in the first position (11) of the ring (6).

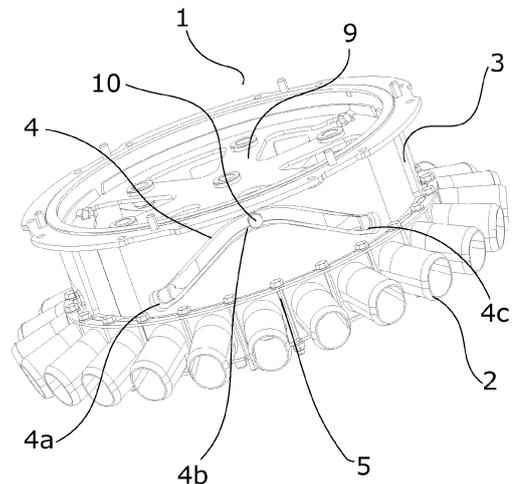


Fig. 1

**EP 3 689 122 A1**

## Description

### Field of the Invention

**[0001]** The invention relates to a distributor head of a distribution agricultural device comprising an inner ring, which has three operating positions allowing to change the extent of the processed area.

### Background of the Invention:

**[0002]** A distributor head of a distribution agricultural device is used for even distribution of seeds, fertilizing aggregate or other granulated material. It comprises a main inlet from a hopper of distributed material, which is usually fed to the distributor head by an air flow. The main exit is then divided by the internal mechanism of the distributor head into larger number of side outlets, which are arranged along the outer circumferential part of the distributor head. These outlets then distribute the granulated material to the individual exits evenly arranged on row units of the distribution agricultural device. As a result, even distribution of e.g. seeds on the area of processed soil is ensured.

**[0003]** When the field is of irregular shape or when adjusting tracks for different passages of sprinklers, it is necessary to selectively switch off some exits to avoid unnecessary waste of the distributed material on area not intended for growing crops. This selective switch-off is usually performed by mechanism which covers certain exits, so that the required extent is achieved.

**[0004]** Solution to this issue is presented, for example, in a patent document EP2269434 to Lemken company. A number of openings, which are used as side exits, are arranged along the circumferential part of the head at regular intervals. A mechanism for closing the individual exits is located in the inner part of the distributor. This mechanism consists of two, alternatively three, hoops. The first hoop has a number of openings arranged along its circumference, which correspond to the openings on the outer circumferential part of the head in terms of their position and number. Therefore, when using the first hoop, no openings are covered and seeds are distributed across the whole area. The second hoop has a number of openings arranged along its circumference, wherein the number of openings is lower than the number of openings of the first hoop, however, their positions correspond to some of the openings on the outer circumferential part of the head. As a result of using the second hoop, some openings are covered, which leads to changes in the area on which the seeds are sowed or fertilizer is distributed. A potential third hoop then ensures processing of another area. For example, with the second hoop, the left half of the distribution agricultural device is used, and the right one is used when using the third hoop. The disadvantage of this embodiment is the necessity to use at least two hoops, preferably three. These hoops move vertically within the distributor head. In practice, it often happens

that the granulated material (seeds, fertilizer, etc.) gets into grooves, in which the individual hoops move. This causes the hoop movement to jam and it is necessary to disassemble and clean the distributor head, in order to ensure a fluent movement of the hoops.

**[0005]** Another solution to this issue is presented in a lapsed patent EP1478221 to Väderstad company. Here, along the circumference of the outer part of the head, exit pairs are spaced in regular intervals. A closing device, which comprises a number of flaps, is located inside the inner part of the head. Depending on the position of the closing device, the flaps either cover none of the exits or half of the exits, thereby changing the extent of the area on which the granulated material is distributed. Because of the gaps between the individual exit pairs, the circumference of the distributor head is bigger than without gaps. This results in a need for a bigger head construction, i.e. poor folding of the whole structure of the distribution agricultural device and higher weight.

### Summary of the Invention:

**[0006]** The mentioned drawbacks are at least partially eliminated by a distributor head of a distribution agricultural device comprising an outer hoop provided with at least four outlets of the same size, evenly arranged along the outer hoop circumference, movably positioned ring, main inlet, and a driving mechanism, wherein the ring is connected to the driving mechanism by a ring attachment. The distributor head ring is provided with evenly spaced openings of the same size, their number corresponds to half the number of outlets. The ring can be in three operating positions, where in the first position the ring is located in the same plane as the outer hoop and covers every other outlet, in the second position it is not located in the same plane as the outer hoop and thus covers no outlet, and in the third position it is located in the same plane as the outer hoop and covers every other outlet, wherein the outlets covered in the third position are different from the outlets covered in the first position.

**[0007]** The inner hoop of the distributor head of the distribution agricultural device can be provided with at least one guiding groove. The distributor head ring is then provided with at least one guiding pin, which is movably positioned in the guiding groove. In a preferred embodiment, the number of guiding grooves and guiding pins is three. The advantage of this embodiment lies in more fluent movement of guiding pins in guiding grooves and in more accurate adjustment of the ring position.

**[0008]** The driving mechanism of the distribution agricultural device includes a star, columns, and levers. The ring attachment is provided with openings, into which the columns of the driving mechanism are inserted.

**[0009]** In preferred embodiment, the driving mechanism of the distributor head of the distribution agricultural device is driven by at least one motor, wherein the motor and the driving mechanism are connected by levers. The advantage of this embodiment lies in a simple handling

of the driving mechanism, movement of which can be controlled remotely.

**[0010]** The outer hoop of the distributor head of the distribution agricultural device must then be provided with an even number of outlets, preferably with twelve, twenty-four, thirty-six or forty-eight.

**[0011]** In preferred embodiment, the ring can be provided on its outer circumferential part with a brush. The advantage of using the brush lies in cleaning the inner space of the distributor head, which leads to lower need of maintenance of the inner space of the distributor head and more fluent movement of the ring due to the dirt removal.

**[0012]** The guiding groove can be of an arched shape, where, in the first operating position of the ring, the guiding pin is located at the beginning of the guiding groove, in the second operating position of the ring, the guiding pin is located in the center of the guiding groove, and in the third operating position of the ring, the guiding pin is located at the end of the guiding groove.

**[0013]** The guiding groove may be further T-shaped, where, in the first operating position of the ring, the guiding pin is located at the left side of the guiding groove, in the second operating position of the ring, the guiding pin is located at the top of the guiding groove, and in the third operating position of the ring, the guiding pin is located at the right side of the guiding groove.

**[0014]** The guiding groove may be further L-shaped, where in the first operating position of the ring, the guiding pin is located at the beginning of the base of the guiding groove, in the second operating position of the ring, the guiding pin is located at the top of the guiding groove, and in the third operating position of the ring, the guiding pin is located at the end of the base of the guiding groove.

#### Description of Drawings:

**[0015]** The summary of the invention is further illustrated by examples of embodiments thereof, which are described by means of the attached drawings, where:

Fig. 1 shows the distributor head of the distribution agricultural device with the ring in the second operating position, where all outlets are open,

Fig. 2 shows the distributor head ring provided with evenly arranged openings of the same size, driving mechanism and the connection of the ring and the driving mechanism through the ring attachment,

Fig. 3 shows the distributor head ring and the ring attachment,

Fig. 4 shows the inner hoop of the distributor head provided with three guiding grooves of an arched shape,

Fig. 5 shows a top view of the distributor head of the

distribution agricultural device, where the driving mechanism is connected to the motor through levers,

Fig. 6 shows the distributor head ring,

Fig. 7 shows the distributor head of the distribution agricultural device with the ring in the third operating position, where every other outlet is covered,

Fig. 8 shows the distributor head of the distribution agricultural device with the ring in the first operating position, where every other outlet is covered, where in the covered outlets are different from the outlets covered when the ring is used in the third operating position,

Fig. 9 is a schematic representation of the guiding groove of an arched shape showing the guiding pin position in the guiding groove for different operating positions of the ring,

Fig. 10 is a schematic representation of the T-shaped guiding groove showing the guiding pin position in the guiding groove for different operating positions of the ring and

Fig. 11 is a schematic representation of the L-shaped guiding groove showing the guiding pin position in the guiding groove for different operating positions of the ring.

#### Description of exemplary embodiments:

**[0016]** A distributor head 1 of a distribution agricultural device 100 shown in Fig. 1, 5, 7 and 8 comprises an outer hoop 5, an inner hoop 3, a movably positioned ring 6, a main inlet 102 and a driving mechanism 9. The outer hoop 5 is provided with an even number of outlets 2, which are of the same size and are arranged evenly along the circumference of the outer hoop 5. In an exemplary embodiment of the invention, a total of 24 outlets 2 are arranged evenly along the circumference of the outer hoop 5. However, the invention is not limited to this number of outlets 2; 12, 24, 36 or 48 outlets 2 are often used in practice, and the invention can be used with any of these numbers.

**[0017]** The inner hoop 3 of the distributor head 1 of the distribution agricultural device 100 is provided with at least one guiding groove 4, see Fig. 4. In the exemplary embodiment, this guiding groove 4 is of an arched shape, where the arched shape is a portion of the circumference of a circle, ellipse, or another conic section. In an exemplary embodiment, three significant points are on the guiding groove 4, namely the beginning 4a, the center 4b and the end 4c of the guiding groove 4, see Fig. 8. In the exemplary embodiment of the invention, the inner hoop 3 of the distributor head 1 is provided with exactly three guiding grooves 4. Further, a movably positioned

ring 6 shown in Fig. 2, 3 and 6 is located inside the distributor head 1. The ring 6 is provided with a number of openings 7, which are arranged evenly along its circumference. In the exemplary embodiment of the invention, the number of openings 7 in the ring 6 corresponds to the half of the number of outlets 2. The ring 6 is further provided with at least one guiding pin 10. In the exemplary embodiment of the invention the ring 6 is provided with exactly three guiding pins 10. Guiding pins 10 are movably positioned in the guiding grooves 4. The ring 6 is connected to a driving mechanism 9, shown in Fig. 2, through the ring 6 attachment 8. The driving mechanism 9 consists of a star 9a and columns 9b and ensures the movement of the ring 6. In the exemplary embodiment of the invention, the driving mechanism 9 is driven by a motor 12 shown in Fig. 5, to which it is connected through levers 13. However, embodiment of the invention with a manual drive of the driving mechanism 9 is also possible. The ring attachment 8 is provided with openings 8a, position of which corresponds to the position of columns 9b of the driving mechanism 9 in such way that the columns 9b are located in these openings 8a.

**[0018]** In exemplary embodiment of the invention, the ring 6 can be in three operating positions 11a, 11b and 11c, shown in Fig. 1, 7 and 8. In the first operating position 11a, shown in Fig. 8 and Fig. 9a, the ring 6 is in the same plane as the outer hoop 5. The guiding pin 10 is located at the beginning 4a of the guiding groove 4. In this position 11a, every other outlet 2 is open, because of an overlap of the opening 7 in the ring 6 with the given outlet 2. The other outlets 2 are then covered with the ring 6. Because of this, the granulated material 103 is further distributed only within one half of the distribution agricultural device 100. In the second operating position 11b, shown in Fig. 1 and Fig. 9b, the guiding pin 10 is located in the center 4b of the guiding groove 4. In this position 11b the ring 6 is not located in the same plane as the outer hoop 5 and, therefore, it does not overlap with any of the outlets 2. Because of this, the granulated material 103 is distributed to all outlets 2 and thus across the whole area of the distribution agricultural device 100. In the third operating position 11c, shown in Fig. 7 and Fig. 8c, the ring 6 is in the same plane as the outer hoop 5. The guiding pin 10 is located at the end 4c of the guiding groove 4. In this position 11c every other outlet 2 is open, because of the overlap of the opening 7 in the ring 6 with the given outlet 2. These are different outlets 2 from those that are open in the first operating position 11a of the ring 6. The remaining outlets 2 are then covered with the ring 6. Because of this, the granulated material 103 is further distributed only within one half of the distribution agricultural device 100, different from the half used in the first operating position 11a.

**[0019]** Other embodiments of the invention allow the use of a T-shaped guiding groove 4, see Fig. 10. In this embodiment, in the first operating position 11a the guiding pin 10 is then located at the left side 14a of the guiding groove 4, in the second operating position 11b the guiding

pin 10 is located at the top 14b of the guiding groove and in the third operating position 11c the guiding pin 10 is located at the right side 14c of the guiding groove 4.

**[0020]** Other embodiments of the invention allow the use of a L-shaped guiding groove 4, see Fig. 11. In this embodiment, in the first operating position 11a the guiding pin 10 is then located at the beginning of the base 15a of the guiding groove 4, in the second operating position 11b the guiding pin 10 is located at the top 15b of the guiding groove, and in the third operating position 11c the guiding pin 10 is located at the end of the base 15c of the guiding groove 4.

**[0021]** Other embodiments of the invention which utilize a guiding groove 4 provided with three significant points in which the guiding pin 10 can be located in such way that in these points the ring 6 is located in individual operating positions 11a, 11b and 11c are also possible.

**[0022]** The ring 6 is moved between the individual positions by the driving mechanism 9, which is shown in Fig. 2. The movement of the ring 6 consists of a rotation around axis thereof and of displacement in the direction of the axis. The movement of the driving mechanism 9 is a rotation around the ring 6 axis. The rotation occurs due to the levers 13, which are connected to the driving mechanism 9. The driving mechanism 9 rotation around the ring 6 axis leads to the rotation of the attachment 8 and thus to the rotation of the ring 6 around the axis thereof. The rotation of the ring 6 around its axis then leads to movement of guiding pins 10 within the guiding grooves 4. Because of the movement of guiding pins 10 in the guiding grooves 4, the ring 6 moves also vertically in the direction parallel to the axis thereof. Together with the ring 6, the attachment 8 also moves vertically in such way that its openings 8a move within columns 9b of the driving mechanism 9.

**[0023]** In the case of L-shaped or T-shaped guiding groove 4, the driving mechanism 9 can be driven by two motors, where one motor ensures vertical displacement in the guiding groove 4 and the other motor ensures horizontal displacement in the guiding groove 4.

**[0024]** In exemplary embodiment of the invention, it is possible to extend the beginning 4a and the end 4c of the guiding groove 4, which results in better stability.

**[0025]** The distribution agricultural device 100 does not necessarily have to utilize just one distributor head 1 to divide the processed area into halves. The number of distributor heads 1 of the distribution agricultural device 100 may be higher, thereby providing a higher possibility to change the extent of the processed area.

**[0026]** The ring 6 can be, on its outer circumferential part, provided with a brush, which, when the ring 6 moves between its operating positions 11a, 11b and 11c, cleans the area of the inner hoop 3 from dirt and provides more fluent movement of the ring.

#### Industrial applicability:

**[0027]** The device according to this invention can be

used for agricultural devices that use distributor heads for distributing granulated material, e.g. seeds, fertilizer, etc.

List of reference signs:

**[0028]**

1 - distributor head  
 2 - outlet  
 3 - inner hoop  
 4 - guiding groove  
 4a - beginning of the guiding groove  
 4b - center of the guiding groove  
 4c - end of the guiding groove  
 5 - outer hoop  
 6 - ring  
 7 - opening in the ring  
 8 - ring attachment  
 8a - attachment openings  
 9 - driving mechanism  
 9a - star  
 9b - column  
 10 - guiding pin  
 11a - first position of the ring  
 11b - second position of the ring  
 11c - third position of the ring  
 12 - motor  
 13 - levers  
 14a - left side of the guiding groove  
 14b - top of the guiding groove  
 14c - right side of the guiding groove  
 15a - beginning of the base of the guiding groove  
 15b - top of the guiding groove  
 15c - end of the base of the guiding groove  
 100 - distribution agricultural device (not shown)  
 101 - main inlet (not shown)  
 102 - granulated material (not shown)

**Claims**

1. A distributor head (1) of a distribution agricultural device (100) comprising an outer hoop (5) provided with at least four outlets (2) of the same size evenly arranged along the circumference of the outer hoop (5), a movably positioned ring (6) provided with a number of evenly arranged openings (7) of the same size, number of which corresponds to half of the number of outlets (2), a main inlet (102) and a driving mechanism (9), wherein the ring (6) is connected to the driving mechanism (9) through a ring (6) attachment (8), **characterized in that** the ring (6) has three operating positions (11a, 11b, 11c), where in the first position (11a) the ring (6) is located in the same plane as the outer hoop (5) and the ring (6) covers every other outlet (2), in the second position (11b) the ring (6) is not located in the same plane as the outer hoop

(5) and therefore does not cover any outlet (2), and in the third position (11c), different from the first position (11a), the ring (6) is located in the same plane as the outer hoop (5) and covers every other outlet (2), wherein in the third position (11c) the ring (6) covers different outlets (2) than in the first position (11a).

2. The distributor head (1) of the distribution agricultural device (100) according to claim 1, **characterized in that** it further comprises an inner hoop (3) provided with at least one guiding groove (4).

3. The distributor head (1) of the distribution agricultural device (100) according to claim 2, **characterized in that** the ring (6) is provided with at least one guiding pin (10) movably positioned in the guiding groove (4).

4. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the driving mechanism (9) comprises a star (9a), columns (9b) and levers (13) and the ring (6) attachment (8) is provided with openings (8a), wherein the columns (9b) are inserted in the openings (8a) of the attachment (8).

5. The distributor head (1) of the distribution agricultural device according to any of the previous claims, **characterized in that** the driving mechanism (9) is driven by at least one motor (12), with which it is connected by levers (13).

6. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the number of outlets (2) is twelve, or twenty-four, or thirty-six, or forty-eight.

7. The distributor head (1) of the distribution agricultural device according to any of claims 2 to 6, **characterized in that** the number of the guiding grooves (4) and guiding pins (10) is three.

8. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the ring (6) is provided with a seal brush (16) on the outer circumferential part.

9. The distributor head (1) of the distribution agricultural device (100) according to any of claims 2 to 8, **characterized in that** the guiding groove (4) is of an arched shape, wherein in the first operating position (11a) the guiding pin (10) is located at the beginning (4a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located in the center (4b) of the guiding groove (4), and in the third operating position (11c) the guiding pin (10) is located at the end (4c) of the guiding groove (4).

10. The distributor head (1) of the distribution agricultural device (100) according to any of claims 2 to 8, **characterized in that** the guiding groove (4) is T-shaped, wherein in the first operating position (11a) the guiding pin (10) is located at the left side (14a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located at the top (14b) of the guiding groove (4), and in the third operating position (11c) the guiding pin (10) is located at the right side (14c) of the guiding groove (4).
11. The distributor head (1) of the distribution agricultural device (100) according to any of claims 2 to 8, **characterized in that** the guiding groove (4) is L-shaped, wherein in the first operating position (11 a) the guiding pin (10) is located at the beginning of the base (15a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located at the top (15b) of the guiding groove (4), and in the third operating position (11c) the guiding pin (10) is located at the end of the base (15c) of the guiding groove (14).

**Amended claims in accordance with Rule 137(2) EPC.**

1. A distributor head (1) of a distribution agricultural device (100) comprising an outer hoop (5) provided with at least four outlets (2) of the same size evenly arranged along the circumference of the outer hoop (5), a movably positioned ring (6) provided with a number of evenly arranged openings (7) of the same size, number of which corresponds to half of the number of outlets (2), a main inlet (102) and a driving mechanism (9), wherein the ring (6) is connected to the driving mechanism (9) through a ring (6) attachment (8), **characterized in that** it further comprises an inner hoop (3) provided with at least one guiding groove (4), wherein the ring (6) is provided with at least one guiding pin (10) movably positioned in the guiding groove (4), and wherein the ring (6) has three operating positions (11a, 11b, 11c), where in the first position (11a) the ring (6) is located in the same plane as the outer hoop (5) and the ring (6) covers every other outlet (2), in the second position (11b) the ring (6) is not located in the same plane as the outer hoop (5) and therefore does not cover any outlet (2), and in the third position (11c), different from the first position (11a), the ring (6) is located in the same plane as the outer hoop (5) and covers every other outlet (2), wherein in the third position (11c) the ring (6) covers different outlets (2) than in the first position (11a), and wherein the change of the position (11a, 11b, 11c) of the ring (6) takes place by shifting the guiding member (10) along the guiding groove (4).
2. The distributor head (1) of the distribution agricultural

device (100) according to any of the previous claims, **characterized in that** the driving mechanism (9) comprises a star (9a), columns (9b) and levers (13) and the ring (6) attachment (8) is provided with openings (8a), wherein the columns (9b) are inserted in the openings (8a) of the attachment (8).

3. The distributor head (1) of the distribution agricultural device according to any of the previous claims, **characterized in that** the driving mechanism (9) is driven by at least one motor (12), with which it is connected by levers (13).
4. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the number of outlets (2) is twelve, or twenty-four, or thirty-six, or forty-eight.
5. The distributor head (1) of the distribution agricultural device according to any of the previous claims, **characterized in that** the number of the guiding grooves (4) and guiding pins (10) is three.
6. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the ring (6) is provided with a seal brush (16) on the outer circumferential part.
7. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the guiding groove (4) is of an arched shape, wherein in the first operating position (11a) the guiding pin (10) is located at the beginning (4a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located in the center (4b) of the guiding groove (4), and in the third operating position (11c) the guiding pin (10) is located at the end (4c) of the guiding groove (4).
8. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the guiding groove (4) is T-shaped, wherein in the first operating position (11a) the guiding pin (10) is located at the left side (14a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located at the top (14b) of the guiding groove (4), and in the third operating position (11c) the guiding pin (10) is located at the right side (14c) of the guiding groove (4).
9. The distributor head (1) of the distribution agricultural device (100) according to any of the previous claims, **characterized in that** the guiding groove (4) is L-shaped, wherein in the first operating position (11a) the guiding pin (10) is located at the beginning of the base (15a) of the guiding groove (4), in the second operating position (11b) the guiding pin (10) is located at the top (15b) of the guiding groove (4), and in

the third operating position (11c) the guiding pin (10) is located at the end of the base (15c) of the guiding groove (14).

5

10

15

20

25

30

35

40

45

50

55

7

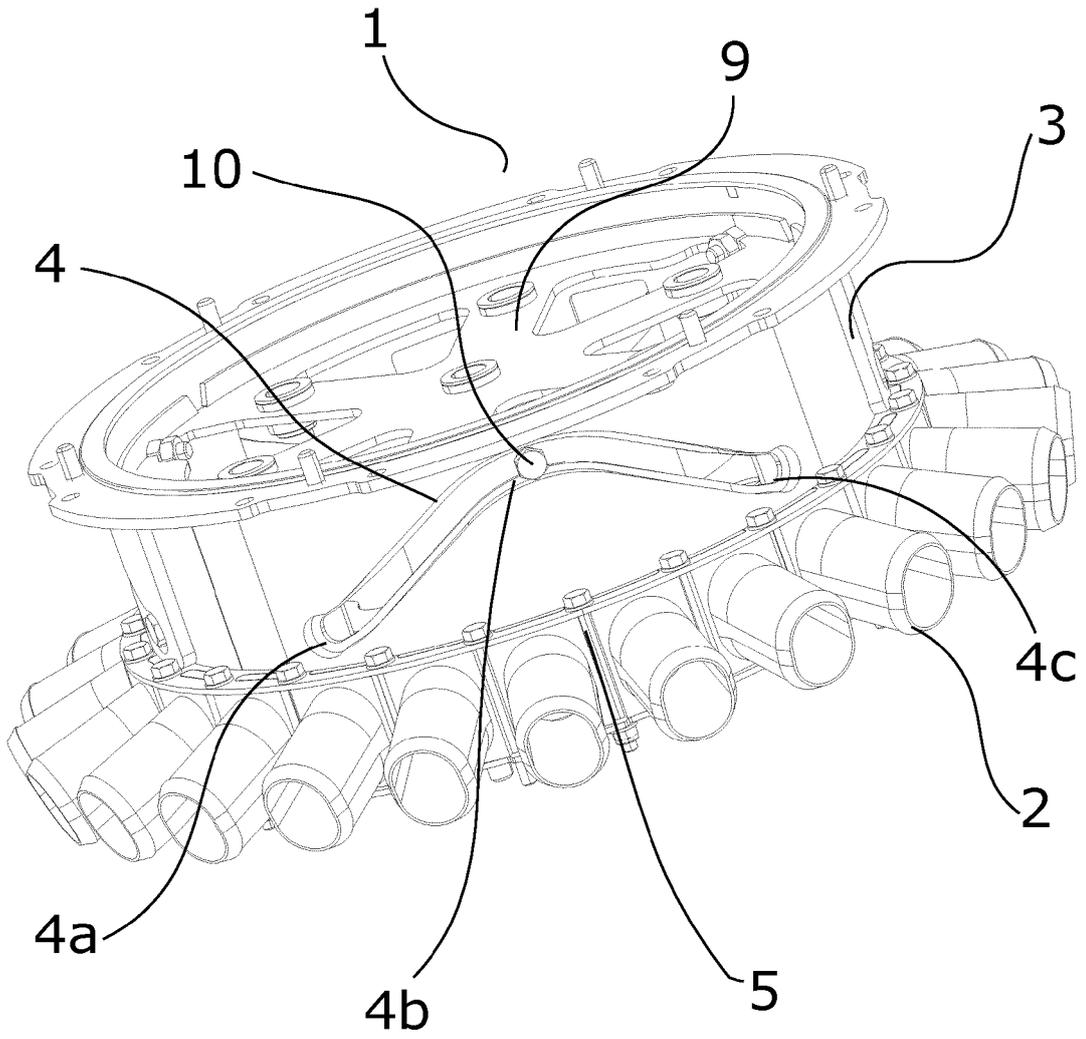


Fig. 1

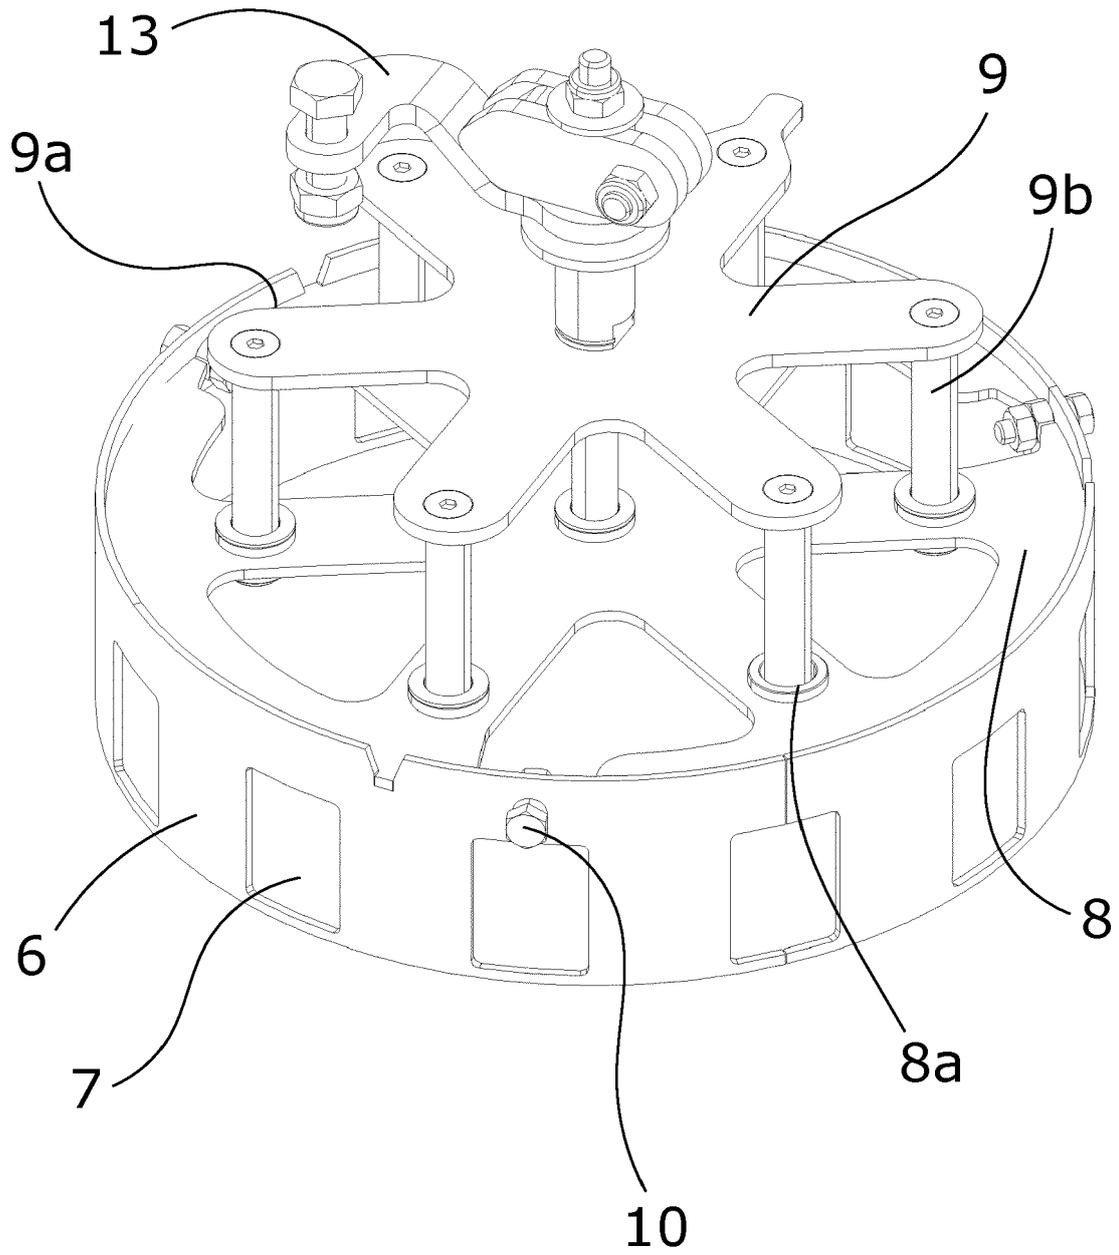


Fig. 2

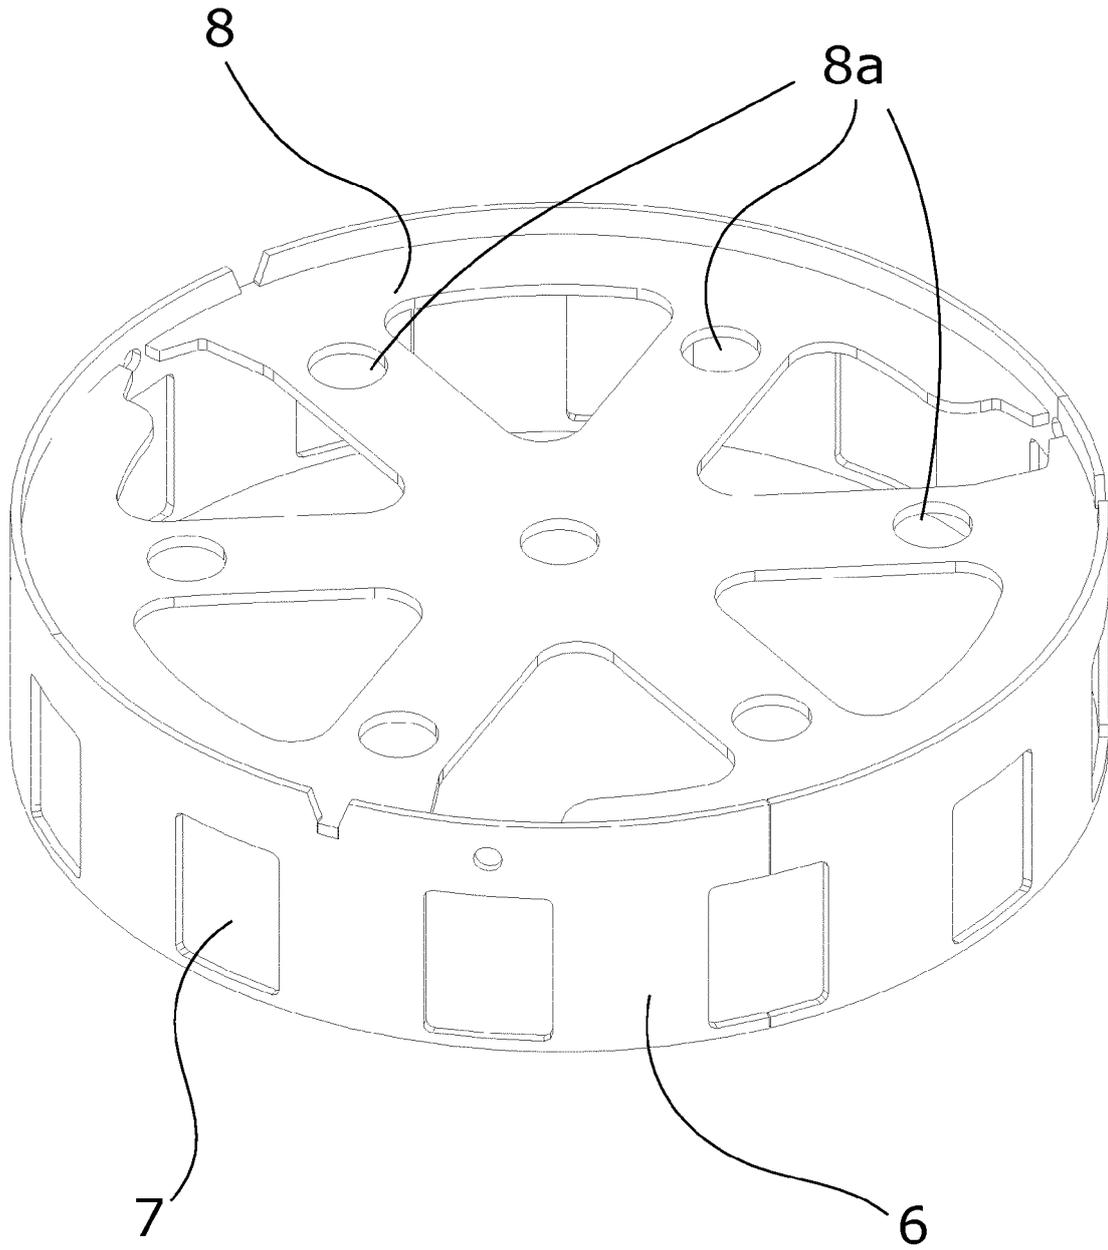


Fig. 3

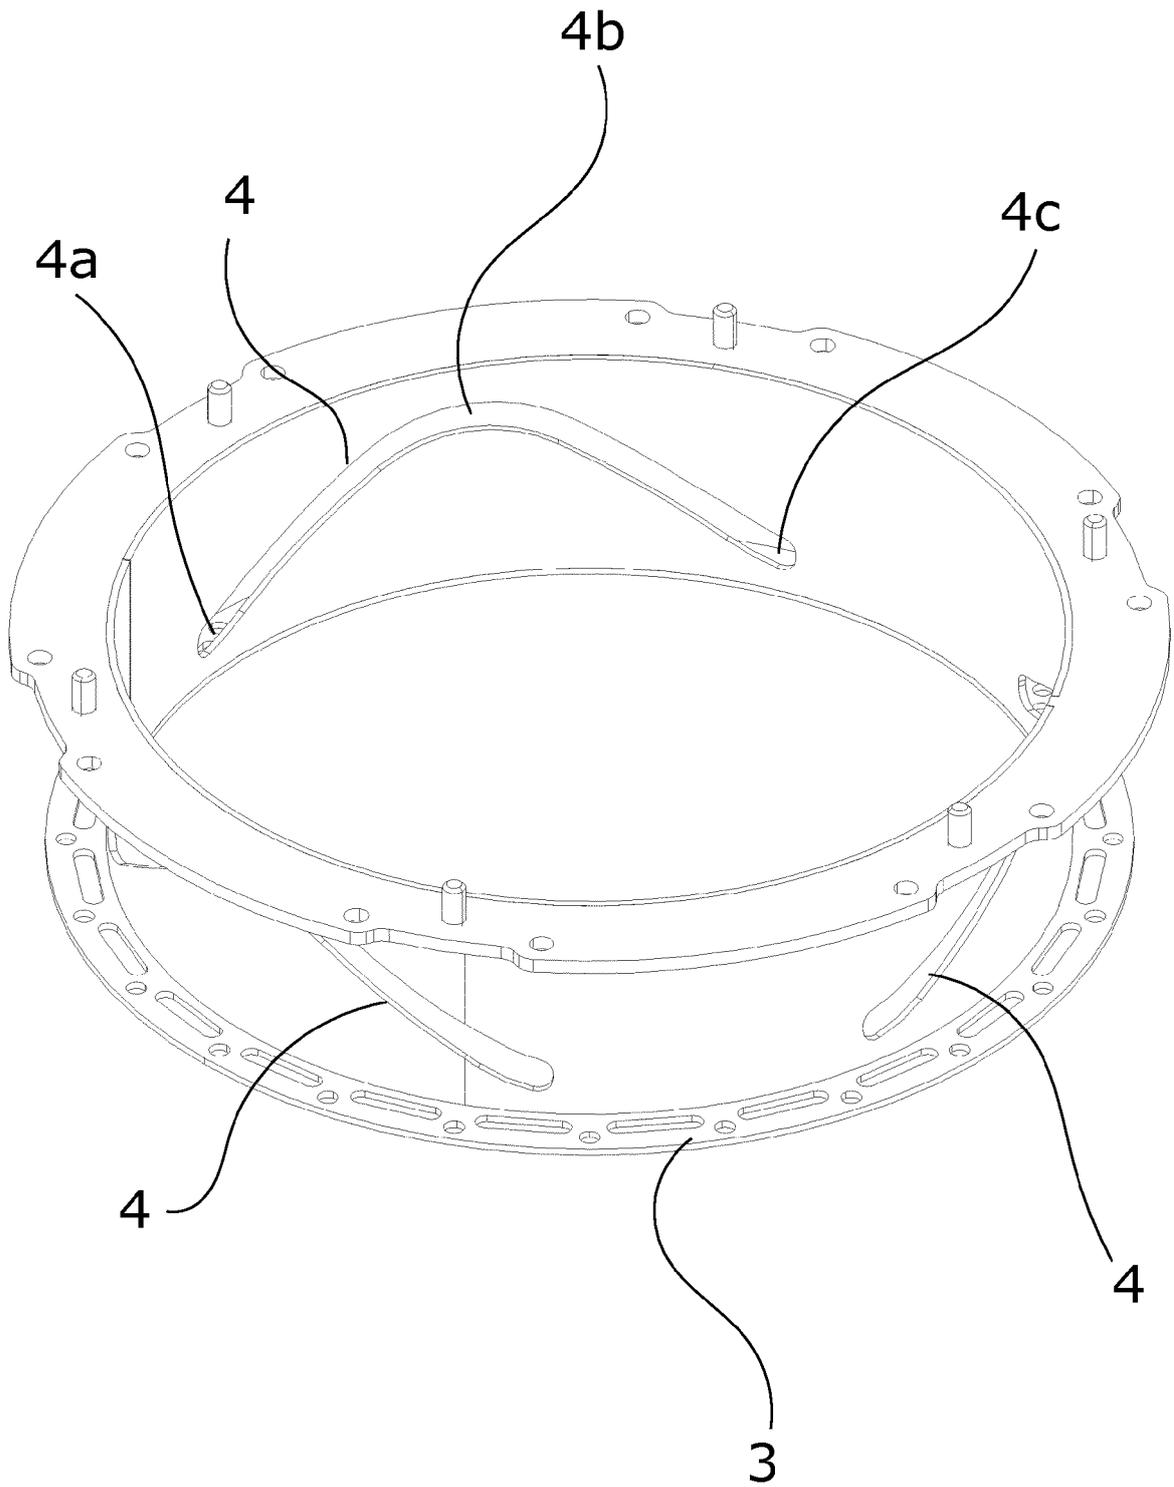


Fig. 4

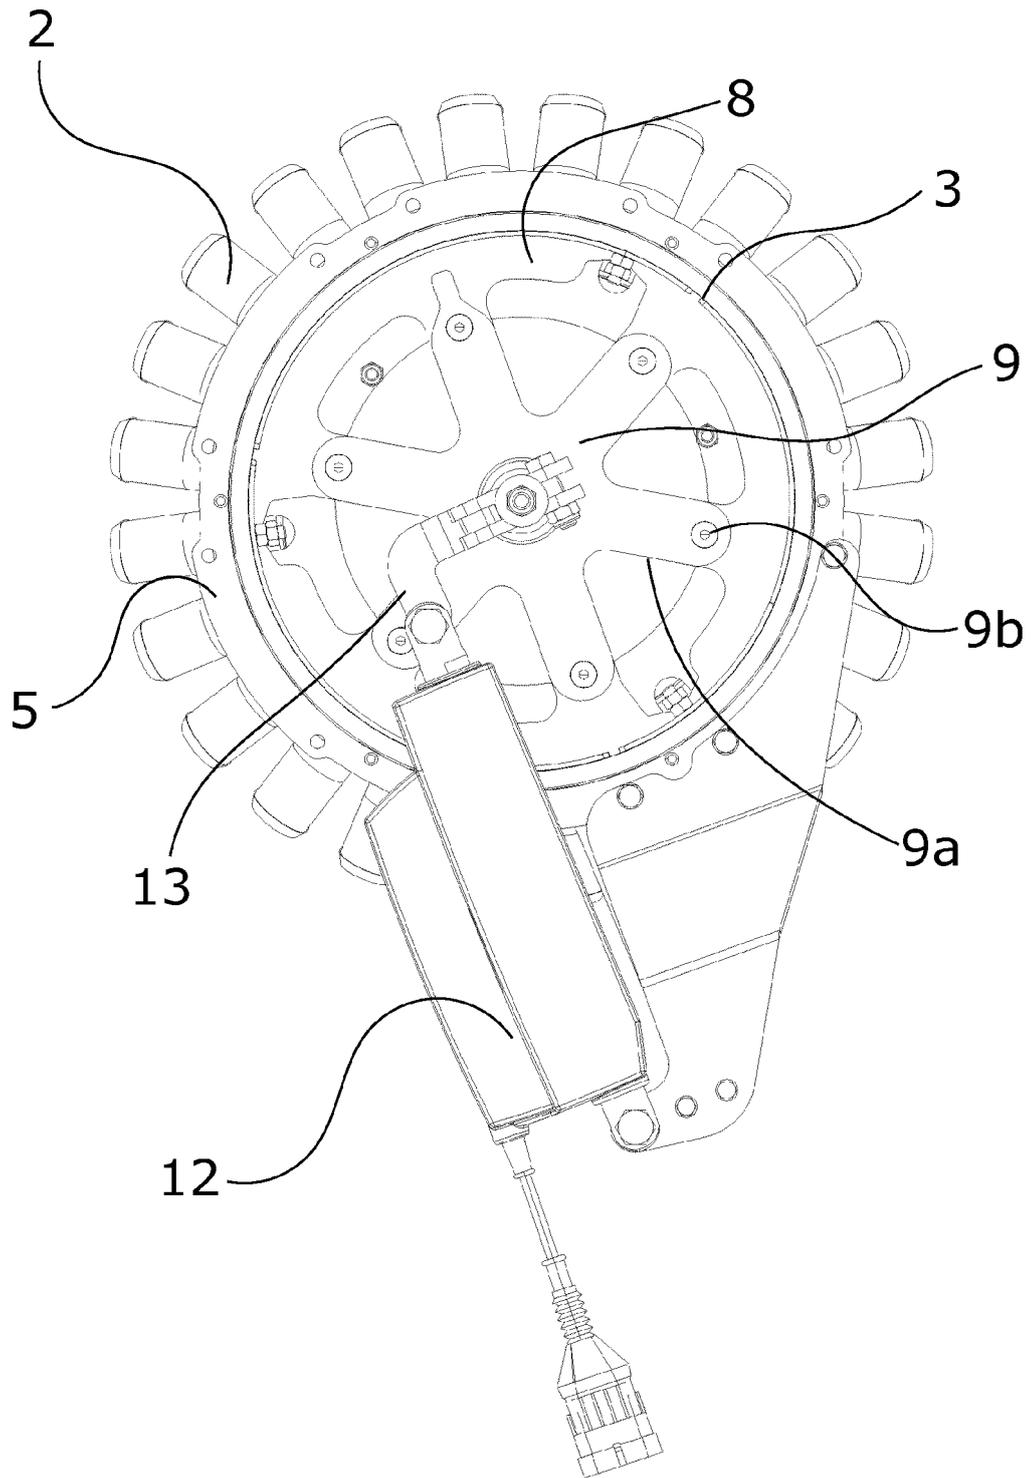


Fig. 5

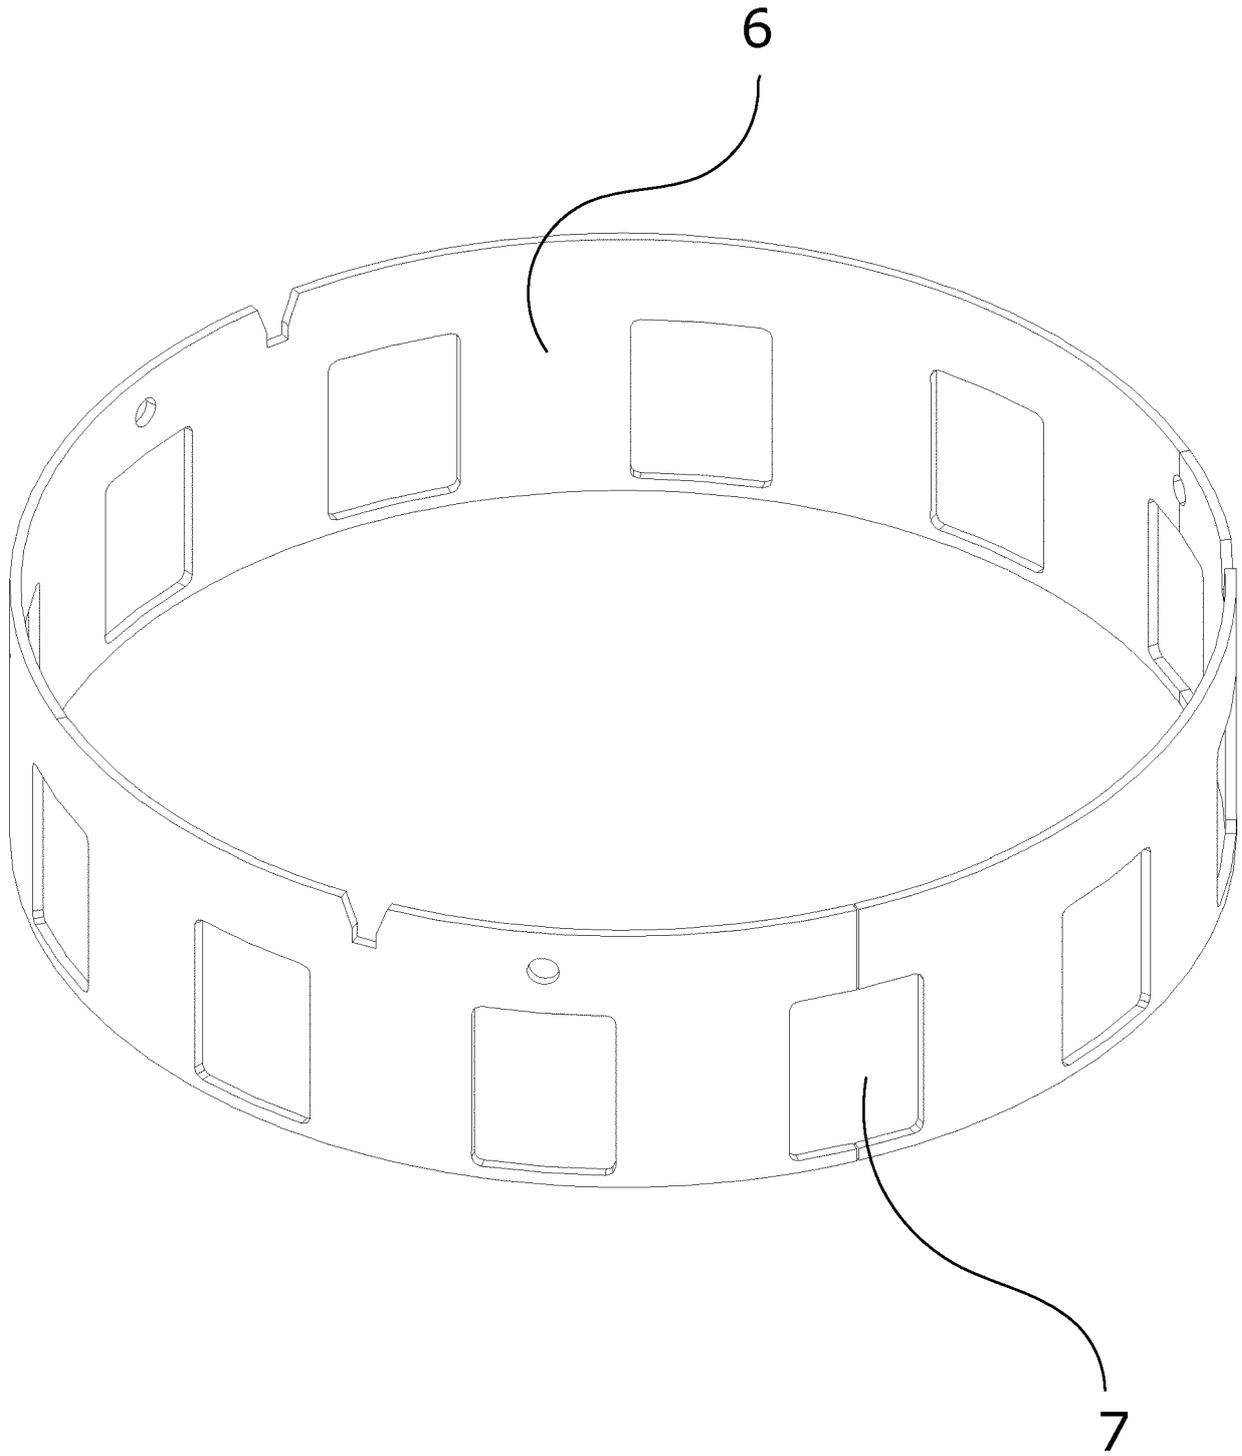


Fig. 6

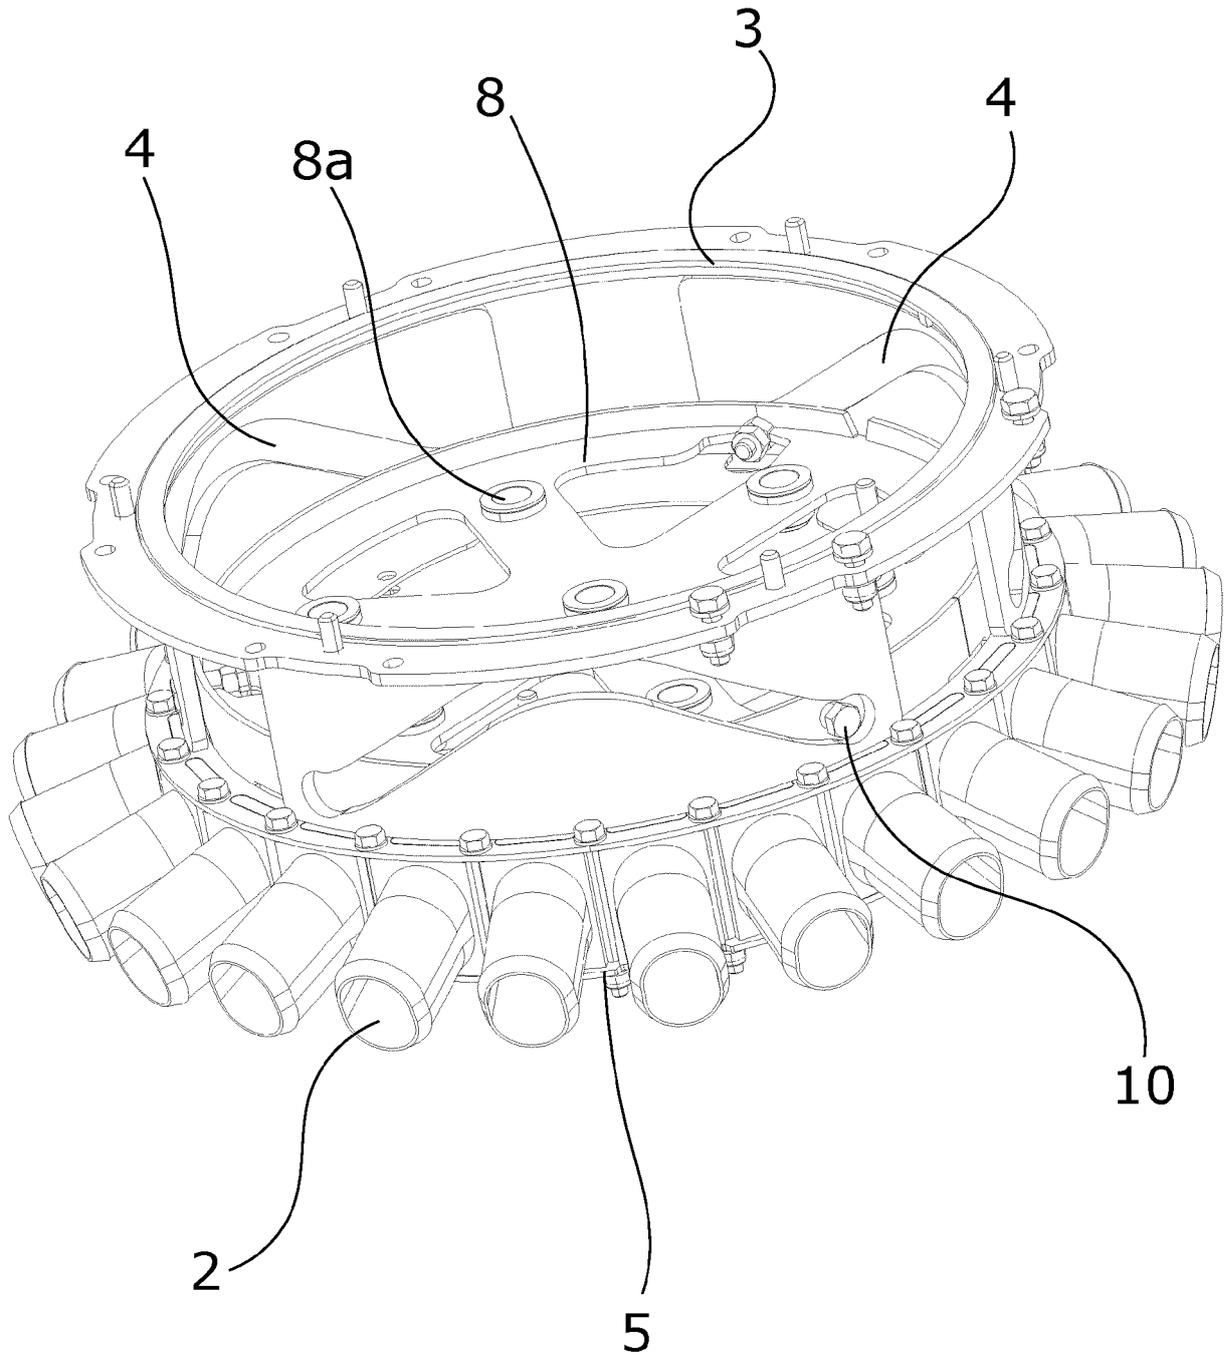


Fig. 7

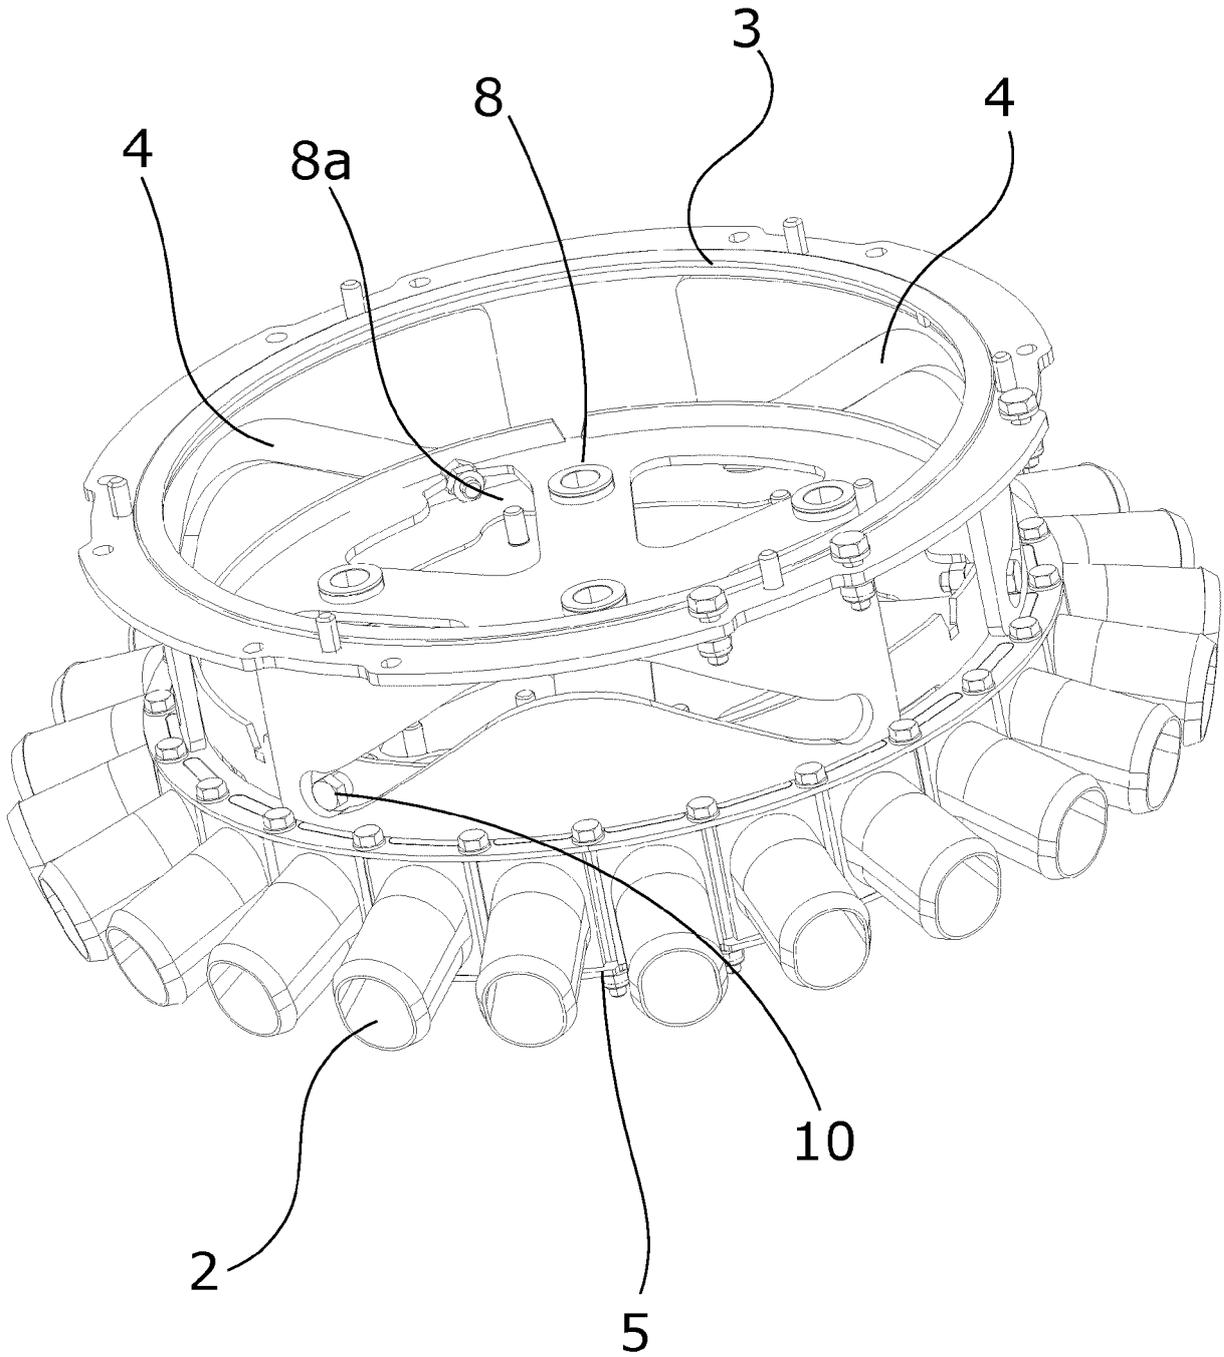


Fig. 8

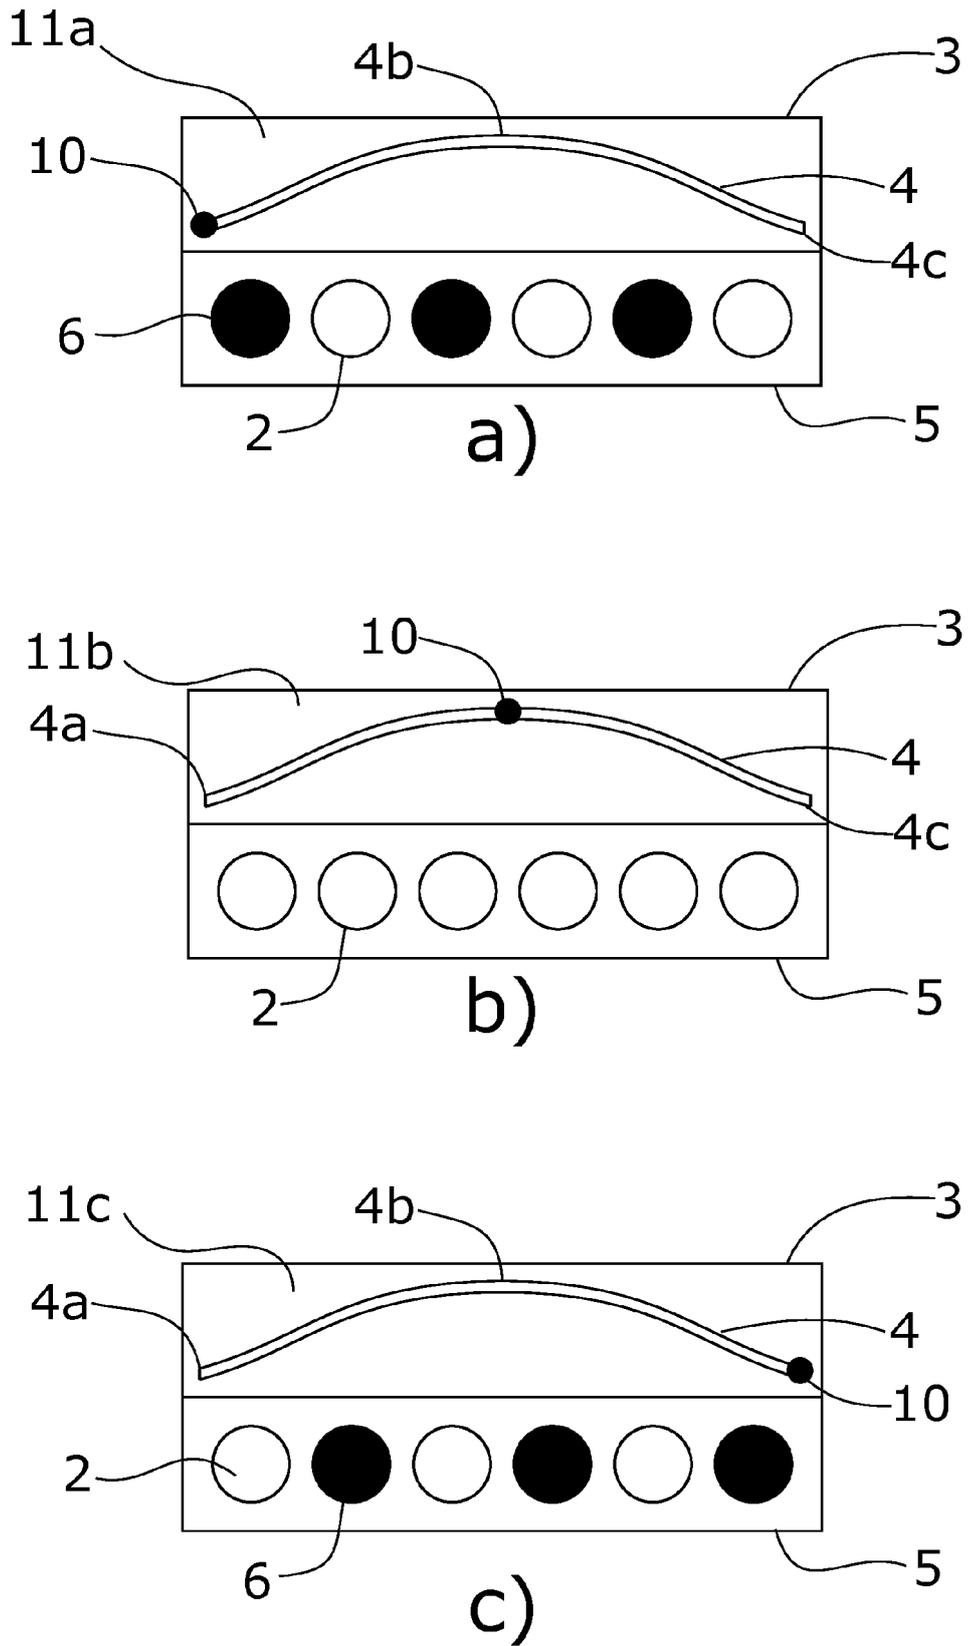


Fig. 8

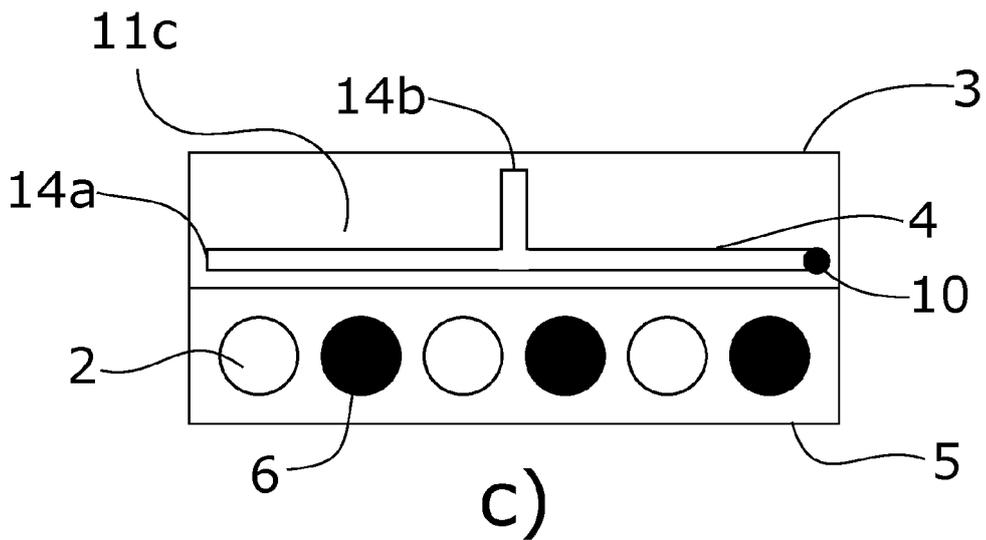
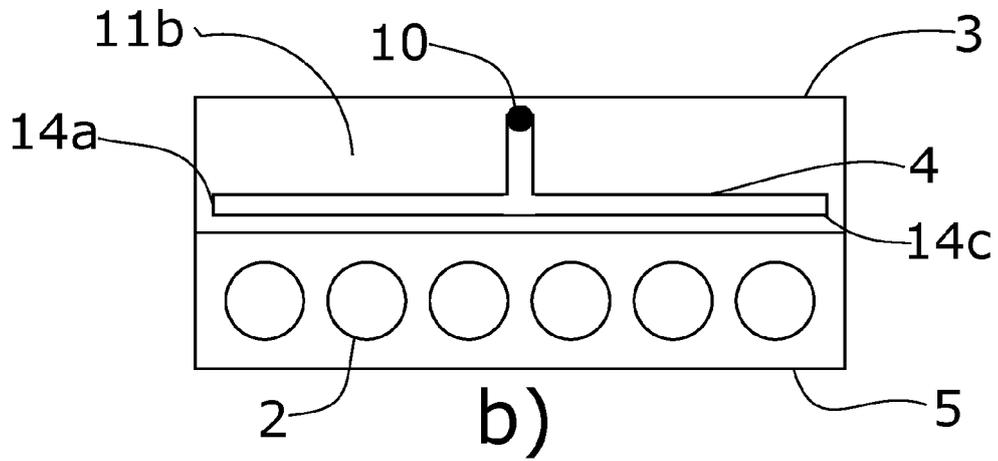
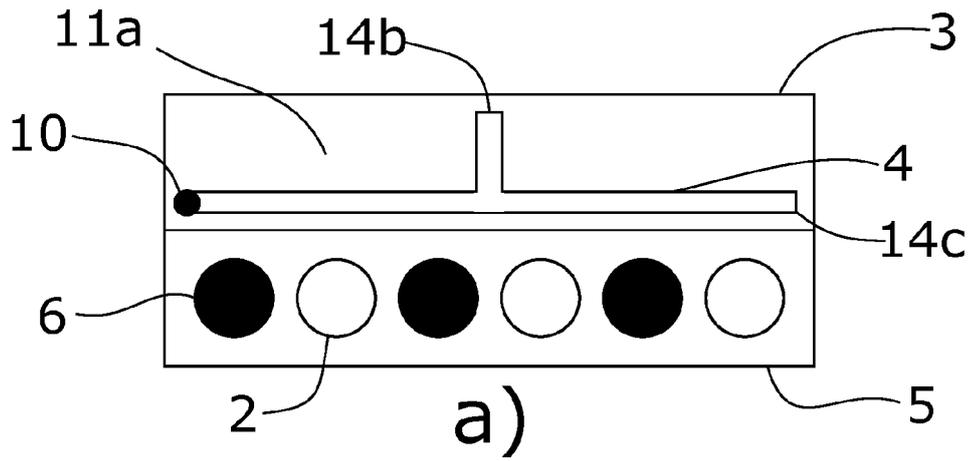


Fig. 10

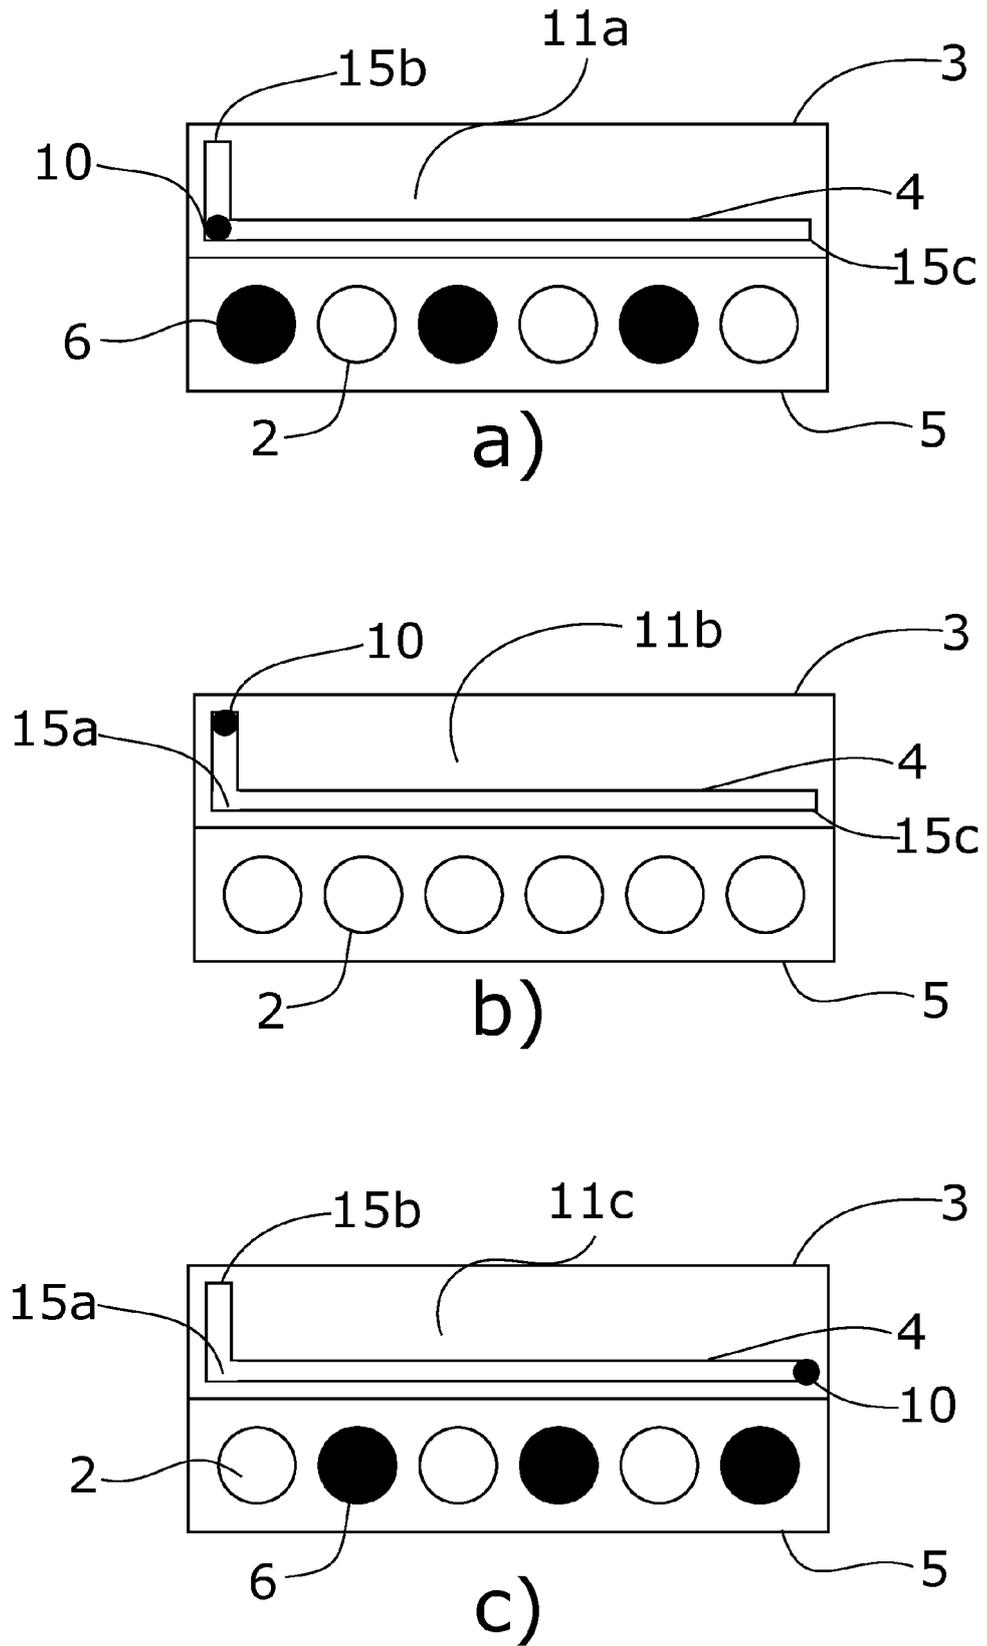


Fig. 11



EUROPEAN SEARCH REPORT

Application Number  
EP 19 15 5198

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D A	EP 2 269 434 A1 (LEMKEN GMBH & CO KG [DE]) 5 January 2011 (2011-01-05) * the whole document *	1,4-6,8 2,3,7, 9-11	INV. A01C7/08
A,D	EP 1 478 221 A1 (VAEDERSTAD VERKEN AB [SE]) 24 November 2004 (2004-11-24) * claims 1-14; figures 1-9 *	1-11	
A	US 3 515 315 A (KIDD ARCHIBALD WATSON) 2 June 1970 (1970-06-02) * column 3, lines 44-61; figure 3 *	1	
A	WO 2018/046639 A1 (FUNCK GERALD [DE]) 15 March 2018 (2018-03-15) * abstract; figure 8 *	1	
A	DE 10 2016 010270 A1 (FUNCK GERALD [DE]) 1 March 2018 (2018-03-01) * figure 4 *	1	
A	EP 0 803 177 A2 (AMAZONEN WERKE DREYER H [DE]) 29 October 1997 (1997-10-29) * abstract; figure 11 *	1	TECHNICAL FIELDS SEARCHED (IPC) A01C
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 22 July 2019	Examiner Weinmüller, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 19 15 5198

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-07-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2269434 A1	05-01-2011	DE 102009031066 A1	13-01-2011
		EP 2269434 A1	05-01-2011
		ES 2393654 T3	27-12-2012
		PT 2269434 E	07-12-2012
		SI 2269434 T1	31-01-2013
EP 1478221 A1	24-11-2004	AU 2003206330 A1	09-09-2003
		DE 60311071 T2	28-06-2007
		EP 1478221 A1	24-11-2004
		WO 03071856 A1	04-09-2003
US 3515315 A	02-06-1970	DE 1557913 A1	02-04-1970
		US 3515315 A	02-06-1970
WO 2018046639 A1	15-03-2018	EP 3310149 A1	25-04-2018
		WO 2018046639 A1	15-03-2018
DE 102016010270 A1	01-03-2018	DE 102016010270 A1	01-03-2018
		EP 3302018 A1	11-04-2018
		EP 3381255 A1	03-10-2018
		US 2019174668 A1	13-06-2019
		WO 2018037054 A1	01-03-2018
EP 0803177 A2	29-10-1997	DE 19522060 A1	19-12-1996
		DE 19538586 A1	24-04-1997
		EP 0803177 A2	29-10-1997

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 2269434 A [0004]
- EP 1478221 A [0005]