



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**02.09.2020 Bulletin 2020/36**

(51) Int Cl.:  
**A61B 17/72 (2006.01) A61B 17/86 (2006.01)**

(21) Application number: **20170777.5**

(22) Date of filing: **06.12.2017**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

• **ZANDER, Nils**  
**24340 Eckernförde (DE)**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**17838148.9 / 3 518 798**

(74) Representative: **Maiwald Patent- und Rechtsanwaltsgesellschaft mbH**  
**Engineering**  
**Elisenhof**  
**Elisenstrasse 3**  
**80335 München (DE)**

(71) Applicant: **Stryker European Holdings I, LLC**  
**Kalamazoo, MI 49002 (US)**

Remarks:


This application was filed on 22-04-2020 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:  
• **WIELAND, Manfred**  
**24146 Kiel (DE)**

(54) **ORTHOPEDIC LOCKING SCREW**

(57) An orthopedic locking screw arranged in a bore of an orthopedic implant enables easy removal of a broken locking screw out of the implant. The orthopedic locking screw for a cooperation with a thread in the orthopedic implant comprises a longitudinally extending shaft. The shaft comprises a thread pattern section extending at least partially along the shaft. The thread pattern section comprises a first thread with a first direction, which is a functional thread configured for the cooperation with the

thread in the orthopedic implant. The thread pattern section further comprises a second thread with a second direction opposite to the first direction of the first thread. The second thread is superimposed on the first thread and intersects the first thread. An orthopedic locking system comprises the orthopedic locking screw and the orthopedic implant. The locking screw is manufactured by applying the thread pattern section to the longitudinally extending shaft.

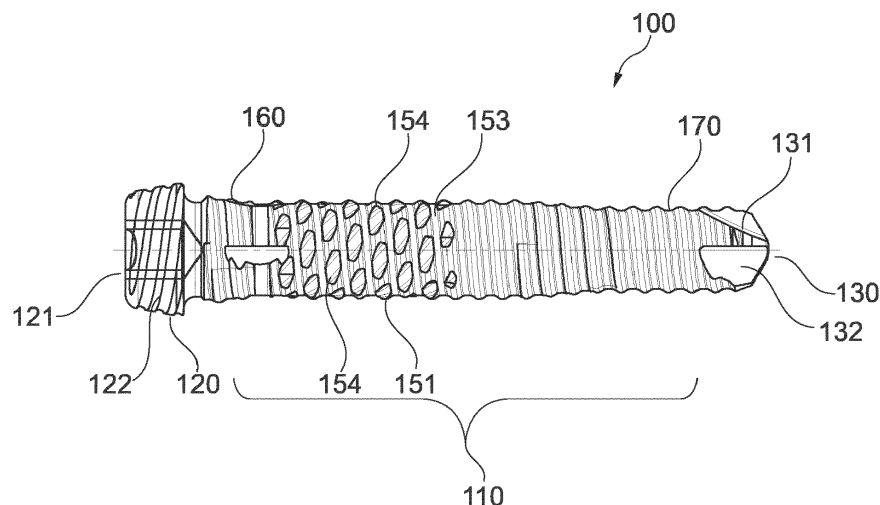

**Fig. 2a**

## Description

### FIELD OF INVENTION

**[0001]** The invention relates to an advanced orthopedic locking screw configured to be arranged in a bore of an orthopedic implant, an orthopedic locking system comprising such locking screw and a method for manufacturing such orthopedic locking screw. Particularly, the invention allows a removal of a broken locking screw out of an implant.

### BACKGROUND OF THE INVENTION

**[0002]** In orthopedic procedures, it is often necessary to secure an orthopedic implant. In such cases, an orthopedic locking screw of an orthopedic fastening system is often used to secure the orthopedic implant to a bone or to another orthopedic implant. The screw sometimes breaks during installation or use so that a part of the screw remains in a hole into which it was threaded. In some instances, the locking screw may be broken due to excessive loading or accidents, e.g., due to shearing forces, at the fixation interface. Usually, a broken or damaged locking screw needs to be removed from the human body.

**[0003]** Various devices exist to remove such implanted broken screws. Some of these prior art devices have their own screw threads to be attached to the broken screw for reverse turning of the screw for its removal. Those instruments often have a tapered opening at their threads for telescoping with the broken screw to grip it in the removal process. Such devices have the disadvantage of also removing a relatively large core of the bone, resulting in considerable bone loss. Accordingly, there is a need to provide a locking screw, which when broken, can be easily removed essentially without damaging bone tissue.

### SUMMARY OF THE INVENTION

**[0004]** The problems of the prior art are addressed by the subject matter of the independent claims, wherein further embodiments are incorporated in the dependent claims. Aspects of the invention described in the following apply also to the advanced orthopedic locking screw system and the method for manufacturing the orthopedic locking screw.

**[0005]** According to an aspect of the present invention, an orthopedic locking screw is presented. The orthopedic locking screw is configured for a cooperation with a thread in an orthopedic implant and comprises a longitudinally extending shaft. The longitudinally extending shaft comprises a thread pattern section extending at least partially along the shaft. The thread pattern section comprises a first thread with a first direction, in which the first thread is a functional thread configured for the cooperation with the thread in the orthopedic implant. The thread pattern section further comprises a second thread

with a second direction opposite to the first direction the first thread. The second thread is superimposed on the first thread and intersects the first thread.

**[0006]** The orthopedic locking screw may be an angular stable locking screw and may be provided to secure the orthopedic implant. The orthopedic locking screw may fasten the orthopedic implant precisely without additional components through a bore of the implant. The bore may be arranged with an internal thread to cooperate with the thread pattern section of the locking screw.

**[0007]** The functional thread of the locking screw may interact with the internal thread of the orthopedic implant. However, when the locking screw fatigues, it usually bends and breaks within the implant itself. The functional thread of the thread pattern section may then also allow for removal of a retained portion of the screw without damaging the adjacent bone tissue. In other words, the thread pattern section may allow an interaction between the thread turns of the functional thread of the locking screw and the internal thread of the orthopedic implant and, at the same time, allow for an easy removal of the retained broken screw from the implant in case of a failure of the screw.

**[0008]** The first thread of the thread pattern section might be screwed in the bore of the implant to fasten it. The second thread of the thread pattern section might be a counter screw thread in opposite direction to the first thread such that the second thread and the first thread intersect each other in the thread pattern section. The term "intersect" means that second thread turns overlap first thread turns and vice versa. Accordingly, each thread intervenes, interrupts and/or interferes a counter thread flow. Accordingly, the second thread turns interrupt the first thread flow and vice versa. In other words, the first thread turns are cut by the passing second thread turns and vice versa. The first and second threads may thereby form at least one island, and preferably a plurality of intersection islands, along the circumference of the thread pattern section. Each intersection island may resemble a roller of a music box. The thread pattern section can also be understood as a groove and intersection island system.

**[0009]** In an example, the thread pattern section may comprise essentially rhombic protrusions and multiple grooves between the rhombic protrusions. By intersecting the first thread and second thread, crossing crests of the first and second threads and crossing roots of the first and second threads may form grooves. If crossing crests of the first thread meet crossing roots of the second thread or crossing roots of the first thread meet crossing crests of the second thread, an intersecting area may form a rhombic protrusion due to a helical structure of the threads. Accordingly, a strong internal cooperation of the first thread of the locking screw and the internal thread of the implant can be realized. At the same time, the thread pattern section may be efficiently sheared off when removing the broken locking screw.

**[0010]** In an example, the functional first thread and

the superimposed second thread of the thread pattern section may have the same pitch. Hence, grooves and rhombic protrusions in the thread pattern section may have identical size and shape, which allows an even distribution of the interlocking and shearing-off forces between the first thread of the locking screw and the internal thread of the implant. In another example, the functional first thread and the superimposed second thread of the thread pattern section may have a different pitch.

**[0011]** In an example, the functional thread may be a right hand thread and the superimposed second thread may be a left hand thread. In another example, the functional thread is a left hand thread and the second thread is a right hand thread. Usually the locking screw is turned in the right hand direction when fastened. Hence, any special skills may not be required to operate or even to manufacture the functional thread section of the locking screw.

**[0012]** In an example, the orthopedic locking screw may further comprise a neck thread arranged between the thread pattern section and a screw head of the locking screw. The neck thread may have an identical pitch and direction as the functional first thread. Hence, the neck thread and the functional thread can be continuously formed on the shaft of the locking screw. In another example, the neck thread may have a different pitch and direction as the functional first thread.

**[0013]** In an example, a cross section of the thread pattern section of the orthopedic locking screw within a plane along a central axis defined by the screw may have an initial major diameter. Further, a screw neck area near a screw head may have a neck major diameter, and the neck major diameter may be larger than the initial major diameter. The major diameter of the thread is to be understood as the larger of two extreme diameters delimiting the height of the thread profile, as a cross-sectional view is taken in a plane containing the axis of the threads. For a screw, this is generally its outside diameter. Hence, the neck thread may serve to interlock the locking screw in a cortex of a bone, when the locking screw is fastened in the bone or to the implant. The major diameter from the neck thread to the thread pattern section may be reduced steadily along the longitudinal direction of the shaft or stepwise between the screw head and the thread pattern section.

**[0014]** In an example, the orthopedic locking screw further comprises a tip thread arranged between the thread pattern section and a screw tip. The tip thread may have an identical pitch and direction as the functional first thread. Hence, the tip thread and the functional thread can be continuously formed on the shaft of the locking screw. In another example, the tip thread may have a different pitch and direction as the functional first thread.

**[0015]** As stated above, a cross section of the thread pattern section of the orthopedic locking screw may have an initial major diameter. A screw tip area near the screw tip may have a tip major diameter and the tip major diameter may be smaller than the initial major diameter.

Accordingly, the locking screw passing the implant also can be fastened on the opposite side to an insertion location of the locking screw in the bone. The major diameter from the thread pattern section to the tip thread may be reduced steadily along the longitudinal direction of the shaft or stepwise between the thread pattern section and the screw tip.

**[0016]** In an example, the orthopedic locking screw may further comprise a screw head having a (counter) screw thread. The (counter) screw thread may have a direction similar or opposite to the functional thread. In the latter case, the orthopedic locking screw can be held by a screw driver engaged with, and preferably threaded onto, the counter screw thread. The counter screw thread may be arranged outwardly on the screw head in an opposite direction to the fastening direction of the locking screw. For example, when the locking screw is fastened in the orthopedic implant in the right hand direction, the locking screw may be firmly held to the screw driver, because the screw head is screwed in a left hand direction into the screw driver. As a result, it may not be necessary to hold the screw with a second hand.

**[0017]** In an example, the second thread intersecting the functional first thread may configure thread turns of the functional first thread for an override of the normal operation of the first thread when forcefully removing the screw out of the implant. The functional thread of the thread pattern section configured for an override of its thread turns may allow for removal of a retained portion of the screw without damaging the adjacent bone tissue. In other words, the locking screw may interact with the internal thread of the orthopedic implant by means of its functional thread configured for an override of its thread turns. The term "configured for an override" may be understood in that the thread turns of the functional thread of the locking screw may be reduced to allow a shearing off and thereby a striking or hammering of the screw throughout the implant to remove the locking screw when it is broken. A residual shear surface of the thread turns may be still sufficient to allow an interaction between the thread turns of the functional thread of the locking screw and the internal thread of the orthopedic implant.

**[0018]** In an example, the second thread intersecting the functional first thread may configure a shearing area of the thread turns of the functional first thread for an intended shearing-off when forcefully removing the orthopedic locking screw in case of a failure of the locking screw. The shearing area may be arranged on a proximal portion of the shaft of the locking screw, may extend in a longitudinal direction of the screw and may serve as a main contact surface of the locking screw to interlock with the internal thread in the bore of the orthopedic implant. As a result, the shearing area of the functional thread allows a locking in the bore of the implant between the internal thread of the implant and the functional thread of the screw and to be easily sheared off in case the broken locking screw has to be extracted.

**[0019]** In an example, the orthopedic implant is an in-

tramedullary nail and the functional thread of the thread pattern section is configured for a cooperation with an inner thread of a bore of the intramedullary nail. Since a breakage of the orthopedic locking screw often occurs in such an intramedullary nail, it is in this case particularly advantageous if the screw can be easily removed.

**[0020]** In an example, the shaft of the orthopedic locking screw may comprise a cannulation.

**[0021]** According to the present invention, also an orthopedic locking system is presented. The orthopedic locking system comprises above described orthopedic locking screw and an orthopedic implant. The orthopedic locking screw is configured for a cooperation with a thread in the orthopedic implant. The orthopedic locking screw may allow a stable transverse locking at a distal end of the orthopedic implant.

**[0022]** According to another aspect of the present invention, a manufacturing method for an orthopedic locking screw is presented. It comprises the following steps:

- applying a first thread of a thread pattern section onto a longitudinally extending shaft with a first direction, the first thread being a functional thread configured for the cooperation with the thread of the orthopedic implant, and
- applying a second thread of the thread pattern section onto the longitudinally extending shaft with a second direction opposite to the first direction of the first thread. The second thread is superimposed on the first thread and at least partially intersects the first thread.

**[0023]** The thread pattern section may comprise grooves between essentially rhombic protrusions. The functional first thread and the superimposed second thread of the thread pattern section may have the same pitch. The functional thread may be a right hand thread.

**[0024]** It shall be understood that the orthopedic locking screw and the orthopedic locking system according to the independent claims have similar and/or identical preferred embodiments, in particular, as defined in the dependent claims. It shall be understood further that a preferred embodiment of the invention can also be any combination of the dependent claims with the respective independent claim.

**[0025]** These and other aspects of the present invention will become apparent from and be elucidated with reference to the embodiments described hereinafter.

#### BRIEF DESCRIPTION OF THE DRAWINGS

##### **[0026]**

Fig. 1 is a side cross-sectional view of an orthopedic implant.

Fig. 2a and Fig. 2b are side views of orthopedic locking screws according to embodiments of the present invention.

Fig. 3a is a perspective view of an orthopedic locking screw before forming a thread.

Fig. 3b is a perspective view of the orthopedic locking screw of Fig. 3a with a left hand thread.

Fig. 3c is a perspective view of the orthopedic locking screw of Fig. 3a with a right hand thread.

Fig. 3d is a perspective view of the orthopedic locking screw of Fig. 3a after applying left and right hand threads.

Fig. 4a and Fig. 4b are side cross-sectional views of an orthopedic locking system according to an embodiment of the present invention.

#### DETAILED DESCRIPTION

**[0027]** In orthopedic procedures, it is often necessary to secure an orthopedic implant. In such cases, an orthopedic fastening system may be provided in which an orthopedic locking screw secures an orthopedic implant to a bone or to another orthopedic implant.

**[0028]** As shown in Fig. 1, an orthopedic implant 200 generally comprises at least a bore 210 and an internal thread 220 to secure a locking screw (not shown). In some arrangements, the orthopedic implant may be, for example, an intramedullary bone nail, with one or more bores extending partially or completely therethrough for receiving a locking screw therein. The orthopedic implant is not limited to being an intramedullary bone nail. The orthopedic implant may be, for example, a plate or bone connector, or another type of orthopedic implant.

**[0029]** Figures 2a and 2b illustrate an orthopedic locking screw 100 according to an embodiment of the present invention. The orthopedic locking screw 100 comprises a shank or shaft 110, a screw head 120 and a screw tip 130. The shaft 110 may have an elongate, form. The shaft 110 may be generally cylindrical, having a substantially constant major diameter extending between the screw head 120 and the screw tip 130. The locking screw 100 may have a region of smaller and tapering diameter at the end near the screw tip.

**[0030]** The screw head 120 at a proximal end of the locking screw 100 comprises a recess 121 and an outer thread 122. The recess 121 is configured to receive a rotational drive, such as a screw driver or wrench. Hence, the orthopedic locking screw 100 may be rotated around a longitudinal axis of the shaft 110 in order to operably engage the orthopedic locking screw 100 with bone 300 (see Fig. 4a) and/or the implant 200. The recess 121 is not limited to a particular shape. For example, the recess 121 may have a socket adapted to receive a square or hexagonal drive, or a slot for receiving a screw driver. The outer thread 122 of the screw head 120 is configured in an opposite direction to the fastening direction of the locking screw 100 to be held by the screw driver by means of a self-holding mechanism during threading of the locking screw 100 into a mating structure, such as the orthopedic implant 200.

**[0031]** The screw tip 130 extends from the distal end

of the shaft 110. The screw tip 130 tapers to a point or, alternatively, to a blunt nose, such as a rounded, flat, or truncated nose. The tip 130 may comprise a self-tapping element 131 for tapping a bore into bone 300. The self-tapping element 131 may comprise at least one, and optionally two or more diametrically opposite axial grooves 132 extending along the tip 130. The axial grooves 132 may be at least partially helical. The axial grooves 132 define an edge that may act to scoop away bone or other material as the orthopedic locking screw 100 is rotated and advanced into the bone 300.

**[0032]** The orthopedic locking screw 100 may be more particularly detailed by a thread pattern section 150, a neck 160 between the head 120 and the thread pattern section 150, and a transition section between the thread pattern section 150 and the tip 130. As shown in Fig. 2a, the head 120 of the locking screw 100 may be configured to have a bigger major diameter than a major diameter of the shaft 110. Further, in one arrangement, one or both of a major diameter of the neck 160 and a major diameter of the transition section 170 may be similar to the major diameter of the thread pattern section 150. In the present embodiment, the major diameter of the neck 160 is larger than the major diameter of the thread pattern section 150, and a major diameter of the tip 130 is smaller than the major diameter of the thread pattern section 150. Hence, the transition section 170 is provided with a taper from the thread pattern section 150 to the distal end of the locking screw, i.e. the tip 130. In this manner, the transition section 170 is used to draw the shaft 110 through the implant bore 220.

**[0033]** Fig. 3a to Fig. 3d show an exemplary manufacturing method of the locking screw according to an embodiment of the present invention. As a first step to shape the thread pattern section 150 of the locking screw 100, a left hand thread 152 is arranged in the thread pattern section 150, as shown by a comparison of Fig. 3a and Fig. 3b. Afterwards, a right hand thread 151 is arranged at least partially, and preferably completely, from the neck 160 to the distal end of the locking screw 100 (comparison between Fig. 3a and Fig. 3c). Accordingly, the neck portion 160, the transition portion 170 and the tip portion 130 are threaded in the same direction and with the same pitch as the thread pattern section 150. The right hand thread serves as a functional thread 151 configured to cooperate with an internal thread, such as the inner thread 220 of the orthopedic implant 200. Since the left hand thread and the right hand thread intersect each other in the thread pattern section 150, the thread pattern section 150 is constituted of remaining flanks of both threads and grooves 153 between the flanks accordingly. As shown by Fig. 3b and Fig. 3c, the pitch of the left hand thread is larger than the pitch of the right hand thread.

**[0034]** The remaining flanks in the thread pattern section 150 are provided in the form of rhombic protrusions 154. The thread turns of the functional thread 151 in the thread pattern section 150 include a shearing area provided by the rhombic protrusions 154. The thread pattern

section 150 is configured for the cooperation with the inner thread 220 of the orthopedic implant 200 and for an intended shearing-off when removing the orthopedic locking screw 100 in a case of a failure of the screw 100.

**[0035]** Fig. 4a and Fig. 4b show an orthopedic locking system using an orthopedic locking screw 100. An orthopedic implant 200 such as an intramedullary nail is inserted in a bone 300 comprising marrow 310. The marrow 310 is circumferentially encased by cortex as illustrated by a first cortex portion 320 and a second cortex portion 330. In a further step, a tip 130 of the locking screw 100 is inserted through the first cortex portion 320 and marrow 310 into a bore 210 of the orthopedic implant 200. A shaft 110 is advanced into the bore 210 in any sufficient manner, such that the tip 130 is advanced through the bore 210. Since the major diameter of the tip 130 is different (e.g., smaller) from the major diameter of a thread pattern section 150, the tip 130 operates to advance (e.g., by pushing) the shaft 110 forward through the bore 210 of the orthopedic implant 200. When the thread pattern section 150 comes into engagement with an internal thread 220 of the bore 210, the shaft 110 may be rotated, for example with a screw driver engaged at a screw head to advance the shaft 110 into and/or through the bore 210. Accordingly, the thread pattern section 150 engages the bore 210 so as to form a mechanical intermeshing fit with the internal thread 220 of the bore 210 as shown in Fig. 4a and Fig. 4b. When the tip 130 comes into contact with the bone 300 on the opposite side of the orthopedic implant 200, i.e., with the second cortex portion 330, the locking screw 100 is rotated further, so as to engage the tip 130 with the bone 300.

**[0036]** In case of a breakage of the locking screw 100 inside the bone 300, a proximal portion of the broken locking screw 100 may be removed by screwing out the screw 100 in the loosening direction using, for example, an appropriate screw driver. Further, a distal portion of the broken screw 100 may be removed by striking it at the broken side of the screw 100 in direction of the second cortex portion 330. The thread pattern section 150 generally cooperates with the internal thread 220 of the orthopedic implant 200 in an engaged state. However, the thread pattern section 150 also allows for overriding of the functional thread turns 151 and instead use of the left hand thread 152 in order to remove the broken screw 100 out of the implant 200. Hence, the broken locking screw 100 can be easily removed without injuring an adjacent bone tissue.

**[0037]** While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive. The invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing a claimed invention, from a study of the drawings, the disclosure, and the dependent claims.

**[0038]** In the claims, the word "comprising" does not

exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to a further advantage. Any reference signs in the claims should not be construed as limiting the scope.

## Aspects

### [0039]

1. An orthopedic locking screw (100) configured for a cooperation with an implant thread (220) of an orthopedic implant (200), the orthopedic locking screw (100) comprising:

a longitudinally extending shaft (110) comprising a thread pattern section (150) extending at least partially along the shaft (110), the thread pattern section (150) comprising a first thread (151) with a first direction and a second thread (152) with a second direction opposite to the first direction of the first thread (151), the first thread being configured for the cooperation with the implant thread (220) of the orthopedic implant (200) and the second thread (152) is superimposed on the first thread (151) and intersects the first thread (151).

2. The orthopedic locking screw (100) according to aspect 1, wherein the thread pattern section (150) comprises essentially rhombic protrusions (154) and grooves (153) between the essentially rhombic protrusions (154).

3. The orthopedic locking screw (100) according to one of the preceding aspects, wherein the first thread (151) and the second thread (152) of the thread pattern section (150) have the same pitch.

4. The orthopedic locking screw (100) according to one of the preceding aspects, wherein the first thread (151) is a right hand thread and the second thread (152) is a left hand thread.

5. The orthopedic locking screw (100) according to one of the preceding aspects, further comprising a screw head (120) and a neck thread (160) arranged between the thread pattern section (150) and the screw head (120).

6. The orthopedic locking screw (100) according to the preceding aspect, wherein the neck thread (160) has an identical pitch and direction as the first thread (151).

7. The orthopedic locking screw (100) according to

one of the preceding aspects, wherein, in a cross section, the thread pattern section (150) has an initial major diameter and a screw neck area between a screw head (120) of the screw (100) and the thread pattern section (150) has a neck major diameter, wherein the initial major diameter is smaller than the neck major diameter.

8. The orthopedic locking screw (100) according to one of the preceding aspects, further comprising a screw tip (130) and tip thread (170) arranged between the thread pattern section (150) and the screw tip (130).

9. The orthopedic locking screw (100) according to the preceding aspect, wherein the tip thread (170) has an identical pitch and direction as the first thread (151).

10. The orthopedic locking screw (100) according to one of the preceding aspects, wherein, in a cross section, the thread pattern section (150) has an initial major diameter and a screw tip area between the thread pattern section (150) and a screw tip (130) of the screw (100) has a tip major diameter, and wherein the initial major diameter is larger than the tip major diameter.

11. The orthopedic locking screw (100) according to one of the preceding aspects, further comprising a screw head (120) having a counter screw thread (122) with a direction opposite to the first thread (151).

12. The orthopedic locking screw (100) according to one of the preceding aspects, wherein the second thread (152) opposite to the first thread (151) defines thread turns of the first thread (151) for an override when forcefully removing the screw (100) out of the implant (200).

13. The orthopedic locking screw (100) according to one of the preceding aspects, wherein the second thread (152) configures a shearing area of thread turns of the first thread (151) for an intended shearing-off when forcefully removing the orthopedic locking screw (100) in case of a failure of the screw (100).

14. The orthopedic locking screw (100) according to one of preceding aspects, wherein the orthopedic implant (200) is an intramedullary nail and the first thread (151) of the thread pattern section (150) of the orthopedic locking screw (100) is configured for a cooperation with the inner thread (220) of a bore (210) in the intramedullary nail.

15. An orthopedic locking system, comprising the orthopedic locking screw (100) according to one of

the preceding aspects and an orthopedic implant (200), wherein the orthopedic locking screw (100) is configured for a cooperation with a thread (220) in the orthopedic implant (200).

16. A method for manufacturing an orthopedic locking screw (100) for a cooperation with a thread (220) in an orthopedic implant (200) comprising the steps of:

applying a first thread (151) of a thread pattern section (150) onto a longitudinally extending shaft (110) with a first direction, the first thread (151) being a functional thread configured for the cooperation with the thread (220) of the orthopedic implant (200); and  
applying a second thread (152) of the thread pattern section (150) onto the longitudinally extending shaft (110) with a second direction opposite to the first direction of the first thread (151) such that the second thread (152) is superimposed on the first thread (151) and at least partially intersects the first thread (151).

thopedic implant (200);  
applying a second thread (152) of the thread pattern section (150) onto the longitudinally extending shaft (110) with a second direction opposite to the first direction of the first thread (151) such that the second thread (152) is superimposed on the first thread (151) and at least partially intersects the first thread (151); and  
applying a counter screw thread (122) with a direction opposite to the first thread (151) onto a screw head (120) .

## Claims

1. An orthopedic locking screw (100) configured for a cooperation with an implant thread (220) of an orthopedic implant (200), the orthopedic locking screw (100) comprising:

a longitudinally extending shaft (110) comprising a thread pattern section (150) extending at least partially along the shaft (110),  
the thread pattern section (150) comprising a first thread (151) with a first direction and a second thread (152) with a second direction opposite to the first direction of the first thread (151), the first thread being configured for the cooperation with the implant thread (220) of the orthopedic implant (200) and the second thread (152) is superimposed on the first thread (151) and intersects the first thread (151),  
wherein the orthopedic locking screw (100) further comprises a screw head (120) having a counter screw thread (122) with a direction opposite to the first thread (151).

2. A method for manufacturing an orthopedic locking screw (100) for a cooperation with a thread (220) in an orthopedic implant (200) comprising the steps of:

applying a first thread (151) of a thread pattern section (150) onto a longitudinally extending shaft (110) with a first direction, the first thread (151) being a functional thread configured for the cooperation with the thread (220) of the or-

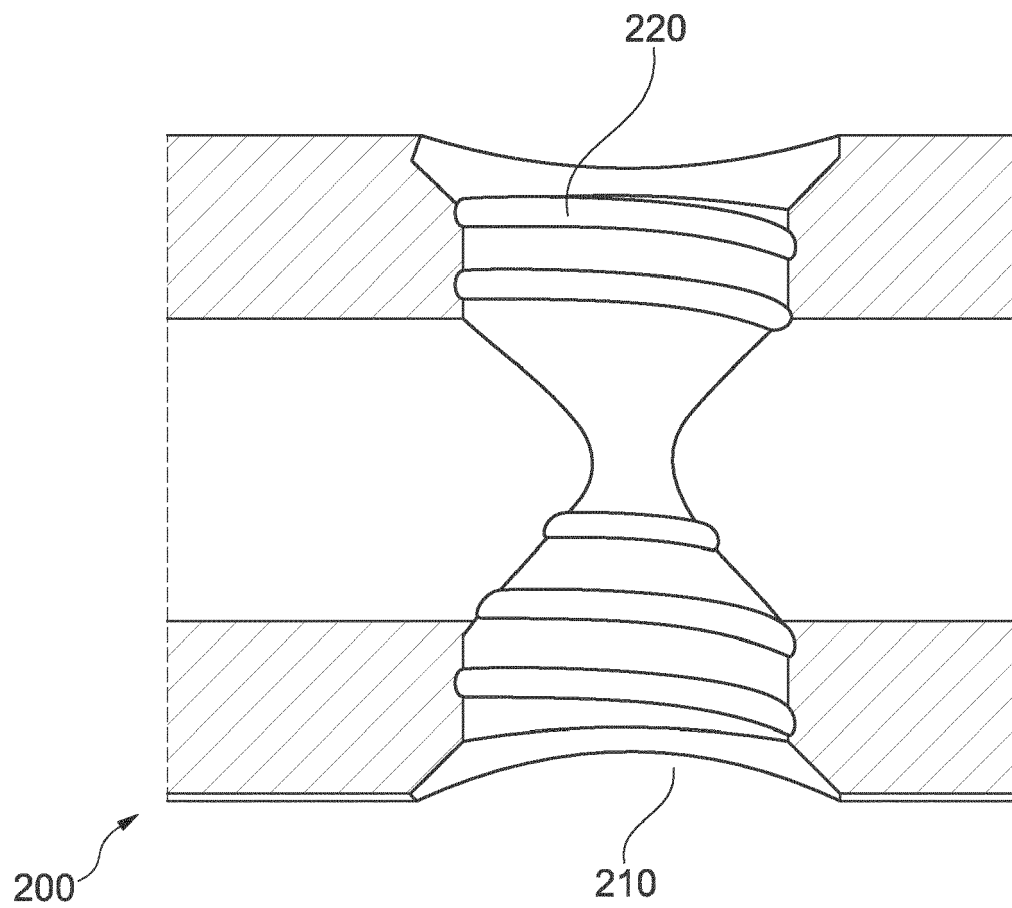


Fig. 1



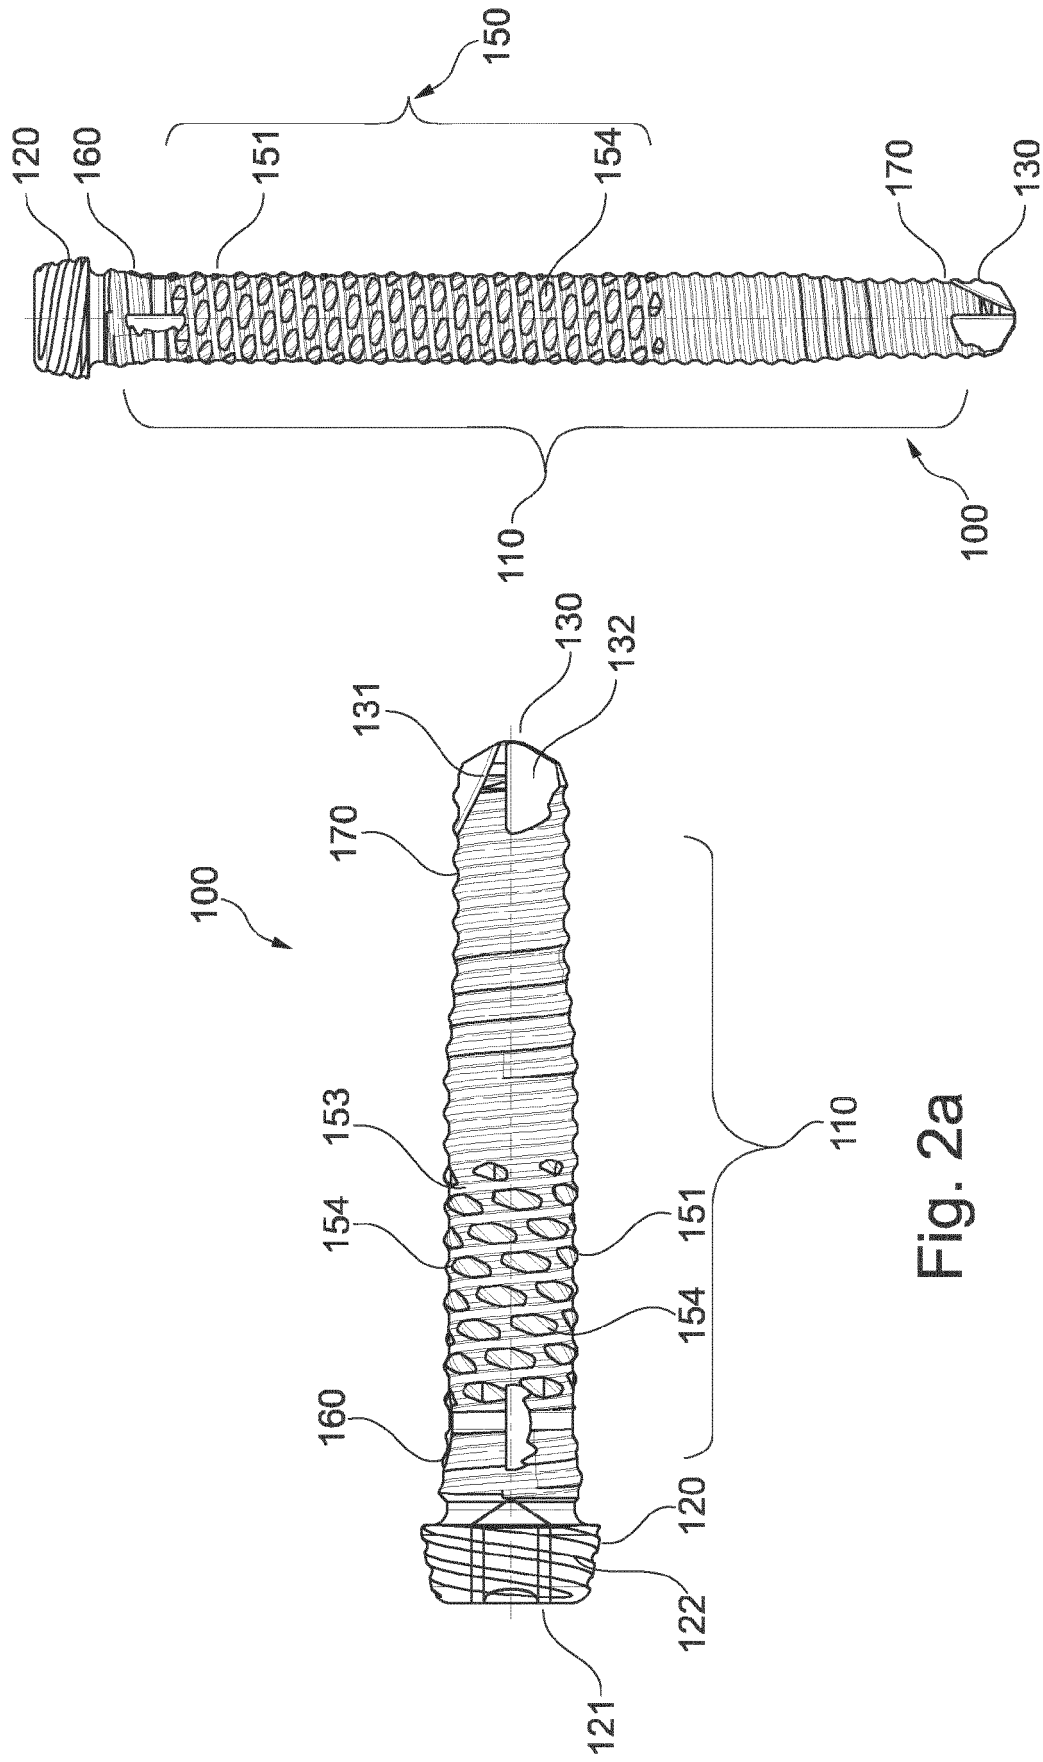
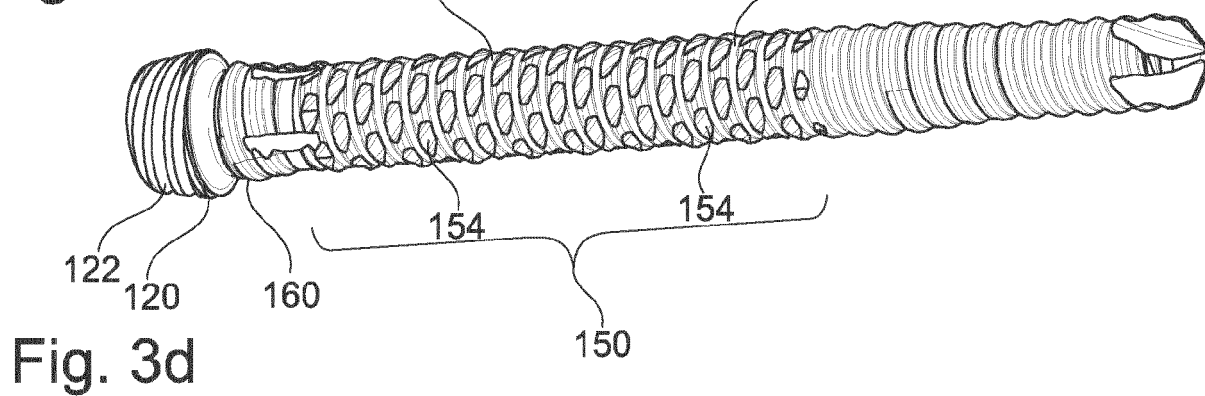
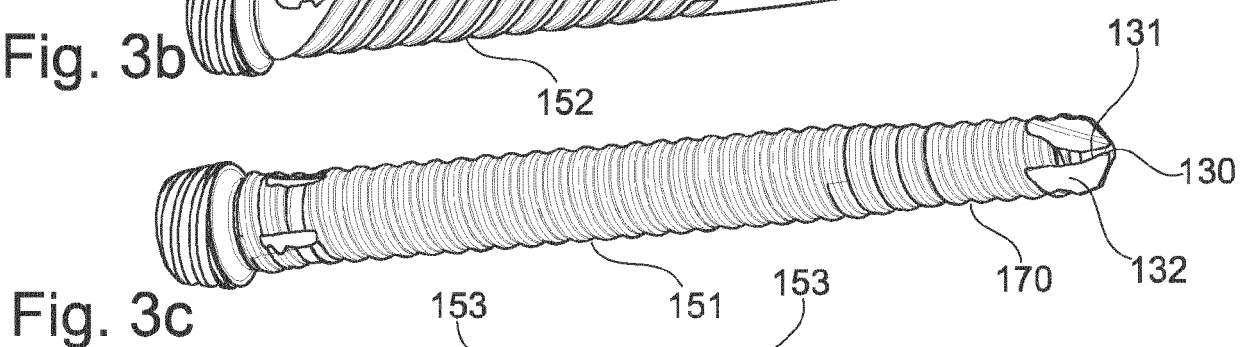
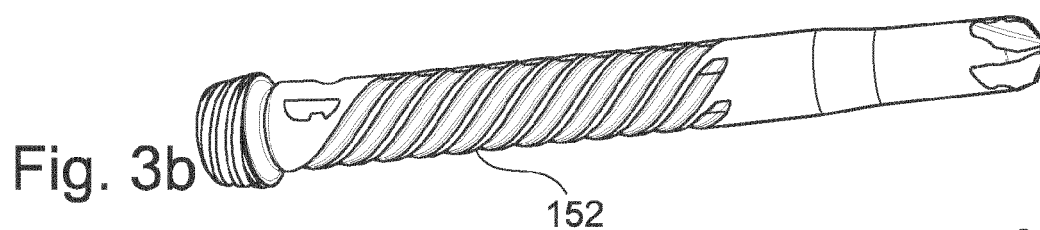
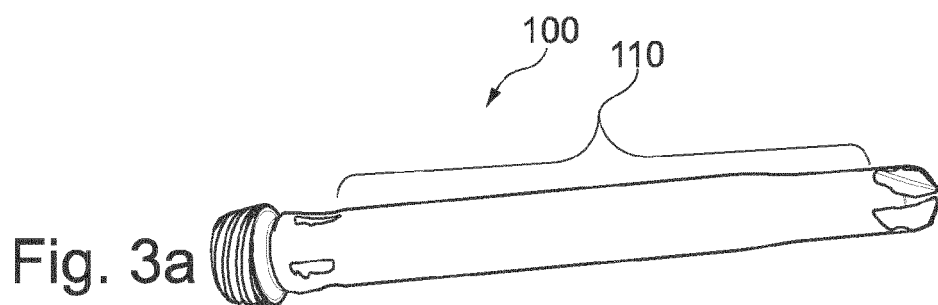


Fig. 2b

Fig. 2a



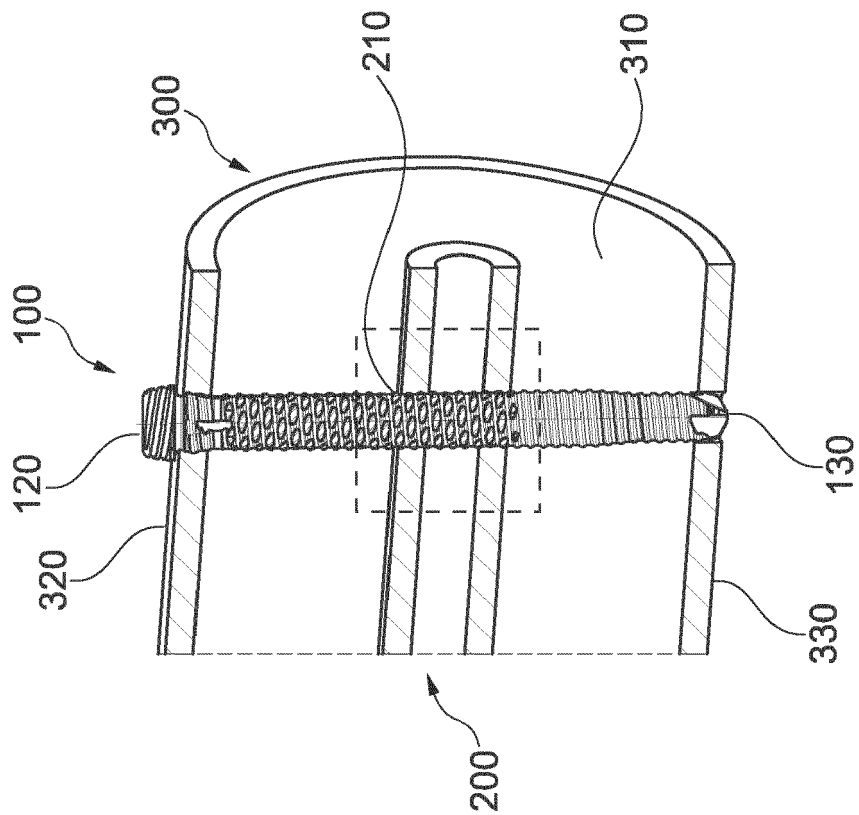


Fig. 4a

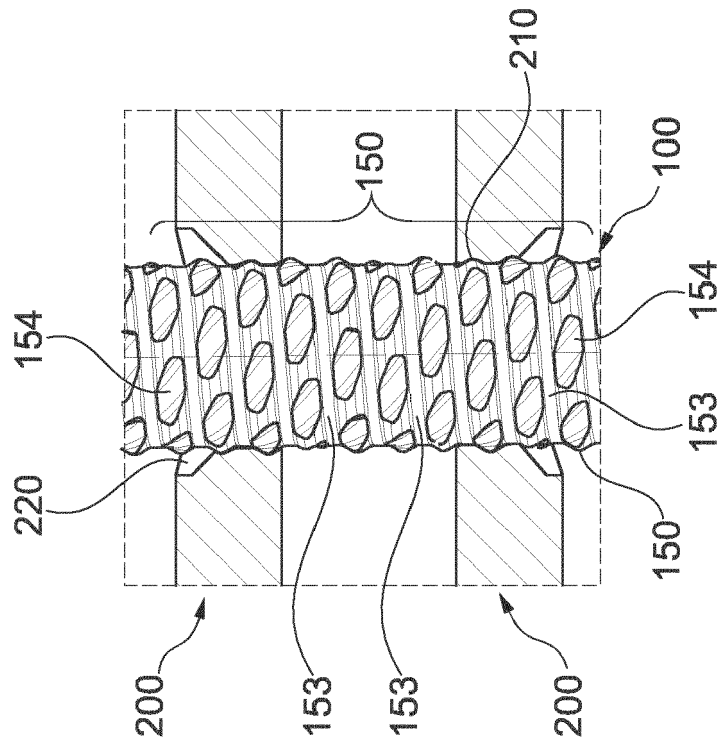


Fig. 4b



## EUROPEAN SEARCH REPORT

 Application Number  
 EP 20 17 0777

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2011/195380 A1 (GIORNO THIERRY [US]) 11 August 2011 (2011-08-11) * figures 1, 4, 5 *	1,2	INV. A61B17/72 A61B17/86
Y	EP 1 864 616 A1 (BIORETEC OY [FI]) 12 December 2007 (2007-12-12) * figure 1h *	1	
A	WO 2017/136801 A1 (HUWAIS IP HOLDING LLC [US]) 10 August 2017 (2017-08-10) * figure 12 *	1	
X	WO 2014/093487 A1 (HUWAIS SALAH [US]) 19 June 2014 (2014-06-19) * figure 16 *	1	
X	US 2014/236242 A1 (ROBINSON JAMES C [US]) 21 August 2014 (2014-08-21) * figures 8-10 *	1,2	
X	US 2014/329202 A1 (ZADEH PARSA T [US]) 6 November 2014 (2014-11-06) * figures 23, 26 *	1,2	TECHNICAL FIELDS SEARCHED (IPC) A61B
X	WO 2014/149746 A1 (INNOVISION INC [US]) 25 September 2014 (2014-09-25) * figure 4 *	1,2	
Y	US 2014/214034 A1 (RAYES FADY [CA] ET AL) 31 July 2014 (2014-07-31) * figure 25 *	1	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 14 July 2020	Examiner Fernández Arillo, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 20 17 0777

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-07-2020

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011195380 A1	11-08-2011	US 2011195380 A1	11-08-2011
		US 2018078297 A1	22-03-2018
		US 2019167324 A1	06-06-2019
EP 1864616 A1	12-12-2007	AT 450205 T	15-12-2009
		EP 1864616 A1	12-12-2007
		ES 2337409 T3	23-04-2010
		FI 20065385 A	27-12-2007
		US 2007299449 A1	27-12-2007
WO 2017136801 A1	10-08-2017	AU 2017214679 A1	16-08-2018
		BR 112018016056 A2	26-12-2018
		CA 3013071 A1	10-08-2017
		CN 108697449 A	23-10-2018
		EP 3410970 A1	12-12-2018
		JP 2019506220 A	07-03-2019
		KR 20180109988 A	08-10-2018
		TW 201729763 A	01-09-2017
		US 2020155210 A1	21-05-2020
		WO 2017136801 A1	10-08-2017
		ZA 201805180 B	26-06-2019
WO 2014093487 A1	19-06-2014	AU 2013359342 A1	14-05-2015
		BR 112015012009 A2	11-07-2017
		CA 2894651 A1	19-06-2014
		CN 105120792 A	02-12-2015
		DK 2931169 T3	08-10-2018
		EP 2931169 A1	21-10-2015
		ES 2687858 T3	29-10-2018
		HK 1210403 A1	22-04-2016
		IL 239190 A	30-04-2020
		JP 6301949 B2	11-04-2018
		JP 2016503666 A	08-02-2016
		KR 20150092238 A	12-08-2015
		KR 20170056030 A	22-05-2017
		US 2015297275 A1	22-10-2015
		WO 2014093487 A1	19-06-2014
		ZA 201504893 B	29-06-2016
US 2014236242 A1	21-08-2014	NONE	
US 2014329202 A1	06-11-2014	NONE	
WO 2014149746 A1	25-09-2014	AU 2014237911 A1	17-09-2015
		AU 2018202662 A1	10-05-2018
		CA 2902714 A1	25-09-2014

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 17 0777

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-07-2020

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2967694 A1	20-01-2016
		JP 6411446 B2	24-10-2018
		JP 2016515857 A	02-06-2016
		US 2015272646 A1	01-10-2015
		US 2018256232 A1	13-09-2018
		WO 2014149746 A1	25-09-2014
-----			
US 2014214034 A1	31-07-2014	CA 2897122 A1	31-07-2014
		EP 2948080 A1	02-12-2015
		US 2014214034 A1	31-07-2014
		US 2015366591 A1	24-12-2015
		WO 2014113879 A1	31-07-2014
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82