



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 3 715 273 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
30.09.2020 Bulletin 2020/40

(51) Int Cl.:
B65D 5/74 (2006.01)
B65D 55/16 (2006.01)

(21) Application number: **19165231.2**

(22) Date of filing: **26.03.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Tetra Laval Holdings & Finance S.A.**
1009 Pully (CH)

(72) Inventors:
• **SORBARA, Angelo**
42048 Rubiera (IT)

- **MARTINI, Pietro**
43122 Parma (IT)
- **DE PAOLA, Rocco**
41122 Modena (IT)
- **BERTANI, Giulio**
41012 Carpi (IT)
- **CANI, Franco**
41124 Modena (IT)

(74) Representative: **Tetra Pak - Patent Attorneys SE**
AB Tetra Pak
Patent Department
Ruben Rausings gata
221 86 Lund (SE)

(54) OPENING DEVICE FOR A PACKAGE CONTAINING A POURABLE PRODUCT

(57) There is described an opening device (3) configured to be applied to a package (1) containing a pourable product; the opening device (3) comprises:
- a cap (12) configured to close a passage (11) for the pourable product obtainable at an opening area of the package (1); and
- tamper-evidence means (21) initially connected to the

cap (12) by means of at least one breakable connecting bridge configured to break during first opening of the opening device (3);

wherein the cap (12) is configured to be tethered to the package (1) by means of the tamper-evidence means (21).

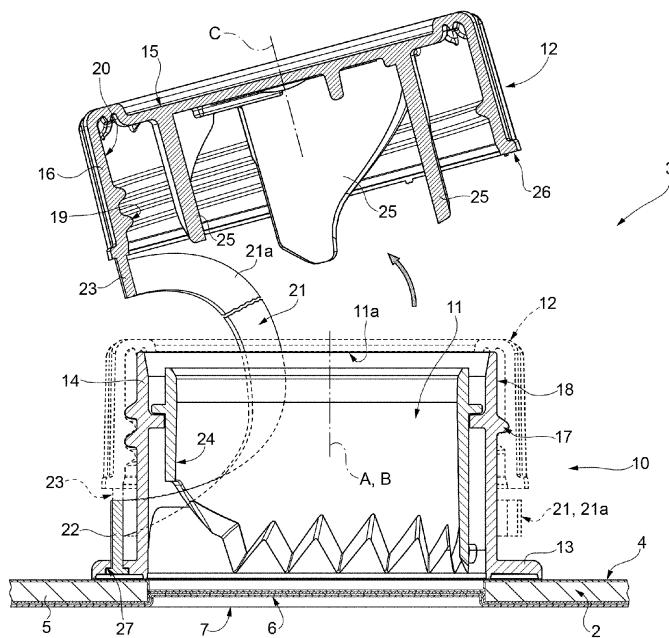


FIG. 2

Description**TECHNICAL FIELD**

[0001] The present invention relates to an opening device, in particular to a reclosable opening device, configured to be applied to a package containing a pourable product, preferably a pourable food product.

BACKGROUND ART

[0002] As it is generally known, many pourable food products, such as fruit juice, UHT (ultra-high temperature-treated) milk, wine, tomato sauce, etc., are sold in packages made of sterilized packaging material.

[0003] A typical example is the parallelepiped-shaped package for pourable food products known as Tetra Brik Aseptic (registered trademark), which is made by folding and sealing a laminated sheet of packaging material.

[0004] In particular, the packaging material has a multilayer structure substantially comprising a base layer for stiffness and strength, which may be made of fibrous material, e.g. paper or mineral-filled polypropylene material, and a number of lamination layers made of heat-seal plastic material, e.g. polyethylene films, covering both sides of the base layer.

[0005] In the case of aseptic packages for long-storage products, such as UHT milk or fruit juice, the packaging material also comprises a layer of gas-barrier material, e.g. aluminum foil or ethyl vinyl alcohol (EVOH) film, which is superimposed on a layer of heat-seal plastic material, and is in turn covered with another layer of heat-seal plastic material. This latter layer of plastic material forms the inner face of the package eventually contacting the pourable food product.

[0006] Packages of this sort are normally produced on fully automatic packaging machines, in which a continuous tube is formed from the sheet of packaging material.

[0007] Furthermore, the sheet of packaging material is sterilized in the packaging machine by applying a chemical sterilization agent, which is then removed after sterilization is completed.

[0008] Subsequently, the sheet of packaging material is maintained in a closed, sterile environment and is folded and sealed longitudinally to form the tube.

[0009] In order to complete the forming operations, the tube is filled from above, by means of a pipe, with the pourable food product and is formed, sealed and subsequently cut along equally spaced transversal cross sections.

[0010] Pillow packs are obtained thereby, which have a longitudinal sealing band, a top transversal sealing band and a bottom transversal sealing band, and which are then folded mechanically to form respective finished substantially parallelepiped-shaped packages.

[0011] Alternatively, the packaging material may be cut into blanks, which are formed into packages on forming spindles, and the resulting packages are filled with the

food product and sealed. One example of such package is the so-called "gable top" package commonly known by the trade name Tetra Rex (registered trademark).

[0012] To open the packages described above, various solutions have been proposed, one of which involves the use of reclosable opening devices made of plastic material.

[0013] Opening devices of such type generally comprise:

- 10 - a frame defining an opening and fitted over a hole or a pierceable or tear-off portion in a wall of the package; and
- a cap configured to be coupled to the frame in order to close the opening.

[0014] According to a known solution, the frame is fitted over a so-called prelaminated hole, i.e. a hole formed through the base layer only and covered, by means of a lamination process, by the other lamination layers of the packaging material, including the layer of gas-barrier material.

[0015] In other words, the frame is fitted, typically glued, onto the pierceable portion of the prelaminated hole, which is made of such lamination layers.

[0016] According to an alternative solution, the pierceable portion may be defined by a patch attached to the packaging material to close a hole formed, in this case, through the full thickness of the packaging material.

[0017] Threaded opening devices are known, in which the frame typically comprises an externally threaded, substantially cylindrical-shaped collar, whereas the cap comprises an internal thread and is initially screwed to the collar. Furthermore, the cap is normally injection-molded integrally with a relative tamper-evidence ring, which is coaxially connected to the cap itself by means of a plurality of breakable bridges and which is configured to remain fitted to the collar once the bridges are broken and the cap is unscrewed.

[0018] It is known in the field that, after unsealing the cap, i.e. after detaching the cap from the tamper-evidence ring and unscrewing the cap from the frame by applying torque, the user must also remove (i.e. cut or tear) the pierceable portion covering the prelaminated hole, in order to access the inside of the package.

[0019] For this purpose, according to a known configuration, the opening device comprises a pull-off tongue coupled to the pierceable portion and configured to be torn by the user, once the cap has been unscrewed from the frame.

[0020] According to an alternative solution, the known opening devices comprise a substantially tubular cutting member screwed inside the collar and having an edge with a number of substantially triangular end teeth, which cooperate with, and partly detach, the pierceable portion from the relative wall, preferably with the exception of a small-angle portion, so as to avoid the torn pierceable portion to fall into the inside of the package after cutting.

[0021] More precisely, the cutting member is activated by the cap by means of a one-way ratchet-type transmission means, operated during disengagement of the cap from the collar of the frame. In detail, the cutting member is movable along a spiral path with respect to the frame, from a raised rest position, in which the end teeth face the pierceable portion, into successive lowered cutting positions, in which the end teeth interact with the pierceable portion, thereby cutting the pierceable portion.

[0022] It is known in the field the constantly growing need for reducing the environmental impact that comes along with packaging and bottling of foodstuff and non-foodstuff products. In particular, due care must be taken with regard to the plastic components of the packages, which can pollute aquatic and terrestrial environments.

DISCLOSURE OF INVENTION

[0023] It is therefore an object of the present invention to provide an opening device for a package containing a pourable product, which is designed to meet the above-mentioned need in a straightforward and low-cost manner.

[0024] This object is achieved by an opening device as claimed in claim 1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] A non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a top portion of a sealed package for containing pourable products, onto which an opening device according to the present invention is fitted;

Figure 2 is a larger-scale, partially sectioned side view of the opening device and package of Figure 1, with parts removed for clarity;

Figure 3 is a larger-scale sectioned side view, with parts removed for clarity, of a detail of the opening device and package of Figure 2 in an assembling condition; and

Figure 4 is a further view of the detail of Figure 3, in a further assembling condition preceding the assembling condition shown in Figure 3.

BEST MODE FOR CARRYING OUT THE INVENTION

[0026] With reference to Figure 1, number 1 indicates as a whole a package made of a multilayer sheet of packaging material 2, adapted to contain a pourable product, and having a wall, in particular a top wall 4, onto which an opening device 3, preferably made of plastic material, is fitted.

[0027] In particular, package 1 is adapted to contain a pourable food product, such as milk, water, fruit juice or the like.

[0028] In the example shown, opening device 3 is fitted to an opening area of package 1 by conventional fixing means, such as adhesive substances, e.g. glue, or by means of welding systems, e.g. laser welding or micro-flame welding.

[0029] With reference to Figures 2 and 3, packaging material 2 comprises a base layer 5 for providing stiffness and strength, which may be made of fibrous material, e.g. paper or mineral-filled polypropylene material, and a cover layer arrangement 6.

[0030] In detail, cover layer arrangement 6 comprises a first covering layer 6a and a second covering layer 6b, both made of heat-seal plastic material, e.g. polyethylene film, and covering both sides of base layer 5.

[0031] Packaging material 2 comprises, at top wall 4 of package 1, a pierceable portion 7 which is covered externally, in use, by opening device 3 and which is configured to be detached, at least partially, from top wall 4 in order to allow the pourable product to exit package 1.

[0032] In one embodiment, pierceable portion 7 defines the opening area to which opening device 3 is fitted.

[0033] In another embodiment not shown, opening area may be a through hole made in the packaging material 2, in particular in the portion of packaging material 2 forming top wall 4.

[0034] In the present case, package 1 is an aseptic package for long-storage food products; accordingly, cover layer arrangement 6 also comprises a barrier layer 8 made of gas-barrier material, e.g. aluminum foil or ethyl vinyl alcohol (EVOH) film, which is superimposed on the second covering layer 6b and is in turn covered with a third covering layer 6c of cover layer arrangement 6, made of heat-seal plastic material.

[0035] In particular, third covering layer 6c forms the inner face of package 1 eventually containing the pourable food product.

[0036] In other words, first covering layer 6a, second covering layer 6b, barrier layer 8 and third covering layer 6c define lamination layers applied, by a lamination process, to base layer 5 when producing packaging material 2 in the form of a continuous sheet, before cutting and folding it to form package 1.

[0037] Pierceable portion 7 is defined by a through hole formed only through base layer 5 and covered by first covering layer 6a, second covering layer 6b, barrier layer 8 and third covering layer 6c.

[0038] In practice, pierceable portion 7 is made of the above-mentioned lamination layers and closes the through hole formed in base layer 5.

[0039] Preferably, pierceable portion 7 is an integral part of cover layer arrangement 6.

[0040] According to an alternative embodiment not shown, pierceable portion 7 may be made of only one or more of first covering layer 6a, second covering layer 6b, barrier layer 8 and third covering layer 6c. For example, pierceable portion 7 may be made solely of barrier layer 8.

[0041] In a further alternative embodiment not shown, pierceable portion 7 may be defined by a patch attached

to packaging material 2 to cover a hole formed, in this case, through the full thickness of packaging material 2. [0042] Pierceable portion 7 has an axis A, preferably orthogonal relative to top wall 4, in particular vertical when package 1 stands on a bottom wall (not shown and substantially parallel to top wall 4).

[0043] According to the non-limiting example shown, pierceable portion 7 has a substantially circular shape concentric to axis A.

[0044] With reference to Figures 1 to 3, opening device 3 comprises:

- a frame 10 defining a passage 11 for the pourable product ending with an opening 11a through which the pourable product is poured, in use, and fitted about pierceable portion 7, onto top wall 4 of package 1; and
- a cap 12 configured to cooperate in contact with frame 10 to close passage 11 and opening 11a.

[0045] In detail, opening 11a is arranged coaxially to axis A and cap 12 is configured to engage frame 10 coaxially to axis A to close passage 11.

[0046] More specifically, frame 10 comprises a base plate 13, preferably flat, configured to be attached to package 1 substantially parallel to top wall 4 and surrounding pierceable portion 7, and a cylindrical collar 14 projecting transversally, in particular orthogonally, from base plate 13, and having a longitudinal axis B coaxial, in use, to axis A. In particular, collar 14 coaxially defines passage 11. Hence, opening 11a is arranged coaxially also to axis B.

[0047] Cap 12 comprises a substantially flat circular portion 15 and a cylindrical portion 16, which projects from flat portion 15 along a longitudinal axis C of cap 12 itself and which is configured to coaxially engage collar 14 in order to close passage 11.

[0048] For this purpose, collar 14 is provided with an outer thread 17 extending onto an external lateral surface 18 of collar 14 itself, and cap 12 is provided with an inner thread 19 extending onto an internal lateral surface 20 of cylindrical portion 16.

[0049] In detail, outer thread 17 and inner thread 19 are configured to mutually engage so as to determine, in use and under the action of the user, unscrewing and screwing of cap 12 relative to frame 10, and therefore collar 14, thereby causing opening and closing of passage 11.

[0050] Opening device 3 further comprises tamper-evidence means, in particular a tamper-evidence band 21, preferably formed integrally with cap 12, for example injection-molded together with cap 12, and initially connected coaxially to a lower axial edge 26 of cap 12 at least by means of a number of breakable connecting bridges.

[0051] In detail, cap 12 is fitted initially to frame 10 in a closed position, in which cap 12 is screwed completely onto collar 14, with edge 26 and tamper-evidence band

21 still connected to one another.

[0052] In such closed position, tamper-evidence band 21 is arranged coaxially around collar 14.

[0053] More specifically, the axial distance of tamper-evidence band 21 from opening 11a is greater than the axial distance of outer thread 17 from opening 11a.

[0054] In practice, when cap 12 is in the above-mentioned sealed position, tamper-evidence band 21 is arranged beneath outer thread 17 of collar 14.

[0055] Once unsealed, cap 12 is moveable between:

- an open position, in which cap 12 is unscrewed off collar 14 and detached from frame 10; and
- the closed position, in which cap 12 is screwed again on collar 14, thereby closing passage 11 and opening 11a; and tamper-evidence band 21 is arranged coaxially around collar 14.

[0056] During first disengagement of cap 12 from collar

14, that is during first movement of cap 12 from its closed position to its open position, the connecting bridges initially connecting tamper-evidence band 21 and cap 12 are broken.

[0057] More specifically, after the first disengagement of cap 12 from collar 14, i.e. during first opening of opening device 3, the connecting bridges break, due to the torque applied thereto by the user, thereby at least partially unconstraining cap 12 from tamper-evidence band 21 and permitting the unscrewing of cap 12 off collar 14.

[0058] According to this non-limiting embodiment shown, opening device 3 further comprises a known tubular cutting member 24 which engages collar 14 axially and in a movable manner and is activated by cap 12 to interact with pierceable portion 7 to open package 1.

[0059] In detail, cutting member 24 is provided with cutting means (known per se and not described in detail) and is connected to collar 14 by means of a guiding arrangement such as thread elements or cam elements (also known per se and not described in detail) and is configured to move between a raised resting position and a lowered opening position, during first disengagement of cap 12 from collar 14.

[0060] In greater detail, in the raised resting position, cutting member 24 is entirely housed within collar 14, with the cutting means facing pierceable portion 7; in the lowered position, cutting member 24 projects axially from collar 14 to cut, penetrate and tear off pierceable portion 7 in a known manner, thereby allowing a fluid connection between the inside of package 1 and passage 11 (and also opening 11a).

[0061] Displacement of cutting member 24 is controlled via a one-way angular transmission device 25 carried by cap 12, in particular fitted to flat portion 15, in a manner known and not described in detail.

[0062] In an alternative embodiment not shown, opening device 3 comprises a pull-off tongue coupled to pierceable portion 7 and configured to be pulled by the user, once cap 12 has been unscrewed from collar 14,

in order to manually tear off pierceable portion 7.

[0063] According to an important aspect of the present invention, cap 12 is tethered to frame 10 by means of tamper-evidence band 21.

[0064] In particular tamper-evidence band 21 is so configured as to allow cap 12 to be unscrewed from collar 14 and to prevent cap 12 from being detached (and in particular disposed of separately) from frame 10, i.e. from package 1.

[0065] For this purpose, tamper-evidence band 21 comprises a first unbreakable connection rib 22 and a second unbreakable connection rib 23, where first connection rib 22 is fitted to frame 10 and second connection rib 23 is fitted to cap 12.

[0066] It is stated that the wording "unbreakable" is hereby intended to mean that such connection ribs will not break during normal operation of opening device 3, in contraposition with the breakable connecting bridges, which are destined to break during normal operation of opening device 3.

[0067] In detail, first connection rib 22 and second connection rib 23 are arranged at respective end portions of tamper-evidence band 21.

[0068] In greater detail, tamper-evidence band 21 comprises a connection portion 21a connecting first connection rib 22 and second connection rib 23 to one another.

[0069] Conveniently, connection portion 21a has a length such as to allow an almost complete winding of tamper-evidence band 21 coaxially around collar 14, thereby permitting a complete unscrewing of cap 12 off collar 14.

[0070] In view of the above, first connection rib 22 and second connection rib 23 are arranged in respective circumferential positions close to one another, when cap 12 is in its closed position.

[0071] Preferably, first connection rib 22 and second connection rib 23 are formed integrally with tamper-evidence band 21.

[0072] Conveniently, tamper-evidence band 21 is formed, for example by injection-molding, integrally with cap 12. Subsequently, the assembly defined by cap 12 and tamper-evidence band 21, which are therefore connected to one other by the above-mentioned breakable connecting bridges and by the unbreakable second connection rib 23, is fitted to frame 10.

[0073] Accordingly, after the first opening of opening device 3, i.e. after the first disengagement of cap 12 from collar 14, cap 12 is fitted, or connected, to tamper-evidence band 21 only by means of second connection rib 23.

[0074] Similarly, according to this non-limiting embodiment shown, tamper-evidence band 21 is fitted to frame 10 only by means of first connection rib 22.

[0075] In this specific example, second connection rib 23 is formed integrally with cap 12 and protrudes axially from edge 26 of cylindrical portion 16.

[0076] As visible in Figure 1 to 4, first connection rib

22 is fitted to base plate 13 of frame 10.

[0077] To this end, base plate 13 comprises a slit 27 configured to be engaged by first connection rib 22.

[0078] Accordingly, first connection rib 22 is, once cap 12 has been assembled to frame 10, rigidly coupled to slit 27. Hence, first connection rib 22 is angularly fixed with respect to axis B.

[0079] In view of the above, first connection rib 22 defines an anchor point for tamper-evidence band 21 relatively to frame 10, by means of which cap 12 is tethered to frame 10.

[0080] Moreover, since being rigidly coupled to frame 10 only at one end thereof, i.e. at first connection rib 22, while being connected to cap 12 at the opposite end thereof, i.e. at second connection rib 23, tamper-evidence band 21 allows and follows the rotation, in particular the counterclockwise rotation, of cap 12 about axis B, during unscrewing of cap 12 off collar 14.

[0081] Correspondingly, tamper-evidence band 21 also allows the clockwise rotation of cap 12 about axis B to screw cap 12 onto collar 14.

[0082] In this way, tamper-evidence band 21 tethers cap 12 to frame 10 without interfering with the normal operation of opening device 3, i.e. with the normal unscrewing and screwing of cap 12 off/onto collar 14.

[0083] Conveniently, slit 27 is obtained through base plate 13 peripherally with respect to collar 14. In particular, slit 27 is obtained substantially at the same radial distance from axis B as edge 26 of cap 12, when cap 12 is in its closed position.

[0084] As visible in Figures 3 and 4, slit 27 defines a through hole 28 passing through base plate 13 and comprising a first stretch 28a, opening towards top wall 4, and a second stretch 28b, extending from first stretch 28a and opening towards the opposite side relative to top wall 4.

[0085] In detail, first stretch 28a has a transversal extension greater than the transversal extension of second stretch 28b.

[0086] During assembly of cap 12 onto frame 10, first connection rib 22 is engaged into slit 27, entering through second stretch 28b.

[0087] In this condition, first connection rib 22 passes first through second stretch 28b and then through first stretch 28a.

[0088] In particular, first connection rib 22 comprises a meltable portion 22a configured to pass through the entire through hole 28 during assembling and configured to be melted, after the coupling is complete, and formed (compressed) so as to have a transversal extension greater than the transversal extension of second stretch 28b.

[0089] In this way, first connection rib 22 is rigidly coupled to base plate 13, and cap 12 is firmly tethered to frame 10.

[0090] According to an alternative embodiment not shown, first connection rib 22 is coupled to slit 27 by means of a snap-in coupling.

[0091] The operation of opening device 3 is described hereinafter with reference to Figure 1 and 2 and starting from a condition in which cap 12 is still screwed on frame 10.

[0092] Starting from this condition, to open package 1, the user unscrews cap 12, thereby causing the connecting bridges of tamper-evidence band 21 to break and causing the activation of cutting member 24, which determines the tearing of pierceable portion 7.

[0093] The action of unscrewing displaces cap 12 from its closed position to its open position.

[0094] During the displacement of cap 12 from the closed position to the open position, cap 12 is tethered to frame 10 by means of tamper-evidence band 21, as described above.

[0095] Once the desired amount of pourable product has been poured through passage 11, the user can close passage 11 by screwing again cap 12 on collar 14.

[0096] The advantages of opening device 3 according to the present invention will be clear from the foregoing description.

[0097] In particular, thanks to the above-described configuration of tamper-evidence band 21, cap 12 is firmly tethered to frame 10 throughout the use of package 1 and after its disposal.

[0098] Accordingly, the risk of dispersing cap 12 in the environment after use of package 1 is consistently reduced, thereby preventing plastic pollution of the environment deriving from packages 1 of the above-mentioned type.

[0099] At the same time, the configuration of opening device 3 according to the present invention does not require cumbersome modifications to the design of existing opening devices not provided with tamper-evidence band 21 according to the invention.

[0100] In addition, thanks to the configuration of tamper-evidence band 21 according to the present invention, opening device 3 maintains at least the same versatility and ease-to-use of the opening devices known in the art and not provided with tamper-evidence band 21.

[0101] Clearly, changes may be made to opening device 3 as described herein without, however, departing from the scope of protection as defined in the accompanying claims.

[0102] In particular, frame 10 of opening device 3 could be directly molded, for example by injection molding, at the opening area of package 1. In this case, a predetermined amount of molten plastic material is injected onto, and through, the pierceable portion 7 by means of a known molding device. During molding, the plastic material is forced to pierce the pierceable portion 7 from a first side thereof, due to the injection pressure and the geometry of the molding device used to form the opening device 3, so as to pass through the pierceable portion 7, and protrude from a second side of the pierceable portion 7, opposite to the first side. The lamination layers forming the pierceable portion 7 and closing the hole of the base layer 5 are first pierced through and then resealed by the

plastic material forming frame 10.

[0103] In such a case, the finished package 1 is defined by the assembly comprising the filled, folded and sealed package 1 and the frame 10 which has been injection molded on the top wall 4 of package 1, in particular at the opening area thereof. In other words, frame 10 can be regarded as part of both package 1 and opening device 3. Therefore, in this case, tamper-evidence band 21 is fitted to cap 12 and to package 1, that is, it secures cap 12 to package 1, as frame 10 is part of package 1.

Claims

15. 1. An opening device (3) configured to be applied to a package (1) containing a pourable product; said opening device (3) comprising:
 - a cap (12) configured to close a passage (11) for said pourable product obtainable at an opening area of said package (1); and
 - tamper-evidence means (21) configured to be fitted to said package (1) and initially connected to said cap (12) by means of at least one breakable connecting bridge configured to break during first opening of said opening device (3); **characterized in that** said cap (12) is configured to be permanently tethered to said package (1) by means of said tamper-evidence means (21).
20. 2. The opening device as claimed in claim 1, wherein said tamper-evidence means (21) comprise a first unbreakable connection rib (22) configured to be fitted to said package (1) and a second unbreakable connection rib (23) fitted to said cap (12).
25. 3. The opening device as claimed in claim 2, wherein said second connection rib (23) is formed integrally with said cap (12).
30. 4. The opening device as claimed in one of the foregoing claims, and further comprising a frame (10) defining said passage (11) and being fittable about said opening area of said package (1); said cap (12) being configured to cooperate in contact with said frame (10) to close said passage (11); said cap (12) being tethered to said frame (10) by means of said tamper-evidence means (21).
35. 5. The opening device as claimed in claim 4, wherein said frame (10) comprises a slit (27) configured to be engaged by said first connection rib (22).
40. 6. The opening device as claimed in claim 5, wherein said first connection rib (22) is configured to be rigidly coupled to said slit (27).
45. 50. 55.

7. The opening device as claimed in claim 6, wherein
said slit (27) defines a through hole (28b) passing
through said frame (10);
said first connection rib (22) having a meltable por-
tion (22a) configured to pass through said through
hole (28b) during coupling of said first connection rib
(22) to said slit (27);
said meltable portion (22a) being configured to be
melted, after coupling of said first connection rib (22)
to said slit (27), so as to have a transversal extension
greater than the transversal extension of said
through hole (28b). 5

8. The opening device as claimed in any one of claims
4 to 7, wherein said frame (10) comprises a cylindri-
cal collar (14) having a first longitudinal axis (B) and
coaxially defining said passage (11);
said cap (12) comprising a cylindrical portion (16)
having a second longitudinal axis (C) and configured
to coaxially engage said collar (14) in order to close
said passage (11);
said tamper-evidence means comprising a tamper-
evidence band (21) coaxially arranged around said
collar (14), when said cap (12) is completely en-
gaged onto said collar (14), and connecting said first
connection rib (22) to said second connection rib
(23). 15

9. The opening device as claimed in claim 8, wherein
said second connection rib (23) is connected to said
cylindrical portion (16). 30

10. The opening device as claimed in claim 9, wherein
said second connection rib (23) is connected to an
axial edge (26) of said cylindrical portion (16). 35

11. The opening device as claimed in any one of the
claims 8 to 10, wherein said first connection rib (22)
and said second connection rib (23) are arranged at
respective end portions of said tamper-evidence 40
band (21).

12. The opening device as claimed in any one of the
claims 8 to 11, wherein said first connection rib (22)
is angularly fixed with respect to said first longitudinal
axis (B). 45

13. The opening device as claimed in any one of the
claims from 4 to 12, wherein, after first opening of
said opening device (3), said cap (12) is fitted to said
tamper-evidence means (21) only by means of said
second connection rib (23); and wherein said
tamper-evidence means (21) are fitted to said frame
(10) only by means of said first connection rib (22). 50

14. The opening device as claimed in any one of the
foregoing claims, wherein said opening area defines
an opening portion (7) of said package (1); 55

5. said opening device (3) comprising a cutting member
(24) configured to engage said passage (11) in a
movable manner, and configured to cooperate in
contact with said opening portion (7) to open said
package (1).

15. A package (1) containing a pourable product and
obtained from a sheet of packaging material (2) hav-
ing an opening portion (7);
said package (1) comprising an opening device (3)
as claimed in any one of the foregoing claims and
fitted about said opening portion (7).

FIG. 1

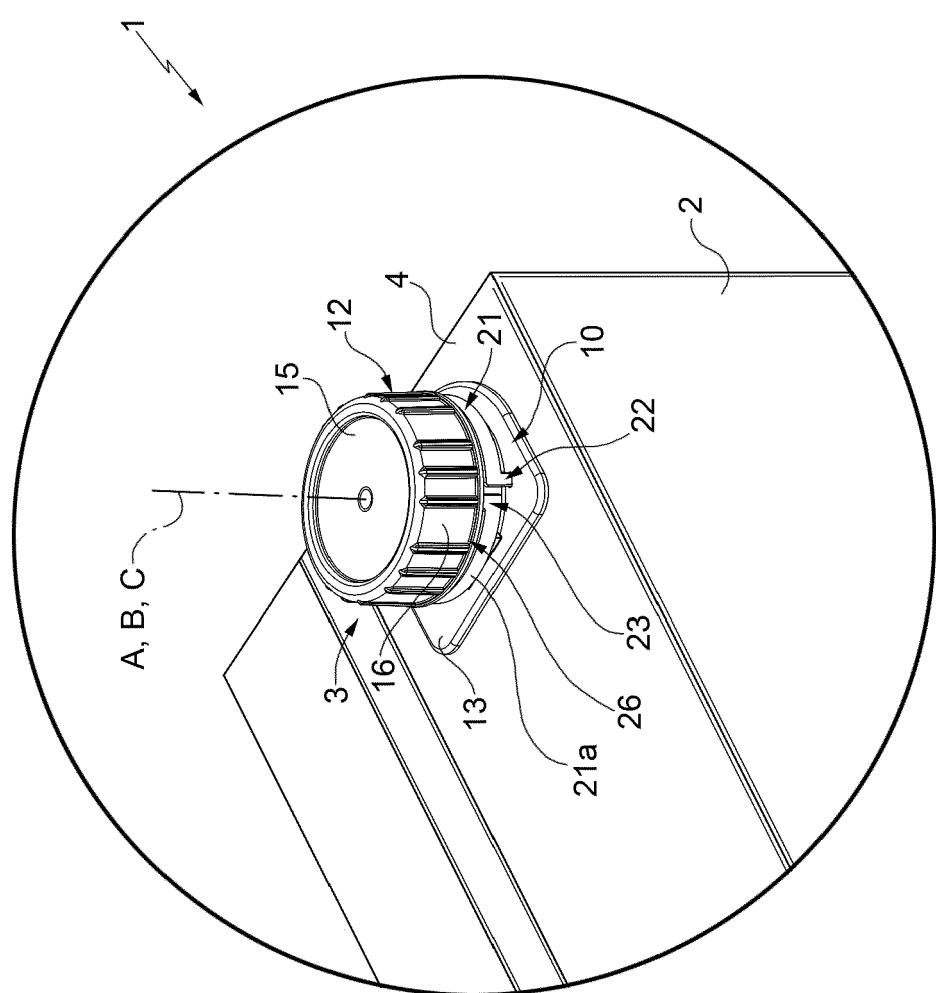
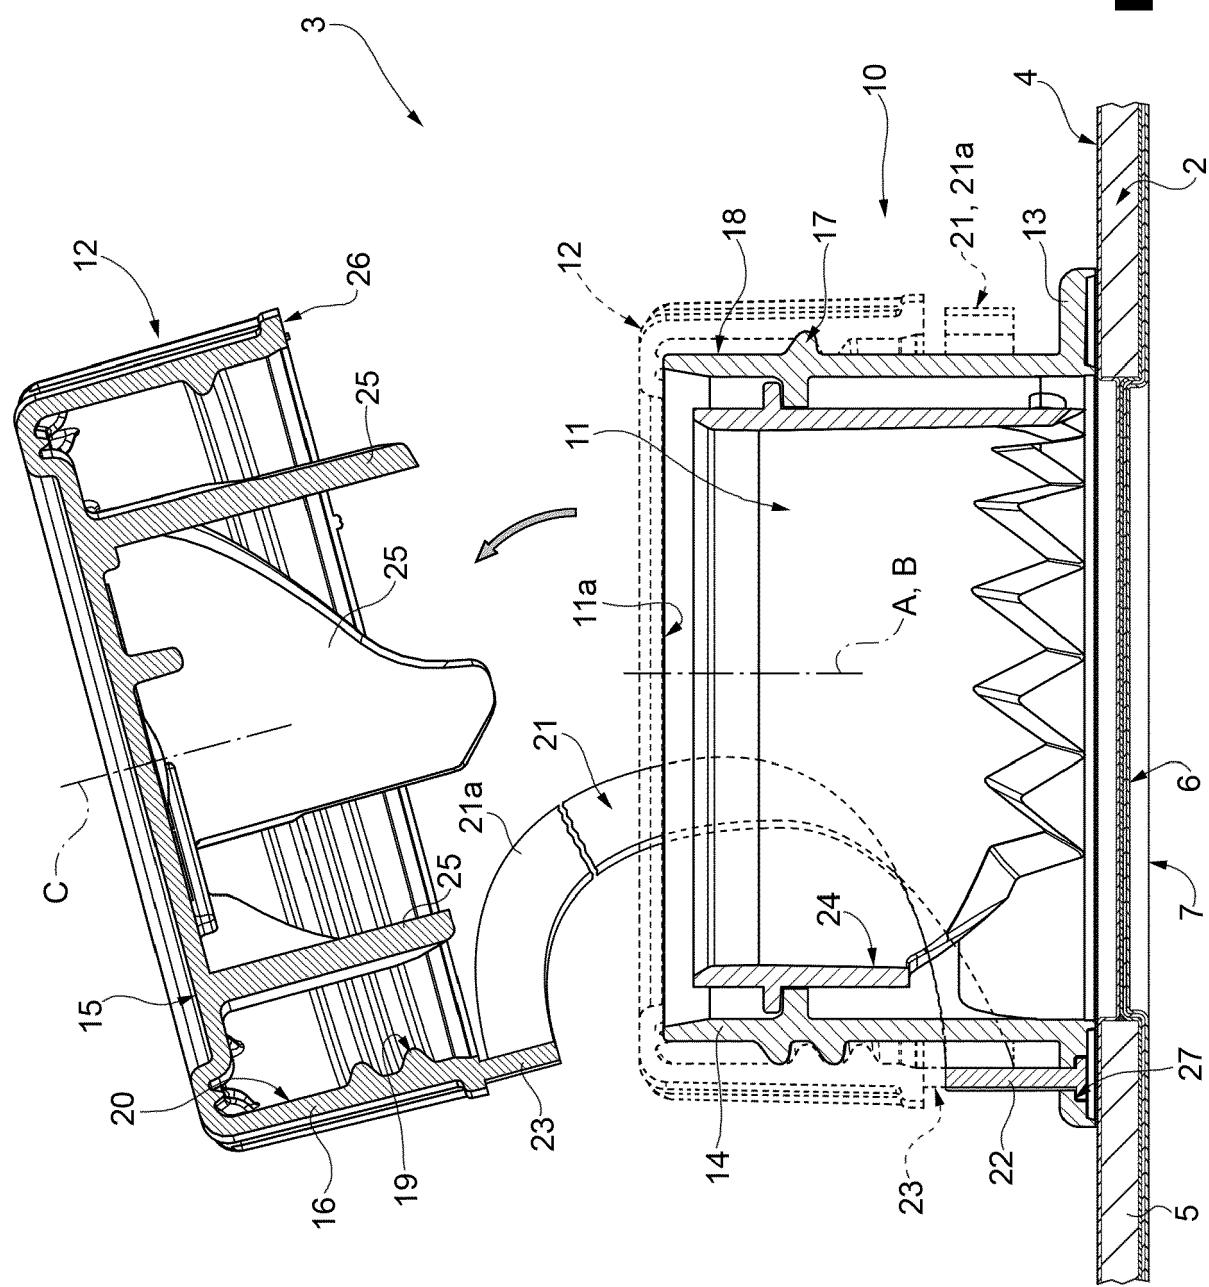


FIG. 2


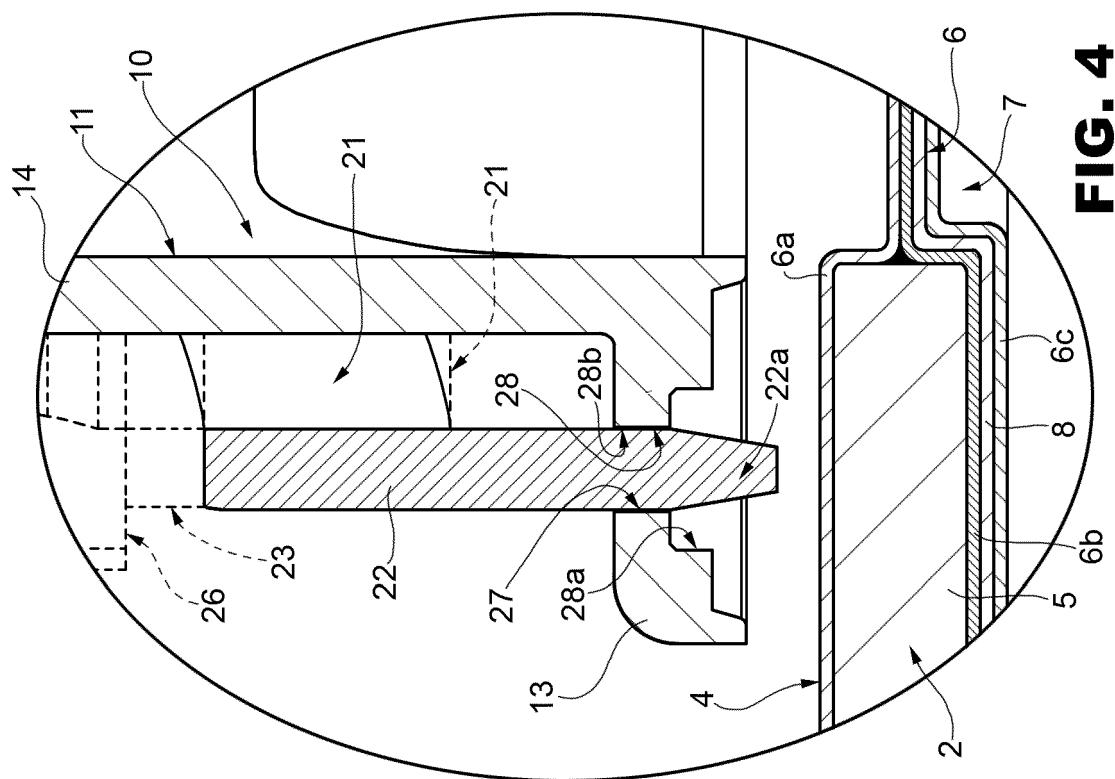


FIG. 4



3
FIG.

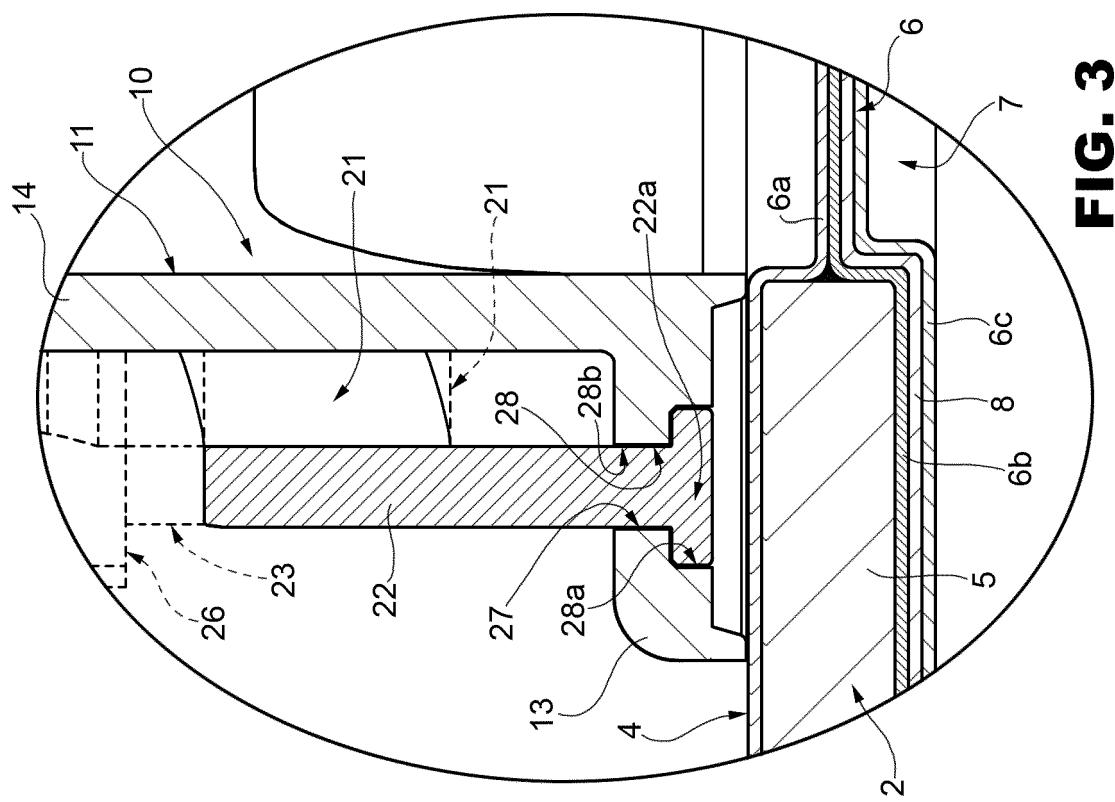

EUROPEAN SEARCH REPORT

Application Number

EP 19 16 5231

5

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
10 X	EP 1 961 669 A2 (BERMAN RONALD H [US]) 27 August 2008 (2008-08-27) * abstract; figures 1-7 *	1-6, 8-13,15 14 7	INV. B65D5/74 B65D55/16
15 Y	-----		
15 X	US 2015/251827 A1 (CAMPBELL PHILLIP JOHN [US]) 10 September 2015 (2015-09-10) * abstract; figures 1-5 *	1-6, 8-13,15 14 7	
15 Y	-----		
15 A	* paragraph [0027] - paragraph [0034] * * paragraph [0041]; figures 14,15 *		
20 Y	-----		
20 A	EP 1 262 412 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]) 4 December 2002 (2002-12-04) * abstract; figures 1,2,3,5 *	14 1-13,15	
25 A	-----		
25 A	DE 24 30 775 A1 (SOMEPLA SA) 23 January 1975 (1975-01-23) * page 3, paragraph 5 - page 5, paragraph 4; figures 1-3 *	1-15	
30	-----		
30			TECHNICAL FIELDS SEARCHED (IPC)
30			B65D
35			
40			
45			
45			
50 3	The present search report has been drawn up for all claims		
50	Place of search Munich	Date of completion of the search 6 August 2019	Examiner Segerer, Heiko
55	CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document	T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 16 5231

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-08-2019

10	Patent document cited in search report	Publication date		Patent family member(s)	Publication date
15	EP 1961669 A2	27-08-2008	EP US	1961669 A2 2008197135 A1	27-08-2008 21-08-2008
20	US 2015251827 A1	10-09-2015	NONE		
25	EP 1262412 A1	04-12-2002	AT DE DK EP ES JP JP PT US	334890 T 60121920 T2 1262412 T3 1262412 A1 2267703 T3 4601242 B2 2003026219 A 2009046201 A 1262412 E 2002179605 A1	15-08-2006 18-01-2007 04-12-2006 04-12-2002 16-03-2007 22-12-2010 29-01-2003 05-03-2009 30-11-2006 05-12-2002
30	DE 2430775 A1	23-01-1975	DE ES FR GB US	2430775 A1 204661 U 2329536 A1 1444302 A 3904062 A	23-01-1975 16-01-1976 27-05-1977 28-07-1976 09-09-1975
35					
40					
45					
50					
55					

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82