



(11) **EP 3 726 573 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) Int Cl.:
H01L 23/373 ^(2006.01) **C08K 3/22** ^(2006.01)
C08L 83/05 ^(2006.01) **C08L 83/07** ^(2006.01)

(48) Corrigendum issued on:
02.12.2020 Bulletin 2020/49

(86) International application number:
PCT/JP2019/038909

(43) Date of publication:
21.10.2020 Bulletin 2020/43

(87) International publication number:
WO 2020/179115 (10.09.2020 Gazette 2020/37)

(21) Application number: **19906601.0**

(22) Date of filing: **02.10.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Fuji Polymer Industries Co., Ltd.**
Nagoya-shi, Aichi 460-0012 (JP)

(72) Inventor: **SHIBUYA, Hitoshi**
Nagoya-shi,
Aichi 463-0026 (JP)

(74) Representative: **Diehl & Partner**
Patent- und Rechtsanwaltskanzlei mbB
Erika-Mann-Straße 9
80636 München (DE)

(30) Priority: **07.03.2019 JP 2019041943**

(54) **HEAT CONDUCTIVE SHEET AND METHOD FOR PRODUCING SAME**

(57) A thermally conductive sheet contains a matrix resin and thermally conductive particles. The content of the thermally conductive particles is 200 parts by volume or more with respect to 100 parts by volume of the matrix resin component. A polymer viscosity of the matrix resin component after a crosslinking reaction in the absence of the thermally conductive particles is 500 Pa·s or less at 25°C. A thermal conductivity of the thermally conductive sheet is 2.0 W/m·K or more. When the thermally conductive sheet with an initial thickness of 1.5 mm is compressed at a compression rate of 5.0 mm/min to measure a 50% compressive load value, the maximum load value is 100 kPa or more and the load value after 1 minute is more than 0 kPa and 100 kPa or less. With this configuration, the thermally conductive sheet has a high thermal conductivity, a low steady load value, and flexibility.

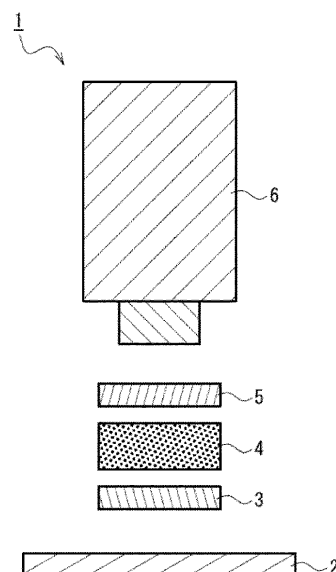


FIG. 1

EP 3 726 573 A8