



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.11.2020 Bulletin 2020/45

(51) Int Cl.:
B65D 17/28 (2006.01)

(21) Application number: **19177080.9**

(22) Date of filing: **28.05.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **LEBOUCHER, Fabrice**
49100 Angers (FR)
• **SIREAU, Lucas**
49100 Angers (FR)
• **BOLIDIN, Philippe**
72230 Guécélard (FR)

(30) Priority: **03.05.2019 EP 19172576**

(74) Representative: **Leonhard, Frank Reimund**
Leonhard & Partner
Patentanwälte
Tal 30
80331 München (DE)


(71) Applicant: **Trivium Packaging Group Netherlands B.V.**
7418 AH Deventer (NL)

(54) **STACKABLE CONTAINER**

(57) The invention relates to a container. The container (350a) comprises an end (300a) and a container body (360a). The end (300a) comprises a central panel (312a), a tab (340a) and at least one stabilizing bead (313a). The central panel (312a) defines an x-y-plane and a z-direction is perpendicular to the x-y-plane. The tab (340a) is attached to the end (300a) and the tab (340a) extends in a positive z-direction. The at least one stabilizing bead (313a) is shaped in the end (300a) and the bead (313a) extends in the positive z-direction. The container body (360a) comprises a lower surface (385a)

opposite to the end (300a). The container (350a) is configured to be stacked with a second container (350b) comprising a second end (300b) with a second central panel (312b) such that a portion of the lower surface (385a) of the container (350a) contacts a portion of the second end (300b) of the second container (350b), and the central panel (312a) of the container (350a) is parallel $\pm 2.0^\circ$ to the second central panel (312b) of the second end (300b) of the second container (350b), wherein the container (350a) and the second container (350b) are same containers (350a,350b).

FIG. 3b B-B

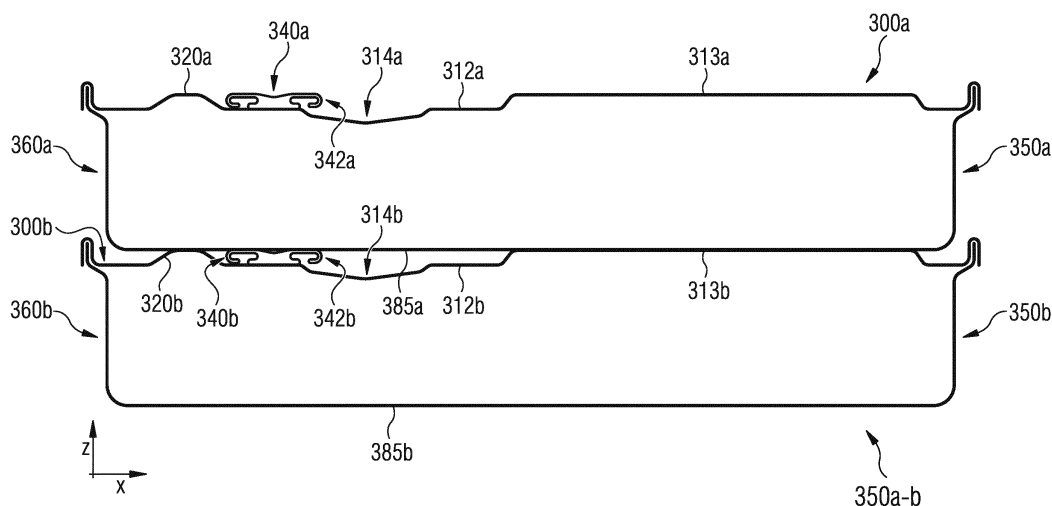

Description

[0001] The invention relates to a container, specifically to a container comprising an easy open end.

[0002] Containers with easy open ends are e.g. used for CLUB cans. These containers, including the end, are typically made of sheet metal. Foodstuff, e.g. seafood, is commonly housed in these containers.

[0003] Typically the containers and the corresponding ends are provided to a customer, i.e. food manufacturer, separately in large quantities. The customer can fill the container with foodstuff, e.g. seafood, and close the opening of the container with the end (the lid), e.g. by a double seam.

[0004] Filled containers are presented at a point of sale in e.g. a supermarket for customers. Such containers are typically stacked in order to save precious room at store shelves. Known containers that comprise a bead for enhanced stability and/or a depression in the end close to a pull-tab for facilitating access to the pull-tab are not stackable with a sufficient stability of the stack.

[0005] A problem to be solved by the invention is to provide an end for a container that allows stacking of a plurality of containers with such ends with increased stability of the stack. A further problem to be solved is to provide a container with such an end that allows a stacking of a plurality of such containers with increased stability.

[0006] This problem is solved by a container according to claim 1 or by a stack of at least two containers according to claim 15.

[0007] A container can comprise an end, specifically an easy-open-end, and a container body. The end comprises a central panel that defines an x-y-plane. A z-direction is perpendicular to the x-y-plane. A tab is attached, for example via a rivet, to the end and the tab extends in a positive z-direction. Preferably the tab is attached to the central panel and the tab extends in a positive z-direction from the x-y-plane of the central panel.

[0008] The end comprises at least one stabilizing bead that is shaped in the end and extends in the positive z-direction. Preferably the stabilizing bead is shaped in the central panel and extends in the positive z-direction from the x-y-plane of the central panel. The container body comprises a lower surface that can be located on an opposite side of the container than the end. The lower surface may be a flat surface.

[0009] The container as a first container is configured to be stacked with a second container, wherein the second container comprises a second end with a second central panel, such that a portion of the lower surface of the container contacts a portion of the second end of the second container. The central panel of the (first) container is parallel $\pm 2.0^\circ$ to the second central panel of the second container. The (first) container and the second container are same containers. The (first) end of the (first) container and the second end of the second end are

same ends.

[0010] Same containers and same ends are to be understood as containers and ends that are configured equally.

5 **[0011]** Thereby, a stacking of (e.g. at least ten) containers is increased.

[0012] The x-y-plane is a reference plane for claimed and described extensions of elements. An extension is measured as a distance in z-direction between the x-y-plane and a second plane that is defined by the respective element itself.

[0013] The end may be an easy-open-end comprising a tab, preferably a pull-tab, and a score line as a mechanically weakened portion in the end. For example, the tab of the end can be attached to the central panel of the end such that a lifting movement of a rear portion of the tab forces a front portion (nose portion) of the tab towards the score line of the end in order to break a portion of the end. A consumer may then pull the tab away from the container in order to remove a large portion of the end. Thereby, the container can be opened and the filling of the container can be accessed.

[0014] The central panel of the end may be the largest portion (by area) of the end extending in the same plane, e.g. an x-y-plane.

25 **[0015]** The tab may be a pull-tab comprising a finger hole for allowing a human finger to reach through the tab. The tab may be attached to the central panel or to another portion of the end e.g. via rivet.

30 **[0016]** Preferably, the tab extends between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm, in a positive z-direction that is perpendicular to the x-y-plane of the central panel. It is especially preferred that the tab extends about 1.95 mm in the positive z-direction.

35 **[0017]** Generally, when an extension of an element, e.g. extension of the tab, stabilizing bead, (at least one) bulge, depression or second bead, is described, the extension is measured as the distance in z-direction between the x-y-plane that is defined by the central panel and a second plane that is defined by the respective element. The second plane is parallel to the x-y-plane and is defined by a portion of the respective element that has the greatest distance from the x-y-plane in the z-direction.

40 **[0018]** The extension of an element may be the actual/physical height of the respective element in z-direction. In this case, the respective element is attached to the central panel (e.g. the tab) or may be formed in the central panel (e.g. the stabilizing bead, the bulge, the depression, the second bead). This applies the general rule of the preceding paragraph to the specific case in which the respective element is associated with the central panel.

45 **[0019]** The stabilizing bead may be substantially c-shaped, substantially circular shaped, substantially oval shaped or substantially straight shaped in the end, preferably in the central plane of the end.

[0020] The stabilizing bead may fully surround a portion of the end or may not fully surround a portion of the

end.

[0021] It is preferred that the stabilizing bead extends between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm, in a positive z-direction that is perpendicular to the x-y-plane of the central panel. Specifically, the stabilizing bead extends about 0.8 mm in the positive z-direction.

[0022] The container body of the container may be a one piece container body. The end may be seamed to the container body, specifically via a double seam. The container body may also be a two-piece container body that may comprise a container wall and a container bottom, wherein the bottom may be seamed to container wall and the end may be seamed to the container wall.

[0023] For example, two containers may be stacked for transportation of filled containers or presentation of the containers at a point of sale. The containers may be same containers comprising same elements, specifically same container bodies and same ends. These stacked containers may be parallel $\pm 2.0^\circ$, specifically the central panels of the containers may be parallel $\pm 2.0^\circ$.

[0024] It is especially preferred that (the central panels of) the two containers are parallel $\pm 1.5^\circ$, $\pm 1.0^\circ$, or even $\pm 0.5^\circ$. Thereby, an increased stability of the stack is achieved.

[0025] Alternatively or additionally, the lower surfaces of the containers may be parallel $\pm 2.0^\circ$, preferably $\pm 1.0^\circ$, more preferably $\pm 0.5^\circ$.

[0026] The end of the container may comprise a depression that is formed in the end. The depression may extend in a negative z-direction. The depression is shaped and positioned to allow a human finger to reach at least partially below the rear portion of the tab. Thereby, a consumer can easily reach the rear portion of the tab for lifting the rear portion and opening the container as described in more detail above.

[0027] The depression can be substantially circular shaped. The depression can have an area between 80 mm² and 500 mm², preferably between 90 mm² and 300 mm².

[0028] A portion of the depression may overlap with a portion of the tab, specifically the rear portion of the tab.

[0029] Preferably, the depression extends between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm, in the negative z-direction that is perpendicular to the x-y-plane of the central panel. It is especially preferred that the depression extends about 1.25 mm in the negative z-direction.

[0030] The extension of the tab in the positive z-direction can be equal to the extension of the stabilizing bead in the positive z-direction ± 1.5 mm. Preferably the extension of the tab in the positive z-direction is equal to the extension of the bead in the positive z-direction ± 0.75 mm or ± 0.3 mm.

[0031] The extension of the stabilizing bead may be lower or equal to the extension of the tab in the positive

z-direction. Preferably, the extension of the stabilizing bead is at most 1.5 mm, more preferably at most 0.75 mm, even more preferably at most 0.3 mm, smaller than the extension of the tab in the positive z-direction. It is especially preferred that the extension of the stabilizing bead is substantially equal to the extension of the tab in the positive z-direction.

[0032] The extension of the depression in the negative z-direction may be equal to the extension of the tab in the positive z-direction ± 1.0 mm, preferably ± 0.5 mm. It is especially preferred that the extension of the depression in the negative z-direction is equal to the extension of the tab in the positive z-direction ± 0.2 mm.

[0033] It is preferred that the extension of the depression in the negative z-direction is equal to the extension of the stabilizing bead in the positive z-direction ± 2.0 mm, preferably ± 1.2 mm. Specifically, the extension of the depression in the negative z-direction is equal to the extension of the stabilizing bead in the positive z-direction ± 0.8 mm.

[0034] The end may comprise at least one bulge, preferably at least two bulges. The bulge may be shaped in the end and may extend in the positive z-direction. The at least one bulge may be positioned in the proximity of the tab and associated with the tab.

[0035] Preferably, the at least one bulge is located in the proximity of an outer side of the tab that extends between the front portion and the rear portion of the tab. Specifically, a first bulge is located in the proximity of a first outer side of the tab that extends between the front portion and the rear portion of the tab and a second bulge is located in the proximity of a second outer side of the tab that extends between the front portion and the rear portion of the tab.

[0036] The extension of the at least one bulge in the positive z-direction may be equal to the extension of the tab in the positive z-direction ± 2.0 mm, preferably ± 1.5 mm. Specifically, the extension of the bulge in the positive z-direction is equal to the extension of the tab in the positive z-direction ± 1.0 mm.

[0037] The bulge may extend between 0.4 mm and 2.5 mm, preferably between 0.7 mm and 2.0 mm, more preferably between 1.0 mm and 1.5 mm, in the positive z-direction that is perpendicular to the x-y-plane of the central panel. It is preferred that the bulge extends about 1.2 mm in the positive z-direction.

[0038] The extension of the at least one bulge may be lower or equal to the extension of the tab in the positive z-direction. Preferably, the extension of the bulge is at most 1.5 mm, more preferably at most 1.2 mm, even more preferably at most 0.9 mm, smaller than the extension of the tab in the positive z-direction. It is especially preferred that the extension of the at least one bulge is substantially equal to the extension of the tab in the positive z-direction.

[0039] The extension of the at least one bulge may be equal to the extension of the stabilizing bead ± 2.0 mm, preferably ± 1.2 mm, more preferably ± 0.6 mm, in the

positive z-direction.

[0040] The extension of the at least one bulge in the positive z-direction may also be equal to the extension of the depression in the negative z-direction ± 2.0 mm, preferably ± 1.2 mm, more preferably ± 0.6 mm, even more preferably ± 0.2 mm.

[0041] The end of the container can comprise a second bead that extends in the negative z-direction of the x-y-plane of the central panel.

[0042] The second bead can be at least partially surrounded by the (first) stabilizing bead, fully surrounded by the (first) stabilizing bead or not surrounded by the (first) stabilizing bead, preferably in a plane.

[0043] It is preferred that the second bead extends between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm, in the negative z-direction that is perpendicular to the x-y-plane of the central panel.

[0044] The second bead and the depression may be positioned and shaped such that the x-y-plane of the central panel of the end is parallel to a flat surface $\pm 2.0^\circ$, preferably $\pm 1.5^\circ$, more preferably $\pm 1.0^\circ$, most preferred $\pm 0.5^\circ$, when the end is positioned on the flat surface.

[0045] Preferably, the second bead and the depression may be positioned and shaped such that the x-y-plane of the central panel of the end is parallel to a flat surface $\pm 2.0^\circ$, preferably $\pm 1.5^\circ$, more preferably $\pm 1.0^\circ$, most preferred $\pm 0.5^\circ$, when the second bead and/or the depression contacts the flat surface.

[0046] The flat surface may be a transport surface, e.g. a conveyor belt.

[0047] The extension of the second bead may be equal to the extension of the depression in the negative z-direction ± 1.5 mm, preferably ± 1.0 mm, more preferably ± 0.5 mm, most preferably ± 0.2 mm. It is especially preferred that the extension of the second bead is substantially equal to the extension of the depression in the negative z-direction.

[0048] The end of the container may comprise metal, preferably steel or aluminum. The end may also be made of metal, preferably steel or aluminum.

[0049] The container body may comprise metal, preferably steel or aluminum. The container body may also be made of metal, preferably steel or aluminum.

[0050] Preferably, the container comprises food, such as seafood or vegetables.

[0051] The container, preferably the container body, may have a non-round basic shape in a plane parallel to the plane of the central panel.

[0052] A stack of at least containers can comprise at least two of any of the herein disclosed containers. The at least two containers may be same containers.

[0053] Embodiments of the invention are described in more detail with regard to the drawings. The description of the embodiments is not to be construed as to limit the scope defined by the claims. Same reference signs of the figures describe same elements.

Figure 1 depicts an end 100 in a perspective view.
 Figure 2a depicts an end 200 in a top view, indicating further ends beneath the end 200.
 Figure 2b depicts several stacked ends 200a to 200e in a sectional view A-A as indicated in figure 2a.
 Figure 2c depicts two stacked ends 200a, 200b in a sectional view A-A as indicated in figure 2a.
 Figure 3a depicts a stack of two containers 350a, 350b comprising ends 300a, 300b in a top view.
 Figure 3b depicts two stacked containers 350a, 350b comprising ends 300a, 300b in a sectional view B-B as indicated in figure 3a.
 Figure 3c depicts two stacked containers 350a, 350b comprising ends 300a, 300b of figure 3b in a sectional view B-B as indicated in figure 3a.
 Figure 4a depicts a container 450 comprising an end 400 in a top view.
 Figure 4b depicts an end 400 in a top view, indicating further ends beneath the end 400.
 Figure 4c depicts several stacked ends 400a to 400e in a sectional view C-C as indicated in figure 4b.
 Figure 4d depicts three stacked ends 400a to 400c in a sectional view C-C as indicated in figure 4b.
 Figure 5a depicts a container 550 comprising an end 500 in a top view.
 Figure 5b depicts an end 500 in a top view, indicating further ends beneath the end 500.
 Figure 5c depicts several stacked ends 500a to 500e in a sectional view D-D as indicated in figure 5b.
 Figure 5d depicts two stacked ends 500a, 500b in a sectional view D-D as indicated in figure 5b.
 Figure 6a depicts a stack of two containers 650a, 650b comprising ends 600a, 600b in a top view.
 Figure 6b depicts an end 600 in a top view, indicating further ends beneath the end 600.
 Figure 6c depicts several stacked ends 600a to 600e in a sectional view F-F as indicated in figure 6b.
 Figure 6d depicts two stacked containers 650a, 650b comprising ends 600a, 600b in a sectional view E-E as indicated in figure 6a.
 Figure 6e depicts two stacked ends 600a, 600b in a sectional view F-F as indicated in figure 6b.
 Figure 6f depicts two stacked containers 650a, 650b comprising ends 600a, 600b in a sectional view E-E as indicated in figure 6a.
 Figure 7a depicts a container 750 comprising an end 700 in a top view.
 Figure 7b depicts an end 700 in a top view, indicating further ends beneath the end 700.
 Figure 7c depicts several stacked ends 700a to 700e

- in a sectional view G-G as indicated in figure 7b.
- Figure 7d depicts two stacked ends 700a, 700b in a sectional view G-G as indicated in figure 7b.
- Figure 8a depicts an end 800 in a top view.
- Figure 8b depicts the end 800 in a sectional view H-H as indicated in figure 8a.
- Figure 8c depicts an end 800a in a top view.
- Figure 8d depicts an end 800b in a top view.

[0054] Fig. 1 shows an end 100 for a container. The end 100 comprises central panel 112 and a tab 140. The tab 140 is attached to the end 100, especially to the central panel 112, via a rivet 116 and the tab 140 comprises a front portion 141 and a rear portion 142.

[0055] The central panel 112 of the end 100 defines an x-y-plane. A z-direction is perpendicular to the x-y-plane. A bead 113 is formed in the end 100, preferably in the central panel 112, and extends in the positive z-direction from the x-y-plane of the central panel 112. The bead 113 is substantially c-shaped and not fully surrounds a portion of the central panel 112. Beads such as bead 113 are formed to enhance mechanical stability of an end.

[0056] Further, the end 100 comprises a depression 114 that is formed in the end 100, preferably in the central panel 112, and extends in the negative z-direction from the x-y-plane. The depression 114 has a basic circular shape and is positioned such that a portion of the tab 140, i.e. the rear portion 142 of the tab 140, overlaps the depression 114. The depression allows a consumer to reach the rear portion 142 in a more convenient manner, when the consumer intends to lift the rear portion 142 of the tab 140 in order to open the end 100.

[0057] A first bulge 120 and a second bulge 121 are formed in the end 100, preferably in the central panel 112 of the end 100. The bulges 120, 121 extend from the x-y-plane in the positive z-direction. The first bulge 120 is located close to a first side of the tab 140 that extends from the front portion 141 to the rear portion 142. The second bulge 121 is located close to a second side of the tab 140 that extends from the front portion 141 to the rear portion 142. The first side of the tab 140 and the second side of the tab 140 are opposite sides.

[0058] The bulges 120, 121 are provided to prevent a rotation of the tab 140 about the rivet 116 in a plane parallel to the x-y-plane. Such a rotation of the tab 140 prior to lifting the rear portion 142 of the tab 140 might cause the tab 140 to break since the front portion 141 of the tab 140 can attack the central panel 112 at a position that is too far away from the score line 118 as mechanically weakened portion of the end 100, preferably of the central panel 112.

[0059] The score line 118 as mechanically weakened portion is located in the end 100, preferably in the central panel 112, close to the outer edge of the end 100. The score line 118 surrounds a portion of the end 100, specifically the central panel 112. The tab 140 is positioned

and shaped such that the front portion 141 of the tab 140 contacts (a portion of the end close to) the score line 118 in order to break a portion of the end 100, e.g. the central panel 112, when the tab 140 is pivoted about the rivet 116 by lifting the rear portion 142 of the tab 140. By pulling the tab 140 away from the end 100, a large portion of the central panel 112 that is surrounded by the score line 118 is removed from the end 100 and the end 100 is open.

[0060] At the outer edge of the end 100, a curl 130 (implied in Fig. 1) is positioned. The curl 130 of the end 100 can be used to attach the end 100 to a container body in order to produce a closed container. For example, the end 100 can be seamed to a container body via the curl 130.

[0061] Fig. 2a shows a first end 200 in a top view, wherein a further end 200 is indicated below the first end 200 that is rotated by 180° in a x-y-plane as will be discussed in more detail below.

[0062] The end 200 may be equal to the end 100. The end 200 comprises a central panel 212 that defines an x-y-plane. In the end 200, specifically in the central panel 212, a stabilizing bead 213 is formed and the bead 213 extends in a positive z-direction, wherein the z-direction is perpendicular to the x-y-plane. Further, a depression 214 is formed, preferably in the central panel 212, and the depression 214 extends in the negative z-direction.

[0063] End 200 comprises a tab 240 with a front portion 241 and a rear portion 242. The tab 240 is attached to the end 200, e.g. to the central panel 212, via a rivet 216. The depression 214 is partially overlapped by a portion of the tab 240, specifically by the rear portion 242 of the tab 240. The front portion 241 of the tab 240 may break a score line 218 that is located close to the outer edge of the end 200, when the tab 240 is pivoted about the rivet 216 by lifting the rear portion 242 of the tab 240.

[0064] Optionally, in the proximity of the tab 240, a first bulge 220 and a second bulge 221 are formed in the end 200, preferably in the central plane 212. The bulges 220, 221 extend in the positive z-direction from the x-y-plane.

[0065] A curl 230 is located at the outer edge of the end 200.

[0066] In Fig. 2a a cross section A-A is indicated that is shown in Fig. 2b and 2c.

[0067] Fig. 2b depicts a stack of ends 200a-e comprising several ends 200 as ends 200a, 200b, 200c, 200d and 200e. The ends 200a through 200e are same ends 200.

[0068] In the stack of ends 200a-e, the ends 200a-e are each rotated by 180° in the x-y-plane relative to the next end 200 in the stack 200a-e. For example, end 200a has the same orientation as end 200 as shown in Fig. 2a. Compared to end 200a, end 200b is rotated by 180° in the x-y-plane and positioned below end 200a. Compared to end 200b, end 200c is rotated by 180° in the x-y-plane and positioned below end 200b. Other ends of the stack 200a-e are positioned similarly.

[0069] Each of the ends 200a through 200e comprises a tab 240, wherein the tab 240 of end 200a is denoted

as tab 240a and so on. Each of the ends 200a through 200e further comprises a central panel 212, a stabilizing bead 213, at least one bulge 220 and a depression 214.

[0070] With reference to Fig 2b, the depression 214a of the first end 200a in the stack of ends 200a-e may contact the central panel 212b of the second end 200b in the stack of ends 200a-e. Alternatively or additionally, the tab 240b of the second end 200b may contact the (lower side of the) central panel 212a of the first end 200a. Alternatively or additionally, the bead 213b of the second end 200b may contact the (lower side of the) central panel 212a of the first end 200a. Alternatively or additionally, the at least one bulge 220b may contact the (lower side of the) central panel 212a of the first end 200a.

[0071] It is preferred that the tab 240b of the second end 200b contacts the (lower side of the) central panel 212a of the first end 200a and the bead 213b of the second end 200b contacts the (lower side of the) central panel 212a of the first end 200a.

[0072] The central planes 212a-e of the stack of ends 200a-e are parallel and the stack of ends 200a-e shows a high stability.

[0073] In Fig. 2c a stack of ends 200a and 200b only is depicted. The at least one bulge 220a, 220b of ends 200a, 200b may have an extension sTB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.7 mm and 2.0 mm, more preferably between 1.0 mm and 1.5 mm. Specifically, the at least one bulge 220a, 220b has an extension sTB of about 1.2 mm in the positive z-direction.

[0074] The at least one bulge 220a, 220b of ends 200a, 200b may have an extension sTB lower or equal to an extension sT in the positive z-direction of the tab 240a, 240b.

[0075] The tab 240a, 240b of ends 200a, 200b may have an extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 240a, 240b has an extension sT of about 1.95 mm in the positive z-direction.

[0076] The depression 214a, 214b of ends 200a, 200b may have an extension sFH from the respective central panel 212a, 212b in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 214a, 214b has an extension sFH of about 1.25 mm in the negative z-direction.

[0077] The stabilizing bead 213a, 213b of ends 200a, 200b may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 213a, 213b has an extension sPB of about 0.8 mm in the positive z-direction.

[0078] The extension sPB of the stabilizing bead 213a, 213b may be lower or equal to the extension sT of the tab 240a, 240b in the positive z-direction.

[0079] As can best be seen in Fig. 2a and 2b, when

two ends 200a, 200b are stacked while the ends 200a, 200b are rotated by 180 ° in the x-y-plane, the depression 214a, 214b of one of the ends 200a, 200b is not overlapped by the stabilizing bead 213b, 213a of the other one of the ends 200b, 200a such that the central panels 212a, 212b of the ends 200a, 200b are substantially parallel ($\pm 2.0^\circ$).

[0080] Preferably, the depression 214a, 214b of an end 200a, 200b does not contact the stabilizing bead 213a, 213b of another end 200b, 200a, specifically when the ends 200a, 200b are stacked while the ends 200a, 200b are rotated relative to another by 180 ° in the x-y-plane.

[0081] The depression 214a, 214b of an end 200a, 200b may be spaced from the stabilizing bead 213a, 213b of another end 200b, 200a, specifically when the ends 200a, 200b are stacked while the ends 200a, 200b are rotated relative to another by 180 ° in the x-y-plane.

[0082] It is preferred, that the depression 214a, 214b of an end 200a, 200b is at least partially surrounded by the stabilizing bead 213a, 213b of another end 200b, 200a (in a plane parallel to the x-y-plane), specifically when the ends 200a, 200b are stacked while the ends 200a, 200b are rotated relative to another by 180 ° in the x-y-plane.

[0083] Fig. 3a shows a container 350 comprising an end 300. The end 300 is the same as the ends 100, 200.

[0084] The end 300 comprises a stabilizing bead 313, that is formed in the end 300, e.g. in a central panel 312 of the end 300, and extends in a positive z-direction. The end 300 comprises a tab 340 having a front portion 341 and a rear portion 342. The tab 340 is attached to the end 300, specifically to the central panel 312 of the end 300, via a rivet 316.

[0085] Two bulges 320, 321 are formed in the end 300, preferably in the central panel 312 of the end 300, and extend in the positive z-direction from the x-y-plane. The bulges 320, 321 are positioned close to the tab 340 as described above with reference to ends 100, 200.

[0086] A depression 314 is formed in the end 300, specifically in the central panel 312, and extends in the negative z-direction from the x-y-plane of the central panel 312 as also described above with reference to ends 100, 200.

[0087] A score line 318 surrounds a large portion of the central panel 312 and is positioned and functions as described above with reference to ends 100, 200.

[0088] A curl 330 is seamed to a container body 360a, b (see Fig. 3b) for attaching the end 300 to the container body 360a, b and to form a closed container 350.

[0089] The cross section B-B indicated in Fig. 3a is shown in Fig. 3b and 3c.

[0090] Fig. 3b depicts a stack of containers 350a, 350b wherein each container 350a, 350b is equal to container 350. Each container 350a, 350b comprises an end 300a, 300b having a stabilizing bead 313a, 313b, a central panel 312a, 312b, a depression 314a, 314b, a tab 340a, 340b and at least one bulge 320a, 320b. The end 300a, 300b is attached to a container body 360a, 360b that comprises

a lower surface 385a, 385b.

[0091] The containers 350a, 350b are stacked and the central panels 312a, 312b of the respective ends 300a, 300b are substantially parallel ($\pm 2.0^\circ$).

[0092] The lower surfaces 385a, 385b of the containers 350a, 350b may be substantially parallel ($\pm 2.0^\circ$).

[0093] The stabilizing bead 312b of an end 300b of a container 350b may contact the lower surface 385a of another container 350a, when the containers 350a, 350b are stacked. Alternatively or additionally, the tab 340b of an end 300b of a container 350b may contact the lower surface 385a of another container 350a, when the containers 350a, 350b are stacked. Alternatively or additionally, the at least one bulge 320b of an end 300b of a container 350b may contact the lower surface 385a of another container 350a, when the containers 350a, 350b are stacked.

[0094] The extension sT of the tab 340a, 340b of ends 300a, 300b of containers 350a, 350b in the positive z-direction may be between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 340a, 340b has an extension sT of about 1.95 mm in the positive z-direction.

[0095] The at least one bulge 320a, 320b of ends 300a, 300b of containers 350a, 350b may have an extension sTB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.7 mm and 2.0 mm, more preferably between 1.0 mm and 1.5 mm. Specifically, the at least one bulge 320a, 320b has an extension sTB of about 1.2 mm in the positive z-direction.

[0096] The at least one bulge 320a, 320b of ends 300a, 300b of containers 350a, 350b may have an extension sTB lower or equal to the extension sT in the positive z-direction of the tab 340a, 340b.

[0097] The extension sPB of the stabilizing bead 313a, 313b of ends 300a, 300b of containers 350a, 350b in the positive z-direction may be between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 313a, 313b has an extension sPB of about 0.8 mm in the positive z-direction.

[0098] The extension sPB of the stabilizing bead 313a, 313b may be lower or equal to the extension sT of the tab 340a, 340b in the positive z-direction.

[0099] Fig. 4a depicts a container 450 that comprises an end 400 and a container body (not shown in Fig. 4a) analogous to e.g. container body 360a comprised by container 350a.

[0100] The end 400 comprises a central panel 412 that defines an x-y-plane. A stabilizing bead 413 is formed in the end 400, e.g. in the central panel 412. Further, a depression 414 is formed in the end 400, preferably in the central panel 412. The stabilizing bead 413 may have a basic c-shape. The stabilizing bead 413 may not fully surround a portion of the central panel in the x-y-plane.

[0101] A tab 440 comprising a front portion 441 and a rear portion 442 is attached to the end 400, specifically

to the central panel 412, via a rivet 416.

[0102] The rear portion 442 of the tab 440 partially covers the depression 414 such that a consumer may reach the rear portion 442 of the tab 440 by moving a portion of the finger into the depression 414 and at least partially below the rear portion 442 of the tab 440.

[0103] Preferably, the depression 414 is not (fully) surrounded by the stabilizing bead 413.

[0104] A score line 418 is formed in an outer portion of the end 400, e.g. in the central plane 412, and surrounds a (large) portion of the end 400, e.g. the central plane 412.

[0105] The end 400 is seamed to the container body via curl 430 of the end 400.

[0106] The end 400 has a basic triangular shape in the x-y-plane.

[0107] Fig. 4b shows the end 400 in a top view. Further ends 400 are indicated below the shown end 400, wherein the ends 400 below the shown end 400 are rotated by 120° in the x-y-plane relative to the next end 400 as will be more detailed described with reference to Fig. 4c. A cross section C-C is indicated in Fig. 4b.

[0108] In Fig. 4c a stack of ends 400a-e is shown in the cross sectional view C-C indicated in Fig. 4b. Five ends 400 as ends 400a, 400b, 400c, 400d, and 400e are stacked. The end 400a has the same orientation in the x-y-plane as the end 400 shown in Fig. 4b.

[0109] Each end 400a-e is rotated by 120° in the x-y-plane relative to the preceding end 400a-e in the stack. E.g. end 400b is rotated by 120° in the x-y-plane relative to the end 400a and end 400c is rotated by 120° in the x-y-plane relative to the end 400b in the x-y-plane. Other ends 400d-e are orientated in the x-y-plane analogously. Thus, end 400c is rotated by 240° in the x-y-plane relative to the end 400a and e.g. end 400d has the same orientation in the x-y-plane as end 400a.

[0110] Each of the ends 400a-e comprises a central panel 412a-e, a stabilizing bead 413a-e, a depression 414a-e and a tab 440a-e. The central panels 412a-e of the stack of ends 400a-e are (substantially) parallel. Thereby, the stack of ends 400a-e shows an enhanced stability.

[0111] Fig. 4d depicts three stacked ends 400a-c, wherein each of the ends 400a-c is an end 400 as described above.

[0112] The tab 440a-c of the ends 400a-c may have an extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 240a, 240b has an extension sT of about 1.95 mm in the positive z-direction.

[0113] The stabilizing bead 413a-c of ends 400a-c may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 413a-c has an extension sPB of about 0.8 mm in the positive z-direction.

[0114] The depression 414a-c of ends 400a-c may

have an extension sFH in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 414a-c has an extension sFH of about 1.25 mm in the negative z-direction.

[0115] The extension sPB of the stabilizing bead 413a-c in the positive z-direction may be lower or equal to the extension sT of the tab 413a-c in the positive z-direction.

[0116] In the stack 400a-c, the stabilizing bead 413b of the end 400b may contact the end 400a, specifically the central panel 412a. The tab 440b of the end 400b may contact the end 400a, specifically the central panel 412a. The tab 440c of the end 400c may contact the end 400b, preferably the central panel 412b. The tab 440c of the End 400c may contact the end 400b, e.g. the central panel 412b.

[0117] Fig. 5a depicts a container 550 comprising an end 500 and a container body (not shown in Fig. 5a). The end 500 is sealed to the container body for closing the container 550 via a curl 530 of the end 500.

[0118] The end 500 comprises a central panel 512 that defines an x-y-plane. In the end 500, e.g. in the central panel 512, a stabilizing bead 513 is formed and the bead 513 extends in a positive z-direction, wherein the z-direction is perpendicular to the x-y-plane. Further, a depression 514 is formed in the end 500, preferably in the central panel 512, that extends in the negative z-direction.

[0119] End 500 comprises a tab 540 with a front portion 541 and a rear portion 542. The tab 540 is attached to the end 500, specifically to the central plane 512, via a rivet 516. The Depression 514 is partially overlapped by a portion of the tab 540, specifically by the rear portion 542 of the tab 540. The front portion 541 of the tab 540 may break a score line 518 that is located close to the outer edge of the end 500, when the tab 540 is pivoted about the rivet 516 by lifting the rear portion 542 of the tab 540.

[0120] The stabilizing bead 513 (fully) surrounds a portion of the central panel 512. The depression 514 may be positioned outside the surrounded portion of the central panel 512. The depression 514 may not be surrounded by the stabilizing bead 513.

[0121] The stabilizing bead 513 may have a basic oval shape.

[0122] The end 500 may have a basic oval shape.

[0123] Fig. 5b shows the end 500 in a top view, wherein a further end 500 is indicated below the end 500. Further, a cross section D-D is indicated in Fig. 5b.

[0124] Fig. 5c depicts a stack of ends 500a-e comprising several ends 500 as ends 500a, 500b, 500c, 500d and 500e.

[0125] In the stack of ends 500a-e, the ends 500a-e are each rotated by 180° in the x-y-plane relative to the next end 500 in the stack 500a-e. For example, end 500a has the same orientation as end 500 as shown in Fig. 5b. Compared to end 500a, end 500b is rotated by 180° in the x-y-plane and positioned below end 500a. Other

ends of the stack 500a-e are positioned and orientated similarly.

[0126] Each of the ends 500a-e comprises a tab 540a-e. Each of the ends 500a-e further comprises a central panel 512a-e, a stabilizing bead 513a-e and a depression 514a-e.

[0127] In Fig. 5d a stack of ends 500a and 500b is depicted.

[0128] The tab 540a-b of ends 500a-b may have an extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 540a-b has an extension sT of about 1.95 mm in the positive z-direction.

[0129] The depression 514a-b of ends 500a-b may have an extension sFH in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 514a-b has an extension sFH of about 1.25 mm in the negative z-direction.

[0130] The stabilizing bead 513a-b of ends 500a-b may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 513a-b has an extension sPB of about 0.8 mm in the positive z-direction.

[0131] The extension sPB of the stabilizing bead 513a-b may be lower or equal to the extension sT of the tab 540a-b in the positive z-direction.

[0132] As can best be seen in Fig. 5c and 5d, when two ends 500a-b are stacked while the ends 500a-b are rotated by 180° in the x-y-plane, the depression 514a-b of one of the ends 500a-b is not overlapped by the stabilizing bead 513b-a of the other one of the ends 500b-a such that the central panels 512a-b of the ends 500a-b are substantially parallel ($\pm 2.0^\circ$).

[0133] With reference to Fig 5d, the depression 514a of the first end 500a in the stack of ends 500a-b may contact the second end 500b, preferably the central panel 512b, in the stack of ends 500a-b. Alternatively or additionally, the tab 540b of the second end 500b may contact the first end 500a, preferably the central panel 512a. Alternatively or additionally, the stabilizing bead 513b of the second end 500b may contact the first end 500a, specifically the central panel 512a.

[0134] It is preferred that the tab 540b of the second end 500b contacts the first end 500a, e.g. the central panel 512a of the first end 500a, and the stabilizing bead 513b of the second end 500b contacts the first end 500a, e.g. the central panel 512a.

[0135] Fig. 6a shows a stack of two containers 650a-b, wherein each of the containers 650a-b comprises an end 600a-b and a container body 660a-b (also see Fig. 6c and 6d). In Fig. 6a only the end 600a is visible due to the perspective view on the stack of containers 650a-b. Further, a cross section E-E is indicated in Fig. 6a that is shown in Fig. 6d.

[0136] The end 600a comprises a stabilizing bead

613a, that is formed in the end 600a, preferably in a central panel 612a of the end 600a, and extends in a positive z-direction from a x-y-plane defined by the central panel 612a. The end 600a comprises a tab 640a having a front portion 641a and a rear portion 642a. The tab 640a is attached to the end 600a, specifically to the central panel 612a of the end 600a, via a rivet 616a.

[0137] A depression 614a is formed in the end 600a, preferably in the central panel 612a, and extends in the negative z-direction from the x-y-plane of the central panel 612a.

[0138] A score line 618a surrounds a (large) portion of the end 600a, preferably the central panel 612a, as a mechanically weakened portion described above.

[0139] A curl 630a is seamed to the container body 660a (see Fig. 6d) for attaching the end 600a to the container body 660a and to form a closed container 650a.

[0140] The end 600a has a basic oblonged rectangular shape. Two sides of the basic rectangular shape are longer, preferably at least two or three times longer, than the other two sides of the basic rectangular shape.

[0141] Fig. 6b shows an end 600, e.g. end 650. Further ends 600 are indicated below end 600. Additionally, a cross section F-F is indicated in Fig. 6b that is shown in Fig. 6c.

[0142] Fig. 6c depicts a stack of ends 600a-e comprising ends 600a, 600b, 600c, 600d and 600e.

[0143] In the stack of ends 600a-e, the ends 600a-e are each rotated by 180 ° in the x-y-plane relative to the next end 600 in the stack 600a-e. For example, end 600a has the same orientation as end 600 as shown in Fig. 6b. Compared to end 600a, end 600b is rotated by 180 ° in the x-y-plane and positioned below end 600a. Other ends of the stack 600a-e are positioned and orientated similarly.

[0144] Each of the ends 600a-e comprises a tab 640a-e. Each of the ends 600a-e further comprises a central panel 612a-e, a stabilizing bead 613a-e and a depression 614a-e.

[0145] Fig. 6d shows a stack of containers 650a-b as indicated in Fig. 6a. Each container 650a-b comprises an end 600a-b and a container body 660a-b.

[0146] Each end 600a-b comprises a stabilizing bead 613a-b, a central panel 612a-b, a depression 614a-b and a tab 640a-b. The container bodies 660a-b comprise a lower surface 685a-b.

[0147] The containers 650a-b are stacked and the central panels 612a-b of the respective ends 600a-b are substantially parallel ($\pm 2.0^\circ$).

[0148] The tab 640b of end 600b may contact the lower surface 685a of end 600a. The stabilizing bead 613b of end 600b may contact the lower surface 685a of end 600a.

[0149] In Fig. 6e a stack of ends 600a and 600b is depicted. The ends 600a and 600b as shown in Fig. 6e and described with reference to Fig. 6e are not attached to a container body.

[0150] The tab 640a-b of ends 600a-b may have an

extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 640a-b has an extension sT of about 1.95 mm in the positive z-direction.

[0151] The depression 614a-b of ends 600a-b may have an extension sFH in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 614a-b has an extension sFH of about 1.25 mm in the negative z-direction.

[0152] The stabilizing bead 613a-b of ends 600a-b may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 613a-b has an extension sPB of about 0.8 mm in the positive z-direction.

[0153] The extension sPB of the stabilizing bead 613a-b may be lower or equal to the extension sT of the tab 640a-b in the positive z-direction.

[0154] The central panels 612a-b of ends 600a-b are (substantially) parallel. Thus, a stack of ends 600a, 600b with a high stability is provided.

[0155] In Fig. 6f, a stack of containers 650a-b is shown, wherein each of the containers 650a-b comprises an end 600a-b as described above.

[0156] The central panels 612a-b of the ends 600a-b of the containers 650a-b are (substantially) parallel.

[0157] Alternatively or additionally, the lower surfaces 685a-b of containers 650a-b may be (substantially) parallel.

[0158] Fig. 7a depicts a container 750 comprising an end 700 and a container body. The container body is not shown in Fig. 7a. The end 700 is seamed to the container body for closing the container 750 via a curl 730 of the end 700.

[0159] The end 700 comprises a central panel 712 that defines an x-y-plane. In the end 700, specifically in the central panel 712, a stabilizing bead 713 is formed and the bead 713 extends in a positive z-direction, wherein the z-direction is perpendicular to the x-y-plane. Further, a depression 714 is formed in the end 700, e.g. in the central panel 712, that extends in the negative z-direction.

[0160] End 700 comprises a tab 740 with a front portion 741 and a rear portion 742. The tab 740 is attached to the end 700, e.g. to the central panel 712, via a rivet 716. The Depression 714 is partially overlapped by a portion of the tab 740, specifically by the rear portion 742 of the tab 740. The front portion 741 of the tab 740 may break a score line 718 as described above.

[0161] The stabilizing bead 713 (fully) surrounds a portion of the central panel 712. The depression 714 may be positioned outside the surrounded portion of the central panel 712. The depression 714 may not be surrounded by the stabilizing bead 713.

[0162] The stabilizing bead 713 may have a basic oval shape with two elongated sides that may be parallel over

a distance of at least 10 mm.

[0163] The end 700 may have a basic oval shape with two elongated sides that may be parallel over a distance of at least 10 mm.

[0164] Fig. 7b shows the end 700 in a top view. A further end 700 is indicated below the end 700. A cross section G-G is indicated in Fig. 7b.

[0165] Fig. 7c depicts a stack of ends 700a-e. Each of the ends 700a-e may be an end 700 as described above.

[0166] In the stack of ends 700a-e, the ends 700a-e are each rotated by 180 ° in the x-y-plane relative to the next end 700 in the stack 700a-e. For example, end 700a has the same orientation as end 700 as shown in Fig. 7b. End 700b is rotated by 180 ° in the x-y-plane relative to end 700a and positioned below end 700a. Other ends of the stack 700a-e are positioned and orientated similarly.

[0167] Each of the ends 700a-e comprises a tab 740a-e, a central panel 712a-e, a stabilizing bead 713a-e and a depression 714a-e.

[0168] In Fig. 7d ends 500a and 500b are stacked.

[0169] The tab 740a-b of ends 700a-b may have an extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 740a-b has an extension sT of about 1.95 mm in the positive z-direction.

[0170] The depression 714a-b of ends 700a-b may have an extension sFH in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 714a-b has an extension sFH of about 1.25 mm in the negative z-direction.

[0171] The stabilizing bead 713a-b of ends 700a-b may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 713a-b has an extension sPB of about 0.8 mm in the positive z-direction.

[0172] The extension sPB of the stabilizing bead 713a-b may be lower or equal to the extension sT of the tab 740a-b in the positive z-direction.

[0173] As can best be seen in Fig. 7c and 7d, when two ends 700a-b are stacked while the ends 700a-b are rotated by 180 ° in the x-y-plane, the depression 714a-b of one of the ends 700a-b is not overlapped by the stabilizing bead 713b-a of the other one of the ends 700b-a such that the central panels 712a-b of the ends 700a-b are substantially parallel ($\pm 2.0^\circ$).

[0174] With reference to Fig 7d, the depression 714a of the first end 700a in the stack of ends 700a-b may contact the end 700b, specifically the central panel 712b, in the stack of ends 700a-b. Alternatively or additionally, the tab 740b of the second end 700b may contact the first end 700a, e.g. the central panel 712a. Alternatively or additionally, the stabilizing bead 713b of the second end 700b may contact the first end 700a, preferably the central panel 712a.

[0175] It is preferred that the tab 740b of the second end 700b contacts the first end 700a, preferably the central panel 712a, and the stabilizing bead 713b of the second end 700b contacts the first end 700a, specifically the central panel 712a.

[0176] Fig. 8a shows an end 800 that can be similar to any of the ends 100, 200, 300, 400, 500, 600, 700.

[0177] The end 800 comprises a central panel 812 that defines an x-y-plane, wherein a z-direction is perpendicular to the x-y-plane. A stabilizing bead 813 is formed in the end 800, e.g. in the central panel 812 of the end 800, and the stabilizing bead 813 extends in the positive z-direction.

[0178] Further, a depression 814 is formed in the end 800, specifically in the central panel of the end 800. The depression 814 is positioned such that a rear portion 842 of a tab 840, attached to the end 800, e.g. to the central panel 812, via a rivet 816, covers the depression 814 at least partially. A front portion 841 of the tab 840 may break a score line 818 in the end 800, preferably in the central panel 812, when a consumer uses the tab as described above in order to remove a (large) portion of the end 800, e.g. of the central panel 812, surrounded by the score line 818.

[0179] The end 800 may be attached to a container body (not shown in Fig. 8a) via a curl 830.

[0180] In the end 800, specifically in the central panel 812 of the end 800, a (second) bead 880 is formed that extends in the negative z-direction.

[0181] The second bead 880 may be formed such that a surface 881, preferably with an area of at least 100 mm², is formed. The surface 881 may be substantially parallel to the central panel 812. The surface 881 may extend in the negative z-direction.

[0182] The second bead 880 may be partially surrounded by the stabilizing bead 813.

[0183] The second bead 880 may be fully surrounded by the stabilizing bead 813.

[0184] The second bead 880 may not be surrounded by the stabilizing bead 813.

[0185] With reference to Fig. 8b, the second bead 880 and/or the surface 881 may extend sNB between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm, in the negative z-direction that is perpendicular to the x-y-plane of the central panel.

[0186] The second bead 880 and the depression 814 may be positioned and shaped such that the x-y-plane of the central panel of the end is parallel to a flat surface $\pm 2.0^\circ$, preferably $\pm 1.5^\circ$, more preferably $\pm 1.0^\circ$, most preferred $\pm 0.5^\circ$, when the end is positioned on the flat surface.

[0187] Preferably, the second bead 880 and the depression 814 may be positioned and shaped sFH,sNB such that the x-y-plane of the central panel of the end is parallel to a flat surface $\pm 2.0^\circ$, preferably $\pm 1.5^\circ$, more preferably $\pm 1.0^\circ$, most preferred $\pm 0.5^\circ$, when the second bead and/or the depression contacts the flat surface.

[0188] The extension sNB of the second bead 880 may be equal to the extension of the depression 814 in the negative z-direction ± 1.5 mm, preferably ± 1.0 mm, more preferably ± 0.5 mm, most preferably ± 0.2 mm. It is especially preferred that the extension sNB of the second bead is substantially equal to the extension of the depression in the negative z-direction.

[0189] The tab 840 of end 800 may have an extension sT in the positive z-direction between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm. Specifically, the tab 800 has an extension sT of about 1.95 mm in the positive z-direction.

[0190] The depression 814 of end 800 may have an extension sFH in the negative z-direction between 0.5 mm and 4.0 mm, preferably between 1.0 mm and 2.5 mm, more preferably between 1.2 mm and 1.5 mm. Specifically, the depression 814 has an extension sFH of about 1.25 mm in the negative z-direction.

[0191] The stabilizing bead 813 of end 800 may have an extension sPB in the positive z-direction between 0.4 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.6 mm and 1.0 mm. Specifically, the stabilizing bead 813 has an extension sPB of about 0.8 mm in the positive z-direction.

[0192] An alternative embodiment of an end 800a comprising a second bead 880a', 880a" that extends in the negative z-direction is shown in Fig. 8c.

[0193] The second bead 880a', 880a" comprises a first portion 880a' and a second portion 880a". The first and second portions of the second bead 880a', 880a" are located in the end 800a, preferably in the central panel 812a, such that the bead 813a does not surround a portion of the second bead 880a', 880a".

[0194] Each of the portions 880a', 880a" may have an elongated shape in the x-y-plane. The portions 880a', 880a" may extend in the x-y-plane from a portion of the tab 840a to a portion of the stabilizing bead 813a. Preferably the stabilizing bead 813a is at least partially surrounded by the portions 880a', 880a" of the second bead.

[0195] Extension dimensions and relations of the stabilizing bead 813, the second bead 880, the depression 814 and the tab 840 described with reference to Fig. 8a and 8b are as well disclosed for the stabilizing bead 813a, the second bead 880a', 880a", the depression 814a and the tab 840a with reference to Fig. 8c.

[0196] Fig. 8d shows another alternative of an end 800b comprising a second bead 880b', 880b" that extends in the negative z-direction. The second bead 880b', 880b" comprises a first portion 880b' and a second portion 880b", wherein each of the portions 880b', 880b" comprises more than one, preferably at least three, independent beads that extend in the negative z-direction.

[0197] The independent beads of the portions 880b', 880b" may have a substantially circular shape in the x-y-plane, an oval shape in the x-y-plane and/or an elongated shape in the x-y-plane. The portions

880b', 880b" may be located in the end 800b, e.g. in the central panel 812b, such that the stabilizing bead 813b does not surround a portion of the second bead 880b', 880b". The stabilizing bead 813b may be at least partially surrounded by the portions 880b', 880b" of the second bead.

[0198] Extension dimensions and relations of the stabilizing bead 813, the second bead 880, the depression 814 and the tab 840 described with reference to Fig. 8a and 8b are as well disclosed for the stabilizing bead 813b, the second bead 880b', 880b", the depression 814b and the tab 840b with reference to Fig. 8d.

[0199] Although, the second bead is described herein with reference to Fig. 8a to d, the second bead as described may be comprised by any one of the ends 100, 200, 300, 400, 500, 600, 700 described herein.

[0200] Each of the herein described ends 100, 200, 300, 400, 500, 600, 700, 800 may comprise at least one bulge 120, 121; 220, 221 as described with reference to Fig. 1, 2a-c and 3a-c.

Claims

1. Container (350a), comprising an end (300a) and a container body (360a), the end (300a) comprising:

- (a) a central panel (312a), that defines an x-y-plane, a z-direction being perpendicular to the x-y-plane;
- (b) a tab (340a) attached to the end (300a), and wherein the tab (340a) extends in a positive z-direction; and
- (c) at least one stabilizing bead (313a), that is shaped in the end (300a) and wherein the bead (313a) extends in the positive z-direction;
- (d) and wherein the container body (360a) comprises a lower surface (385a) opposite to the end (300a);
- (e) wherein the container (350a) is configured to be stacked with a second container (350b) comprising a second end (300b) with a second central panel (312b) such that a portion of the lower surface (385a) of the container (350a) contacts a portion of the second end (300b) of the second container (350b), and the central panel (312a) of the container (350a) is parallel $\pm 2.0^\circ$ to the second central panel (312b) of the second end (300b) of the second container (350b), wherein the container (350a) and the second container (350b) are same containers (350a, 350b).

2. Container according to claim 1, wherein the end (300a) comprises a depression (314a), that is formed in the end (300a) and wherein the depression (314a) extends in a negative z-direction, the depression (314a) being shaped and positioned to allow a hu-

man finger to reach at least in part below a rear portion (342a) of the tab (340a).

3. Container according to any one of the preceding claims, wherein the extension (sT) of the tab (340a) in the positive z-direction is equal to the extension (sPB) of the bead (313a) in the positive z-direction ± 1.5 mm, preferably ± 0.75 mm, more preferably ± 0.3 mm.
4. Container according to claim 2 or 3, wherein an extension (sFH) of the depression (314a) in the negative z-direction is equal to an extension (sT) of the tab (340a) in the positive z-direction ± 1.0 mm, preferably ± 0.5 mm, more preferably ± 0.2 mm.
5. Container according to any one of claims 2 to 4, wherein an extension (sFH) of the depression (314a) in the negative z-direction is equal to an extension (sPB) of the bead (313a) in the positive z-direction ± 2.0 mm, preferably ± 1.2 mm, more preferably ± 0.8 mm.
6. Container according to any one of the preceding claims, wherein the end (300a) comprises at least one bulge (320a) that is shaped in the end (300a), and wherein the at least one bulge (320a) extends in the positive z-direction, and is associated with the tab (340a).
7. Container according to claim 6, wherein an extension (sTB) of the bulge (320a) in the positive z-direction is equal to an extension (sT) of the tab (340a) in the positive z-direction ± 2.0 mm, preferably ± 1.5 mm, more preferably ± 1.0 mm, and/or an extension (sTB) of the bulge (320a) in the positive z-direction is equal to an extension (sPB) of the bead (313a) in the positive z-direction ± 2.0 mm, preferably ± 1.2 mm, more preferably ± 0.6 mm, and/or an extension (sTB) of the bulge (320a) in the positive z-direction is equal to an extension (sFH) of the depression (314a) in the negative z-direction ± 2.0 mm, preferably ± 1.0 mm, more preferably ± 0.5 mm, most preferred ± 0.2 mm.
8. Container according to any one of the preceding claims, wherein the end (300a) comprises a second bead (880), wherein the second bead (880) extends in the negative z-direction.
9. Container according to claim 8, wherein the second bead (880) and the depression (314a) are shaped and positioned such that the x-y-plane of the central panel (312a) is parallel $\pm 2.0^\circ$ to a flat surface, when the end (300a) is positioned on the flat surface, preferably when the second bead (880) and/or the depression (314a) contacts the flat surface.

10. Container according to any one of the preceding claims, wherein an extension (sT) of the tab (340a) is between 1.4 mm and 2.5 mm, preferably between 1.7 mm and 2.2 mm, more preferably between 1.8 mm and 2.0 mm.
11. Container according to any one of the preceding claims, wherein the end (300a) comprises metal preferably steel or aluminum, or is made of metal, preferably steel or aluminum, and/or the container body (360a) comprises metal preferably steel or aluminum, or is made of metal, preferably steel or aluminum.
12. Container according to any one of the preceding claims, wherein the depression (314a) is located outside an area that is surrounded by the bead (313a) in the x-y-plane.
13. Container according to any one of the preceding claims, wherein the container (350a) comprises food.
14. Container according to any one of the preceding claims, wherein the container (300a) has a non-round basic shape in the x-y-plane.
15. **Stack of at least two containers** according to any one of the preceding claims.

FIG. 1

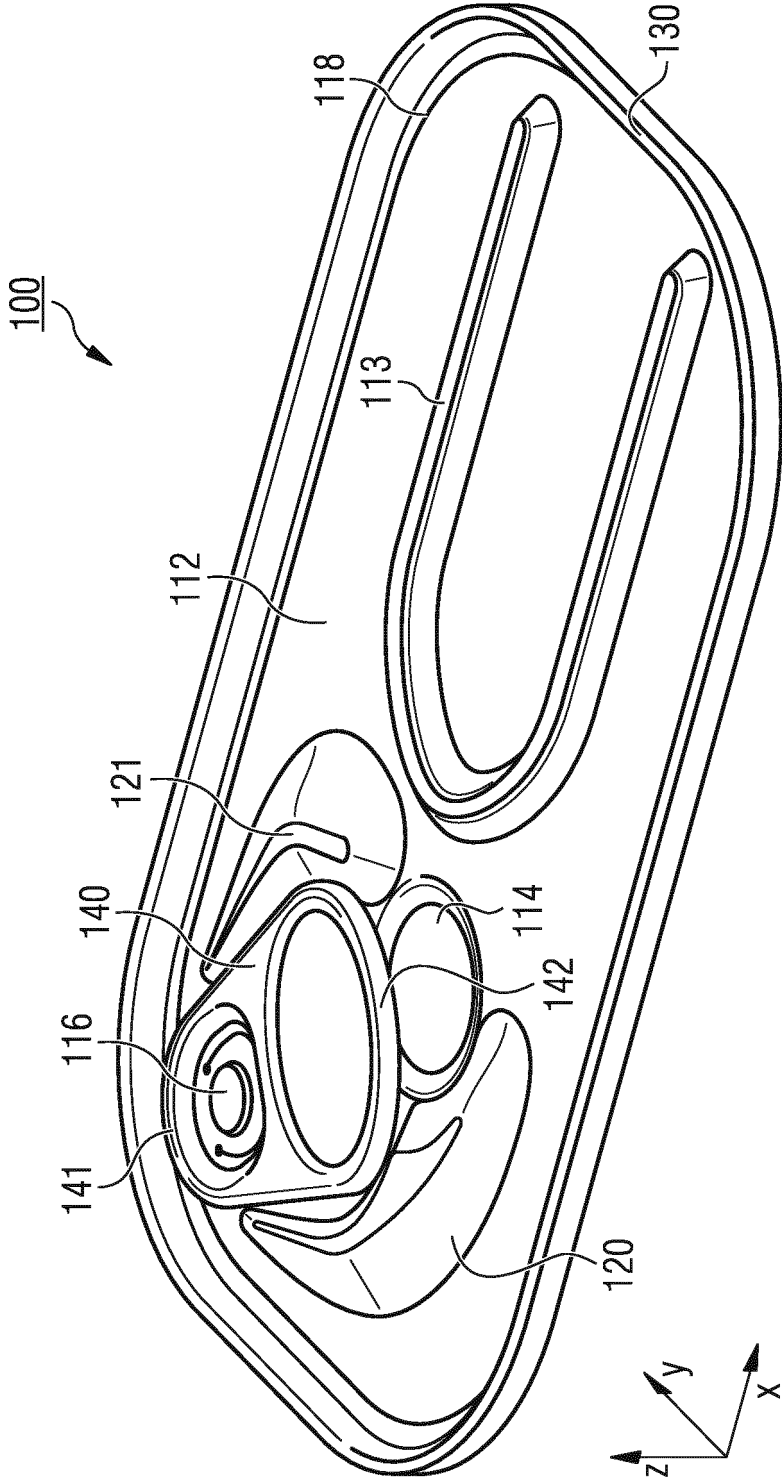


FIG. 2a

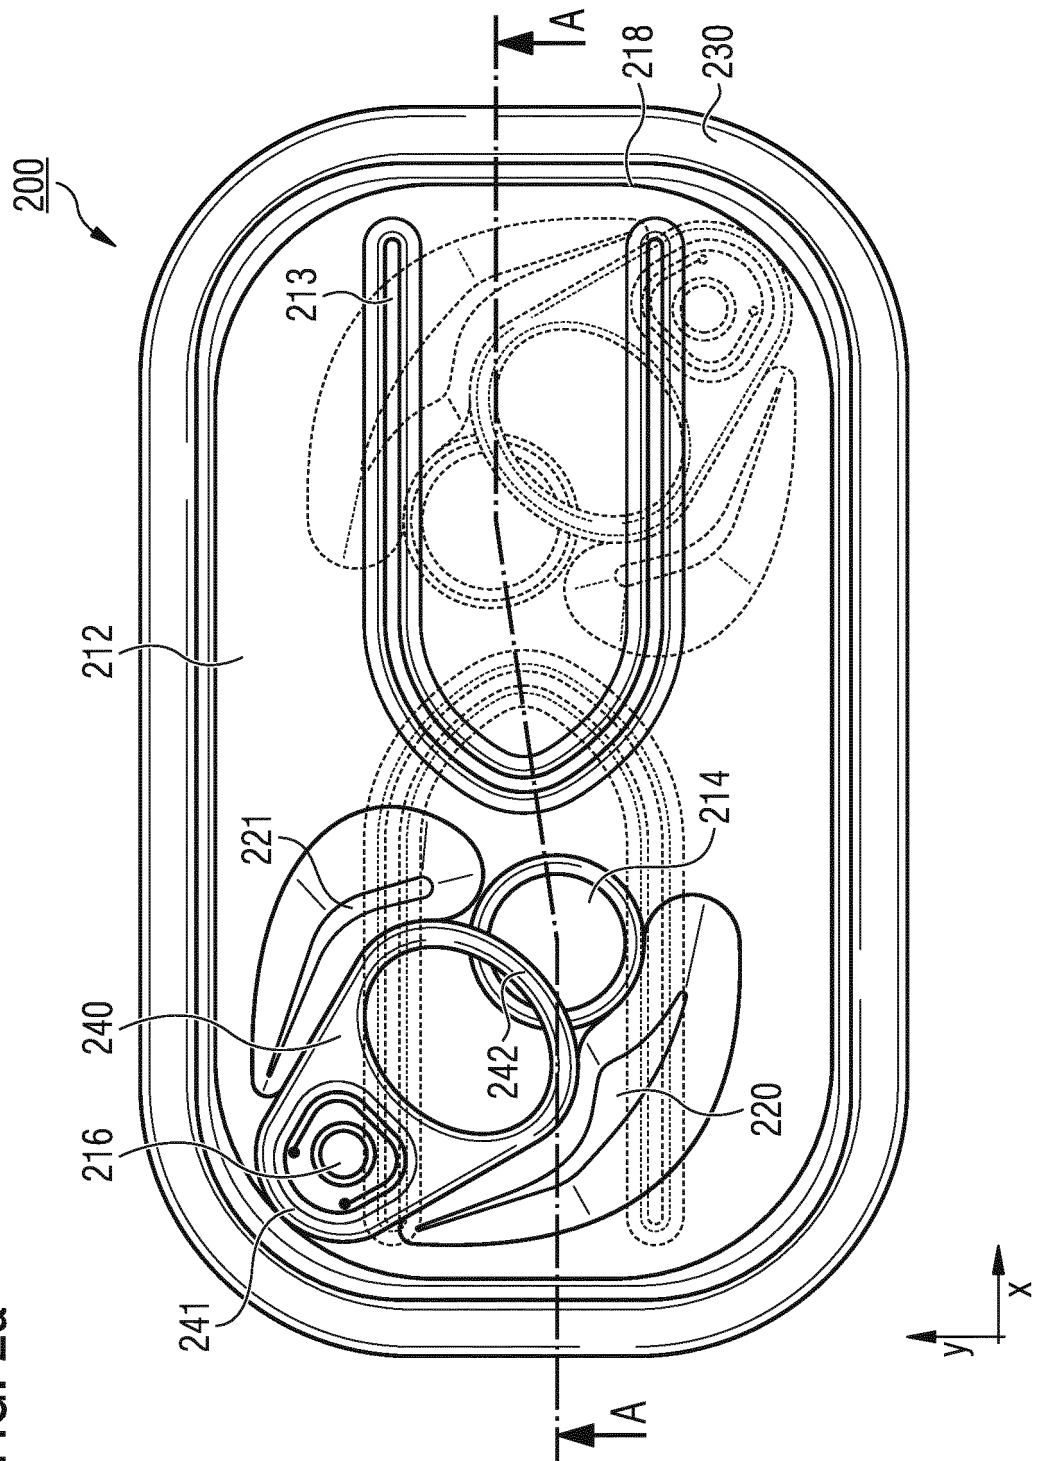


FIG. 2b A-A

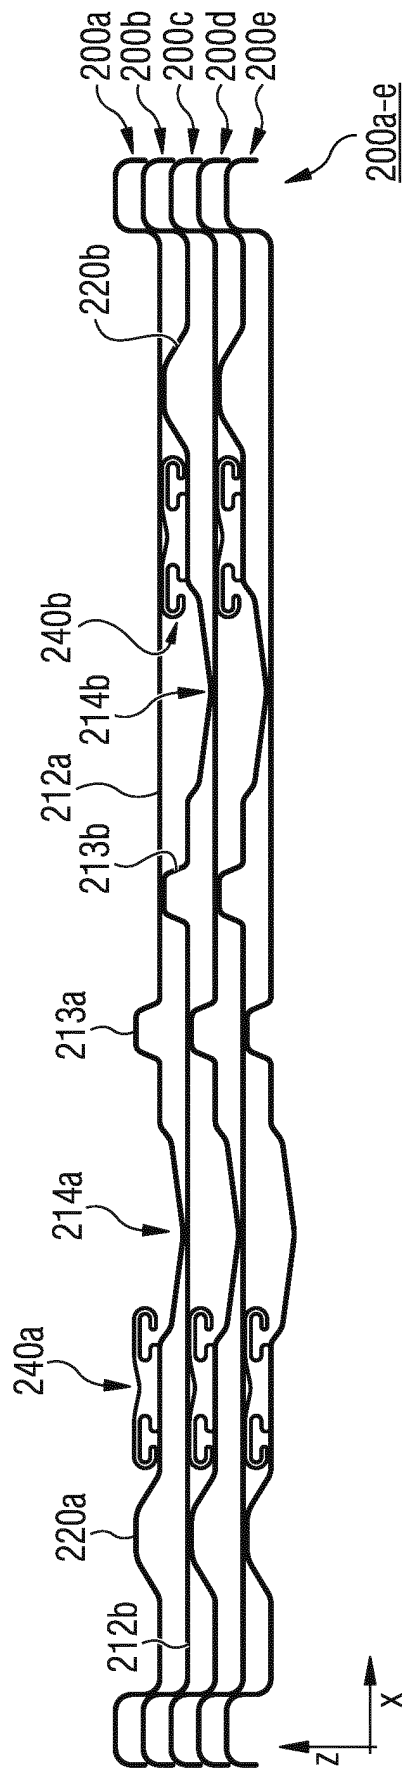


FIG. 2c A-A

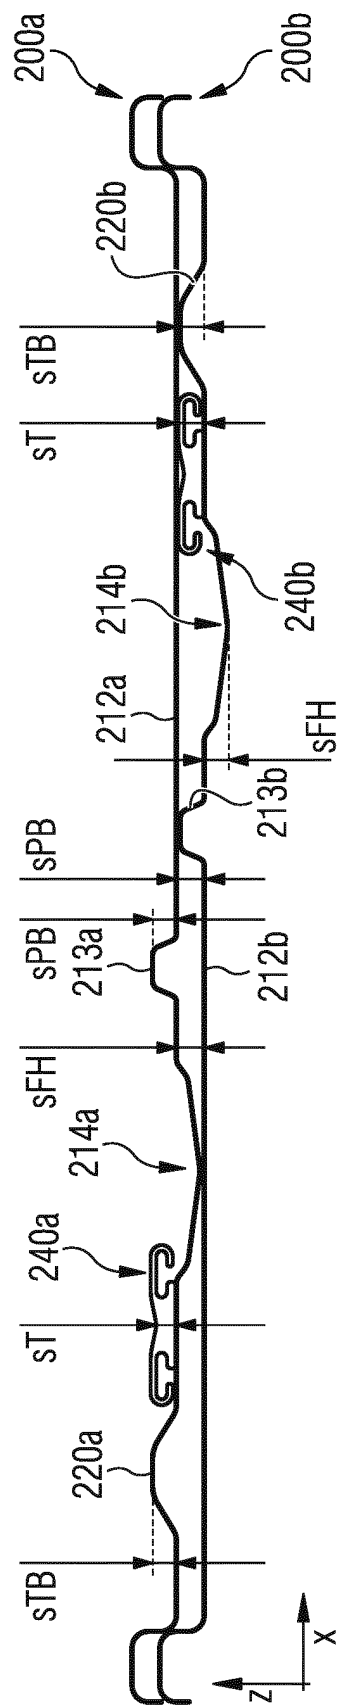


FIG. 3a

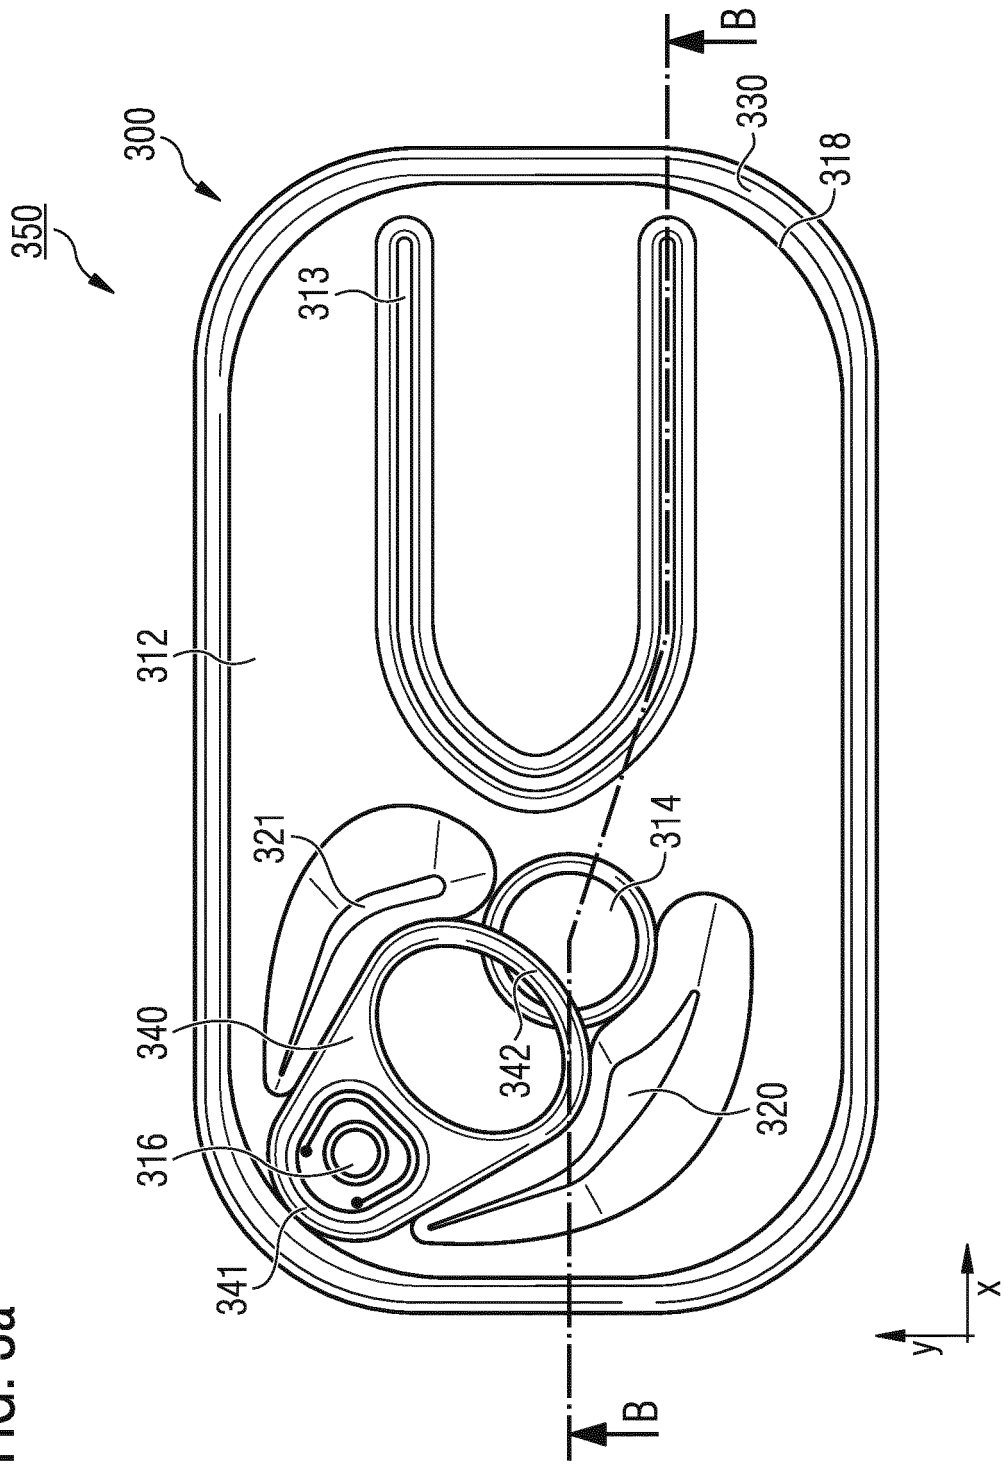


FIG. 3b B-B

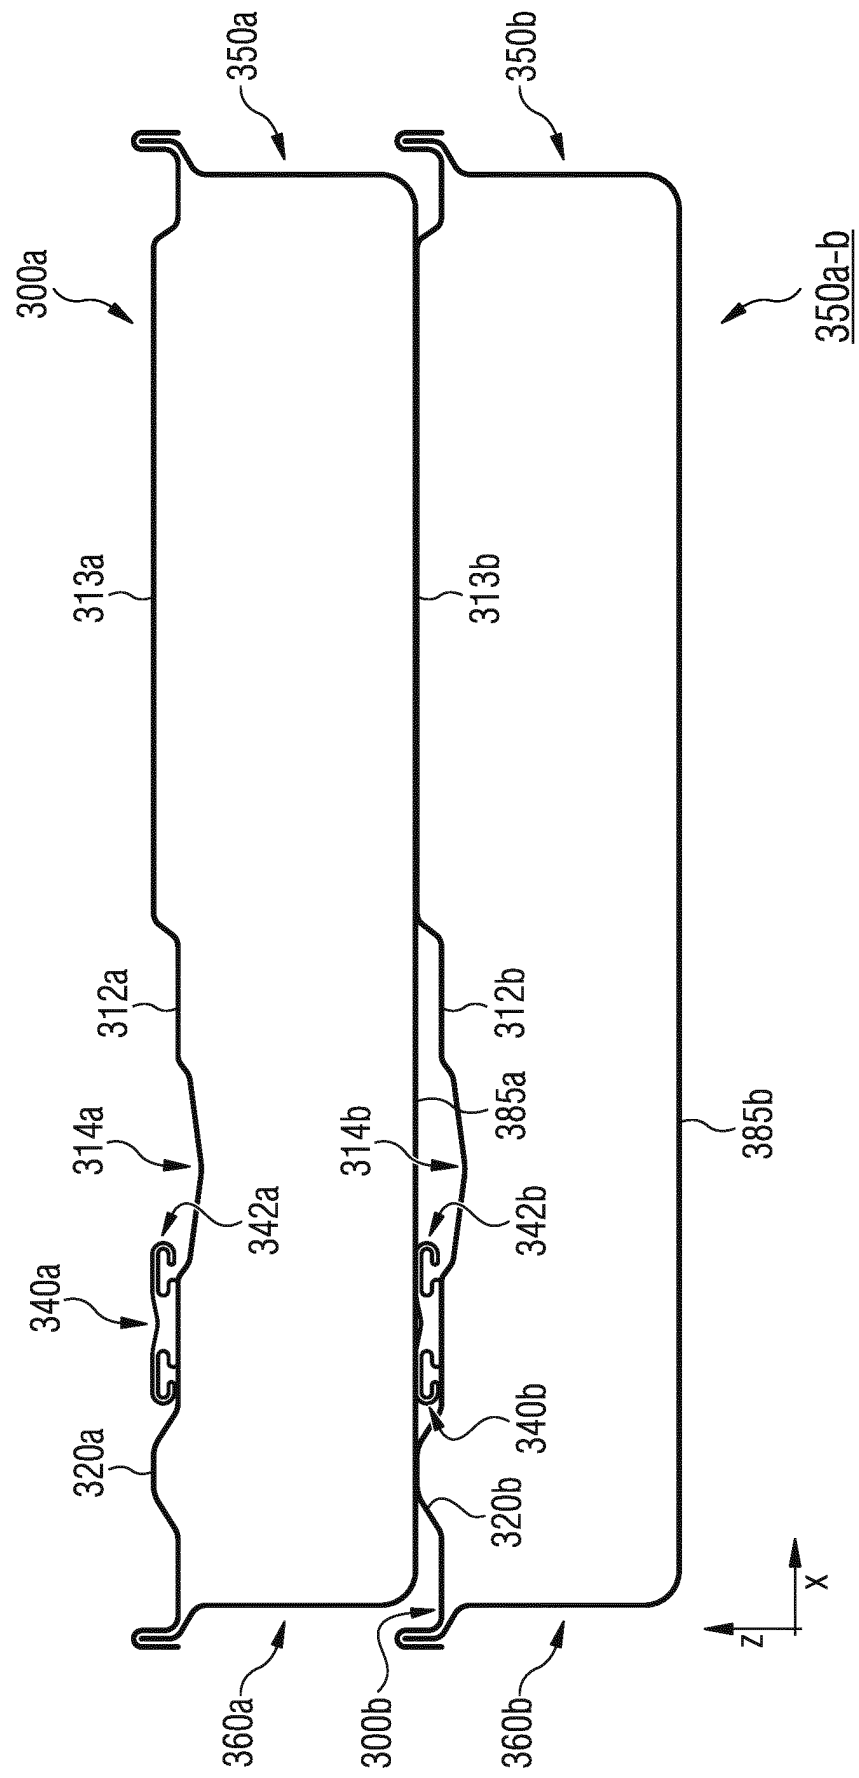


FIG. 4a

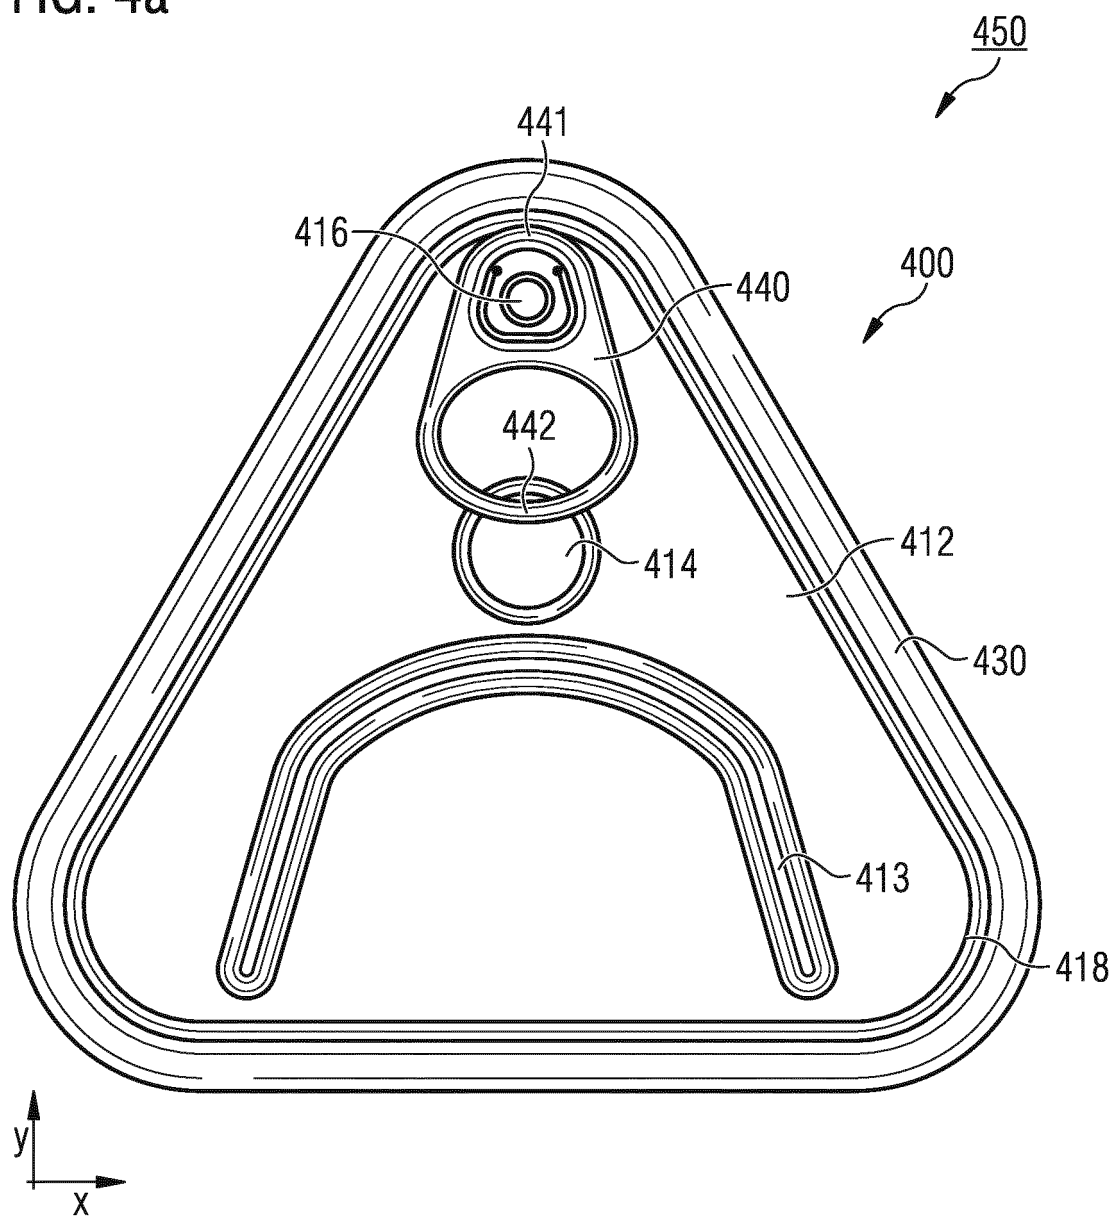


FIG. 4b

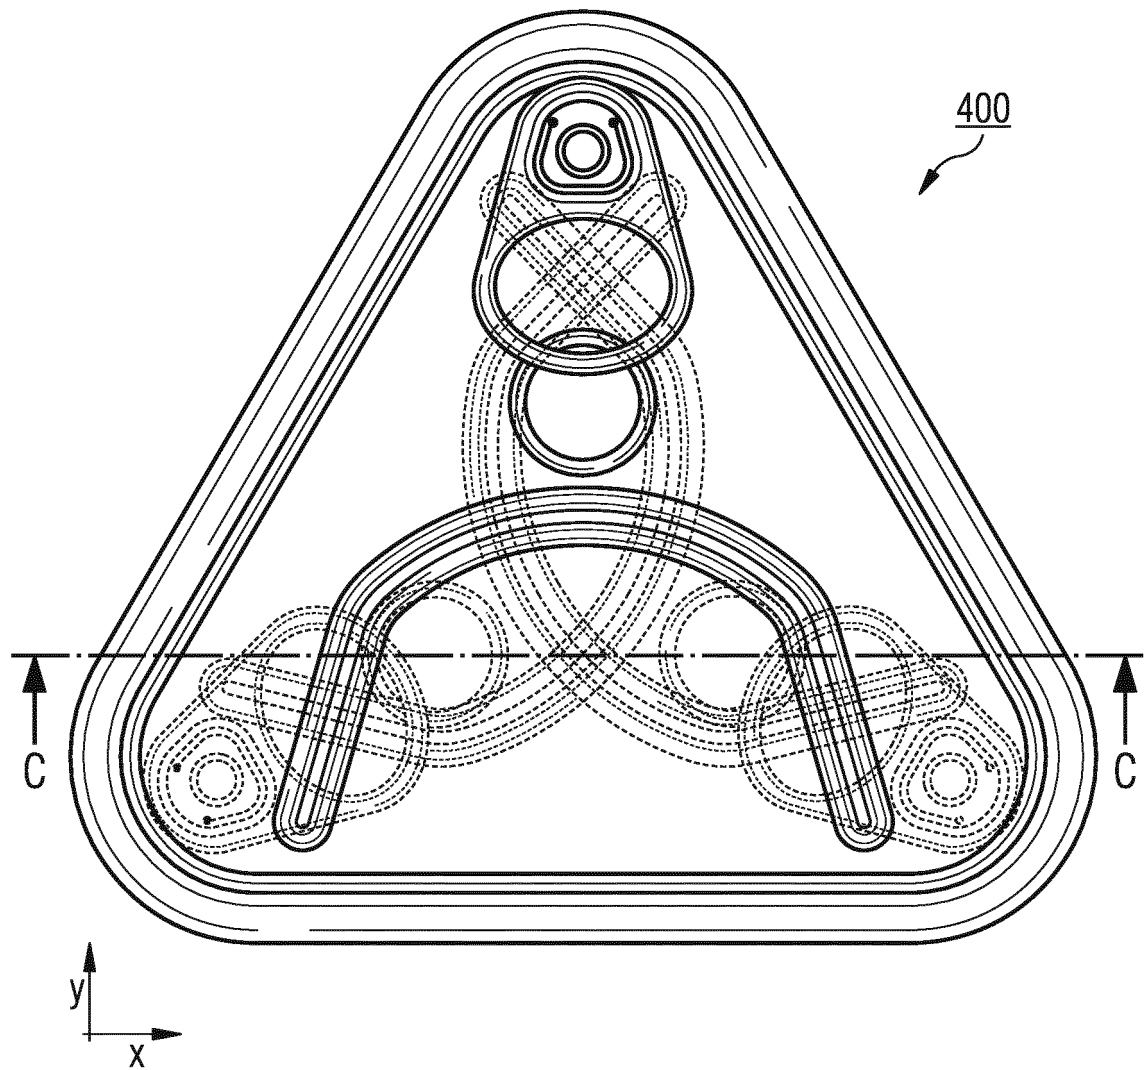


FIG. 4c C-C

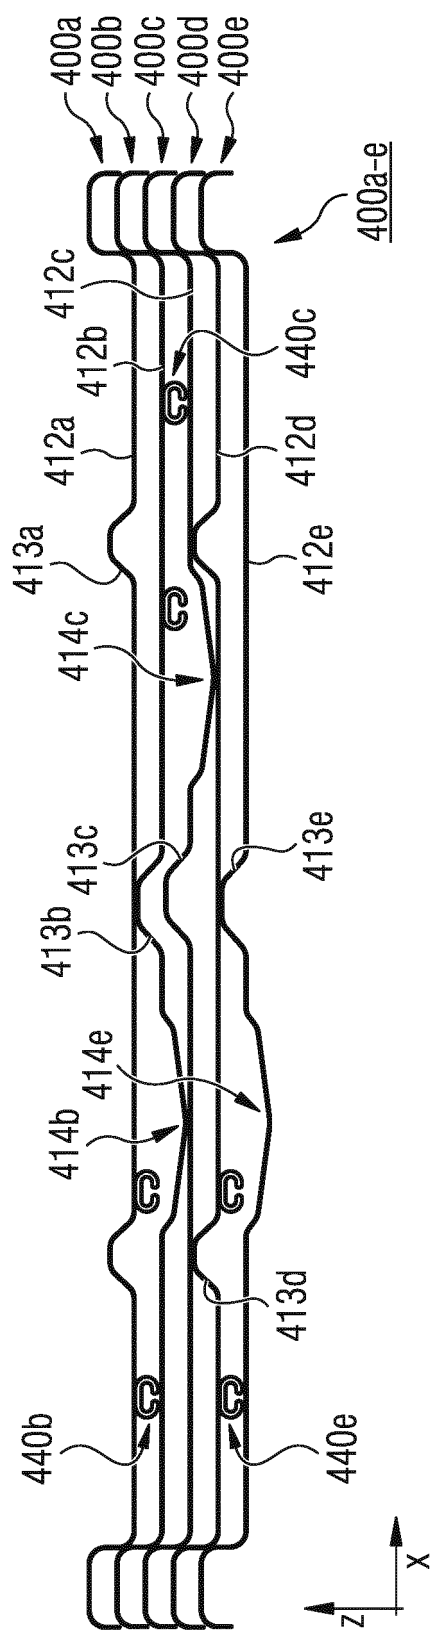
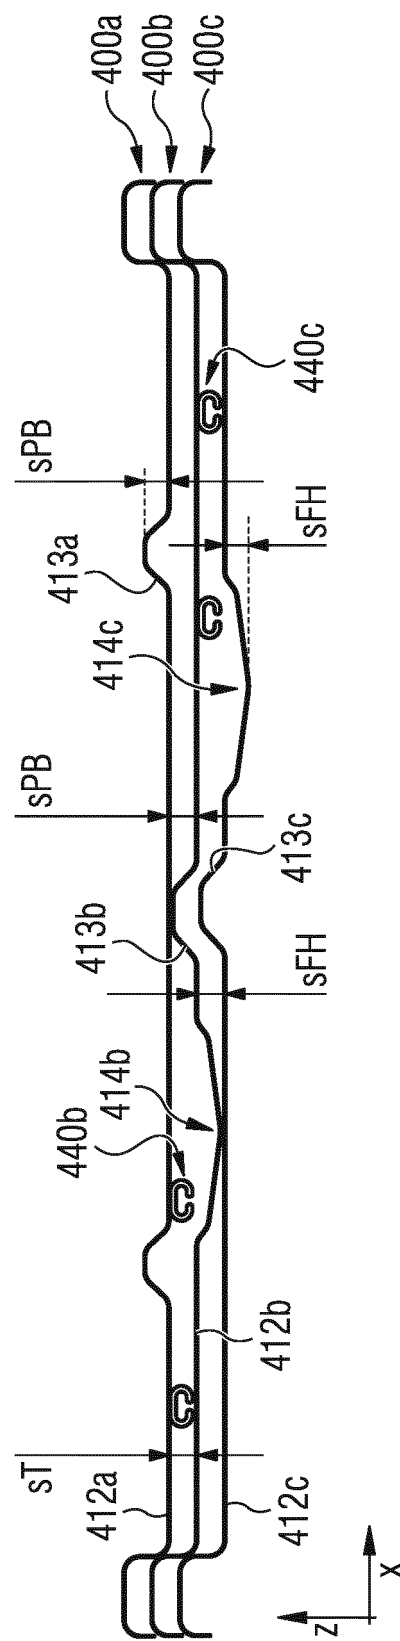


FIG. 4d C-C



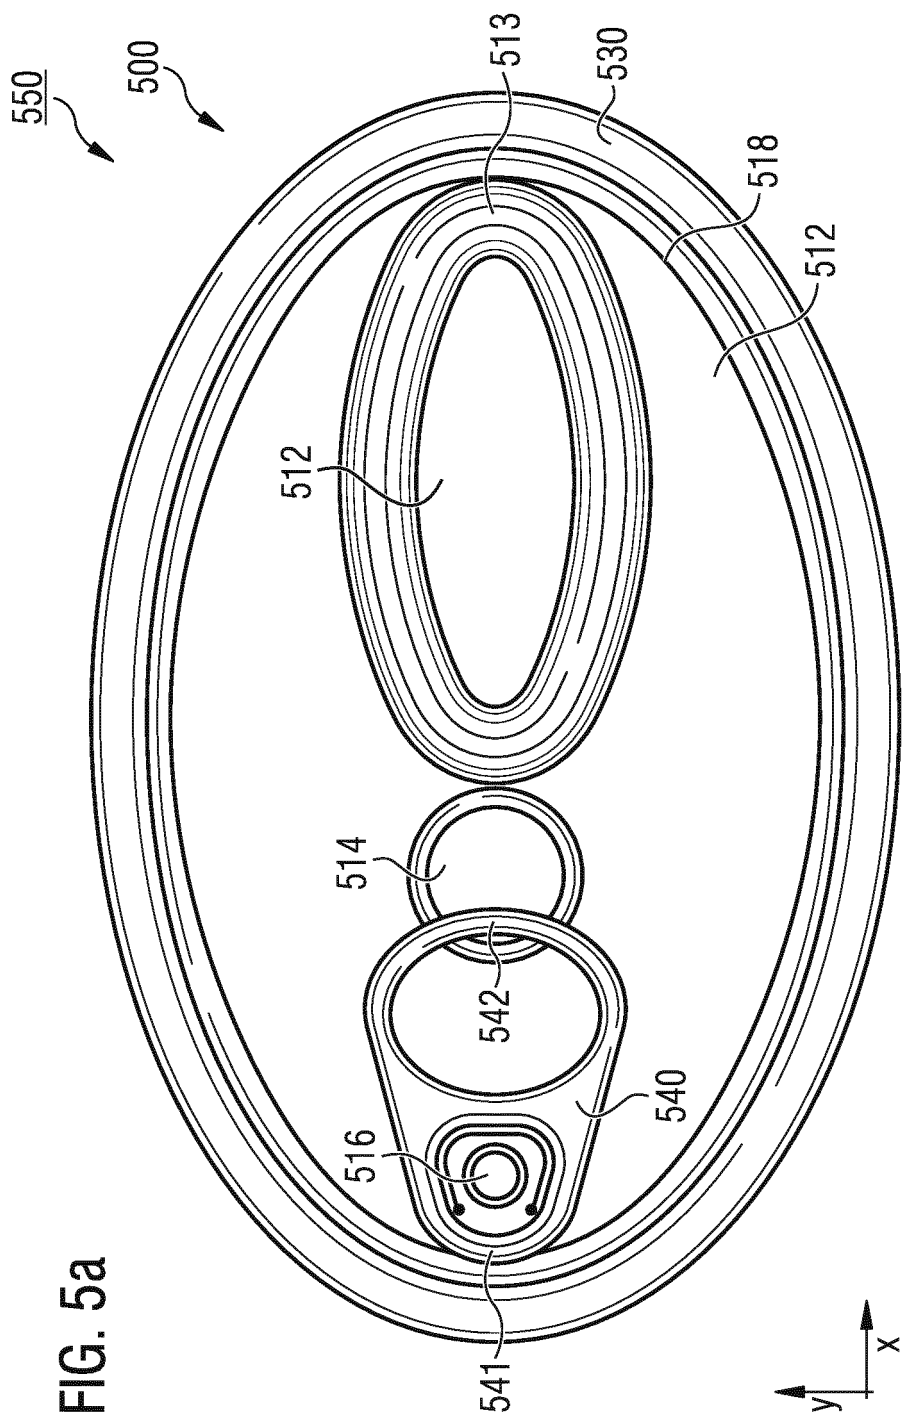


FIG. 5a

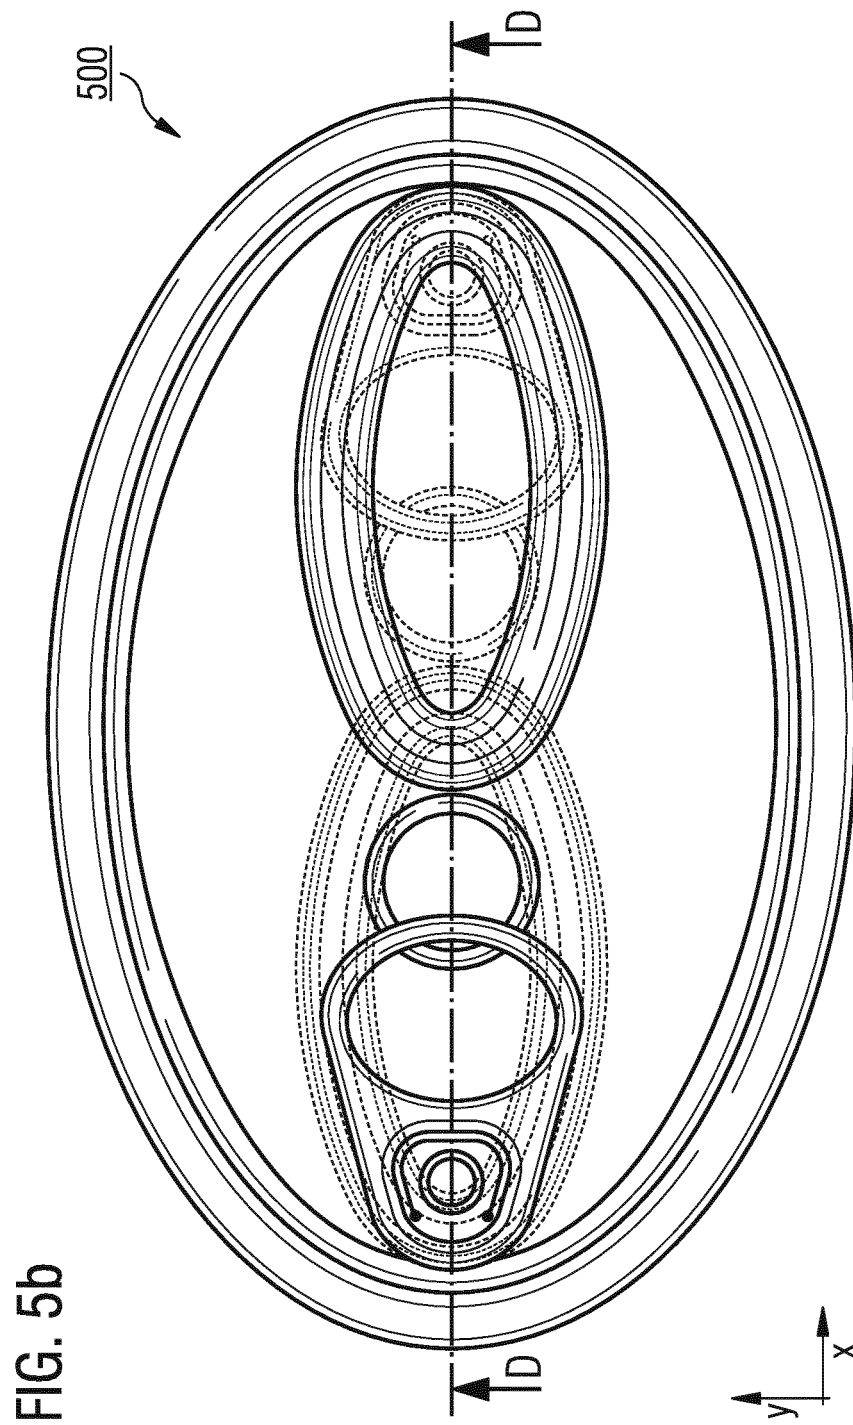


FIG. 5b

FIG. 5c D-D

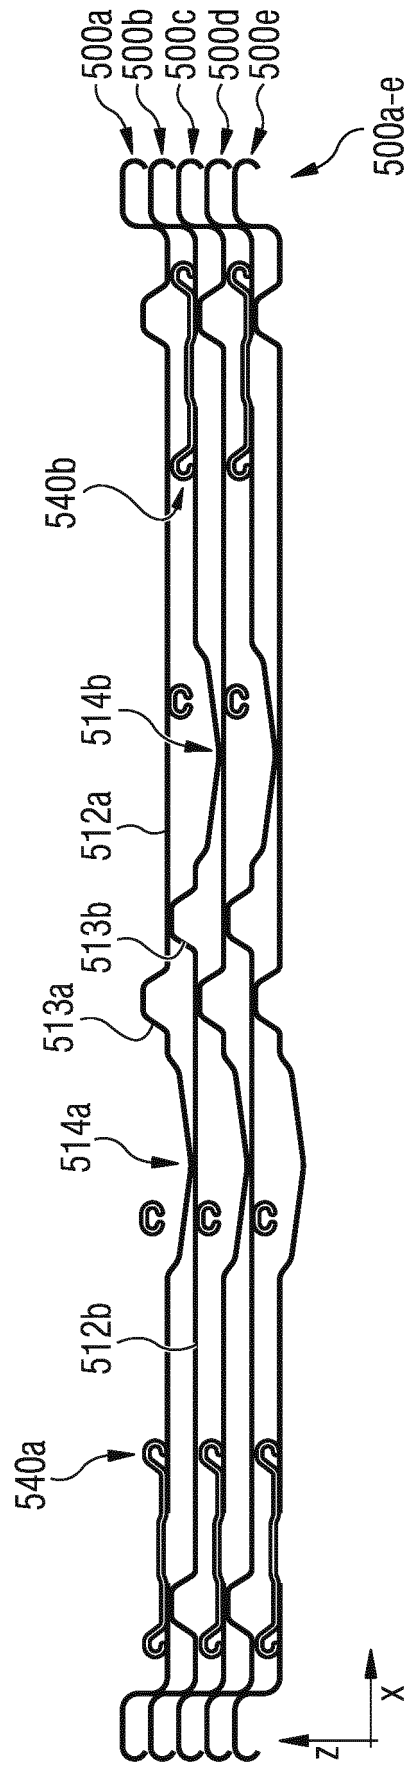


FIG. 5d D-D

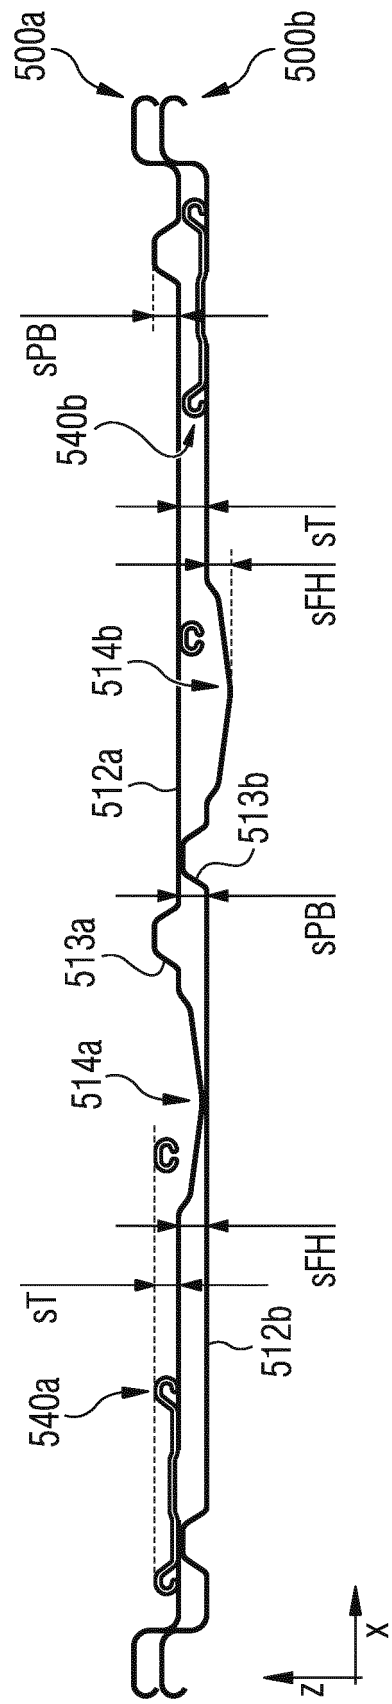


FIG. 6a

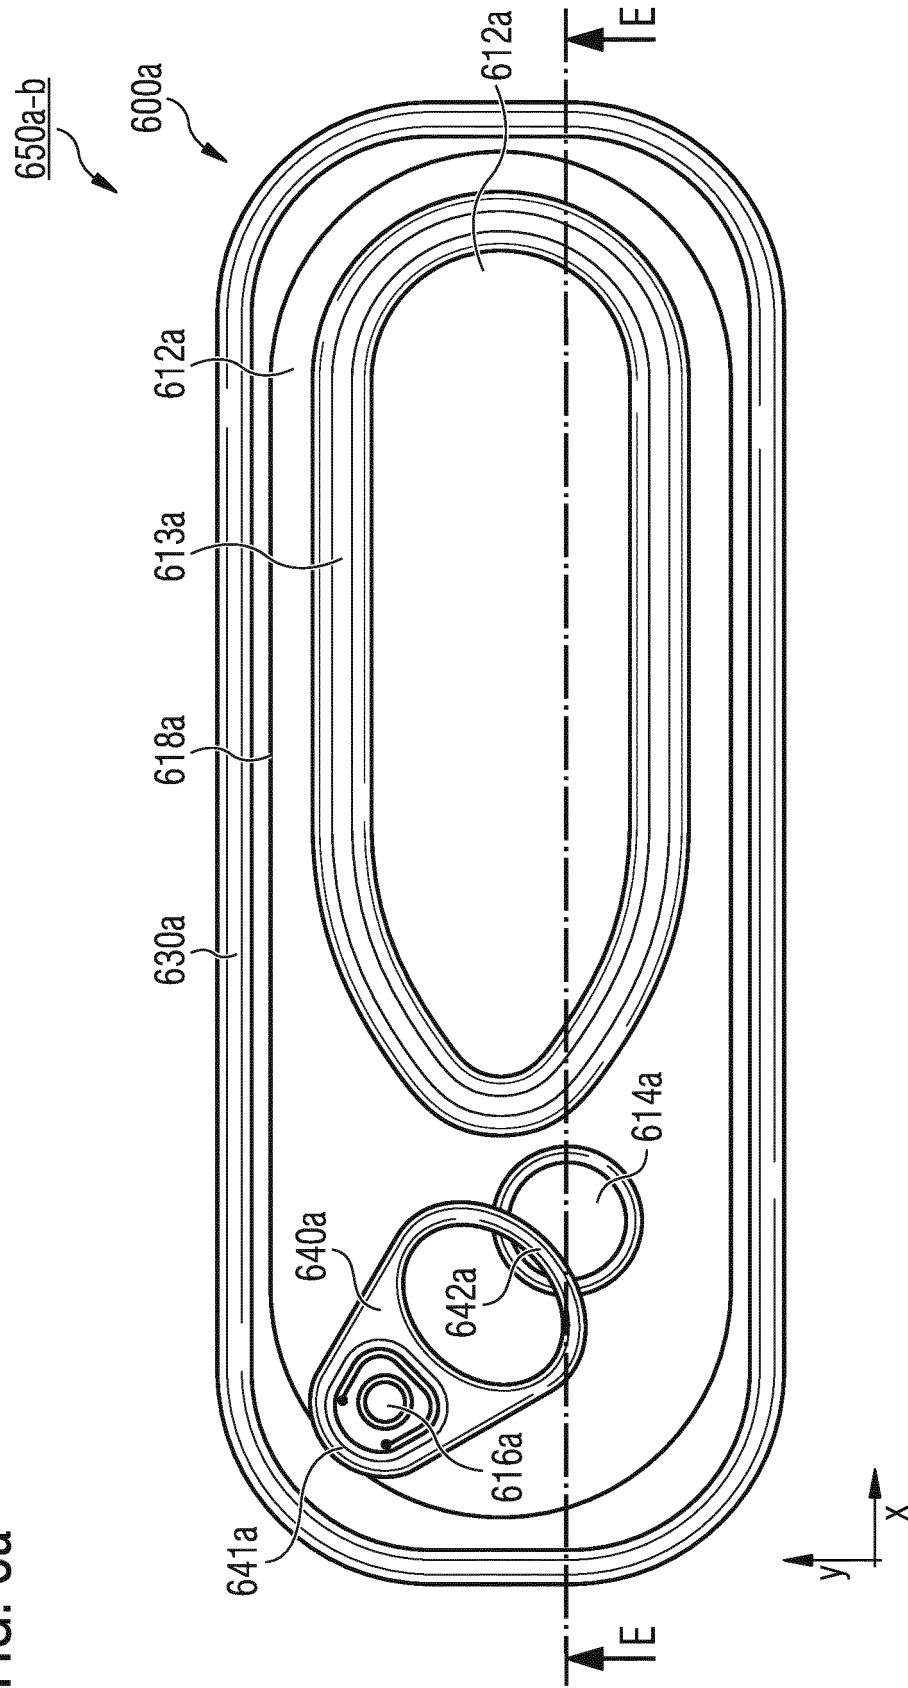


FIG. 6b

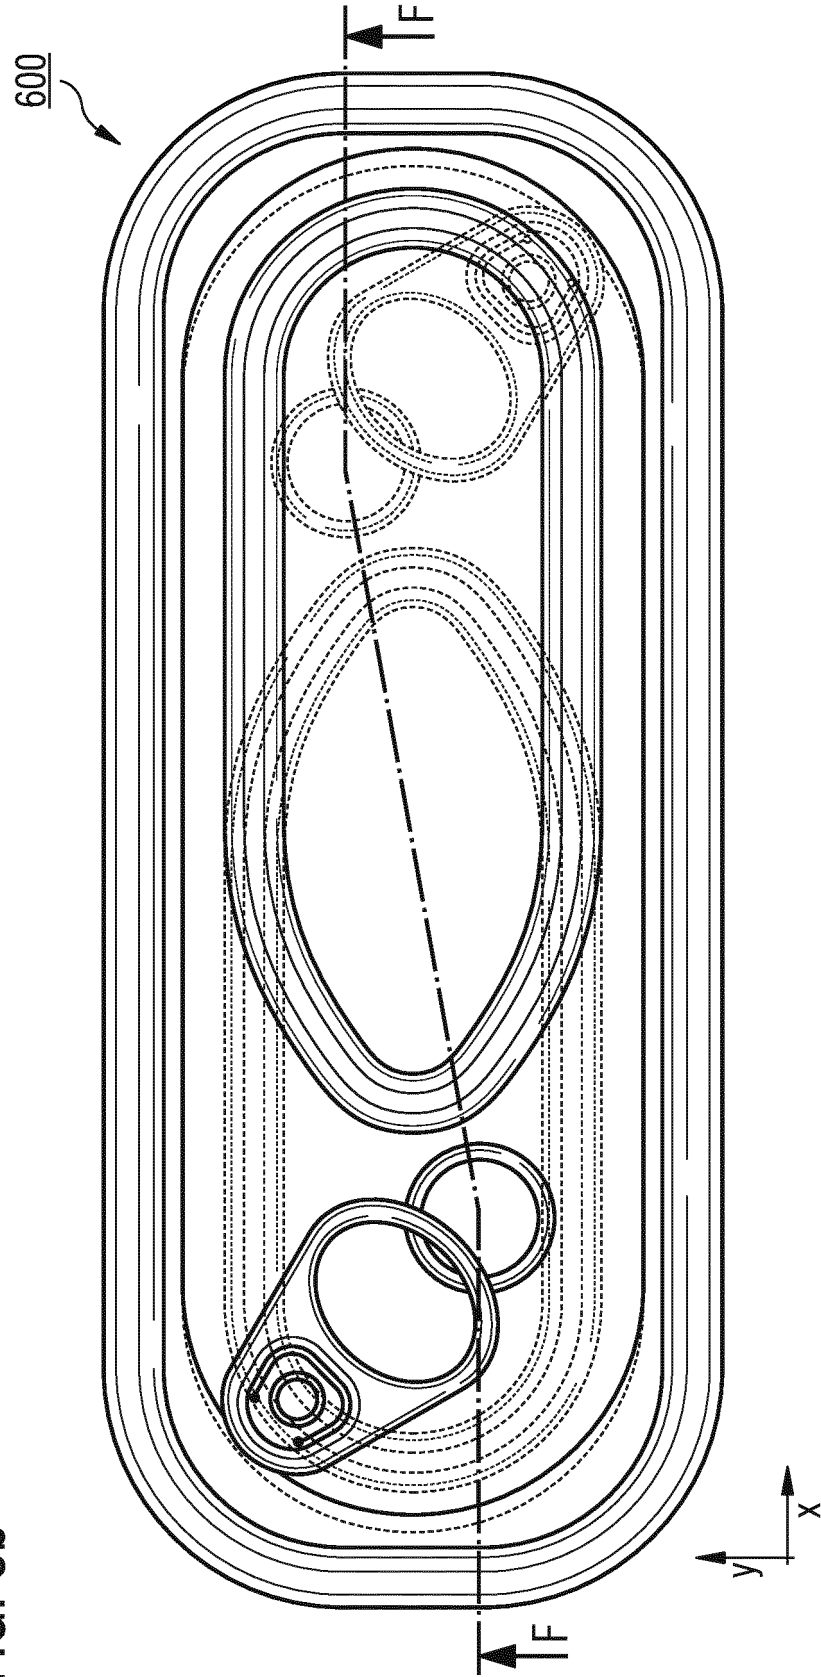


FIG. 6c F-F

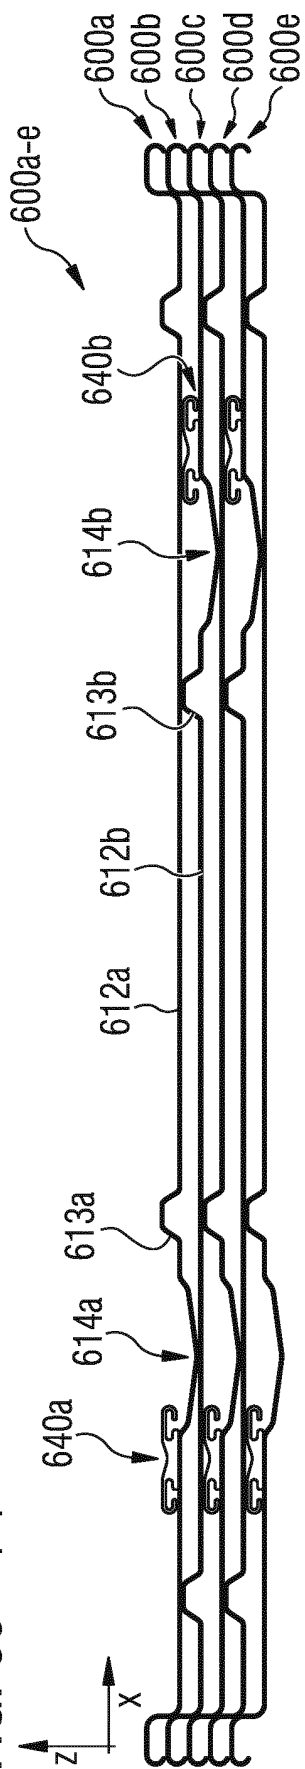


FIG. 6d E-E

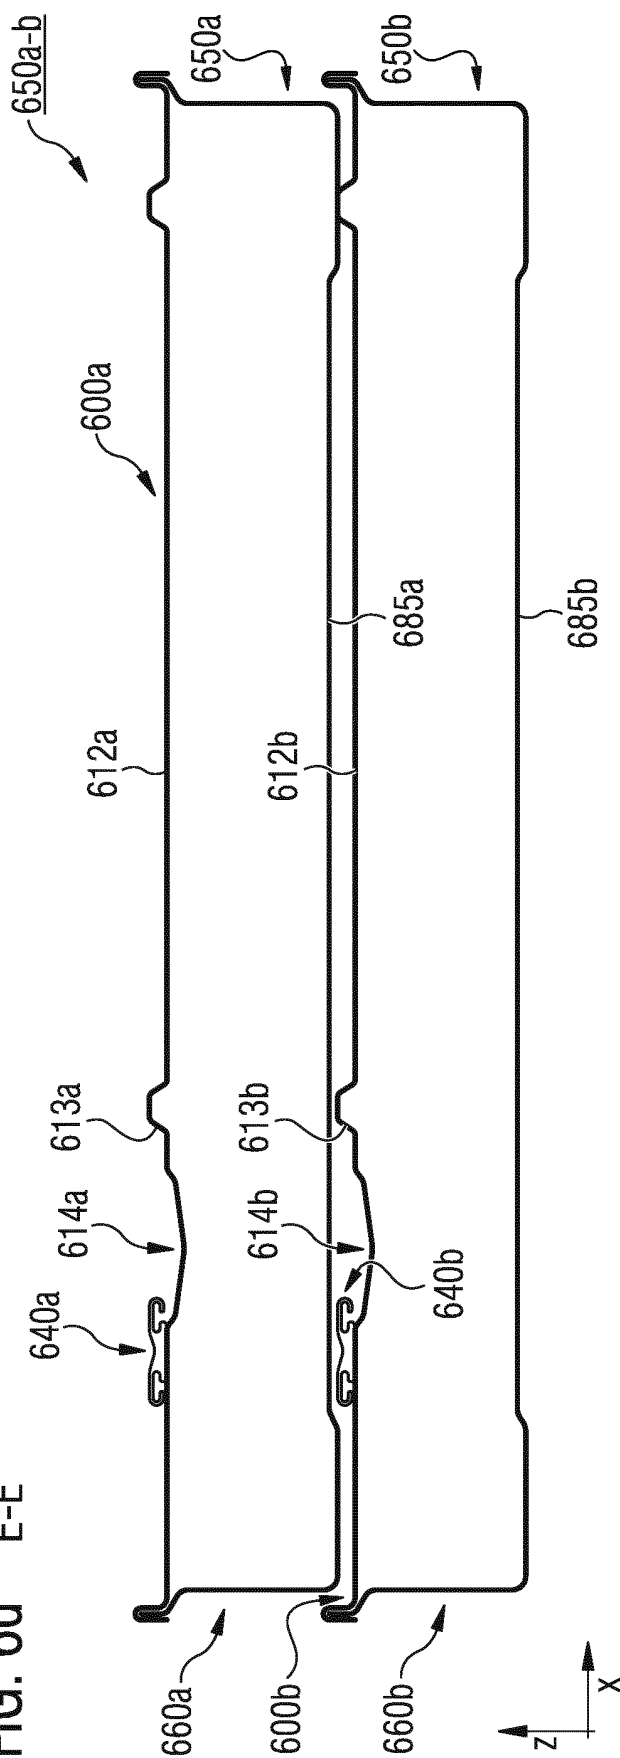


FIG. 6e F-F

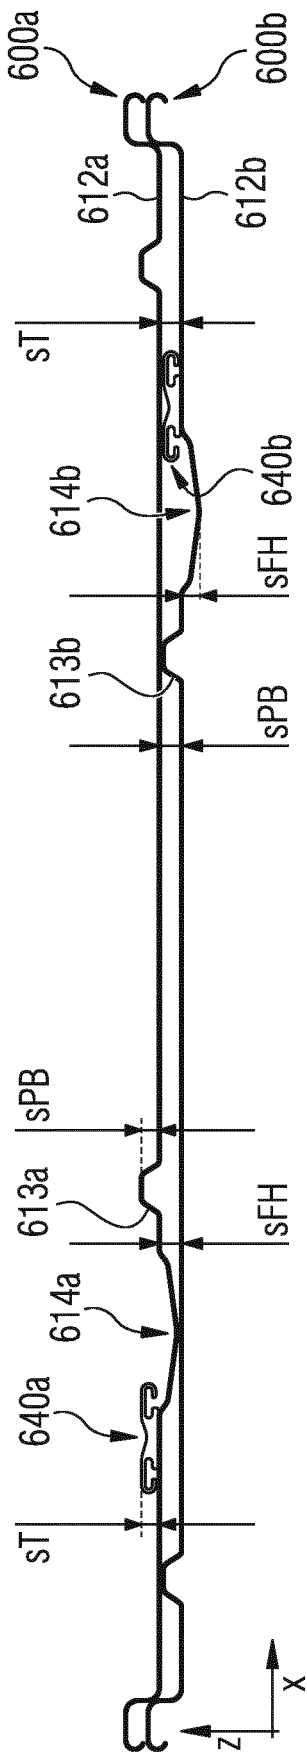
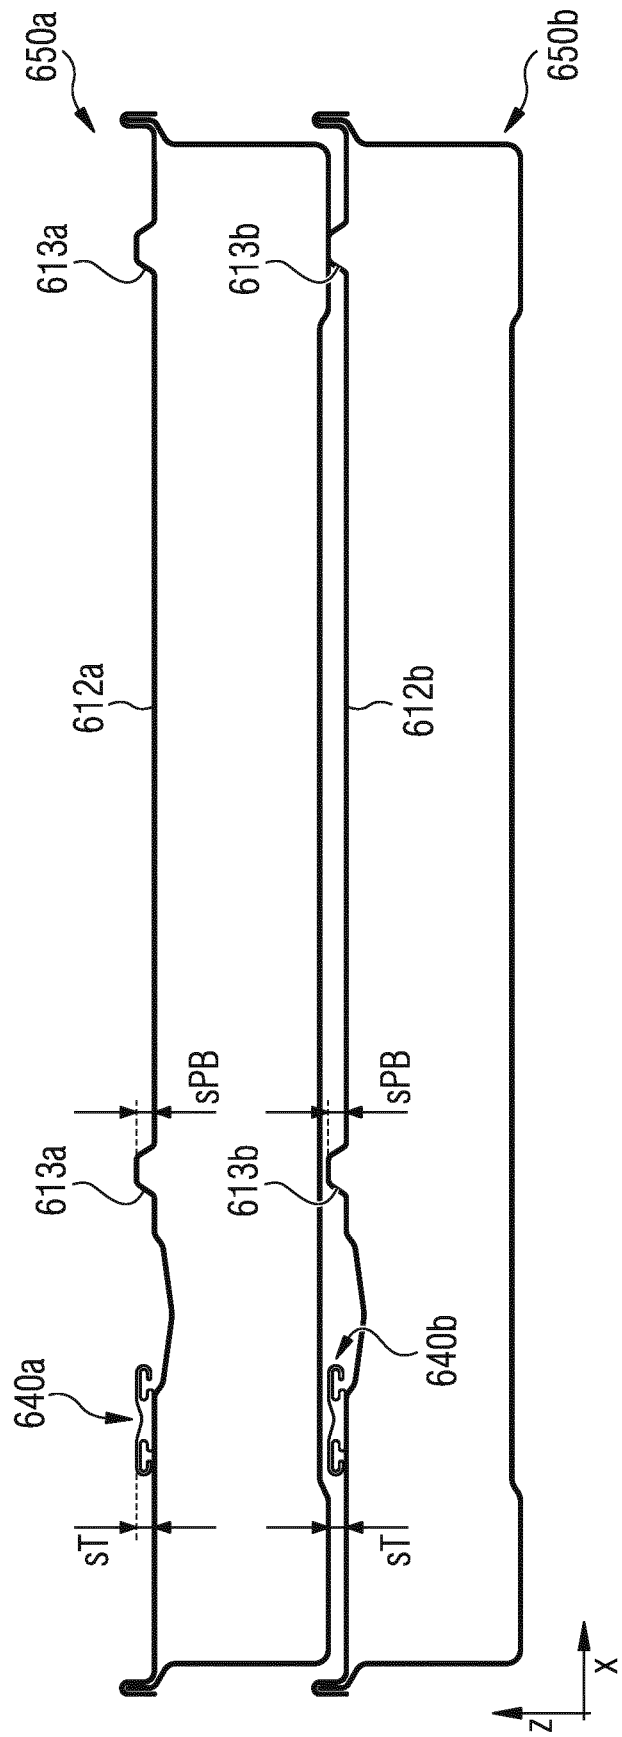
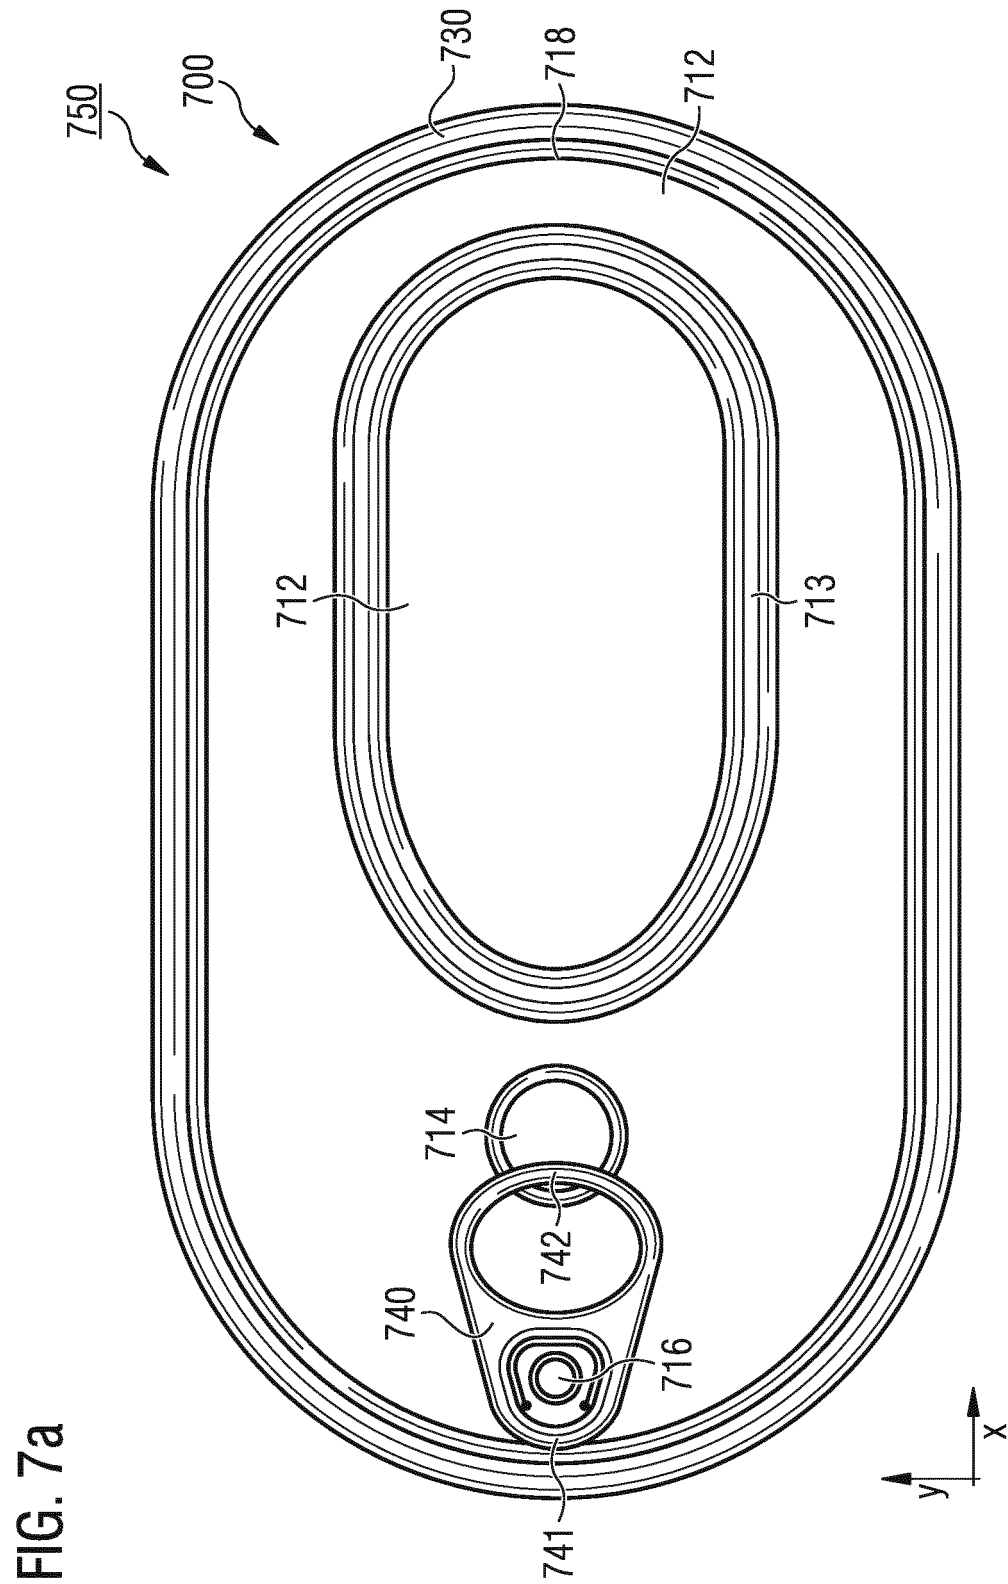


FIG. 6f E-E





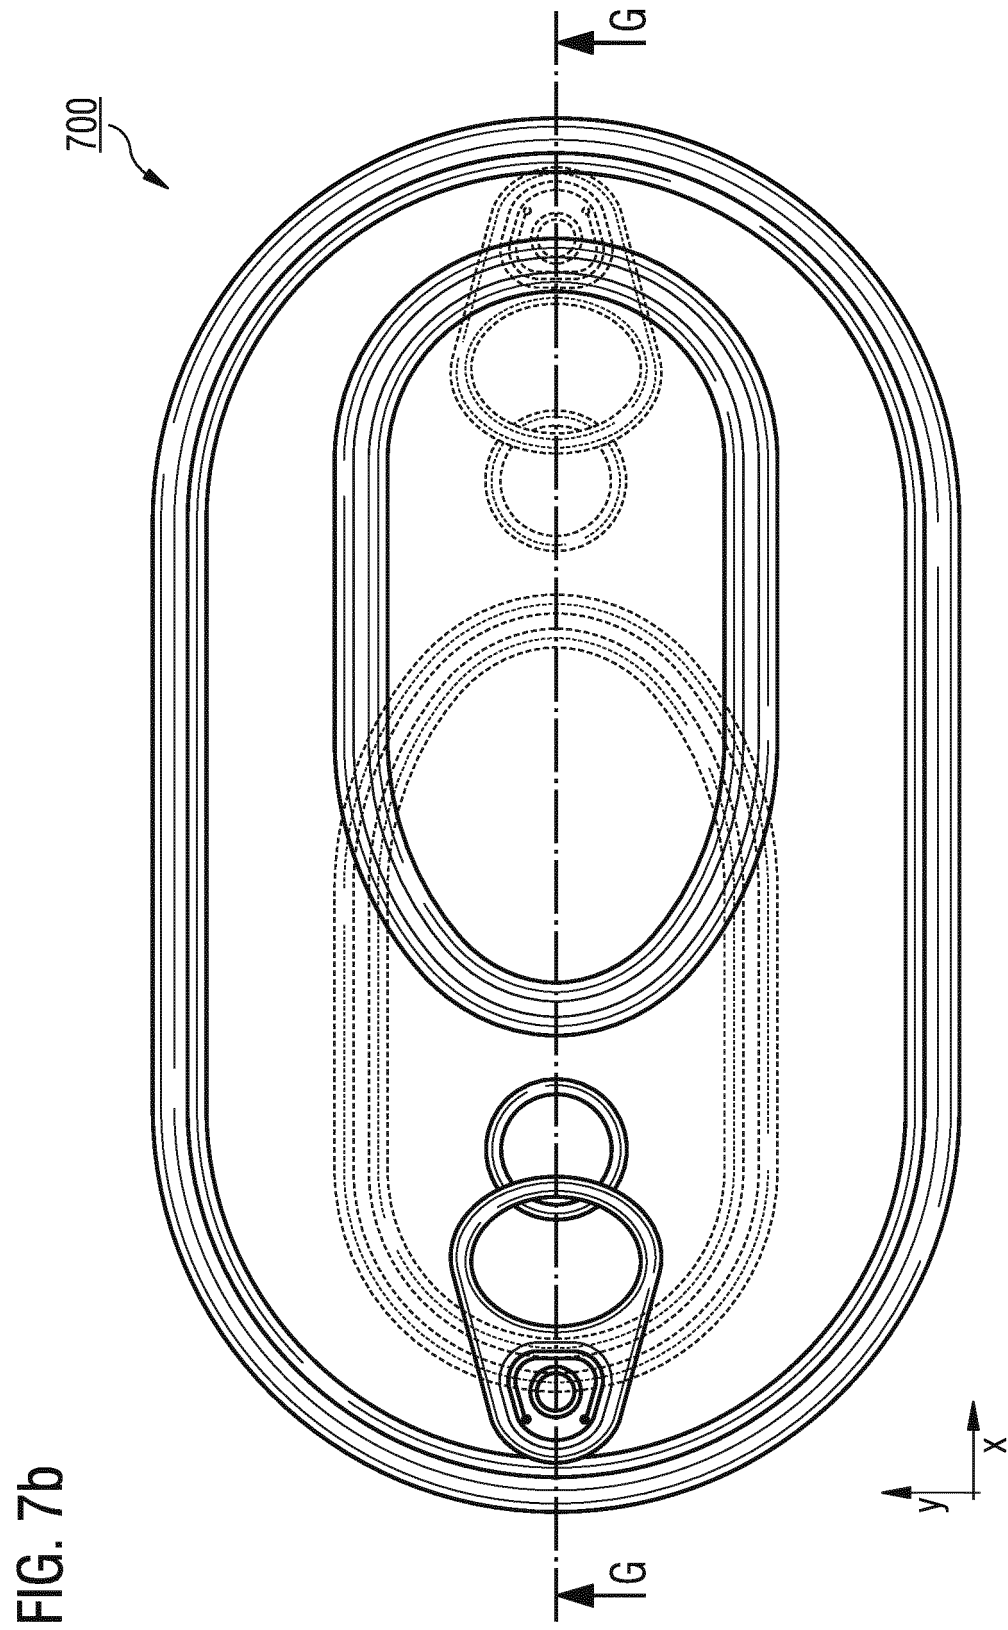


FIG. 7c G-G

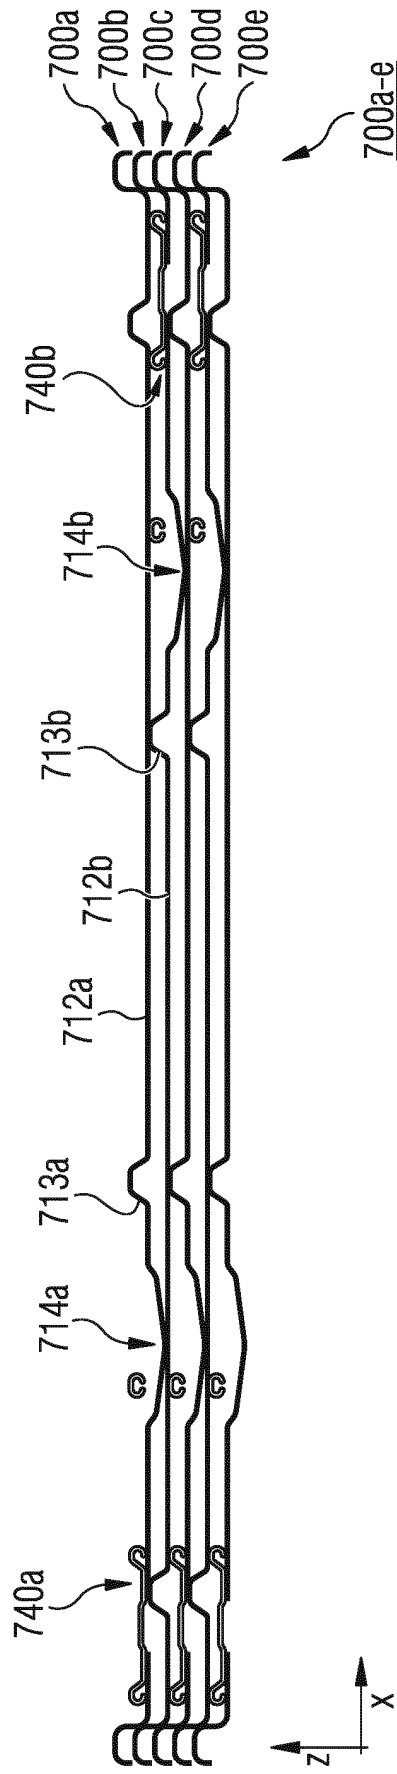


FIG. 7d G-G

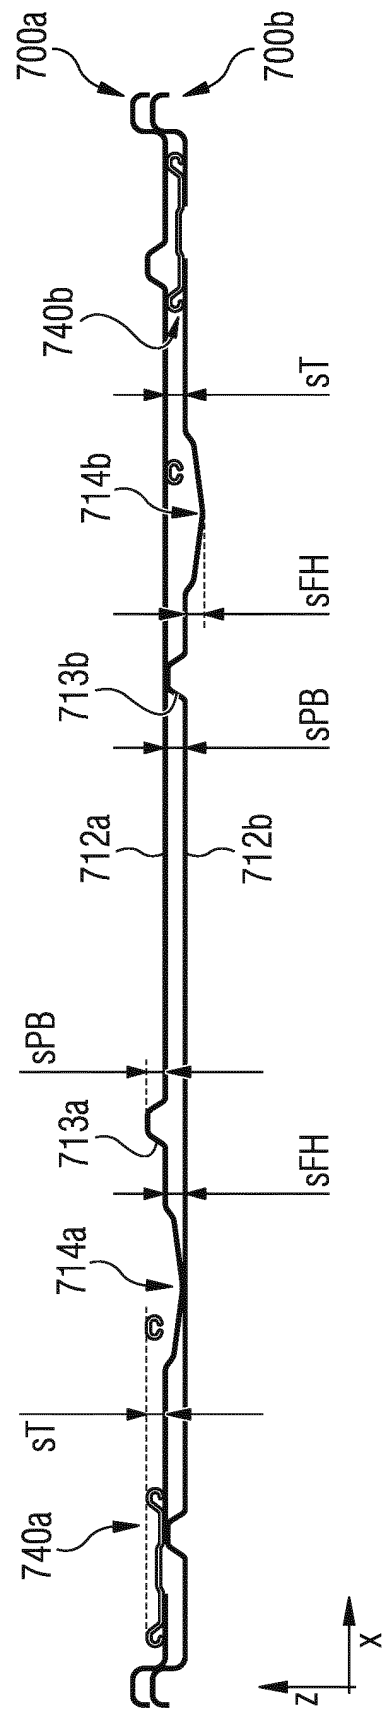


FIG. 8a

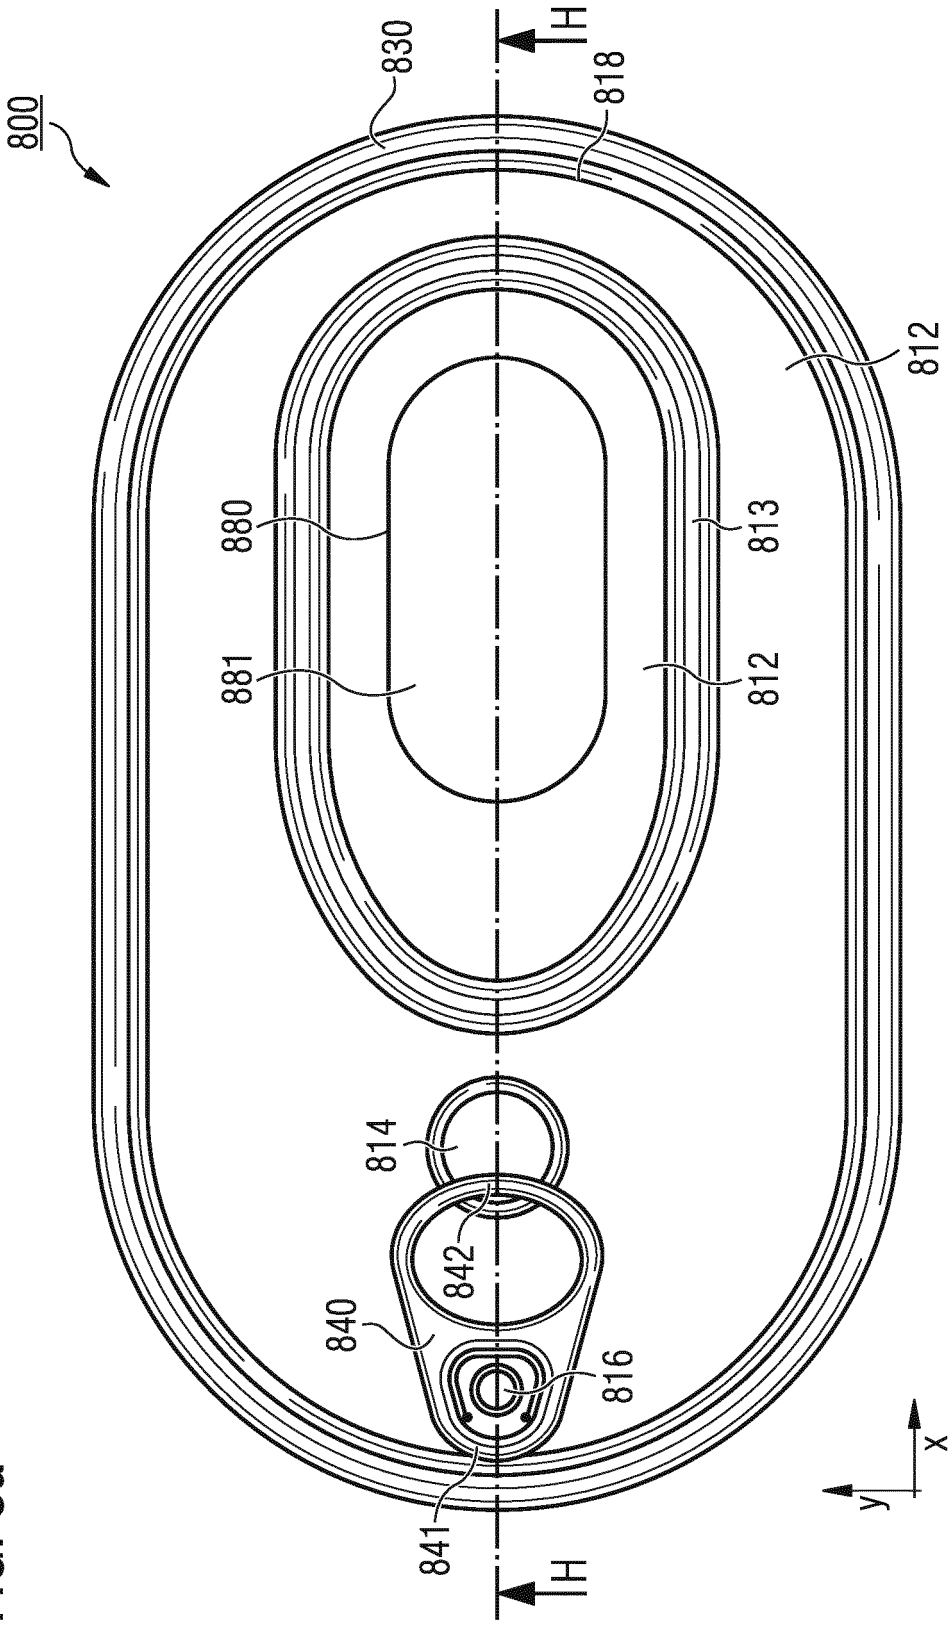
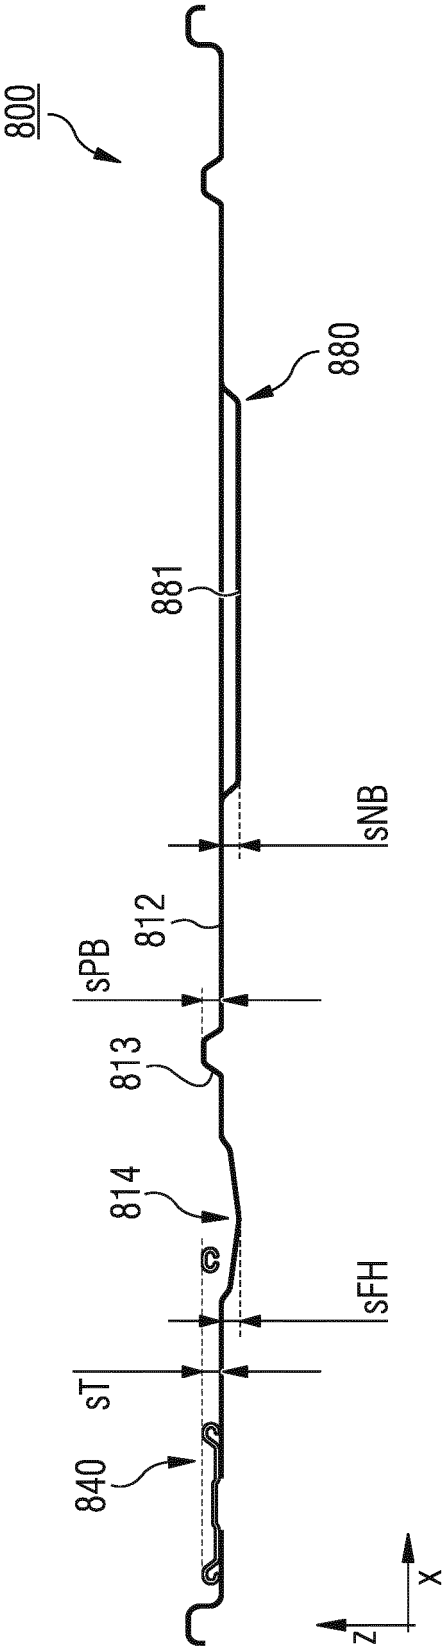


FIG. 8b H-H




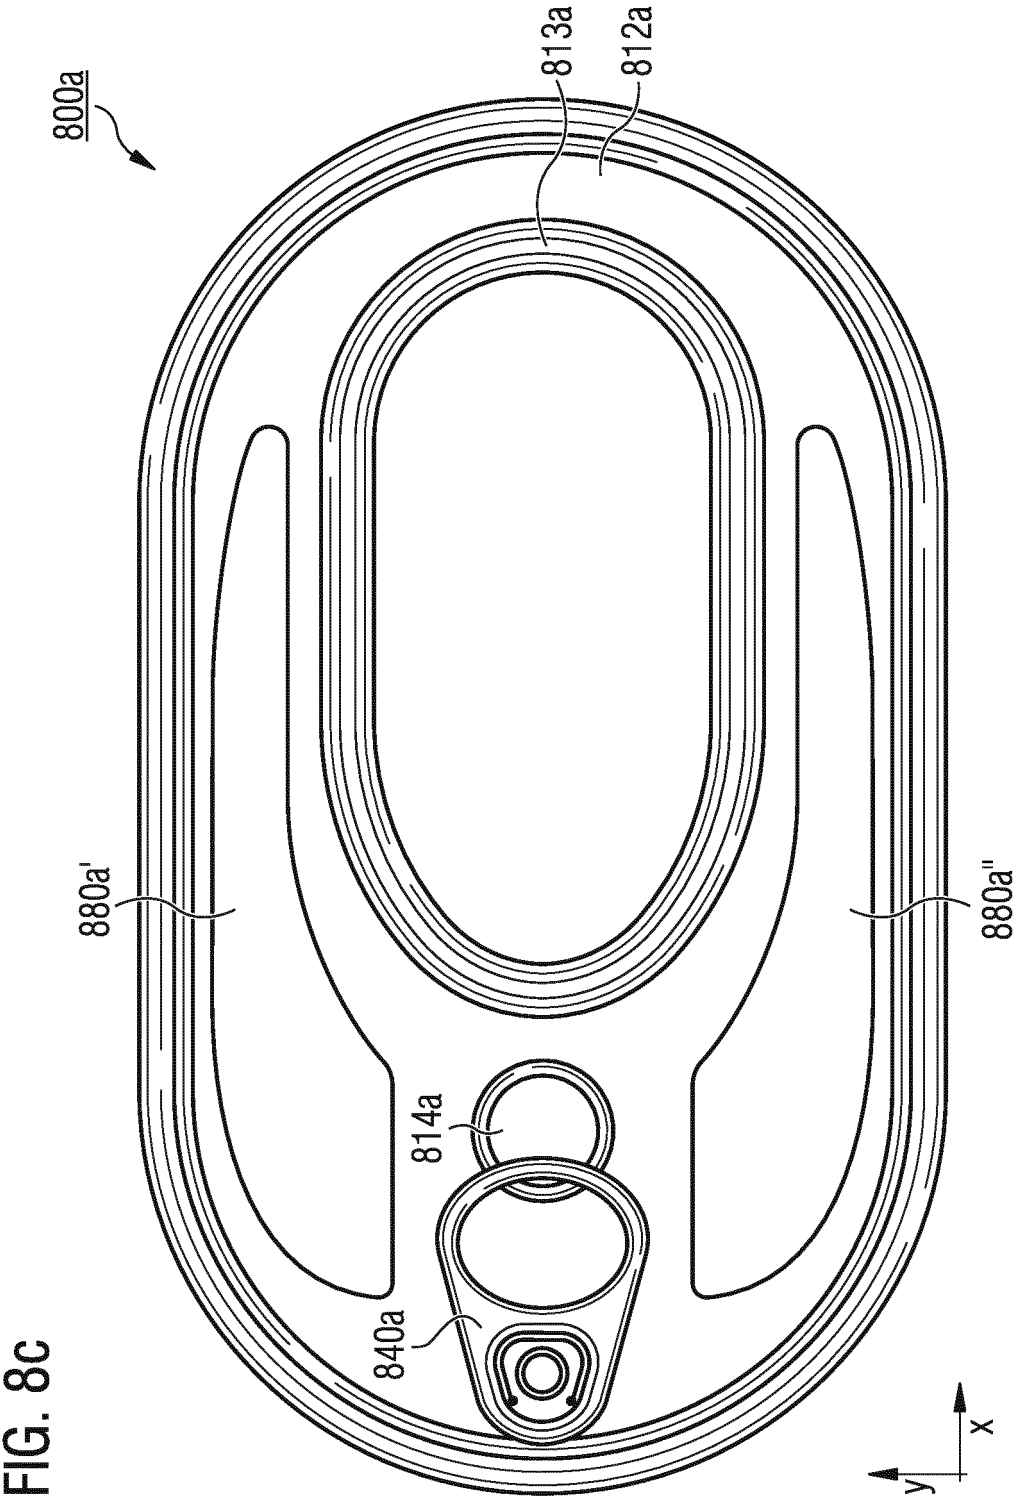


FIG. 8d



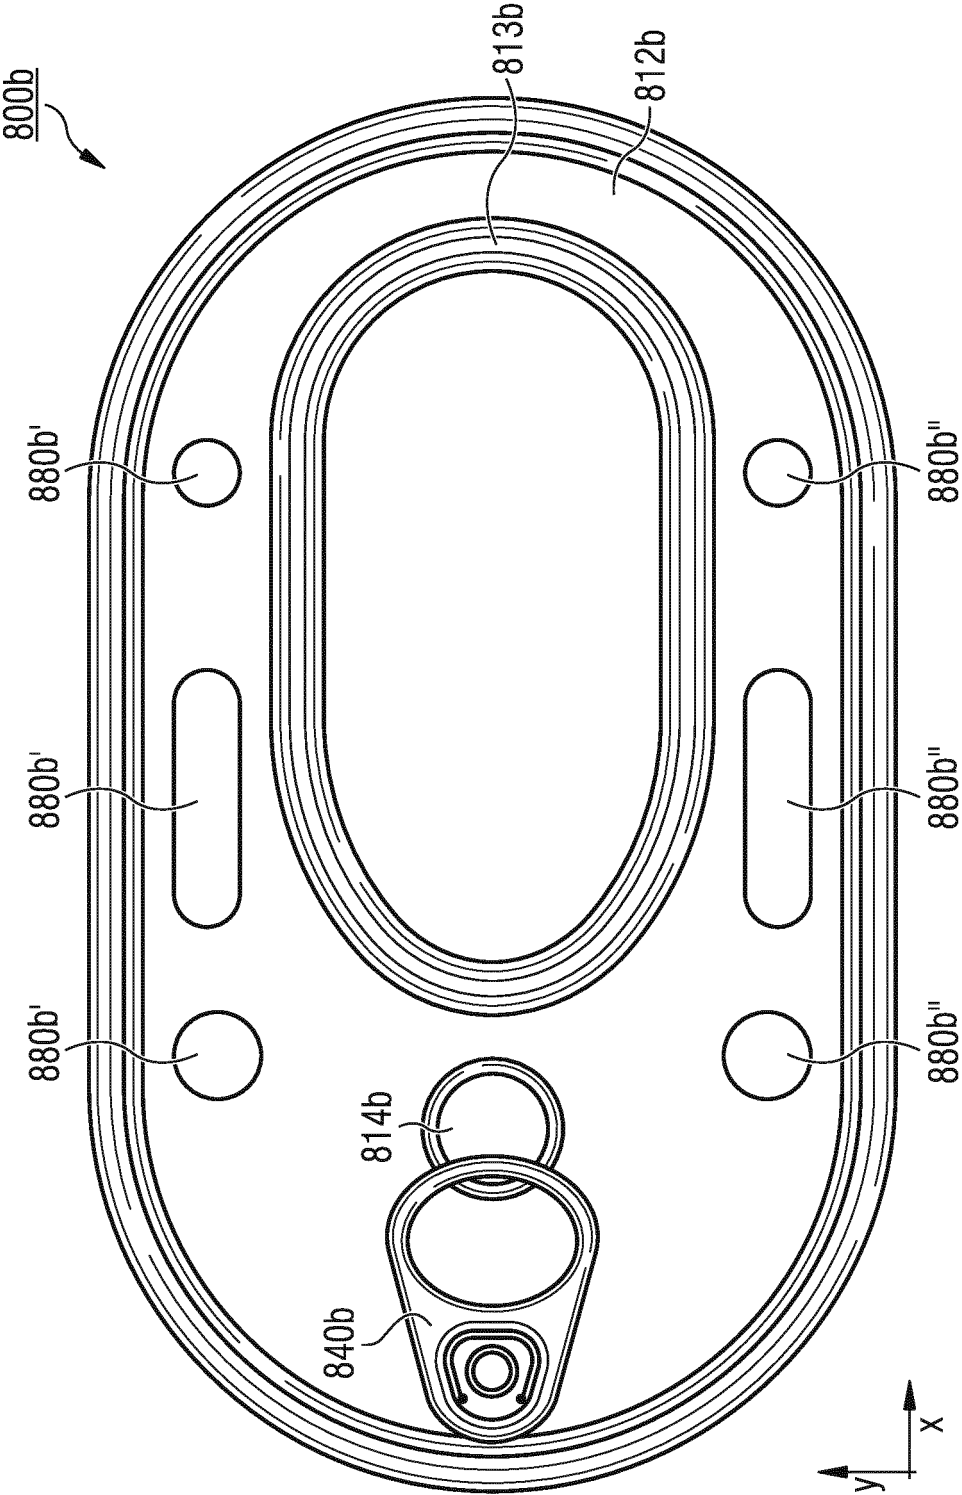

EUROPEAN SEARCH REPORT

Application Number
EP 19 17 7080

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 042 144 A (HENNING GEORGE J ET AL) 16 August 1977 (1977-08-16)	1-7, 10-15	INV. B65D17/28
Y	* figures 4,17 * * column 5, line 45 - line 50 * * column 1, line 7 *	8,9	
Y	----- EP 2 149 502 A1 (IMPRESS GROUP BV [NL]) 3 February 2010 (2010-02-03) * figure 1 * * claim 9 *	8,9	
A	----- FR 2 002 147 A1 (CONTINENTAL CAN CO) 17 October 1969 (1969-10-17) * page 3, paragraph 4 * * claim 2 * * claim 5 * * figures 1,3 *	1-15	
A	----- GB 1 405 019 A (SCHMALBACH LUBECA) 3 September 1975 (1975-09-03) * page 2, column 2, line 97 - line 99 * * page 1, column 2, paragraph 1 * * figure 1 *	1,6,14, 15	TECHNICAL FIELDS SEARCHED (IPC) B65D
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 26 November 2019	Examiner Le Bihan, Nicolas
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 17 7080

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-11-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4042144 A	16-08-1977	NONE	
EP 2149502 A1	03-02-2010	EP 2149502 A1 WO 2010012947 A2	03-02-2010 04-02-2010
FR 2002147 A1	17-10-1969	AT 293263 B DE 1809985 A1 ES 145670 U FR 2002147 A1 US 3450301 A	27-09-1971 21-08-1969 16-05-1969 17-10-1969 17-06-1969
GB 1405019 A	03-09-1975	BE 792612 A FR 2163612 A1 GB 1405019 A LU 66683 A1 NL 7216868 A	30-03-1973 27-07-1973 03-09-1975 19-02-1973 20-06-1973