



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.12.2020 Bulletin 2020/49

(51) Int Cl.:
F21K 9/232 ^(2016.01) **F21K 9/237** ^(2016.01)
F21V 19/00 ^(2006.01) **F21Y 103/10** ^(2016.01)
F21Y 107/30 ^(2016.01) **F21Y 115/10** ^(2016.01)

(21) Application number: **19186814.0**

(22) Date of filing: **17.07.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **WU, Chenjun**
Xiamen (CN)
• **WU, Chengzong**
Xiamen (CN)
• **JIANG, Hongkui**
Xiamen (CN)

(30) Priority: **29.05.2019 CN 201920794019 U**

(74) Representative: **Patentanwälte Bals & Vogel**
Universitätsstrasse 142
44799 Bochum (DE)

(71) Applicant: **Xiamen Eco Lighting Co., Ltd.**
Xiamen Area, Fujian (CN)

(54) **LIGHT BULB APPARATUS**

(57) The light bulb apparatus (100) includes a light bulb shell (1), a bulb head (7), and a heat sink cup (6). The heat sink cup (6) has a first end connected to the light bulb shell (1), and a second end connected to the bulb head (7). The light bulb apparatus (100) includes a flexible filament (2) and a central support (4). The flexible filament (2) has a first terminal and a second terminal, and the central support (4) provides a first electrode (41) electrically connected to the first terminal, and provides a second electrode (42) for electrically connected to the second terminal. The light bulb apparatus (100) includes an expanding structure (3) and a driver module (5). The expanding structure (3) is mechanically coupled to the central support (4), and includes a plurality of holding portions for holding the flexible filament (2). The driver module (5) is electrically connected to the bulb head (7) and the central support (4) for providing electrical power to the flexible filament (2).

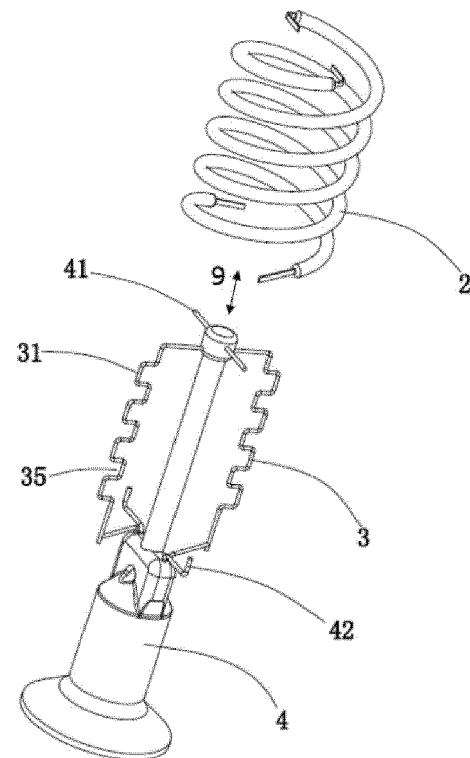


FIG. 3

Description

TECHNICAL FIELD

[0001] The present invention is related to a light bulb apparatus, and is more particularly related to a light bulb apparatus with a flexible filament.

BACKGROUND

[0002] Light emitting diode (LED) light bulbs have advantages over traditional lighting solutions such as incandescent and fluorescent lighting because they are more durable, use less energy, operate longer, and may be controlled to deliver light of various colors. Therefore LED light bulbs with flexible filaments are becoming more popular as replacements for older lighting systems.

[0003] A traditional way to produce the light bulb with a flexible filament is to provide a few fixation rings on a central support of the light bulb, manually bend the flexible filament to pass through each of the fixation rings, and then fix the flexible filament. Such design requires a lot of manual work, so the production efficiency is low and the workmanship quality cannot be assured.

SUMMARY

[0004] One objective of the invention is to provide a light bulb apparatus with a flexible filament; the new design proposed by the present disclosure includes a novel expanding structure to help improve the production efficiency and quality, and also reduce the manufacturing cost of the light bulb apparatus.

[0005] To achieve such objective, according to some embodiments of the present disclosure, the light bulb apparatus includes a light bulb shell, a bulb head, and a heat sink cup. The heat sink cup has a first end and a second end. The first end of the heat sink cup is connected to the light bulb shell, and the second end of the heat sink cup is connected to the bulb head. The light bulb apparatus includes a flexible filament for emitting light, and a central support. The flexible filament has a first terminal and a second terminal. The central support provides a first electrode electrically connected to the first terminal of the flexible filament, and provides a second electrode electrically connected to the second terminal of the flexible filament. The light bulb apparatus further includes an expanding structure and a driver module. The expanding structure is mechanically coupled to the central support, and includes a plurality of holding portions for holding the flexible filament. The driver module is electrically connected to the bulb head and the central support for providing electrical power to the first electrode and the second electrode of the central support.

[0006] In some embodiments, the expanding structure includes two bending strips symmetrically or asymmetrically arranged with respect to a central axis of the central support. And each of the bending strips has a plurality of

concave portions as the holding portions to hold the flexible filament. The concave portions may be substantially U-shaped, C-shaped, or G-shaped.

[0007] In another embodiment, the expanding structure includes a plurality of support rods arranged along a central axis of the central support. Each of the support rods has a first end mechanically coupled to the central support, and has a second end extending outward from the central support to hold the flexible filament. The second ends of the support rods may be substantially U-shaped, C-shaped, or G-shaped.

[0008] In another embodiment, the expanding structure includes a block-shaped pillar having a concave slot. The concave slot is spiral on the surface of the block-shaped pillar for holding the flexible filament. The expanding structure may be made of metal, ceramic, glass, or plastic material. The block-shaped pillar may be hollow or solid inside.

[0009] In another embodiment, the expanding structure includes a plurality of support boards. Each of the support boards has a plurality of concave portions as the holding portions to hold the flexible filament. The concave portions may be substantially U-shaped, C-shaped, or G-shaped.

[0010] In some embodiments, the central support and the expanding structure may be made of a same material and may be integrally formed.

[0011] In some embodiments, the light bulb apparatus includes at least two flexible filaments connected in series or in parallel. The two flexible filaments may emit light of different colors or different color temperatures.

[0012] In some embodiments, the holding portions include a blocking structure for preventing the flexible filament from falling out of the holding portions. For example, the holding portions may be G-shaped for preventing the flexible filament from falling out of the holding portions.

BRIEF DESCRIPTION OF DRAWINGS

[0013] For a better understanding of the present disclosure, its operating advantages and the specific objects attained by its uses, reference should be made to the accompanying drawings listed below. It is noted that these drawings are for illustration of preferred embodiments only and should not be regarded as limiting.

FIG. 1 is a perspective view of a light bulb apparatus according to a first embodiment of the present disclosure.

FIG. 2 illustrates the exploded view of the light bulb apparatus according to the first embodiment.

FIG. 3 illustrates the exploded view of the expanding structure and some components of the first embodiment.

FIG. 4 illustrates an assembly view of the expanding

structure and the components in FIG. 3 in the first embodiment.

FIG. 5 illustrates an assembly view of the expanding structure and some components according to a second embodiment of the present disclosure.

FIG. 6 illustrates an assembly view of the expanding structure and some components according to a third embodiment of the present disclosure.

FIG. 7 illustrates an assembly view of the expanding structure and some components according to a fourth embodiment of the present disclosure.

FIG. 8 illustrates an assembly view of the expanding structure and some components according to a fifth embodiment of the present disclosure.

FIG. 9 illustrates an assembly view of the expanding structure and some components according to a sixth embodiment of the present disclosure.

DETAILED DESCRIPTION

[0014] To facilitate a better understanding of the present disclosure, the following examples of certain embodiments are given. In no way should the following examples be read to limit or define the scope of the disclosure.

[0015] FIG. 1 to 4 illustrate the first embodiment of the present disclosure. In the first embodiment, the light bulb apparatus 100 includes a light bulb shell 1, a bulb head 7, and a heat sink cup 6. The heat sink cup 6 has a first end and a second end. As shown in FIG. 1 and FIG. 2, the first end of the heat sink cup 6 is connected to the light bulb shell 1, and the second end of the heat sink cup 6 is connected to the bulb head 7. The bulb head 7 may be a traditional Edison bulb head configured to receive external power source for the light bulb apparatus 100.

[0016] Refer to FIG. 2. The light bulb apparatus 100 includes a flexible filament 2 and a central support 4. The flexible filament 2 includes one or more LED chips for emitting light. The flexible filament 2 has a first terminal and a second terminal, and the central support 4 provides a first electrode 41 electrically connected to the first terminal of the flexible filament 2, and provides a second electrode 42 electrically connected to the second terminal of the flexible filament 2. The first electrode 41 and the second electrode 42 are physically located away from each other.

[0017] The light bulb apparatus 100 further includes an expanding structure 3 and a driver module 5. The expanding structure 3 is mechanically coupled to the central support 4, and includes a plurality of holding portions for holding the flexible filament 2. The driver module 5 includes a driver circuit board and electrical components

arranged on the driver circuit board. The driver module 5 is electrically connected to the bulb head 7 and the central support 4, and the driver module 5 is capable of providing electrical power to the first electrode 41 and the second electrode 42 of the central support 4. The first electrode 41 and the second electrode 42 may be made of metal material. The bulb head 7 includes a metal tip 71 located distal to the heat sink cup 6. The bulb head 7 and the metal tip 71 work together to receive external power for the light bulb apparatus 100.

[0018] In this embodiment, the central support 4 extends and a part of the central support 4 is located inside the light bulb shell 1, so the flexible filament 2 could be physically located inside the light bulb shell 1.

[0019] Refer to FIG. 3 and FIG. 4. In this embodiment, the expanding structure 3 includes two bending strips 31 symmetrically arranged with respect to a central axis 9 of the central support 4. The two bending strips 31 are mechanically coupled to the central support 4. Each of the bending strips 31 has a plurality of concave portions 35 as the holding portions to hold the flexible filament 2. The flexible filament 2 is bent to spiral along a central axis 9 of the central support 4 and is held and fixed by the concave portions 35. The concave portions 35 are substantially U-shaped in this embodiment so as to properly hold and fix the flexible filament 2. Comparing to a traditional way which includes bending the filament to pass through the fixation rings, the new way proposed by the present disclosure is more efficient and reliable, and may reduce the manufacturing cost and improve the production quality.

[0020] In this embodiment of the present disclosure, the central support 4 has a horn-type bottom. The horn-type bottom is connected to the light bulb shell 1 by high melting-point soldering, and the flexible filament 2 is sealed inside the light bulb shell 1 so as to improve the heat dissipation of the light bulb apparatus 100. The heat dissipation gas may be helium, or a combination of helium and oxygen. The central support 4 and the heat sink cup 6 may be connected to each other by glue, by buckles, or by screw thread. The heat sink cup 6 may be made of plastic material. The heat sink cup 6 and the light bulb shell 1 may be connected to each other by glue.

[0021] In this embodiment, the first terminal of the flexible filament 2 is soldered to the first electrode 41. Then the flexible filament 2 is bent to spiral and to be held by the concave portions 35 of the expanding structure 3. And then the second terminal of the flexible filament 2 is soldered to the second electrode 42. In another embodiment, the flexible filament 2 may be first bent to spiral and to be held by the concave portions 35 of the expanding structure 3. And then the first terminal and the second terminal of the flexible filament 2 are soldered to the first electrode 41 and the second electrode 42 respectively.

[0022] In this embodiment, the bending strips 31 may be made of metal, plastic, or glass material. If the bending

strips 31 are made of metal material, the bending strips 31 may be connected to the central support 4 by plug/socket and soldering. If the bending strips 31 are made of plastic or glass material, the bending strips 31 may be connected to the central support 4 by plug/socket and glue. In another embodiment, there may be more than two bending strips 31, for example, there may be four or six bending strips 31 used in the light bulb apparatus 100.

[0023] Refer to FIG. 5, which illustrates a second embodiment of the present disclosure. The second embodiment is similar to the first embodiment, but the two bending strips 31 are mechanically coupled to the first electrode 41 and the second electrode 42. The bending strip 31 may be made of metal, plastic, or glass material. With the arrangement proposed by the second embodiment, the cost for installing the bending strips 31 may be reduced, and it may be more convenient for soldering or gluing the bending strips 31 to the first electrode 41 and the second electrode 42.

[0024] FIG. 6 illustrates a third embodiment of the present disclosure. In the third embodiment, the expanding structure 3 includes a plurality of support rods 32 arranged along the central axis 9 of the central support 4. The support rods 32 are spaced an equal distance apart from each other on the surface of the central support 4. Each of the support rods 32 has a first end mechanically coupled to the central support 4, and has a second end extending outward from the central support 4 to hold the flexible filament 2. The second ends of the support rods 32 may be bent into substantial U-shape or C-shape, with the open ends of the U-shape or the C-shape facing toward the central axis 9 of the central support 4. It is noted that since the open ends of the U-shape or the C-shape face toward the central axis 9 of the central support 4, the open ends could not be shown in FIG. 6.

[0025] In the third embodiment, the support rods 32 may be made of metal, plastic, or glass material. With such arrangement, the material required for composing the expanding structure 3 may be reduced, and the process for installing the expanding structure 3 may also be simplified. In this embodiment, there are at least two groups of support rods 32 arranged parallel to each other so as to properly support the flexible filament 2. The support rods 32 may be connected to the central support 4 by soldering, glue, or screw-thread.

[0026] FIG. 7 illustrates the fourth embodiment of the present disclosure. The fourth embodiment is similar to the first embodiment shown in FIG. 4, but the bending strips 31 are asymmetrically arranged with respect to the central axis 9 of the central support 4. The bending strips 31 may be made of metal, plastic, or glass material. In this embodiment, the bending strips 31 are arranged surrounding the central axis 9 of the central support 4 as a circle. In this embodiment, there may be an odd number, for example three or five, of bending strips 31 used in the light bulb apparatus 100.

[0027] FIG. 8 illustrates the fifth embodiment of the

present disclosure. In the fifth embodiment, the expanding structure 3 includes a block-shaped pillar 33 having a concave slot 35. The concave slot 35 is arranged spiral on the surface of the block-shaped pillar 33 for holding the flexible filament 2. The block-shaped pillar 33 may be hollow inside, so the overall weight of the light bulb apparatus 100 could be reduced. The block-shaped pillar 33 may also be solid inside. The block-shaped pillar 33 may be made of metal, ceramic, glass, or plastic material. Preferably, the block-shaped pillar 33 may be made of transparent glass or plastic material. The block-shaped pillar 33 may be installed onto the central support 4 by glue.

[0028] Refer to FIG. 9, which shows the sixth embodiment of the present disclosure. In the sixth embodiment, the expanding structure 3 includes a plurality of support boards 34. Each of the support boards 34 has a plurality of concave portions 35 at its edge area as the holding portions to hold the flexible filament 2. The concave portions 35 may be substantially U-shaped or C-shaped. In this embodiment, there are four support boards 34 arranged in the shape of a cross. The support boards 34 may be made of metal, ceramic, glass, or plastic material. Preferably, the support boards 34 are made of transparent glass or plastic material. The support boards 34 are connected to the central support 4 by soldering or glue. In another embodiment, there may be three, five, or six support boards 34 used in the light bulb apparatus 100.

[0029] In some embodiments, the central support 4 and the expanding structure 3 may be made of a same material and may be integrally formed. In this way, the manufacturing cost for the light bulb apparatus 100 may be further reduced.

[0030] In the above embodiments, the holding portions are substantially U-shaped or C-shaped. The size of the open ends of the U-shapes or the C-shapes should be suitable to properly hold and fix the filament 2. In some other embodiments, the holding portions may further include a blocking structure so as to prevent the flexible filament 2 from falling out of the holding portions. For example, the holding portions may be G-shaped, so the holding portions would include a blocking structure to properly prevent the flexible filament 2 from falling out of the holding portions.

[0031] In some embodiments, the light bulb apparatus 100 may include two or more flexible filaments 2 connected in parallel. Accordingly, there are two or more sets of the first electrodes 41 and the second electrodes 42, with each set of the first electrode 41 and the second electrode 42 electrically connected to one of the flexible filaments 2. Each of the flexible filaments 2 includes one or more LED chips capable of emitting light. With such arrangement, if one flexible filament 2 fails, the other ones may continue to provide lighting.

[0032] Alternatively, each of the flexible filaments 2 may include one or more LED chips capable of emitting light of different colors (e.g., red, green, or blue...) or different color temperatures (e.g., 3000K, 4500K, or

6000K...). With such arrangement, the light bulb apparatus 100 may emit light of different color or different color temperature by providing power to one or a combination of the flexible filaments 2.

[0033] In another embodiment, the two or more flexible filaments 2 may be connected in series.

[0034] In the above embodiments, the light bulb apparatus of the present disclosure includes an expanding structure having holding portions to properly hold the flexible filament. The expanding structure may be bending strips, support rods, block-shaped pillar, or support boards ... etc. As illustrated above, the expanding structure according the present disclosure is easy to implement and install, and may be applied in various lighting apparatuses. High production quality and manufacturing efficiency of the light bulb apparatus may be achieved.

[0035] The foregoing description, for purpose of explanation, has been described with reference to specific embodiments. However, the illustrative discussions above are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the techniques and their practical applications. Others skilled in the art are thereby enabled to best utilize the techniques and various embodiments with various modifications as are suited to the particular use contemplated.

[0036] Although the disclosure and examples have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the disclosure and examples as defined by the claims.

Claims

1. A light bulb apparatus (100), comprising:

a light bulb shell (1);
 a bulb head (7);
 a heat sink cup (6) having a first end and a second end, the first end of the heat sink cup (6) is connected to the light bulb shell (1), and the second end of the heat sink cup (6) is connected to the bulb head (7);
 a flexible filament (2) for emitting light, the flexible filament (2) has a first terminal and a second terminal;
 a central support (4) for providing a first electrode (41) and a second electrode (42), the first electrode (41) of the central support (4) is electrically connected to the first terminal of the flexible filament (2), and the second electrode (42) is electrically connected to the second terminal of the flexible filament (2);

an expanding structure (3) mechanically coupled to the central support (4), the expanding structure (3) includes a plurality of holding portions for holding the flexible filament (2), and a driver module (5) for electrically connected to the bulb head (7) and the central support (4) for providing electrical power to the first electrode (41) and the second electrode (42) of the central support (4).

2. The light bulb apparatus (100) of claim 1, wherein the expanding structure (3) comprises two bending strips (31) symmetrically arranged with respect to a central axis (9) of the central support (4), and each of the bending strips (31) has a plurality of concave portions (35) as the holding portions to hold the flexible filament (2).
3. The light bulb apparatus (100) of claim 2, wherein the concave portions (35) are substantially U-shaped, C-shaped, or G-shaped.
4. The light bulb apparatus (100) of claim 1, wherein the expanding structure (3) comprises two bending strips (31) asymmetrically arranged with respect to a central axis (9) of the central support (4), and each of the bending strips (31) has a plurality of concave portions (35) as the holding portions to hold the flexible filament (2).
5. The light bulb apparatus (100) of claim 4, wherein the concave portions (35) are substantially U-shaped, C-shaped, or G-shaped.
6. The light bulb apparatus (100) of claim 1, wherein the expanding structure (3) comprises a plurality of support rods (32) arranged along a central axis (9) of the central support (4), each of the support rods (32) has a first end mechanically coupled to the central support (4) and a second end extending outward from the central support (4) to hold the flexible filament (2).
7. The light bulb apparatus (100) of claim 6, wherein the second ends of the support rods (32) are substantially U-shaped, C-shaped, or G-shaped.
8. The light bulb apparatus (100) of claim 1, wherein the expanding structure (3) comprises a block-shaped pillar (33) having a concave slot, the concave slot is spiral on a surface of the block-shaped pillar (33) for holding the flexible filament (2).
9. The light bulb apparatus (100) of claim 8, wherein the expanding structure (3) is made of metal, ceramic, glass, or plastic material.
10. The light bulb apparatus (100) of claim 8, wherein

the block-shaped pillar (33) is hollow inside.

11. The light bulb apparatus (100) of claim 8, wherein the block-shaped pillar (33) is solid inside. 5
12. The light bulb apparatus (100) of claim 1, wherein the expanding structure (3) comprises a plurality of support boards (34), each of the support boards (34) has a plurality of concave portions (35) as the holding portions to hold the flexible filament (2). 10
13. The light bulb apparatus (100) of claim 12, wherein the expanding structure (3) is made of metal, ceramic, glass, or plastic material. 15
14. The light bulb apparatus (100) of claim 12, wherein the concave portions (35) are substantially U-shaped, C-shaped, or G-shaped.
15. The light bulb apparatus (100) of claim 1, wherein the central support (4) and the expanding structure (3) are made of a same material and are integrally formed. 20

25

30

35

40

45

50

55

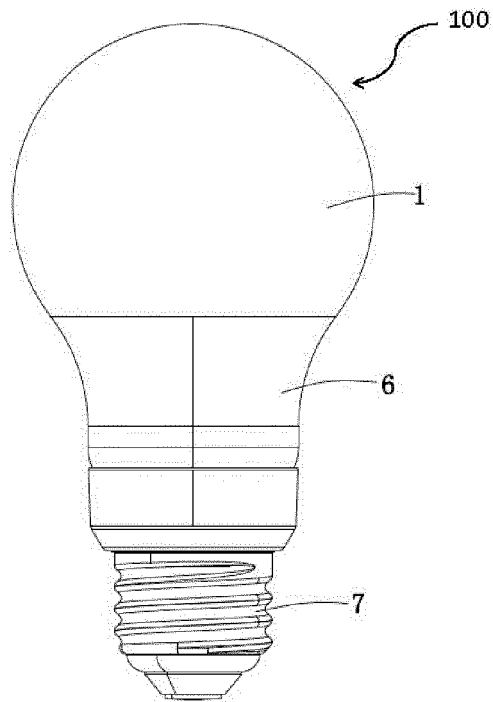


FIG. 1

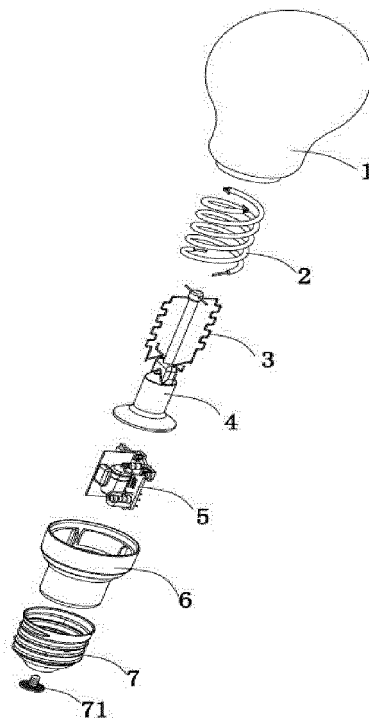


FIG. 2

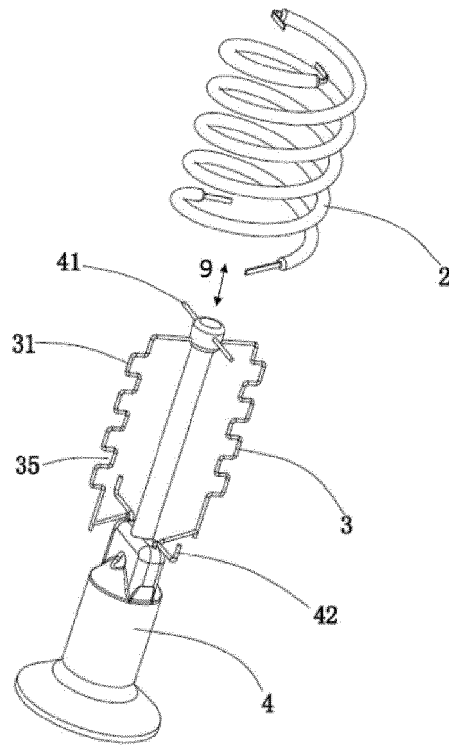


FIG. 3

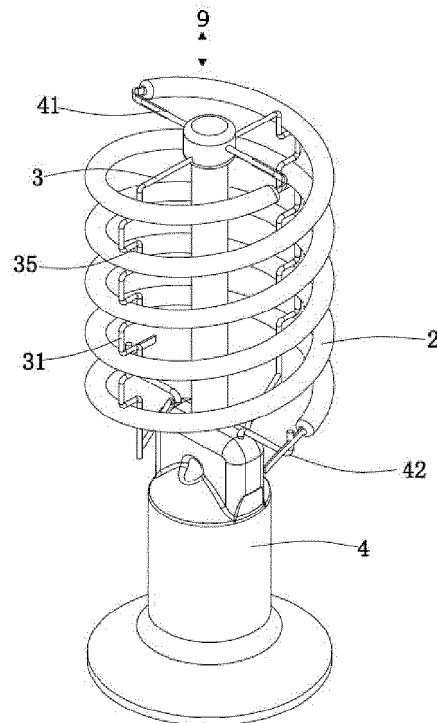


FIG. 4

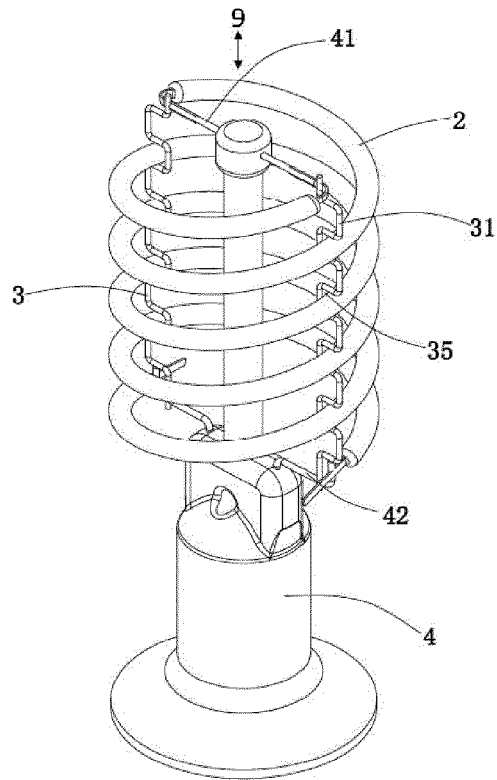


FIG. 5

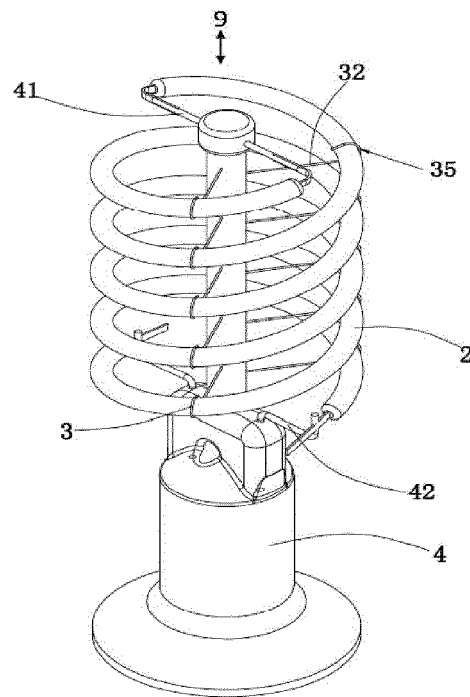


FIG. 6

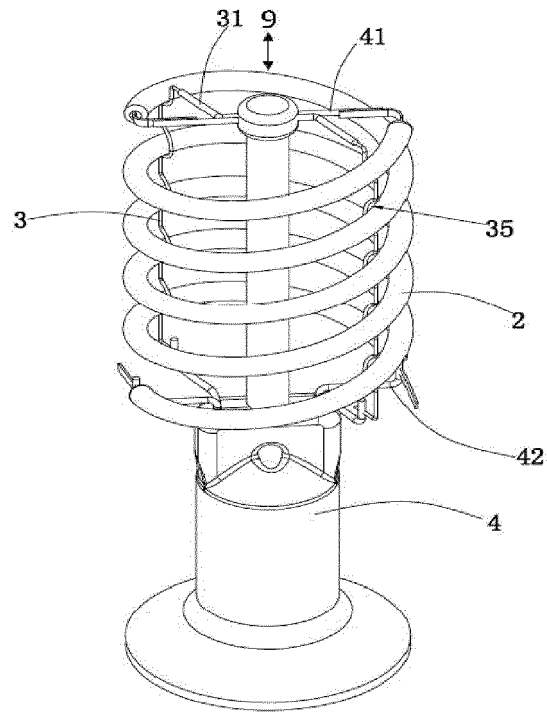


FIG. 7

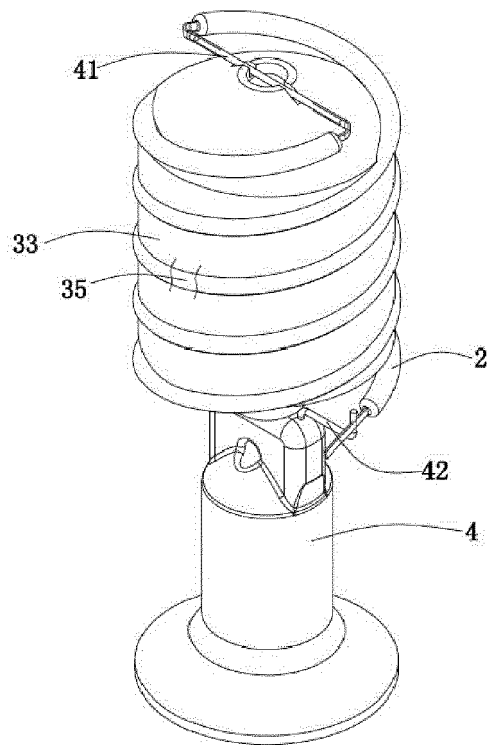


FIG. 8

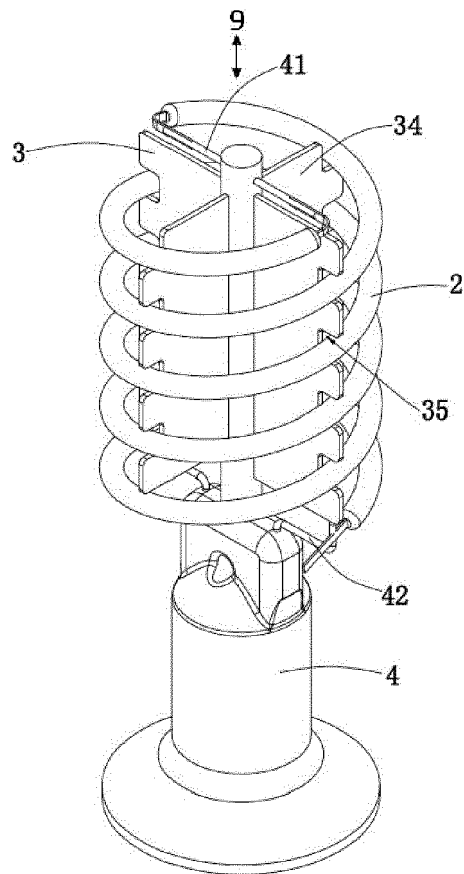


FIG. 9



EUROPEAN SEARCH REPORT

Application Number
EP 19 18 6814

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2019/015763 A1 (EXPLORENTIS [BE]) 24 January 2019 (2019-01-24) * paragraph [0046] - paragraph [0055] * * claims 4-9 * * figures 4-6, 8 *	1-7,15	INV. F21K9/232 F21K9/237 F21V19/00
X	US 2017/051878 A1 (JIANG TAO [CN] ET AL) 23 February 2017 (2017-02-23) * paragraph [0115] - paragraph [0131] * * figures 12B, 13A, 13B *	1-7,15	ADD. F21Y103/10 F21Y107/30 F21Y115/10
X	US 2018/347802 A1 (FU MINGYAN [CN] ET AL) 6 December 2018 (2018-12-06) * paragraph [0027] - paragraph [0035] * * figures 1-7 *	1,6	
X	CN 109 723 986 A (ZHEJIANG EMITTING OPTOELECTRONIC TECH CO LTD) 7 May 2019 (2019-05-07) * paragraph [0020] - paragraph [0030] * * figures 1-6 *	1,8-11,15	
X	CN 207 584 401 U (GMY LIGHTING TECH CO LTD) 6 July 2018 (2018-07-06) * paragraph [0019] - paragraph [0028] * * figures 1,2 *	1-7,15	F21K F21V F21Y
X	CN 108 050 399 A (GMY LIGHTING TECH CO LTD) 18 May 2018 (2018-05-18) * paragraph [0031] - paragraph [0041] * * figure 2 *	1-7,15	
A	WO 2018/041826 A1 (PHILIPS LIGHTING HOLDING BV [NL]) 8 March 2018 (2018-03-08) * page 9 - page 10, line 16 * * figure 1 *	1-15	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 19 December 2019	Examiner Demirel, Mehmet
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 18 6814

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-12-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2019015763 A1	24-01-2019	NONE	
US 2017051878 A1	23-02-2017	CN 106468405 A	01-03-2017
		CN 106838660 A	13-06-2017
		CN 106939973 A	11-07-2017
		CN 107035978 A	11-08-2017
		CN 206563190 U	17-10-2017
		CN 206669380 U	24-11-2017
		CN 207349843 U	11-05-2018
		CN 207364690 U	15-05-2018
		CN 207500848 U	15-06-2018
		CN 207500849 U	15-06-2018
		CN 207716114 U	10-08-2018
		EP 3341653 A1	04-07-2018
		GB 2543139 A	12-04-2017
		US 2017051878 A1	23-02-2017
		US 2019154206 A1	23-05-2019
		WO 2017028787 A1	23-02-2017
US 2018347802 A1	06-12-2018	CN 107120548 A	01-09-2017
		US 2018347802 A1	06-12-2018
CN 109723986 A	07-05-2019	NONE	
CN 207584401 U	06-07-2018	NONE	
CN 108050399 A	18-05-2018	CN 108050399 A	18-05-2018
		WO 2019109978 A1	13-06-2019
WO 2018041826 A1	08-03-2018	CN 109716013 A	03-05-2019
		EP 3507541 A1	10-07-2019
		JP 2019532465 A	07-11-2019
		US 2019226644 A1	25-07-2019
		WO 2018041826 A1	08-03-2018