

(19)



(11)

EP 3 751 127 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.01.2022 Bulletin 2022/02

(51) Int Cl.:
F02M 26/29 ^(2016.01) **F02M 26/32** ^(2016.01)
F28F 9/00 ^(2006.01) **F28D 7/16** ^(2006.01)
F28D 21/00 ^(2006.01)

(21) Application number: **19179471.8**

(22) Date of filing: **11.06.2019**

(54) EXHAUST GAS RE-CIRCULATION COOLER

ABGASRÜCKFÜHRUNGSKÜHLER

REFROIDISSEUR DE RECIRCULATION DE GAZ D'ÉCHAPPEMENT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
16.12.2020 Bulletin 2020/51

(73) Proprietor: **Valeo Systemes Thermiques-THS**
78322 Le Mesnil Saint Denis Cedex (FR)

(72) Inventors:
• **BUGELLI, Rafael**
13252-904 ITATIBA (BR)
• **BAHOUS, Mohamed**
78322 LE MESNIL SAINT DENIS CEDEX (FR)

• **JOVANINI, Eduardo**
13252-904 ITATIBA (BR)
• **BENEVIDES, Rodrigo**
78320 Le Mesnil Saint Denis Cedex (FR)

(74) Representative: **Valeo Systèmes Thermiques**
Service Propriété Intellectuelle
ZA l'Agiot, 8 rue Louis Lormand
CS 80517
La Verrière
78322 Le Mesnil-Saint-Denis Cedex (FR)

(56) References cited:
EP-A1- 1 801 407 **DE-A1-102016 110 772**
DE-B3-102008 028 244 **US-A1- 2014 338 873**
US-A1- 2017 009 708 **US-A1- 2017 336 147**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention generally relates to an Exhaust Gas Re-circulation (EGR) cooler, and in more particularly, to an Exhaust Gas Re-circulation cooler having beads to withstand pulsating pressure of exhaust gas from an engine of a vehicle.

[0002] Generally, an Exhaust Gas Re-circulation cooler, hereinafter referred to as EGR cooler, is provided in a vehicle to cool exhaust gas before being re-circulated into an engine of the vehicle. The EGR cooler receives a part of exhaust gas from the engine of the vehicle and the exhaust gas rejects heat to the coolant flowing in the EGR cooler. After rejecting heat, the exhaust gas can be reused in the vehicle. The exhaust gas received from the engine may be subjected to different pressure levels or pulsating pressure over a time-period based on the speed of the engine. In one example, pressure of the exhaust gas may be "P1" at time "T1", and "P2" at time "T2". As the pressure of the exhaust gas entering the EGR cooler is differential or pulsating nature, a housing of the EGR cooler may experience some stress, which leads to damages of the housing. Further, the higher stress acting on the housing may cause swelling of the housing, which may crack the housing of the EGR cooler.

[0003] To mitigate such problems, beads 104 are provided in housing 102 of a conventional EGR cooler 100 as shown in Fig. 1. The beads 104 are formed in lateral walls of the housing 102, with an aim of enabling the housing 102 to withstand the pulsating pressure of exhaust gas. Although the beads 104 provided in the housing 102 withstand the pulsating pressure of exhaust gas to some extent, corners and the lateral walls of the housing 102 still experience some stress. Therefore, the stress acting on the housing 102 of the EGR cooler 100 needs to be eliminated to improve service life of the EGR cooler 100 and to avoid cracking the housing 102 of the EGR cooler 100.

[0004] Other EGR coolers are known from DE 10 2008 028244 B3, US 2014/338873 A1, DE 10 2016 110772 A1, US 2017/009708 A1, US 2017/336147 A1 and EP 1 801 407 A1.

[0005] Accordingly, there is a need for an EGR cooler that withstands the exhaust gas received from an engine of a vehicle and having differential pressure over the time. Further, there is a need for a housing of an EGR cooler that avoids cracking even when the housing is subjected to the exhaust gas having pulsating pressure over the time.

[0006] In the present description, some elements or parameters may be indexed, such as a first element and a second element. In this case, unless stated otherwise, this indexation is only meant to differentiate and name elements which are similar but not identical. No idea of priority should be inferred from such indexation, as these terms may be switched without betraying the invention. Additionally, this indexation does not imply any order in mounting or use of the elements of the invention.

[0007] In view of the foregoing, an embodiment of the invention herein provides an Exhaust Gas Re-circulation (EGR) cooler for a vehicle. The EGR cooler includes a housing having a first fluid circuit, at least one first bead, and a plurality of curved beads. The housing further includes lateral walls having a middle portion, a first side portion and a second side portion, in which the first side portion and the second side portion are formed on opposite sides of the middle portion. The first fluid circuit is formed in the housing to receive pulsating pressure of exhaust gas from an engine of a vehicle. The at least one first bead is formed at the middle portion of the housing and the plurality of curved beads is formed on the first side portion and the second side portion of the lateral walls of the housing. Further, the at least one first bead and the plurality of curved beads are formed along a longitudinal axis on the lateral walls of the housing. Further, the plurality of curved beads is progressively continuous curved beads, the beads of the plurality of curved beads are curved in such a way that a bead of the plurality of curved beads at a distal end with respect to the middle portion is more curved as compared to a bead of the plurality of curved beads at a proximal end with respect to the middle portion of the housing.

[0008] In one embodiment, the plurality of curved beads formed in the first side portion and the second side portion is concave with respect to the at least one first bead provided in the middle portion of the housing.

[0009] In yet another embodiment, the plurality of curved beads formed in the first side portion of the housing is convex with respect to the at least one first bead provided in the middle portion of the housing, whereas the plurality of curved beads formed in the second side portion of the housing is concaved with respect to the at least one first bead provided in the middle portion of the housing.

[0010] Generally, the plurality of curved beads is progressively continuous curved beads and the at least one first bead is a straight bead. The housing is formed by connecting the lateral walls with sidewalls.

[0011] Further, the housing includes at least one corner bead formed at corners where the lateral walls are connected with the sidewalls that are perpendicular to the lateral walls.

[0012] In one embodiment, the at least one first bead, the plurality of curved beads, and the at least one corner bead are provided in the housing to reduce stress generated on the housing by the pulsating pressure of exhaust gas entering into the housing.

[0013] In another embodiment, the first fluid circuit is formed by a plurality of heat exchange elements to receive the pulsating pressure of exhaust gas from the engine of the vehicle, wherein the housing further includes a second fluid circuit formed around the plurality of heat exchange elements to enable heat exchange between the pulsating pressure of exhaust gas and a coolant flowing in the second fluid circuit.

[0014] In another embodiment, the plurality of curved

beads is any one of "W" shaped beads, concavely curved beads and convexly curved beads.

[0015] Generally, the heat exchanger is an Exhaust Gas Re-circulation cooler and the housing is formed by connecting the lateral walls with sidewalls that is perpendicular to the lateral walls.

[0016] Other characteristics, details and advantages of the invention can be inferred from the description of the invention hereunder. A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying figures, wherein:

Fig. 1 illustrates a schematic representation of a conventional EGR cooler, in accordance with an embodiment of prior art;

Figs. 2A and 2B illustrate perspective views of the EGR cooler, in accordance with an embodiment of the present invention;

Fig. 2C illustrates a front view of a housing of the EGR cooler of the Fig. 2A;

Fig. 3A illustrates a perspective view of the housing of Fig. 2A having first beads, second beads and corner beads;

Fig. 3B illustrates a perspective view of a heat exchange element provided in the housing of the EGR cooler of Fig. 2A;

Fig. 4 illustrates another perspective view of the housing having the first and second beads, in accordance with another embodiment of the invention; and

Fig. 5 illustrates another perspective view of the housing having the corner beads, in accordance with another embodiment of the invention.

[0017] It must be noted that the figures disclose the invention in a detailed enough way to be implemented, the figures helping to better define the invention if needs be.

[0018] The present invention relates to an Exhaust Gas Re-circulation cooler, hereinafter referred to as EGR cooler, for a vehicle. Generally, the EGR cooler is provided at exhaust channel of an engine. The EGR cooler cools down exhaust gas before being re-circulated into the engine in-order to reduce emission of pollutant from the vehicle. The EGR cooler may receive exhaust gas from the engine with differential or pulsating pressure based on the speed of the engine. To withstand the differential pressure of exhaust gas, one or more curved beads are provided in a housing the EGR cooler. The

one or more curved beads are progressively continuous curved beads to eliminate the stress acting on lateral walls of the housing. Further, corner beads are provided in the corners of the housing to eliminate stress acting on the housing due to the differential pressure of exhaust gas. As the one or more curved beads and the corner beads withstand the differential pressure of exhaust gas entering the housing and reduce stress acting on the housing, damages and cracking of the housing are mitigated which enhances service life of the EGR cooler.

[0019] While aspects relating to one or more curved and corner beads provided the EGR cooler as described above and henceforth can be implemented in symmetrical and non-symmetrical shapes on the lateral walls of the EGR cooler, the embodiments are described in the context of the following system(s).

[0020] Figs. 2A, 2B and 2C illustrate different views of an EGR cooler 200, according to an embodiment of the present invention. In one example, Figs. 2A and 2B are perspective views of the EGR cooler 200, and Fig. 2C is a front view of a housing 202 of the EGR cooler 200. The EGR cooler 200 is provided at an exhaust channel of a vehicle to receive a part of the exhaust gas from an engine of the vehicle. The EGR cooler 200 may reduce the temperature of the exhaust gas received from the engine and recirculate back to the engine. The EGR cooler 200 may include the housing 202 connected with respective tanks 204 to facilitate distribution of the exhaust gas to the housing 202 of the EGR cooler 200. For sake of brevity and clarity, single heat exchange element 206 is shown in the figure and is explained in the forthcoming sections. The housing 202 further may include a first fluid circuit 204A and a second fluid circuit 204B formed in such a way to enable heat exchange between exhaust gas flowing through the first fluid circuit 204A and coolant flowing through the second fluid circuit 204B. The first fluid circuit 204A is formed by the heat exchange element 206 to receive the exhaust gas from the engine. In one embodiment, the exhaust gas may flow through the heat exchange element 206 in the first fluid circuit 204A. The respective tanks 204 may include a first inlet and a first outlet to facilitate ingress and egress the exhaust gas to/from the tanks 204. The second fluid circuit 204B may be formed around the heat exchange element 206 and adapted to receive a coolant to enable heat exchange between the exhaust gas flowing through the heat exchanger element 206 and the coolant flowing around the heat exchanger element 206. The housing may further include a second inlet 208A and a second outlet 208B to provide the coolant and to receive the coolant from the housing 202 respectively. The EGR cooler 200 may include other elements which are necessary to function and known to the person skilled in the art.

[0021] The housing 202 further includes lateral walls 210 provided with a middle portion 212, a first side portion 214A, and a second side portion 214B. The middle portion 212 may be defined in center of the lateral walls 210 of the housing 202. The first side portion 214A and the

second side portion 214B are formed on adjacent side of the middle portion 212 defined on the housing 202. In one example, the first side portion 214A is defined at right side with respect to the middle portion 212 and the second side portion 214B is defined at left side with respect to the middle portion 212. The housing may include one or more first beads 216 and one or more second beads 218. In one embodiment, the one or more first beads 216 are straight beads, and the one or more second beads are curved beads. In one aspect, the one or more first beads 216 are formed at the middle portion 212 of the housing 202. For the sake of brevity and clarity, the invention is explained with single first bead formed in the middle portion 212, however, it does not limit to define any number of first beads in the middle portion 212. The one or more second beads 218 are formed on the first side portion 214A and the second side portion 214B of the lateral walls 210 of the housing 202. The one or more second beads 218 are formed along a longitudinal axis on the lateral walls 210 of the housing 202 and each of the beads extend along at least a portion of the width of the housing 202. In one embodiment, the first bead 216 and the one or more second beads 218 may be in form of grooves or protruded outwards. As the exhaust gas entering into the first fluid circuit 204A is pulsating in nature, stress is formed in the housing 202. As the first bead 216 and the one or more second beads 218 are formed in the housing 202, the stress acting on the housing 202 is reduced, which mitigate cracking in the housing 202 and enhance the fatigue life span of the EGR cooler 200.

[0022] The housing 202 is formed by connecting the lateral walls 210 with sidewalls 220, thereby forming corners in the housing 202. In other words, corners of the housing 202 are formed by connecting the lateral walls 210 with the sidewall 220. In one embodiment, the lateral walls 210 are perpendicular to the sidewalls 220, so that the corners are formed in the housing 202. The housing 202 further includes one or more corner beads 222, hereinafter referred to as corner bead, formed in the corner of the housing 202 to reduce stress acting at the corners of the housing 202, due to the pulsating pressure of exhaust gas entering into the housing 202. In one embodiment, the first bead 216, the second beads 218 and the corner bead 222 are engraved in the housing 202. However, present invention is not limited to any particular method of configuring the beads on the housing.

[0023] Fig. 3A illustrates a perspective view of the housing 202 of the EGR cooler 200. The one or more second beads 218, hereinafter referred as to second beads, being curved in such a way that the second beads 218 are progressively curved. In other words, the second beads 218 are curved in such a way that a second bead at a distal end with respect to the middle portion 212 is more curved as compared to the second bead at a proximal end with respect to the middle portion 212 of the housing 202. In one embodiment, the second beads 218 formed in the first side portion 214A and the second side portion 214B are concaved with respect to the first bead

216 provided in the middle portion 212 of the housing 202. In another embodiment, the second beads 218 formed in the first side portion 214A and the second side portion 214B may be convex with respect to the first bead 216 provided in the middle portion 212 of the housing 202. In yet another embodiment, the second beads 218 formed in the first side portion 214A of the housing 202 is convex with respect to the first bead 214 provided in the housing 202, and the second beads 218 formed in the second side portion 218B of the housing 202 is concave with respect to the first bead 214 provided in the housing 202. In another embodiment, the second beads 218 formed in the first side portion 214A and the second side portion 214B may be "W" shaped beads.

[0024] In one aspect of the invention, a height of the first bead 216 and the second beads 218 is 53.8mm. In one embodiment, a distance between adjacent second beads 218 are in ascending with respect to the first bead 216. In other words, a distance between adjacent second beads 218 that are formed proximal with respect to the first bead 216 is less as compared to a distance between adjacent second beads 218 formed distal with respect to the first bead 216. In another aspect of the invention, the second beads 218 may include eight curved beads equally distributed in the first side portion 214A and the second side portion 214B of the lateral walls 210 of the housing 202. Further, a distance between an inner curve 302 and an outer curve 304 of the second beads 218 is 6.5mm, 8.8mm, 12.7mm and 13.5mm respectively from the second bead at the proximal end to the second bead at the distal end. According to this aspect of the invention, an inner radius of the inner curve 302 of the second beads 218 is 96mm, 37mm, 29mm and 24 mm respectively from the second bead at the proximal end to the second bead at the distal end of the housing 202. Further, an outer radius of the outer curve 304 of the second beads 218 is 110mm, 36.5mm, 29mm, and 26.5mm respectively from the second bead at the proximal end to the second bead at the distal end of the housing 202. In one embodiment, the first bead 216 being a straight bead having a width of 8.6mm. Further, the first bead 216, the second beads 218, and the corner bead 222 provided in the EGR cooler 200 may reduce the stress by 10% as compared to the conventional EGR cooler 100 having only straight beads as shown in Fig. 1A. Further, life of the EGR cooler 200 is increased by 22 times as compared to the conventional EGR cooler 100, due to reduced stress level in the housing 202. In another embodiment, the conventional EGR cooler 100 may experience stress of 139 Mpa when it is connected to the exhaust of the vehicle, whereas the proposed EGR cooler 200 may experience 126 Mpa when it is connected to the exhaust of the vehicle.

[0025] Fig. 3B illustrates a perspective view of a heat exchanger element amongst the plurality of heat exchange elements 206 disposed inside the EGR cooler 200 of Fig. 2A. The plurality of heat exchanger elements 206 can be heat exchange tubes or plates stacked together. The first fluid circuit 204A is formed in such a way

that the exhaust gas passes through the plurality of heat exchange elements 206 to enable heat exchange between the exhaust gases flowing through the heat exchange elements 206 and coolant flowing around the plurality of heat exchange elements 206.

[0026] Fig. 4 illustrates a perspective view of the housing 202 of Fig. 2A, in accordance with another aspect of the invention. In this aspect of the invention, the housing 202 may include the first bead 216 and the second bead 218 provided in the lateral walls 210 of the housing 202. The EGR cooler 200, according to this aspect, having the first bead 216 and the second beads 218 may reduce stress by 6% from the conventional EGR cooler 100 as shown in Fig. 1A. The EGR cooler 200, according to this aspect of the invention, may include the first bead 216 and the second beads 218. In one embodiment, the EGR cooler 200 having the first and second beads 216, 218 may experience stress of 131 MPa when it is connected to the exhaust of the vehicle, which is less than the stress acting on the conventional EGR cooler 100. As the stress experiencing in the EGR cooler 200 is reduced as compared to the conventional EGR cooler 100, cracking in the housing 202 is mitigated and the fatigue life span of the EGR cooler 200 is enhanced.

[0027] Fig. 5 illustrates another perspective view of the housing 202 of the EGR cooler 200 of Fig. 2A, in accordance with another aspect of the invention. In this aspect, the housing 202 may include the corner bead 222 alone, provided on the corner of the housing 202. The corner bead 222 is adapted to reduce stress acting on the housing 202 of the EGR cooler 200 by 4% from the conventional EGR cooler 100. In one embodiment, the EGR cooler 200 having the corner beads 222 may experience stress of 135 MPa when it is connected to the exhaust of the vehicle, which is less than of the stress acting on the conventional EGR cooler 100. As the stress experiencing in the EGR cooler 200 is reduced as compared to the conventional EGR cooler 100, cracking in the housing 202 is mitigated and the fatigue life span of the EGR cooler 200 is enhanced.

Claims

1. An Exhaust Gas Re-circulation (EGR) cooler (200), comprising:

a housing (202) comprises lateral walls (210) having a middle portion (212), a first side portion (214A) and a second side portion (214B), wherein the first side portion (214A) and the second side portion (214B) are formed on opposite sides of the middle portion (212);
the housing (202) further comprising:

a first fluid circuit (204A) formed in the housing (202) to receive pulsating pressure of exhaust gas from an engine of a vehicle;

at least one first bead (216) formed at the middle portion (212) of the housing (202); and

a plurality of curved beads (218) formed on the first side portion (214A) and the second side portion (214B) of the lateral walls (210) of the housing (202), wherein the at least one first bead (216) and the plurality of curved beads (218) are formed along a longitudinal axis on the lateral walls (210) of the housing (202)

characterized in that

the plurality of curved beads (218) is progressively continuous curved beads, the beads (218) of the plurality of curved beads are curved in such a way that a bead of the plurality of curved beads at a distal end with respect to the middle portion (212) is more curved as compared to a bead of the plurality of curved beads at a proximal end with respect to the middle portion (212) of the housing (202).

2. The Exhaust Gas Re-circulation cooler (200) as claimed in claim 1, wherein the plurality of curved beads (218) formed in the first side portion (214A) and the second side portion (214B) is concaved towards the at least one first bead (216) provided in the middle portion (212) of the housing (202).
3. The Exhaust Gas Re-circulation cooler (200) as claimed in claim 1, wherein the plurality of curved beads (218) formed in the first side portion (214A) of the housing is convex towards the at least one first bead (216) provided in the middle portion (212) of the housing (202), whereas the plurality of curved beads (218) formed in the second side portion (214B) of the housing is concaved towards the at least one first bead (216) provided in the middle portion (212) of the housing (202).
4. The Exhaust Gas Re-circulation cooler (200) as claimed in any of preceding claims, wherein the at least one first bead (216) is a straight bead.
5. The Exhaust Gas Re-circulation cooler (200) as claimed in any of preceding claims, wherein the housing (202) is formed by connecting the lateral walls (210) with sidewalls (220) that are perpendicular to the lateral walls (210).
6. The Exhaust Gas Re-circulation cooler (200) as claimed in the previous claim, the housing (202) further comprising at least one corner bead (222) formed at corners where the laterals walls (210) are connected with the sidewalls (220).
7. The Exhaust Gas Re-circulation cooler (200) as

claimed in any of preceding claims, wherein the first fluid circuit (204A) is formed by a plurality of heat exchange elements (206) to receive the pulsating pressure of exhaust gas from the engine of the vehicle, wherein the housing (202) further includes a second fluid circuit (204B) formed around the plurality of heat exchange elements to enable heat exchange between the pulsating pressure of exhaust gas and a coolant flowing in the second fluid circuit (204B).

8. The exhaust Gas Re-circulation (EGR) cooler (200), as claimed in claim 1, wherein the plurality of curved beads (218) is any one of "W" shaped beads, concavely curved beads and convexly curved beads.

Patentansprüche

1. Abgasrückführungskühler (EGR-Kühler) (200), umfassend:

ein Gehäuse (202), das laterale Wände (210) mit einem Mittelteil (212), einem ersten Seitenteil (214A) und einem zweiten Seitenteil (214B) umfasst, wobei der erste Seitenteil (214A) und der zweite Seitenteil (214B) auf einander gegenüberliegenden Seiten des Mittelteils (212) gebildet sind; wobei das Gehäuse (202) ferner Folgendes umfasst:

einen ersten Fluidkreislauf (204A), der in dem Gehäuse (202) gebildet ist, um pulsierenden Abgasdruck aus einem Motor eines Fahrzeugs aufzunehmen; mindestens einen ersten Wulst (216), der am Mittelteil (212) des Gehäuses (202) gebildet ist; und mehrere gekrümmte Wülste (218), die am ersten Seitenteil (214A) und am zweiten Seitenteil (214B) der lateralen Wände (210) des Gehäuses (202) gebildet sind, wobei der mindestens eine erste Wulst (216) und die mehreren gekrümmten Wülste (218) entlang einer Längsachse an den lateralen Wänden (210) des Gehäuses (202) gebildet sind;

dadurch gekennzeichnet, dass

die mehreren gekrümmten Wülste (218) zunehmend durchgehend gekrümmte Wülste sind, die Wülste (218) der mehreren gekrümmten Wülste (218) so gekrümmt sind, dass ein Wulst der mehreren gekrümmten Wülste an einem distalen Ende bezüglich des Mittelteils (212) im Vergleich zu einem Wulst der mehreren gekrümmten Wülste an einem proximalen Ende bezüglich des Mit-

telteils (212) des Gehäuses (202) stärker gekrümmt ist.

2. Abgasrückführungskühler (200) nach Anspruch 1, wobei die mehreren gekrümmten Wülste (218), die im ersten Seitenteil (A) und im zweiten Seitenteil (214B) gebildet sind, zu dem mindestens einen ersten Wulst (216), der im Mittelteil (212) des Gehäuses (202) vorgesehen ist, konkav sind.
3. Abgasrückführungskühler (200) nach Anspruch 1, wobei die mehreren gekrümmten Wülste (218), die im ersten Seitenteil (214A) des Gehäuses gebildet sind, zu dem mindestens einen ersten Wulst (216), der im Mittelteil (212) des Gehäuses (202) vorgesehen ist, konvex sind, während die mehreren gekrümmten Wülste (218), die im zweiten Seitenteil (214B) des Gehäuses gebildet sind, zu dem mindestens einen Wulst (216), der im Mittelteil (212) des Gehäuses (202) vorgesehen ist, konkav sind.
4. Abgasrückführungskühler (200) nach einem der vorhergehenden Ansprüche, wobei der mindestens eine erste Wulst (216) ein gerader Wulst ist.
5. Abgasrückführungskühler (200) nach einem der vorhergehenden Ansprüche, wobei das Gehäuse (202) durch Verbinden der lateralen Wände (210) mit Seitenwänden (220), die senkrecht zu den lateralen Wänden (210) verlaufen, gebildet ist.
6. Abgasrückführungskühler (200) nach dem vorhergehenden Anspruch, wobei das Gehäuse (202) ferner mindestens einen Eckwulst (222) umfasst, der an Ecken gebildet ist, an denen die lateralen Wände (210) mit den Seitenwänden (220) verbunden sind.
7. Abgasrückführungskühler (200) nach einem der vorhergehenden Ansprüche, wobei der erste Fluidkreislauf (204A) durch mehrere Wärmeaustauschelemente (206) zur Aufnahme des pulsierenden Abgasdrucks von dem Motor des Fahrzeugs gebildet ist, wobei das Gehäuse (202) ferner einen zweiten Fluidkreislauf (204B) umfasst, der um die mehreren Wärmeaustauschelemente gebildet ist, um einen Wärmeaustausch zwischen dem pulsierenden Abgasdruck und einem im zweiten Fluidkreislauf (204B) fließenden Kühlmittel zu ermöglichen.
8. Abgasrückführungskühler (200) nach Anspruch 1, wobei die mehreren gekrümmten Wülste (218) eines von "W"-förmigen Wülsten, konkav gekrümmten Wülsten und konvex gekrümmten Wülsten sind.

Revendications

1. Refroidisseur (200) de recyclage de gaz d'échappe-

ment (EGR), comportant :

un boîtier (202) comportant des parois latérales (210) présentant une partie médiane (212), une partie (214A) de premier côté et une partie (214B) de second côté, la partie (214A) de premier côté et la partie (214B) de second côté étant formées sur des côtés opposés de la partie médiane (212) ;

le boîtier (202) comportant en outre :

un premier circuit (204A) de fluide formé dans le boîtier (202) pour recevoir une pression pulsatile de gaz d'échappement provenant du moteur d'un véhicule ;

au moins un premier bourrelet (216) formé au niveau de la partie médiane (212) du boîtier (202) ; et

une pluralité de bourrelets incurvés (218) formée sur la partie (214A) de premier côté et la partie (214B) de second côté des parois latérales (210) du boîtier (202), le ou les premiers bourrelets (216) et la pluralité de bourrelets incurvés (218) étant formés suivant un axe longitudinal sur les parois latérales (210) du boîtier (202),

caractérisé en ce que

les bourrelets de la pluralité de bourrelets incurvés (218) sont des bourrelets continus progressivement incurvés, les bourrelets (218) de la pluralité de bourrelets incurvés sont incurvés de telle manière qu'un bourrelet de la pluralité de bourrelets incurvés à une extrémité distale par rapport à la partie médiane (212) soit plus incurvé en comparaison d'un bourrelet de la pluralité de bourrelets incurvés à une extrémité proximale par rapport à la partie médiane (212) du boîtier (202).

2. Refroidisseur (200) de recyclage de gaz d'échappement selon la revendication 1, la pluralité de bourrelets incurvés (218) formée dans la partie (214A) de premier côté et la partie (214B) de second côté étant rendue concave en direction du ou des premiers bourrelets (216) réalisés dans la partie médiane (212) du boîtier (202) .

3. Refroidisseur (200) de recyclage de gaz d'échappement selon la revendication 1, la pluralité de bourrelets incurvés (218) formée dans la partie (214A) de premier côté du boîtier étant convexe en direction du ou des premiers bourrelets (216) réalisés dans la partie médiane (212) du boîtier (202), la pluralité de bourrelets incurvés (218) formée dans la partie (214B) de second côté du boîtier étant rendue concave en direction du ou des premiers bourrelets (216) réalisés dans la partie médiane (212) du boîtier

(202).

4. Refroidisseur (200) de recyclage de gaz d'échappement selon l'une quelconque des revendications précédentes, le ou les premiers bourrelets (216) étant un bourrelet rectiligne.

5. Refroidisseur (200) de recyclage de gaz d'échappement selon l'une quelconque des revendications précédentes, le boîtier (202) étant formé en raccordant les parois latérales (210) avec des parois (220) de côtés qui sont perpendiculaires aux parois latérales (210) .

6. Refroidisseur (200) de recyclage de gaz d'échappement selon la revendication précédente, le boîtier (202) comportant en outre au moins un bourrelet (222) de coin formé dans des coins où les parois latérales (210) sont raccordées aux parois (220) de côtés.

7. Refroidisseur (200) de recyclage de gaz d'échappement selon l'une quelconque des revendications précédentes, le premier circuit (204A) de fluide étant formé par une pluralité d'éléments (206) d'échange de chaleur pour recevoir la pression pulsatile de gaz d'échappement provenant du moteur du véhicule, le boîtier (202) comprenant en outre un second circuit (204B) de fluide formé autour de la pluralité d'éléments d'échange de chaleur pour permettre un échange de chaleur entre la pression pulsatile de gaz d'échappement et un agent de refroidissement s'écoulant dans le second circuit (204B) de fluide.

8. Refroidisseur (200) de recyclage de gaz d'échappement (EGR) selon la revendication 1, la pluralité de bourrelets incurvés (218) étant d'un type quelconque parmi des bourrelets en forme de "W", des bourrelets incurvés de façon concave et des bourrelets incurvés de façon convexe.

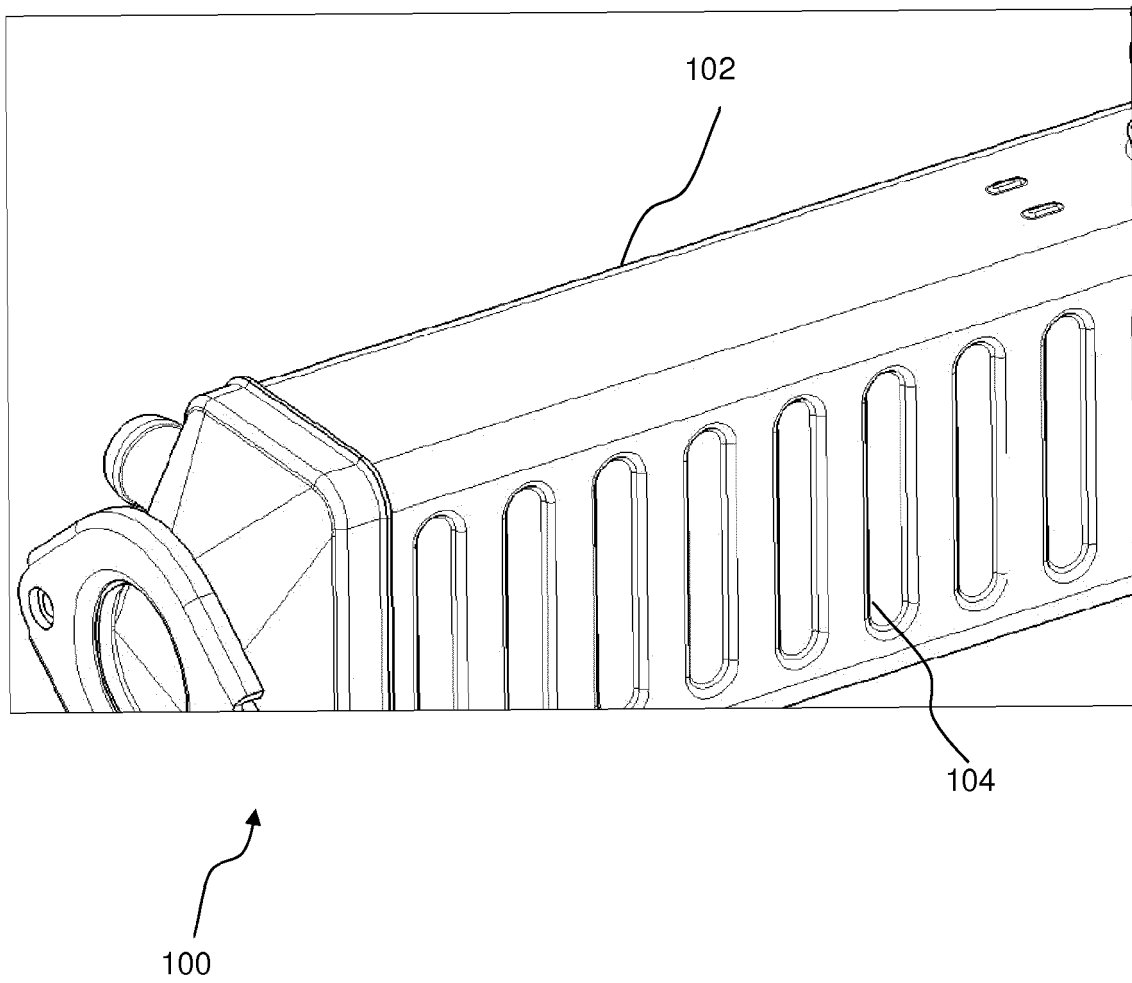


FIG. 1 (Prior Art)

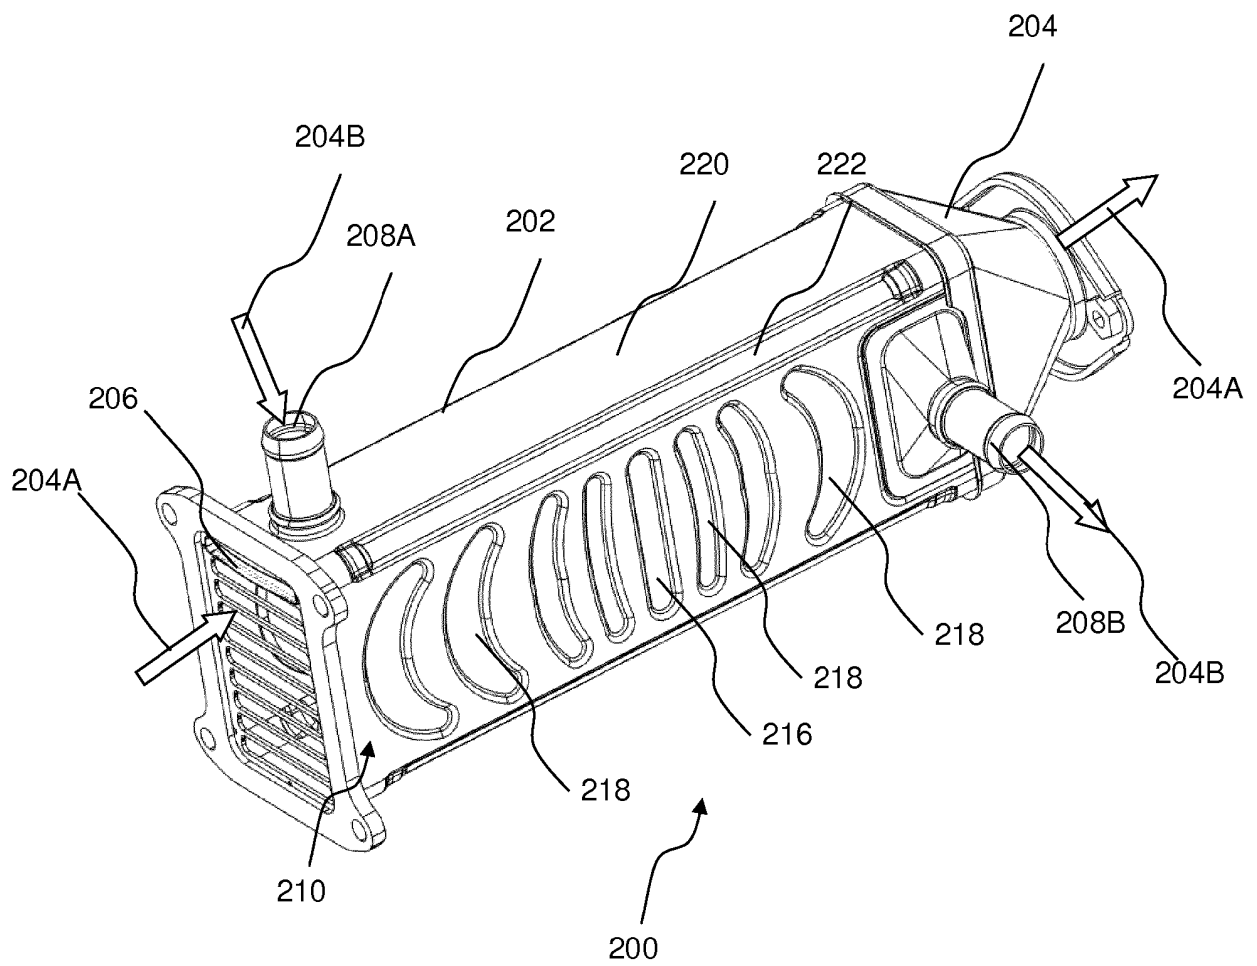


FIG. 2A

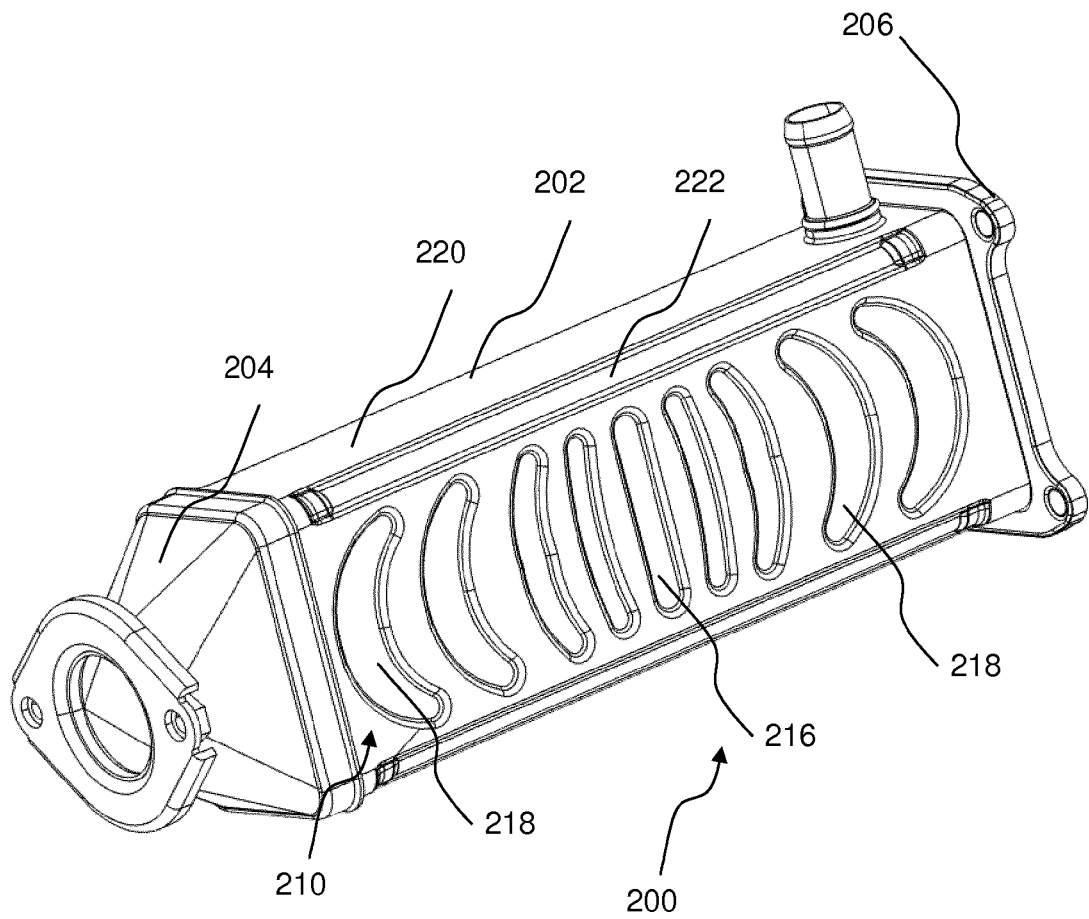


FIG. 2B

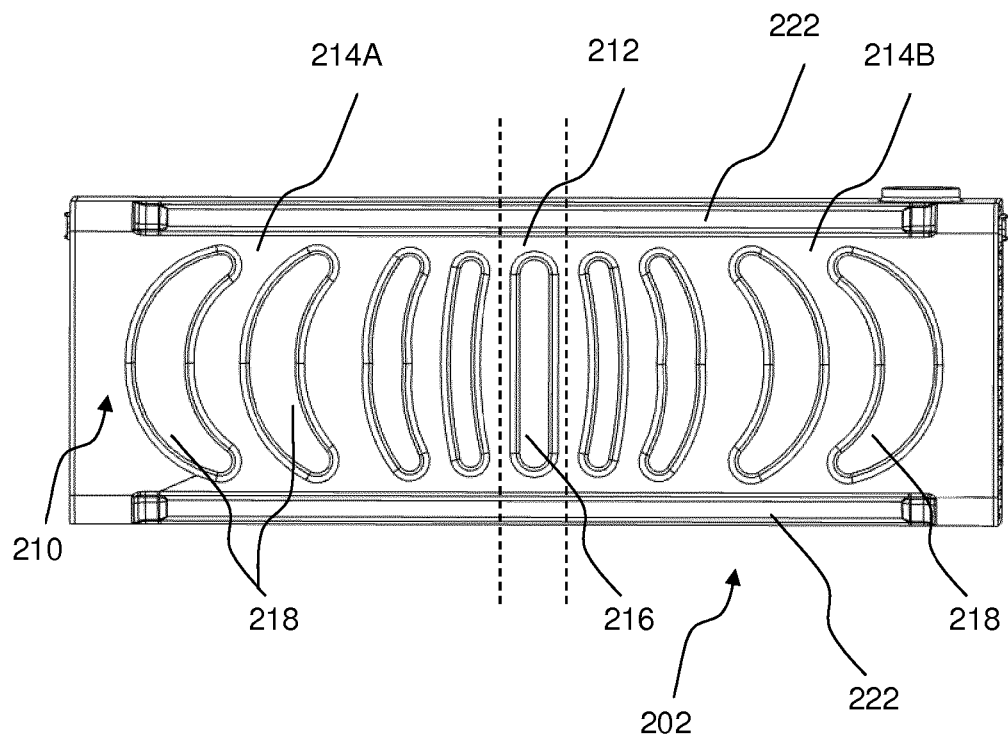


FIG. 2C

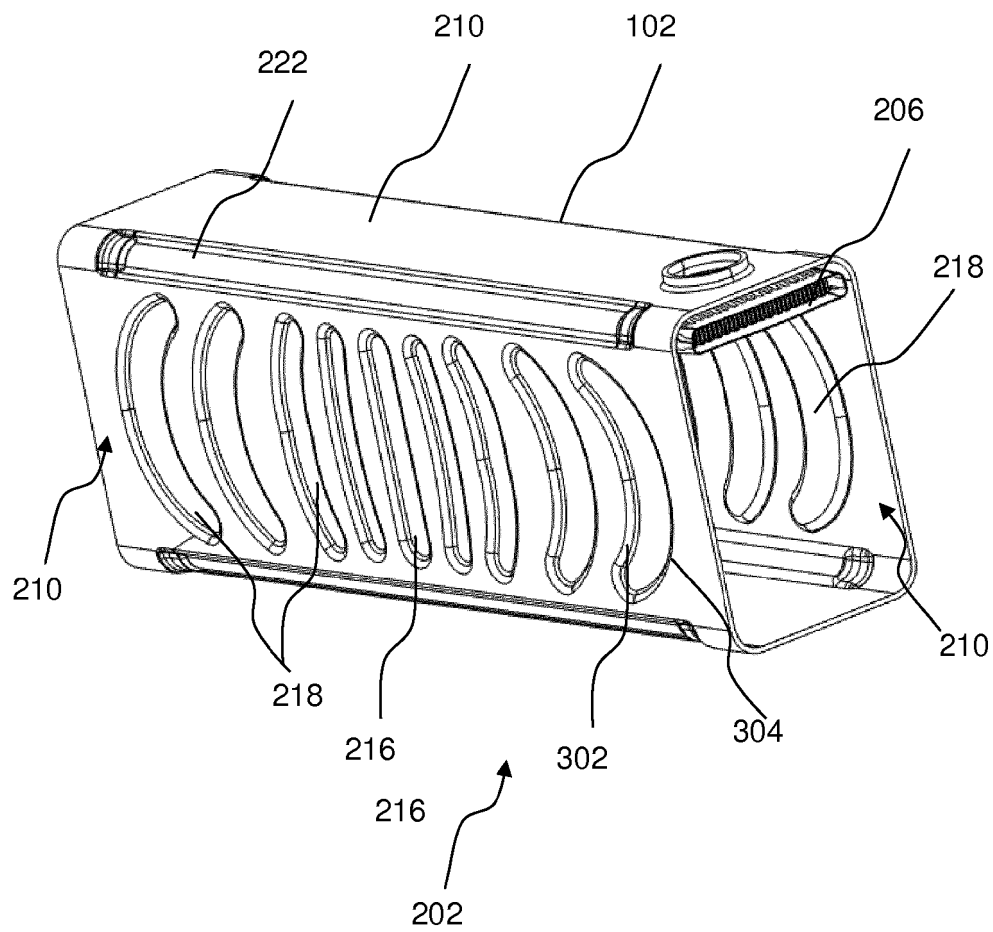


FIG. 3A

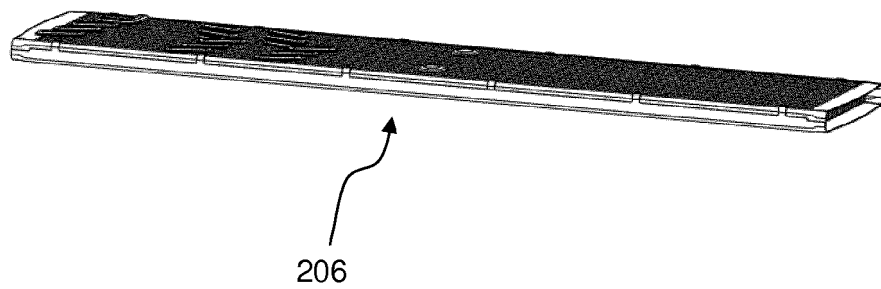
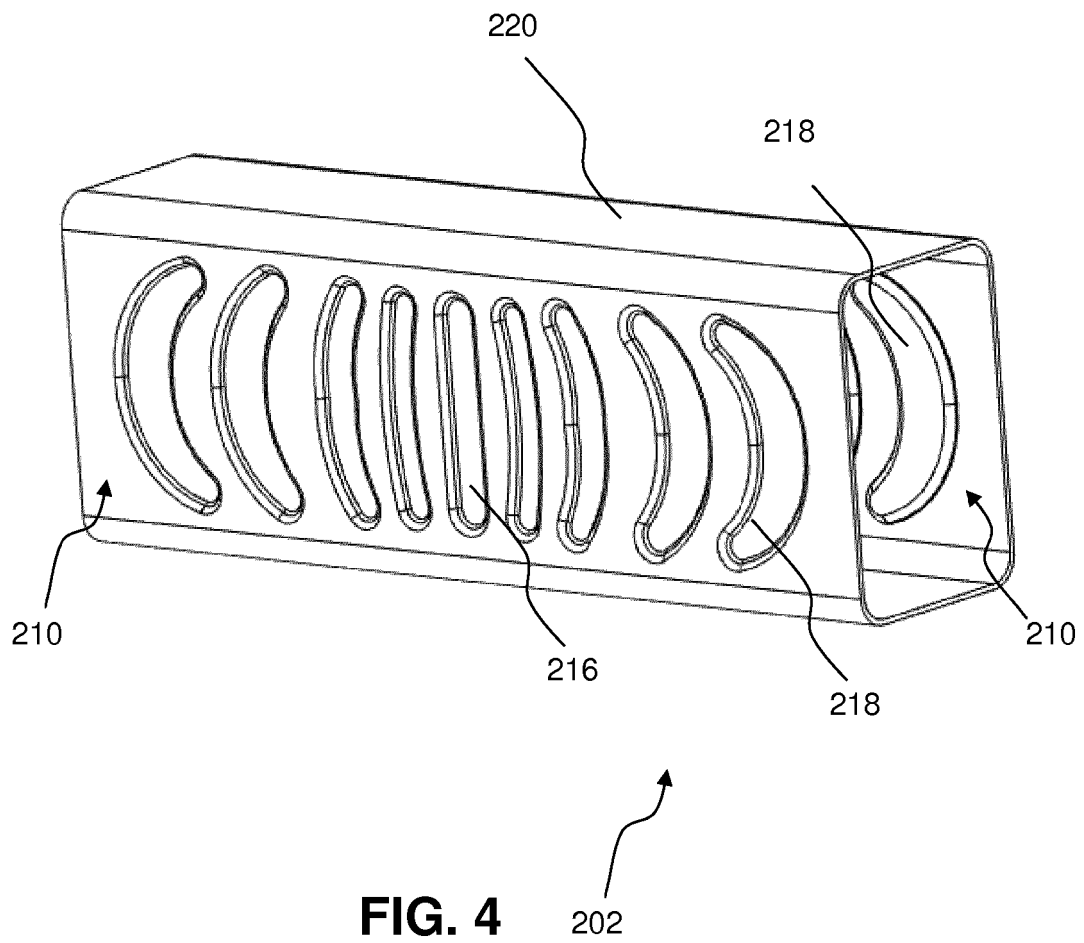


FIG. 3B



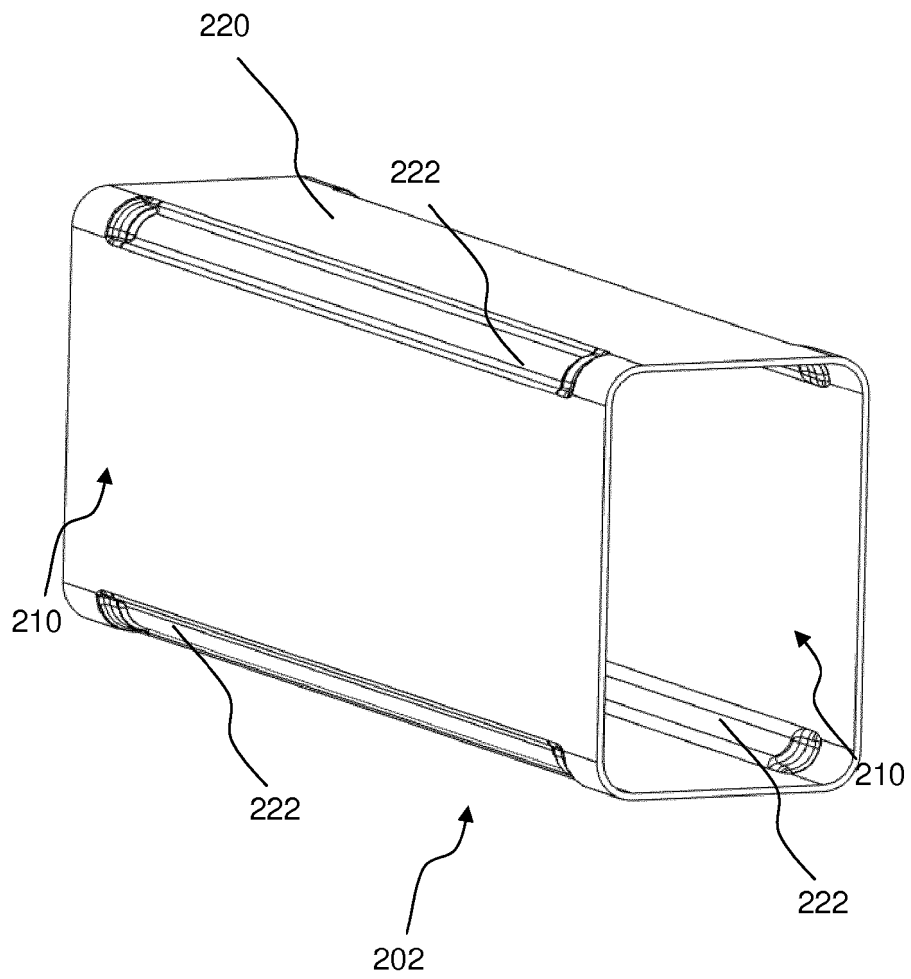


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 102008028244 B3 [0004]
- US 2014338873 A1 [0004]
- DE 102016110772 A1 [0004]
- US 2017009708 A1 [0004]
- US 2017336147 A1 [0004]
- EP 1801407 A1 [0004]