

EP 3 760 931 A1 (11)

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

06.01.2021 Bulletin 2021/01

(51) Int Cl.:

F24C 15/00 (2006.01)

F24C 15/20 (2006.01)

(21) Application number: 19184353.1

(22) Date of filing: 04.07.2019

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

Designated Validation States:

KH MA MD TN

(71) Applicant: ELECTROLUX APPLIANCES **AKTIEBOLAG**

105 45 Stockholm (SE)

(72) Inventors:


- LAMPITELLI, Francesco 47122 Forli (IT)
- PARRELLA, Alessandro 47100 Forlì (IT)
- (74) Representative: Electrolux Group Patents

AB Electrolux **Group Patents**

105 45 Stockholm (SE)

(54)COOKING OVEN WITH OVEN CAVITY AND COOLING CHANNEL

(57)The present invention relates to a cooking oven (10) with an oven cavity (12) and a cooling channel (14). The oven cavity (12) includes at least one cavity opening (16). The cooling channel (14) includes at least one guiding channel (18). The cavity opening (16) is connected to the guiding channel (18). The cavity opening (16) is surrounded by a first structure (22). The guiding channel (18) is surrounded by a second structure (24). The first structure (22) and the second structure (24) are formed complementary to each other.

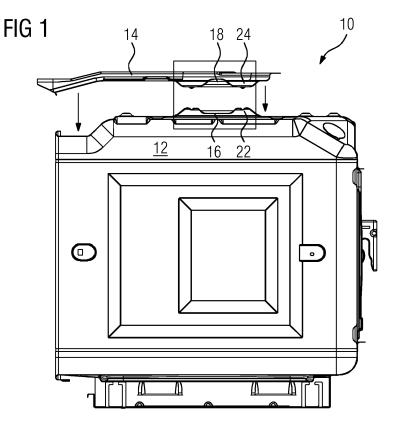

EP 3 760 931 A1

[0001] The present invention relates to a cooking oven with an oven cavity and a cooling channel.

1

[0002] In a cooking oven food is prepared within an oven cavity. The food is inserted into and removed from the oven cavity through a front opening. Said front opening is closable by an oven door. The oven door includes a glass window cooled down by a cooling system. Said cooling system sucks air from the interior of the oven door. The cooling system is formed by cooling ducts surrounding the oven cavity. A cooling fan on the top of the oven cavity circulates air within the cooling ducts.

[0003] During the cooking process steam and vapour in the interior of the oven cavity may condensate at the glass window of the oven door. In order to avoid the condensation of steam and vapour at the glass window of the oven door, a system for removing steam and vapour from the oven cavity is provided. The oven cavity has an aperture connected to the cooling system. Steam and vapour are sucked through said aperture by the cooling fan. The aperture is connected to the cooling system via a guiding channel. The guiding channel and the aperture form a passage for the steam and vapour sucked by the cooling fan. In order to avoid leakages, a sealing element is required between the guiding channel and the aperture.

[0004] Usually, the cooling channel is preassembled in a subsidiary station, while the oven cavity and the cooling channel are fixed to the housing in the main production line. This require the sealing element ad the correct position of the guiding channel and the aperture.

[0005] It is an object of the present invention to provide a cooking oven, which allows an improved sealing between the oven cavity and the cooling channel by low complexity.

[0006] The object is achieved by the cooking oven according to claim 1.

[0007] According to the present invention a cooking oven with an oven cavity and a cooling channel is provided, wherein:

- the oven cavity includes at least one cavity opening,
- the cooling channel includes at least one guiding channel,
- the cavity opening is connected to the guiding chan-
- the cavity opening is surrounded by a first structure,
- the guiding channel is surrounded by a second structure, and
- the first structure and the second structure are formed complementary to each other.

[0008] The complementary first structure and second structure provide a mechanical sealing between the cavity opening and the guiding channel. Any further sealing elements are not required.

[0009] Preferably, the cooling channel is arranged

above the oven cavity.

[0010] Further, the oven cavity may be fixed at a housing of the cooking oven.

[0011] In a similar way, the cooling channel may be fixed at the housing of the cooking oven.

[0012] For example, the oven cavity is fixed at side walls of the cooking oven by screws.

[0013] Similarly, the cooling channel may be fixed at the side walls of the cooking oven by screws.

[0014] In particular, the first structure is formed rotation-symmetrically in view of the cavity opening.

[0015] In a similar way, the second structure is formed rotation-symmetrically in view of the guiding channel.

[0016] For example, the first structure is embossed around the cavity opening.

[0017] Similarly, the second structure may be embossed around the guiding channel.

[0018] Moreover, the oven cavity and the cooling channel are indirectly connected to each other.

[0019] Preferably, the oven cavity is made of carbon steel. Further, the oven cavity may be made of stainless steel.

[0020] Preferably, the cooling channel is made of carbon steel. Further, the cooling channel may be made of stainless steel.

[0021] Novel and inventive features of the present invention are set forth in the appended claims.

[0022] The present invention will be described in further detail with reference to the drawings, in which

- FIG 1 illustrates a schematic partial exploded sectional side view of a cooking oven according to a preferred embodiment of the present invention,
- FIG 2 illustrates a more detailed schematic partial exploded sectional side view of the cooking oven according to the preferred embodiment of the present invention.
- FIG 3 illustrates a schematic perspective view of a guiding channel in a bottom wall of a cooling channel for the cooking oven according to the preferred embodiment of the present invention,
- FIG 4 illustrates a schematic perspective view of a cavity opening in a top wall of an oven cavity for the cooking oven according to the preferred embodiment of the present invention,
- FIG 5 illustrates a schematic partial side view of the cooking oven according to the preferred embodiment of the present invention, and
 - FIG 6 illustrates a schematic partial perspective view of the cooking oven according to the preferred embodiment of the present invention.
 - [0023] FIG 1 illustrates a schematic partial exploded

55

sectional side view of a cooking oven 10 according to a preferred embodiment of the present invention.

[0024] The cooking oven 10 comprises an oven cavity 12 and a cooling channel 14. The cooling channel 14 is arranged above the oven cavity 12. A cavity opening 16 is formed in a top wall of the oven cavity 12. A guiding channel 18 is formed in a bottom wall of the cooling channel 14. When the cooling channel 14 is put onto the oven cavity 12, then the cavity opening 16 and the guiding channel 18 are connected indirectly to each other.

[0025] A first structure 22 is formed around the cavity opening 16. A second structure 24 is formed around the guiding channel 18. The first structure 22 and the second structure 24 are formed complementary to each other. The first structure 22 and the second structure 24 provide a mechanical sealing between the cavity opening 16 and the guiding channel 18.

[0026] FIG 2 illustrates a more detailed schematic partial exploded sectional side view of the cooking oven 10 according to the preferred embodiment of the present invention.

[0027] The guiding channel 18 of the cooling channel 14 is arranged above the cavity opening 16 of the oven cavity 12. The first structure 22 around the cavity opening 16 and the second structure 24 around the guiding channel 18 are formed complementary to each other.

[0028] FIG 3 illustrates a schematic perspective view of the guiding channel 18 formed in the bottom wall of the cooling channel 14 for the cooking oven 10 according to the preferred embodiment of the present invention.

[0029] The second structure 24 is formed around the guiding channel 18. Said second structure 24 is formed complementary to the first structure 22 formed around the cavity opening 16. The second structure 24 is formed rotation-symmetrically in view of the guiding channel 18. [0030] Preferably, the cooling channel 14 is made of carbon steel. Further, the cooling channel 14 may be made of stainless steel.

[0031] FIG 4 illustrates a schematic perspective view of the cavity opening 16 in the top wall of an oven cavity 12 for the cooking oven 10 according to the preferred embodiment of the present invention.

[0032] The first structure 22 is formed around the cavity opening 16. Said first structure 22 is formed complementary to the second structure 24 formed around the guiding channel 18. The first structure 22 is formed rotation-symmetrically in view of the cavity opening 16.

[0033] Preferably, the oven cavity 12 is made of carbon steel. Further, the oven cavity 12 may be made of stainless steel.

[0034] FIG 5 illustrates a schematic partial side view of the cooking oven 10 according to the preferred embodiment of the present invention.

[0035] The cooking oven 10 comprises the oven cavity 12 and the cooling channel 14, wherein the cooling channel 14 is arranged above the oven cavity 12. The first structure 22 around the cavity opening 16 and the second structure 24 around the guiding channel 18 are engaged

with each other. The engagement between the first structure 22 and the second structure 24 provide the mechanical sealing between the cavity opening 16 and the guiding channel 18. Any further sealing elements are not required.

[0036] FIG 6 illustrates a schematic partial perspective view of the cooking oven 10 according to the preferred embodiment of the present invention.

[0037] The cooking oven 10 comprises two side walls 20. The oven cavity 12 is attached at said side walls 20 by screws. Moreover, the cooling channel 14 is attached at the side walls 20 by screws. At the assembling of the cooking oven 10, the oven cavity 12 is fixed to the housing of said cooking oven 10. Then, the cooling channel 14 is laid on the oven cavity 12, wherein the first structure 22 and the second structure 24 come into contact. The complementary surfaces of the first structure 22 and the second structure 24 align the correct position of the cooling channel 14 relative to the oven cavity 12. At last, the cooling channel 14 is fixed by screws to the housing of the cooking oven 10.

[0038] The cooling channel 14 and the oven cavity 12 are indirectly connected to each other.

[0039] Although an illustrative embodiment of the present invention has been described herein with reference to the accompanying drawings, it is to be understood that the present invention is not limited to that precise embodiment, and that various other changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the invention. All such changes and modifications are intended to be included within the scope of the invention as defined by the appended claims.

List of reference numerals

[0040]

- 10 cooking oven
- 40 12 oven cavity
 - 14 cooling channel
 - 16 cavity opening
 - 18 guiding channel
 - 20 side wall
- 45 22 first structure
 - 24 second structure

Claims

50

- 1. A cooking oven (10) with an oven cavity (12) and a cooling channel (14), wherein:
 - the oven cavity (12) includes at least one cavity opening (16),
 - the cooling channel (14) includes at least one guiding channel (18),
 - the cavity opening (16) is connected to the guid-

5

10

15

20

30

35

45

50

ing channel (18),

- the cavity opening (16) is surrounded by a first structure (22),
- the guiding channel (18) is surrounded by a second structure (24), and
- the first structure (22) and the second structure (24) are formed complementary to each other.
- 2. The cooking oven according to claim 1,

characterised in that

the cooling channel (14) is arranged above the oven cavity (12) .

3. The cooking oven according to claim 1 or 2, characterised in that

the oven cavity (12) is fixed at a housing (20) of the cooking oven (10).

4. The cooking oven according to any one of the preceding claims,

characterised in that

the cooling channel (14) is fixed at the housing (20) of the cooking oven (10).

5. The cooking oven according to any one of the preceding claims,

characterised in that

the oven cavity (12) is fixed at side walls (20) of the cooking oven (10) by screws.

6. The cooking oven according to any one of the preceding claims,

characterised in that

the cooling channel (14) is fixed at the side walls (20) of the cooking oven (10) by screws.

7. The cooking oven according to any one of the preceding claims,

characterised in that

the first structure (22) is formed rotation-symmetrically in view of the cavity opening (16).

The cooking oven according to any one of the preceding claims,

characterised in that

the second structure (24) is formed rotation-symmetrically in view of the guiding channel (18).

9. The cooking oven according to any one of the preceding claims,

characterised in that

the first structure (22) is embossed around the cavity opening (16).

10. The cooking oven according to any one of the preceding claims,

characterised in that

the second structure (24) is embossed around the

guiding channel (18).

 The cooking oven according to any one of the preceding claims,

6

characterised in that

the oven cavity (12) and the cooling channel (14) are indirectly connected to each other.

12. The cooking oven according to any one of the preceding claims,

characterised in that

the oven cavity (12) is made of carbon steel.

13. The cooking oven according to any one of the claims 1 to 11, **characterised in that** the oven cavity (12) is made of stainless steel.

The cooking oven according to any one of the preceding claims,

characterised in that

the cooling channel (14) is made of carbon steel.

15. The cooking oven according to any one of the claims 1 to 13,

characterised in that

the cooling channel (14) is made of stainless steel.

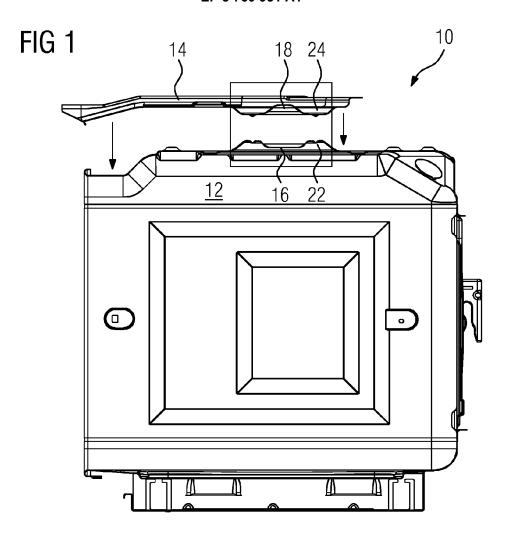
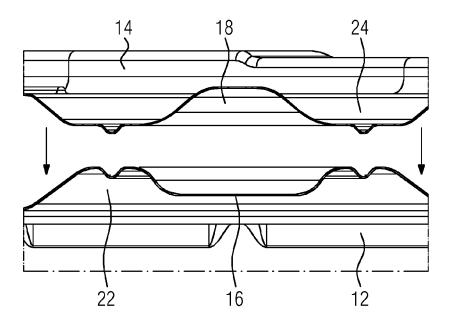
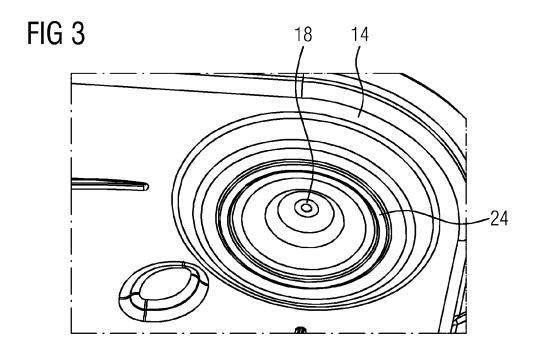
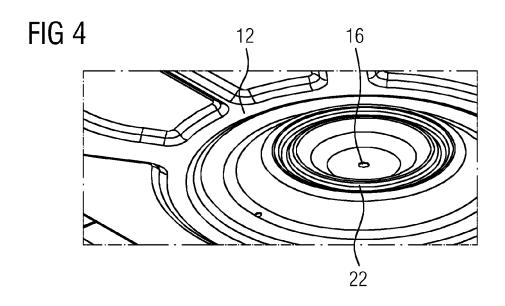


FIG 2








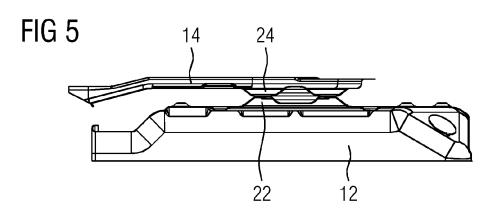


FIG 6



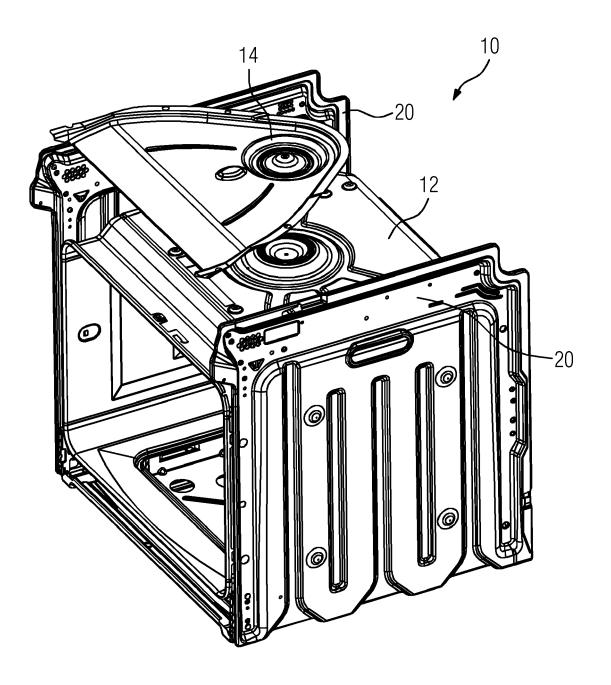

EUROPEAN SEARCH REPORT

Application Number EP 19 18 4353

5

10		
15		
20		
25		
30		
35		
40		
45		

50

5	5	
•	·	

Category	Citation of document with inc of relevant passa		Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Х	EP 2 444 737 A1 (BSH BOSCH SIEMENS 1-5, INV. HAUSGERAETE [DE]) 25 April 2012 (2012-04-25) F24C15/20			
Y A	* figure 3 *	-04-23)	6,12,13, 15 7,8	124013/20
X	DE 20 2016 001920 U APPLIANCES AB [SE]) 14 July 2016 (2016-0 * paragraph [0046];	97-14)	1-4	
Х	CN 107 898 334 A (GI INC ZHUHAI) 13 Apri * figures *	REE ELECTRIC APPLIANCES 1 2018 (2018-04-13)	1-4,9,10	
X	EP 3 438 552 A1 (SAF LTD [KR]) 6 February * figure 3 *	4SUNG ELECTRONICS CO y 2019 (2019-02-06)	1-4,9,10	
Υ	US 2013/025581 A1 (I AL) 31 January 2013 * paragraph [0023]		6	TECHNICAL FIELDS SEARCHED (IPC) F24C A47J
Υ	US 2015/083109 A1 (EAL) 26 March 2015 (2 * claim 4 *	BAEK CHAE HYUN [KR] ET 2015-03-26)	12	A470
Υ	EP 1 867 928 A1 (BR/ 19 December 2007 (20 * paragraph [0071];	007-12-19)	13	
Υ	18 September 1996 (:	 ESHEU WIWA GMBH [DE]) 1996-09-18) - line 26; figures 1,2	13	
		-/		
	The present search report has b	een drawn up for all claims		
	Place of search	Date of completion of the search		Examiner
The Hague		6 December 2019	ecember 2019 Ver	
X : part Y : part docu A : tech	ATEGORY OF CITED DOCUMENTS icularly relevant if taken alone icularly relevant if combined with anothment of the same category inclogical background	L : document cited for	cument, but publise n the application	shed on, or
	-written disclosure rmediate document	& : member of the sa document	ame patent family	, corresponding

page 1 of 2



EUROPEAN SEARCH REPORT

Application Number EP 19 18 4353

5

	DOCUMENTS CONSIDERED TO BE RELEVANT				
	Category	Citation of document with in of relevant pass	ndication, where appropriate, ages	Releva to clain	
10	Y	EP 3 012 537 A1 (EL [SE]) 27 April 2016 * paragraph [0085];	ECTROLUX APPLIANCES 5 (2016-04-27) 5 figure 1 *	AB 15	
15					
20					
25					TECHNICAL FIELDS SEARCHED (IPC)
30					
35					
40					
45					
1		The present search report has Place of search The Hague	been drawn up for all claims Date of completion of the sea	I	Examiner Verdoodt, Luk
50 EPO FORM 1503 03.62 (P04COT)	X : parl Y : parl doc A : tech O : nor	ATEGORY OF CITED DOCUMENTS cicularly relevant if taken alone cicularly relevant if combined with anot ument of the same category nological background l-written disclosure rmediate document	E : earlier pat after the fil her D : document L : document	cited in the applica cited for other reas f the same patent fa	published on, or ation

55

EP 3 760 931 A1

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 19 18 4353

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-12-2019

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
	EP 2444737 A1	25-04-2012	DE 102010042891 A1 EP 2444737 A1	26-04-2012 25-04-2012
15	DE 202016001920 U1	14-07-2016	NONE	
	CN 107898334 A	13-04-2018	NONE	
20	EP 3438552 A1	06-02-2019	EP 3438552 A1 KR 20170137488 A US 2019178500 A1 WO 2017209582 A1	06-02-2019 13-12-2017 13-06-2019 07-12-2017
25	US 2013025581 A1	31-01-2013	CA 2779914 A1 US 2013025581 A1	27-01-2013 31-01-2013
30	US 2015083109 A1	26-03-2015	CN 102422085 A EP 2419677 A2 EP 3531026 A1 KR 20110007030 A US 2011011423 A1 US 2015083109 A1 WO 2011007991 A2	18-04-2012 22-02-2012 28-08-2019 21-01-2011 20-01-2011 26-03-2015 20-01-2011
35	EP 1867928 A1	19-12-2007	EP 1867928 A1 FR 2902500 A1	19-12-2007 21-12-2007
	EP 0732549 A2	18-09-1996	DE 19509569 A1 EP 0732549 A2	19-09-1996 18-09-1996
40	EP 3012537 A1	27-04-2016	NONE	
45				
50				
55	FORM P0459			

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82