



(11) **EP 3 772 047 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**13.09.2023 Bulletin 2023/37**

(51) International Patent Classification (IPC):  
**G08B 29/14** <sup>(2006.01)</sup> **G08B 29/18** <sup>(2006.01)</sup>

(21) Application number: **19189285.0**

(52) Cooperative Patent Classification (CPC):  
**G08B 29/181**

(22) Date of filing: **31.07.2019**

(54) **A SENSOR**

SENSOR

CAPTEUR

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**03.02.2021 Bulletin 2021/05**

(73) Proprietor: **Tridonic GmbH & Co. KG**  
**6851 Dornbirn (AT)**

(72) Inventors:  
• **Lochmann, Frank**  
**88147 Achberg (DE)**  
• **Maldoner, Jakob**  
**6655 Steeg (AT)**

(74) Representative: **Rupp, Christian**  
**Mitscherlich PartmbB**  
**Patent- und Rechtsanwälte**  
**Karlstraße 7**  
**80333 München (DE)**

(56) References cited:  
**JP-A- 2006 141 115 KR-A- 20170 123 295**  
**US-A1- 2010 084 920 US-A1- 2016 063 329**  
**US-B1- 8 767 071**

• **AMARO JOSE PEDRO ET AL: "Harvested Power  
Wireless Sensor Network Solution for  
Disaggregated Current Estimation in Large  
Buildings", IEEE TRANSACTIONS ON  
INSTRUMENTATION AND MEASUREMENT, IEEE  
SERVICE CENTER, PISCATAWAY, NJ, US, vol.  
64, no. 7, 1 July 2015 (2015-07-01), pages  
1847-1857, XP011583547, ISSN: 0018-9456, DOI:  
10.1109/TIM.2014.2383052 [retrieved on  
2015-06-05]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### TECHNICAL FIELD OF THE INVENTION

**[0001]** The invention relates to a sensor for lighting technologies.

### BACKGROUND OF THE INVENTION

**[0002]** Document US 2016/0063329 A1 discloses a security camera system using a power supply by an electromagnetic induction scheme.

**[0003]** Nowadays, detectors, such as smoke detectors, are found in almost all homes.

**[0004]** Moreover, local building codes and insurance companies often require detectors such as movement detectors or smoke detectors to be installed in newly constructed buildings.

**[0005]** For example, public awareness of the benefits of smoke detectors and their low cost have made them very popular. Most of the household smoke detectors are powered by battery in order to simplify their installation by the owner of the home.

**[0006]** However, while the battery powered smoke detectors are easy to install, it is difficult to maintain them. In fact, the battery should be checked at least once a month and usually needs to be replaced once or twice a year.

**[0007]** In general, testing and replacing the battery often requires the use of a ladder, since smoke detectors are advantageously installed on ceilings in order to detect smoke which rises to the ceiling. Since most homes now contain at least one smoke detector in each room of the house, a monthly control by carrying a ladder to each smoke detector and climbing up and down the ladder several times is bothersome and can also be dangerous. As a consequence, most homeowners simply do not test the batteries of the smoke detectors.

**[0008]** This, of course, creates an even greater danger that the smoke detector will fail due to a dead or weak battery.

**[0009]** Commercial smoke detectors, on the other hand, are almost always AC powered with a battery back-up. However, these smoke detectors are complicated to install.

**[0010]** Thus, it is an objective to provide for an improved sensor for lighting technology, such as a smoke sensor, which can easily be supplied with power.

### SUMMARY OF THE INVENTION

**[0011]** The object of the present invention is achieved by the solution provided in the enclosed independent claim 1.

**[0012]** Advantageous implementations of the present invention are further defined in the dependent claims.

**[0013]** According to a first aspect the invention relates to a system comprising a sensor for lighting technology

and a power converter, the sensor comprising a power supply, the power supply being provided with a module configured to mechanically engage a wire of a mains supplying wiring of the power converter for lighting means, which is not directly connected to the sensor, the module designed for inductively tapping off electric power out of said main supplying wiring, wherein the sensor is configured to communicate in a wireless manner with the power converter and instruct the power converter to draw a higher power.

**[0014]** Preferably the sensor is bus-enabled, e.g. via a DALI bus interface.

**[0015]** Preferably, the sensor is a day-light sensor.

**[0016]** In an implementation form of the first aspect, the sensor is a presence detector.

**[0017]** In an implementation form of the first aspect, the sensor is a movement detector.

**[0018]** In an implementation form of the first aspect, the sensor is a smoke detector.

**[0019]** In an implementation form of the first aspect, the power supply comprises a ferrite core and a secondary winding.

**[0020]** The sensor is configured to communicate in a wireless manner with the converter supplied via said mains wire.

**[0021]** The sensor is configured to instruct the converter to draw a higher power.

**[0022]** In an implementation form of the first aspect, the power supply is configured to supply the sensor (also or only) when the converter is in a standby mode.

**[0023]** In an implementation form of the first aspect, the sensor comprises a clip, wherein the clip has a circular shape and wherein the clip surrounds a L wire.

**[0024]** In an implementation form of the first aspect, the sensor comprises a clip, wherein the clip has a circular shape and wherein the clip surrounds a N wire.

**[0025]** In an implementation form of the first aspect, the clip is configured to provide isolation.

**[0026]** According to a second aspect, the invention relates to a kit comprising a system according to the first aspect or any one of the implementation forms thereof, the converter being provided with a L or N mains supply wire designed for being coupled to the module of the power supply.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0027]** The invention will be explained in the followings together with the figure:

Fig. 1 shows an embodiment of a kit comprising a sensor for lighting technology according to an embodiment;

Fig. 2 shows a schematic representation of a supply of a sensor for lighting technology according to an embodiment; and

Fig. 3 shows a schematic representation of a supply of a sensor for lighting technology according to an

embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0028]** Aspects of the present invention are described herein in the context of a sensor for lighting technologies.

**[0029]** The present invention is described more fully hereinafter with reference to the accompanying drawings, in which various aspects of the present invention are shown. This invention however may be embodied in many different forms and should not be construed as limited to the various aspects of the present invention presented through this disclosure. Rather, these aspects are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the present invention to those skilled in the art. The various aspects of the present invention illustrated in the drawings may not be drawn to scale. Rather, the dimensions of the various features may be expanded or reduced for clarity. In addition, some of the drawings may be simplified for clarity. Thus, the drawings may not depict all of the components of a given apparatus.

**[0030]** Various aspects of a sensor for lighting technology will be presented. However, as those skilled in the art will readily appreciate, these aspects may be extended to aspects of sensors for lighting technologies without departing from the invention.

**[0031]** It is further understood that the aspect of the present invention might contain integrated circuits that are readily manufacturable using conventional semiconductor technologies, such as complementary metal-oxide semiconductor technology, short "CMOS". In addition, the aspects of the present invention may be implemented with other manufacturing processes for making optical as well as electrical devices. Reference will now be made in detail to implementations of the exemplary aspects as illustrated in the accompanying drawings. The same reference signs will be used throughout the drawings and the following detailed descriptions to refer to the same or like parts.

**[0032]** Now referring to Fig. 1, a kit 100 comprising a sensor 110 for lighting technologies according to an embodiment is shown.

**[0033]** Moreover, the kit 100 comprises a converter 102 for lighting means, the converter 102 being provided with a L or N mains supply wire designed for being coupled to a module 112 of the sensor 110.

**[0034]** Furthermore, the sensor 110 comprises a power supply 110a, wherein the power supply 110a is provided with the module 112 configured to mechanically engage a wire 104, 106 of a mains supplying wiring and designed for inductively tapping off electric power out of said main supplying wiring.

**[0035]** The sensor 110 can be a presence detector, movement detector or a smoke detector.

**[0036]** Furthermore, the sensor 110 is configured to communicate in a wireless manner with the converter

102, for example via Bluetooth Low Energy (BLE) technology module 110b.

**[0037]** Thus, the sensor may have logics communicating with the consumer. If the sensor notices, e.g. a low supply voltage, it can communicate with the consumer on the grid and request a higher consumption to get more energy.

**[0038]** Consumption can be increased when the consumer e.g. goes out of standby. It is also conceivable that the sensor signals an imminent higher consumption. This can prevent the supply 110a from collapsing.

**[0039]** Moreover, the converter 102 is configured to supply the sensor 110 with power and the sensor 110 can be configured to instruct the converter 102 to draw a higher power in order to guarantee a sufficient secondary power supply for the sensor 110.

**[0040]** In an embodiment, the power supply 110a is configured to supply the sensor 110 even when the converter 102 is in a standby mode in which, for example, only the DALI interface is powered and awaiting incoming signals. This low current flowing in the standby mode has to be sufficient for the secondary power supply of the sensor 110.

**[0041]** As it can be taken from Fig. 1, the sensor 110 can comprise a clip 108, wherein the clip 108 can have a circular shape and wherein the clip 108 can surround either a L wire 104 or a N wire 106. Moreover, the clip 108 can be configured to provide isolation.

**[0042]** Fig. 2 shows a schematic representation of the power supply 110a of the sensor 110 for lighting technology according to an embodiment.

**[0043]** The power supply 110a is connected to the mains 201. Moreover, the power supply 110a can comprise a ferrite core Lp and a secondary winding L1 and L2 for adaptively coupling in electric power as power supply for the sensor 110.

**[0044]** On the secondary side of the supply power circuit 110, there are two diodes D1 and D2 as well as a capacitor C4.

**[0045]** The output of the diode D2 is fed to a module 202 which is connected to ground GND. Moreover, the output voltage of the module 202 are fed into the module 203 which comprises the sensor 110, a microcontroller and a RF module.

**[0046]** Fig. 3 shows a schematic representation of the power supply 110a of the sensor 110 for lighting technology according to an embodiment.

**[0047]** The power supply 110a is connected to the mains 201. Moreover, the power supply 110a can comprise a ferrite core Lp and a secondary winding L3 for adaptively coupling in electric power as power supply for the sensor 110.

**[0048]** On the secondary side of the supply power circuit 110a, there is one diode D1 as well as a capacitor C4.

**[0049]** The output of the diode D1 is fed to a module 202 which is connected to ground GND. Moreover, the output voltage of the module 202 are fed into the module 203 which comprised the sensor 110, a microcontroller

and an RF module.

**[0050]** All features of all embodiments described, shown and/or claimed herein can be combined with each other.

**[0051]** While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only and not limitation. Numerous changes to the disclosed embodiments can be made in accordance with the disclosure herein without departing from the scope of the invention. Thus, the breadth and scope of the present invention should not be limited by any of the above-described embodiments. Rather, the scope of the invention should be defined in accordance with the following claims and their equivalence.

**[0052]** Although the invention has been illustrated and described with respect to one or more implementations, equivalent alternations and modifications will occur to those skilled in the art upon the reading of the understanding of the specification and the annexed drawings. In addition, while a particular feature of the invention may have been disclosed with respect to only of the several implementations, such features may be combined with one or more other features of the other implementations as may be desired and advantage for any given or particular application.

## Claims

1. A system comprising a sensor (110) for lighting technology and a power converter (102),
  - the sensor (110) comprising a power supply (110a), the power supply (110a) being provided with a module (112) configured to mechanically engage a wire of a mains supplying wiring of the power converter (102) for lighting means, which is not directly connected to the sensor, the module (112) designed for inductively tapping off electric power out of said main supplying wiring, wherein the sensor (110) is configured to communicate in a wireless manner with the power converter (102) and instruct the power converter (102) to draw a higher power.
2. The system of claim 1, wherein the sensor (110) is a presence detector.
3. The system of claim 1, wherein the sensor (110) is a movement detector.
4. The system of claim 1, wherein the sensor is a smoke detector.
5. The system of any one of the preceding claims, wherein the sensor (110) comprises a clip (108), wherein the clip (108) has a circular shape and

wherein the clip (108) surrounds a L wire (104) of the mains supplying wiring.

6. The system of any one of the preceding claims 1 to 4, wherein the sensor (110) comprises a clip (108), wherein the clip (108) has a circular shape and wherein the clip surrounds a N wire (106) of the mains supplying wiring.
7. The system of claim 5 or 6, wherein the clip (108) is configured to provide isolation.
8. A kit (100) comprising a system according to any of the preceding claims, the power converter (102) being provided with a L (104) or N (106) mains supply wire designed for being coupled to the module of the power supply (112).

## Patentansprüche

1. System, umfassend einen Sensor (110) für eine Beleuchtungstechnologie und einen Stromrichter (102),
  - der Sensor (110) umfassend eine Stromversorgung (110a), wobei die Stromversorgung (110a) mit einem Modul (112) versehen ist, das konfiguriert ist, um einen Draht einer Hauptversorgungsverdrahtung des Stromrichters (102) für ein Leuchtmittel, das nicht direkt mit dem Sensor verbunden ist, mechanisch in Eingriff zu bringen, wobei das Modul (112) zum induktiven Abgreifen von elektrischer Leistung aus der Hauptversorgungsverdrahtung ausgelegt ist, wobei der Sensor (110) konfiguriert ist, um mit dem Stromrichter (102) drahtlos zu kommunizieren und den Stromrichter (102) anzuweisen, eine höhere Leistung zu ziehen.
2. System nach Anspruch 1, wobei der Sensor (110) ein Anwesenheitsdetektor ist.
3. System nach Anspruch 1, wobei der Sensor (110) ein Bewegungsdetektor ist.
4. System nach Anspruch 1, wobei der Sensor ein Rauchdetektor ist.
5. System nach einem der vorstehenden Ansprüche, wobei der Sensor (110) eine Klammer (108) umfasst, wobei die Klammer (108) eine kreisförmige Form aufweist und wobei die Klammer (108) einen L-Draht (104) der Hauptversorgungsverdrahtung umgibt.
6. System nach einem der vorstehenden Ansprüche 1 bis 4, wobei der Sensor (110) eine Klammer (108) umfasst, wobei die Klammer (108) eine kreisförmige

Form aufweist und wobei die Klammer einen N-Draht (106) der Hauptversorgungsverdrahtung umgibt.

7. System nach Anspruch 5 oder 6, wobei die Klammer (108) konfiguriert ist, um eine Isolierung bereitzustellen.
8. Kit (100), umfassend ein System nach einem der vorstehenden Ansprüche, wobei der Stromrichter (102) mit einem L- (104) oder N- (106) Hauptversorgungsdraht versehen ist, der zum Koppeln mit dem Modul der Stromversorgung (112) ausgelegt ist.

l'attache (108) est configurée pour fournir une isolation.

8. Kit (100) comprenant un système selon l'une quelconque des revendications précédentes, le convertisseur de puissance (102) étant pourvu d'un fil d'alimentation secteur L (104) ou N (106) conçu pour être couplé au module de l'alimentation en puissance (112).

## Revendications

1. Système comprenant un capteur (110) pour technologie d'éclairage et un convertisseur de puissance (102),  
- le capteur (110) comprenant une alimentation en puissance (110a), l'alimentation en puissance (110a) étant pourvue d'un module (112) conçu pour venir en prise mécaniquement avec un fil d'un câblage d'alimentation secteur du convertisseur de puissance (102) pour des moyens d'éclairage, lequel n'est pas directement connecté au capteur, le module (112) conçu pour extraire par induction de la puissance électrique dudit câblage d'alimentation secteur, le capteur (110) étant configuré pour communiquer d'une manière sans fil avec le convertisseur de puissance (102) et donner pour instruction au convertisseur de puissance (102) de prélever une puissance plus élevée.
2. Système selon la revendication 1, dans lequel le capteur (110) est un détecteur de présence.
3. Système selon la revendication 1, dans lequel le capteur (110) est un détecteur de mouvement.
4. Système selon la revendication 1, dans lequel le capteur est un détecteur de fumée.
5. Système selon l'une quelconque des revendications précédentes, dans lequel le capteur (110) comprend une attache (108), l'attache (108) ayant une forme circulaire et l'attache (108) entourant un fil L (104) du câblage d'alimentation secteur.
6. Système selon l'une quelconque des revendications 1 à 4, dans lequel le capteur (110) comprend une attache (108), l'attache (108) ayant une forme circulaire et l'attache entourant un fil N (106) du câblage d'alimentation secteur.
7. Système selon la revendication 5 ou 6, dans lequel

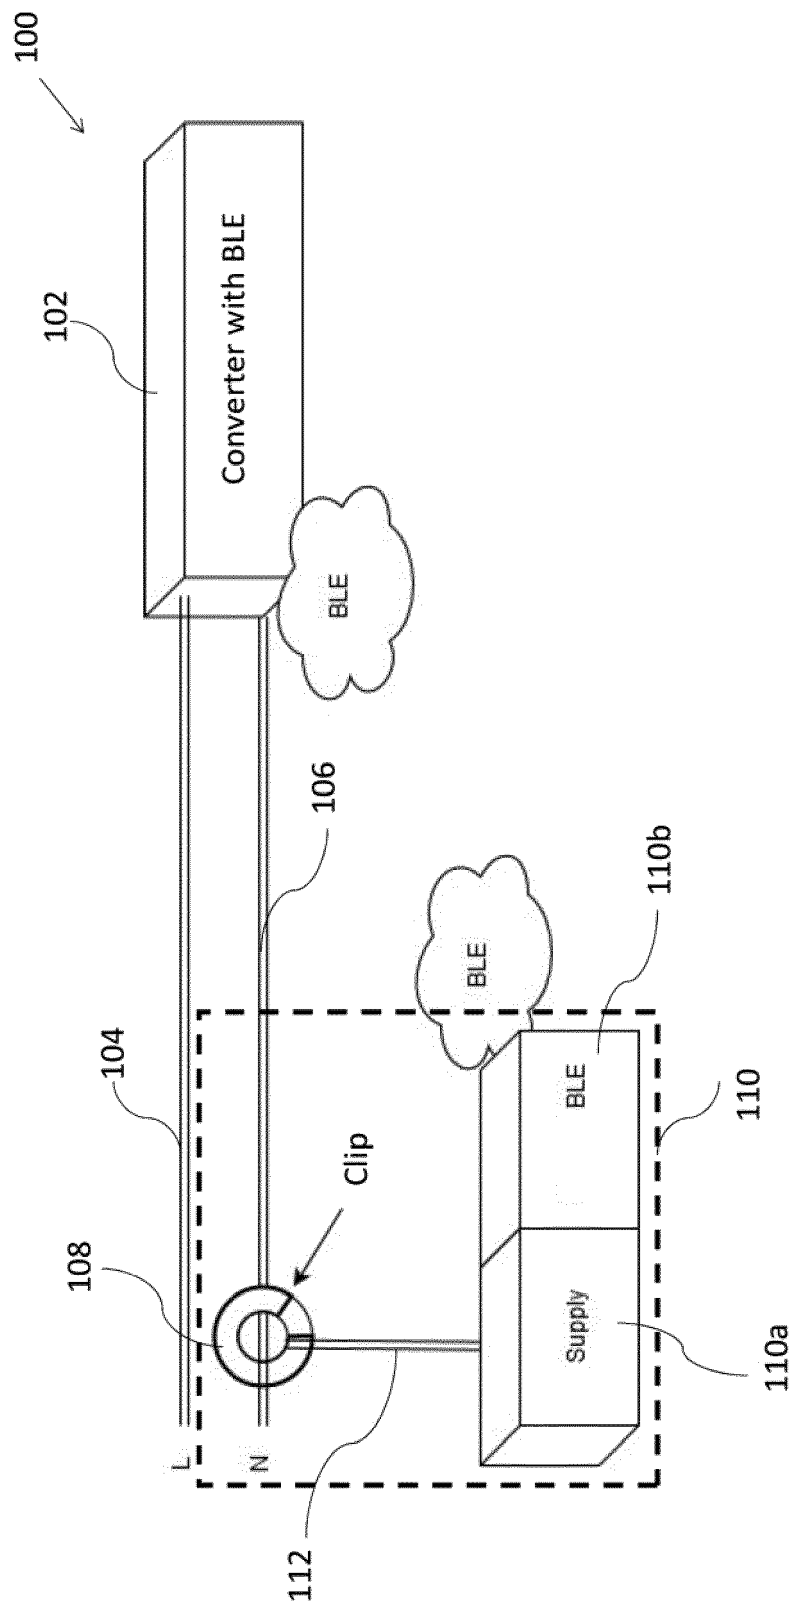


Fig. 1

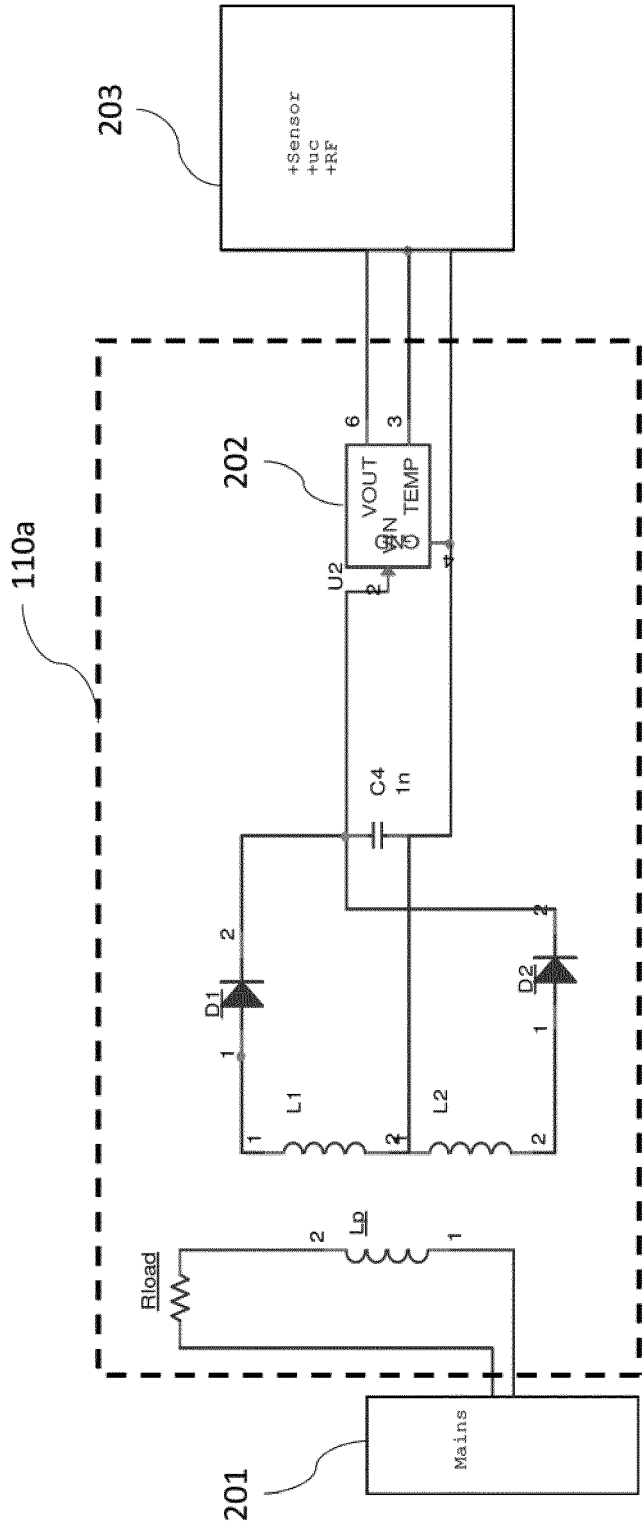


Fig. 2

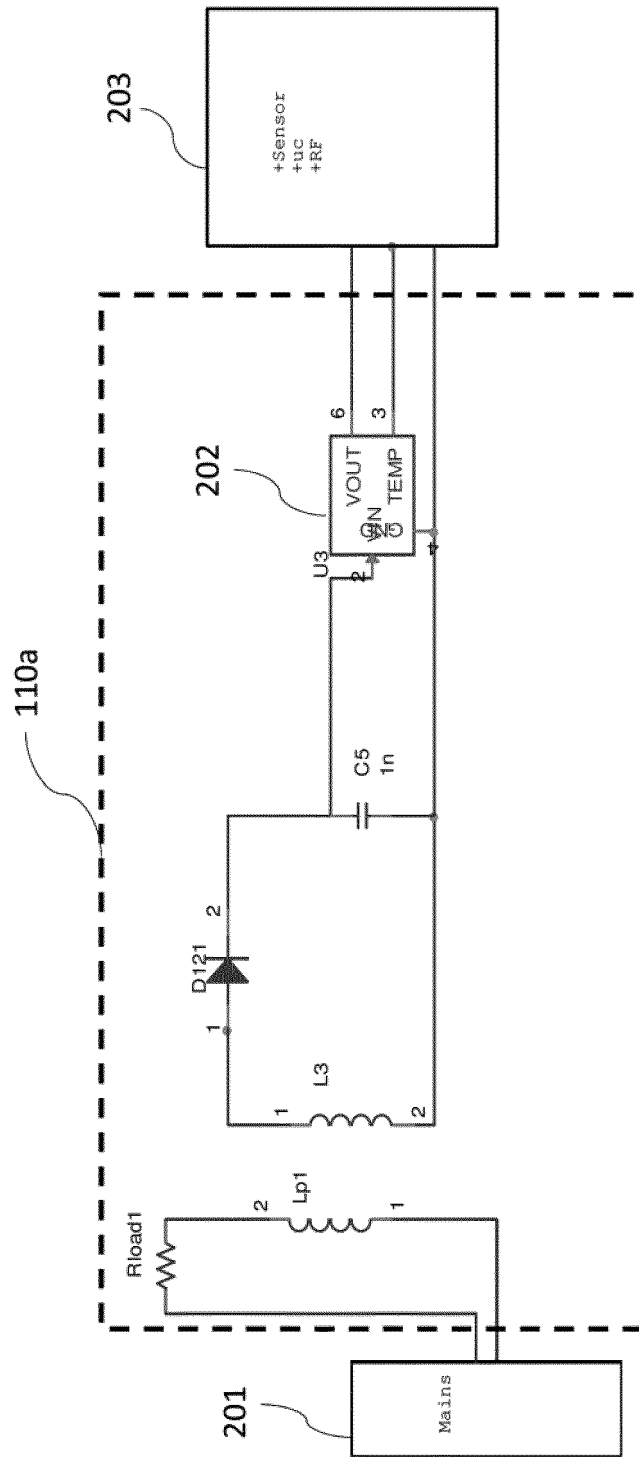


Fig. 3

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20160063329 A1 [0002]