



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
31.03.2021 Bulletin 2021/13

(51) Int Cl.:
D04H 1/49 (2012.01) D04H 1/732 (2012.01)

(21) Application number: **20397512.3**

(22) Date of filing: **29.09.2020**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **POLOSA, Gian Luca**
21040 Varese (IT)
• **NANDGAONKAR, Avinav G.**
Vernon, CT 06066 (US)
• **SHANBHAG, Pramod U.**
Branford, CT 06405 (US)

(30) Priority: **30.09.2019 FI 20194131**


(74) Representative: **Laine IP Oy**
Porkkalankatu 24
00180 Helsinki (FI)

(71) Applicant: **Suominen Corporation**
00380 Helsinki (FI)

(54) **MANUFACTURING LINE FOR NONWOVEN FABRIC**

(57) Nonwoven fabric manufacturing line (1), which comprises a forming device (2) for forming a fibre web (3) on a moving web-forming base (4) and a spunlacing device (5) for reinforcing the web (3). Further, the line comprises at least one first drying device (8, 10) for drying

the web (3) and a calender (12) for forming patterning in the web (3). The manufacturing line (1) comprises at least one second drying device (14) for drying the calendered web (3), which second drying device (14) is located after the calender (12) in the direction of travel of the web (3).

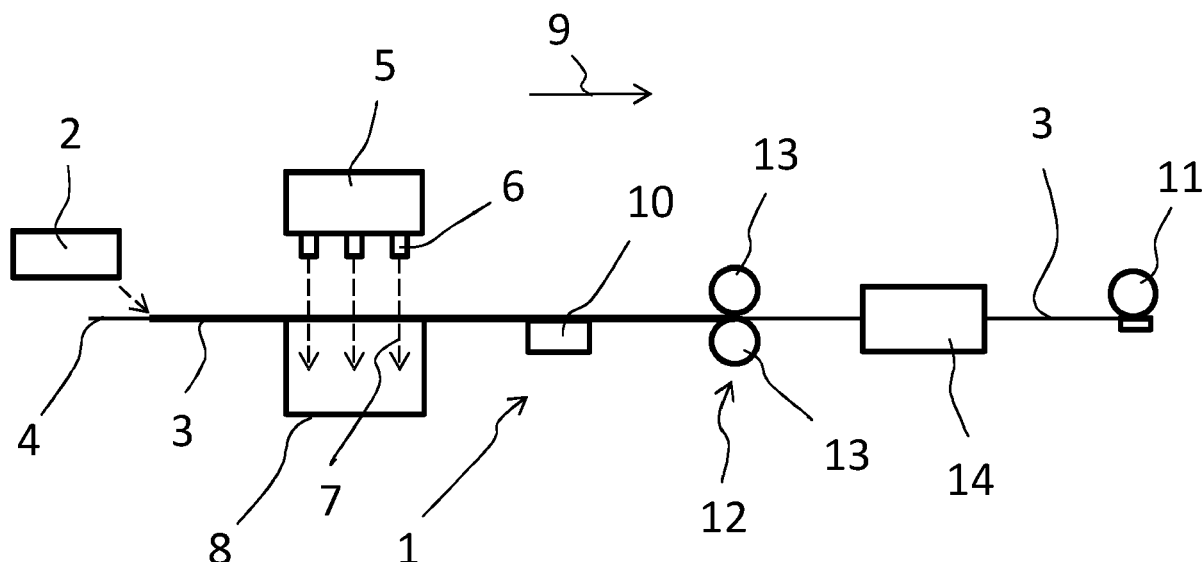

Description

FIELD OF TECHNOLOGY

[0001] The invention relates to a manufacturing line, according to the preamble to Claim 1, for a nonwoven fabric, and correspondingly a method for manufacturing the nonwoven fabric.

BACKGROUND

[0002] Numerous different types of properties are required of nonwoven fabric wiping products. They must have sufficient absorbency, strength, and wear resistance for the intended use. In addition, they must be sufficiently biodegradable, so as to not lead to long-term environmental loading.

[0003] Decorative patterning is made in nonwoven-fabric products, and the patterns can also transmit information in several different ways, as is described, for example, in international patent application PCT/FI2018/050902.

[0004] Wet-spreading is a web-forming process used in the manufacture of nonwoven fabric, which is a rapid, economical, and environmentally-friendly method. All the water used in wet spreading can be filtered and reused. In wet spreading, the initial operations are similar to those in paper manufacture. The web formed by wet spreading requires binding to achieve a sufficient strength. If the web material contains thermoplastic material, heat can be used to partly melt this material and thus reinforce the web. All thermoplastic materials are not, however, biodegradable, which limits their use as web binders. The web can also be bound chemically with the aid of binders.

[0005] Spunlacing is a generally used method to reinforce the web in nonwoven fabric manufacture. In the method, the fibres are needled with the aid of high-pressure water jets. If the web is transported on a base, in which there is a patterned surface, spunlacing can be used to form a permanent pattern in the web surface. The process can then be called water patterning. Water patterning can also be formed on the web's surface using a patterning roll, to which the web is transferred from the spunlacing unit. Water patterning using a patterning roll is described in EP application number 19397518.2.

[0006] In addition to water patterning, the web can be patterned using a calender or belt. A drawback with belt patterning is the long time needed to change the belt. In addition, the belt patterning unit is long, thus increasing the length of the manufacturing line. A drawback with patterning performed using a patterning drum is the equipment's high price. A drawback with patterning formed by calendering is, in turn, that the patterning vanishes when the nonwoven fabric wets, particularly if the nonwoven fabric does not contain thermoplastic material.

SUMMARY

[0007] The intention of the present invention is to create a new type of nonwoven-fabric manufacturing line and method, by which the problems described above can be reduced.

[0008] The intentions of the invention are achieved by means of a manufacturing line, according to Claim 1, for a nonwoven fabric, which comprises a forming device to form a fibre web on a moving forming base, a spunlacing device to reinforce the web, at least one first drying device to dry the web, and a calender to form patterning in the web. In addition, the manufacturing line comprises at least one second drying device to dry the calendered web. The second drying device is located after the calender in the direction of travel of the web.

[0009] Considerable advantages are achieved by means of the solution according to the invention. The patterning of a nonwoven-fabric product manufactured on a manufacturing line according to the invention does not disappear when the nonwoven-fabric product becomes wet, even though the patterning of the nonwoven-fabric product is made by calendering. In addition, the manufacturing line can be short, because patterning is made by calendering, and a long belt-patterning unit is not needed. A calender is also considerably cheaper than the equipment used in drum patterning.

BRIEF DESCRIPTION OF THE DRAWING

[0010] In the following, the invention is described with reference to the accompanying drawing, which shows as a schematic diagram a nonwoven-fabric manufacturing line according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE EMBODIMENT ACCORDING TO THE DRAWING

[0011] The drawing shows schematically a patterned nonwoven-fabric manufacturing line 1. A nonwoven fabric is a fabric-like material, which is made by combining fibres in set or random directions, using friction and/or cohesion and/or adhesive. Papers, woven, tufted, sewn, or felted fabrics are not included in the term nonwoven fabrics. Continuous filament fibres, as well as short and long fibres, which can be both natural and artificial fibres, are used in nonwoven fabrics.

[0012] The manufacturing line 1 comprises a formation device 2 for forming a fibre web 3 on a moving forming base 4. The forming device 2 is of the type wet-forming devices, for example a headbox, by which a watery fibre suspension is fed to the forming base 4.

[0013] Alternatively, the forming device 2 can be of the type dry-forming devices, such as a carding device or an air-spreading device. The fibre web 3 forming on the forming base 4 by carding or air-spreading must then be moistened at a later processing stage, for example by spunlacing.

[0014] The forming base 4 is a forming wire. The fibre web 3 can contain biodegradable material.

[0015] The manufacturing line 1 comprises a spunlacing unit 5 to reinforce the web. The spunlacing unit 5 comprises at least one nozzle 6 to direct a high-pressure water jet 7 through the web 3. Typically the spunlacing unit 5 comprises several nozzles 6 arranged consecutively, for example 3-15 nozzles 6 arranged consecutively.

[0016] The manufacturing line 1 comprises at least one first drying device 8, 10 to dry the web 3. The first drying device 8, 10 is located after the spunlacing unit 5 in the direction of travel of the web 3 and/or at the spunlacing unit 5. The first drying device 8, 10 is arranged to dry the web to a moisture content of 20-50 percent by weight, typically 30-40 percent by weight. The drying device 10 after the spunlacing unit 5 can be a mechanical dryer, a suction dryer, a through-blowing dryer, or an oven dryer, such as, for example, a foulard, a suction dryer, a cylinder dryer, or an omega-dryer. The direction of travel of the web 3 is marked in the drawing with an arrow 9.

[0017] A suction dryer 8 operating by vacuum is located at the spunlacing unit 5. If the suction dryer 8 is sufficiently powerful, the desired moisture content of the web 3 can be achieved without a separate dryer 10 after the spunlacing unit 5. Alternatively an additional dryer can be located in connection with the suction dryer 8, for example another suction dryer, in order to achieve the desired moisture content.

[0018] The manufacturing line 1 comprises a patterning device to form three-dimensional patterning in the web 3. The patterning device is a calender 12, which comprises two rotating rolls 13, which are arranged in a mutual nip contact and form the nip between which the web 3 is arranged to run. In calendering, the web 3 is shaped by being pressed in the nip between the rolls 13. In addition, in calendering heat can be used in addition to compression to shape the web 3. In one, or both of the rolls 13 is a patterned surface to pattern the web 3. The calender 12 is located after the first drying device 8, 10, in the direction of travel of the web 3. The web 3 arriving at the calender 12 has been dried by the first drying device 10 to a moisture content of 20-50 percent by weight, typically 30-40 percent by weight.

[0019] The manufacturing line 1 also comprises at least one second drying device 14 to dry the calendered web 3. The second drying device 14 is located after the calender 12 in the direction of travel of the web 3. The calender 12 is thus between the first drying device 8, 10 and the second drying device 14 in the direction of travel of the web 3. The second drying device 14 is typically a mechanical dryer, through-blowing dryer, or oven dryer, such as, for example, a foulard, cylinder dryer, or omega dryer. The second drying device 14 is arranged to dry the web 3 to its final moisture content, i.e. the moisture content at which the web is brought to the rolling machine 11. The second drying device 14 is the last drying device on the manufacturing line 1.

[0020] The manufacturing line 1 also comprises a rolling machine 11 to reel the web 3 onto a roll. The rolling machine 11 is located after the second drying device 14 in the direction of travel of the web 3. The rolling machine 11 is the last device on the manufacturing line 1.

[0021] According to the drawing, the manufacturing line 1 operates as follows. A fibre suspension is fed to a moving forming base 4, typically a wire, and a web 3 is formed. A forming device 2, such as wet-spreading, carding, or air-spreading, is used to feed the fibre suspension to the base 4.

[0022] Next, the web 3 is spunlaced by directing one or more high-pressure water jets 7 onto the web 3. Spunlacing is performed using a spunlacing unit 5, which comprises at least one nozzle 6, from which a water jet 7 is directed onto the web 3. Typically there are 3-15 consecutive nozzles 6. At the spunlacing unit 5 there is a suction dryer 8, by which water is removed from the web 3.

[0023] The web 3 is dried in the first drying stage using at least one drying device 8, 10. In the first drying stage, the web is dried to a moisture content of 30-40 percent by weight.

[0024] After the first drying stage, the web is calendered and three-dimensional patterning is formed in it by the calender 12. The calender 12 comprises two rolls 13 arranged in nip contact 13, the web 13 being led through the nip between them. In calendering the web 3 is shaped by pressing it in the nip between the rolls 13. Heat can be used in addition to compression to shape the web 3. The moisture content of the web 3 brought to the calender 12 is 20-50 percent by weight, typically 30-40 percent by weight.

[0025] After calendering the web 3 is dried in a second drying stage using a second drying device 14. In the second drying stage, the web 3 is dried to its final moisture content. The web 3 is calendered between the first and second drying stages. After the second drying stage the web 3 is reeled onto a roll by a rolling machine 11.

[0026] In the solution according to the invention, the cellulose molecule chains in the wet nonwoven fabric create short-lived hydrogen bonds. At the same time, these molecule chains slide to overlap each other, which increases the number of their hydrogen bond points. When the nonwoven fabric is calendered, the hydrogen bonds are broken. This permits the easier rearrangement of the molecule chains. The pressure caused by calendering reduces the overlapping of the chains and thus also reduces the number of hydrogen bond points. When the pressure of the calendering ceases, the nonwoven fabric can form these hydrogen bonds normally. Because there are fewer of these points, fewer hydrogen bonds are also formed. As the fabric is dried rapidly after this, the molecule chains are practically unable to move on top of each other, so that new hydrogen bond points cannot arise. When the nonwoven fabric is dry, the hydrogen bonds become more permanent bonds and the nonwoven fabric remains in the patterned form. If the nonwoven fabric is wetted again, it begins to form new hydrogen

bonds and the cellulose molecules begin to slide on top of each other again. In the calendered areas there is less overlapping of the molecule chains, so that here there come fewer hydrogen bonds. In the uncalendered areas there is more overlapping of the molecule chains and this layering is faster than in the calendered areas, therefore these areas are distinguished even more clearly from the calendered areas and emphasize the three-dimensional effect of the calendered pattern.

[0027] The nonwoven fabric made using the solution according to the invention contains natural fibres and/or regenerated fibres. The fibres are bound together by spunlacing. The nonwoven fibre contains at least two different areas, the first area is compressed when wet and the second area is not compressed. In the dry nonwoven fabric there are more hydrogen bond points in the second area than in the first area.

Claims

1. Nonwoven fabric manufacturing line (1), which comprises:

- a forming device (2) for forming a fibre web (3) on a moving web-forming base (4),
- spunlacing device (5) for reinforcing the web (3),
- at least one first drying device (8, 10) for drying the web (3), and
- a calender (12) for forming patterning in the web (3),

characterized in that the manufacturing line (1) comprises at least one second drying device (14) for drying the calendered web (3), which second drying device (14) is located after the calender (12) in the direction of travel of the web (3).

2. Manufacturing line (1) according to the Claim 1, **characterized in that** the first drying device (8, 10) is arranged to dry the web (3) coming to the calender (12) to a moisture content of 20-50 percent by weight, typically 30-40 percent by weight.

3. Manufacturing line (1) according to Claim 1 or 2, **characterized in that** the web-forming device (2) is a wet-spreading device, for example a headbox, which is arranged to feed a watery fibre suspension onto the forming base (4).

4. Manufacturing line (1) according to any of the above Claims, **characterized in that** the web-forming base (4) is a wire.

5. Manufacturing line (1) according to any of the above Claims, **characterized in that** the first drying device (8, 10) is located, in the direction of travel of the web

(3), after the spunlacing unit (5) and/or at the spunlacing unit (5).

6. Manufacturing line (1) according to any of the above Claims, **characterized in that** the second drying device (14) is the last drying device on the manufacturing line (1).

7. Method for manufacturing nonwoven fabric, comprising:

- forming a fibre web (3) by a forming device (2) on a moving web-forming base (4),
- reinforcing the web (3) by spunlacing,
- drying the web with at least one first drying device (8, 10), and
- forming patterning in the web (3) by calendering,

characterized in that in the manufacturing line (1) the web is dried by at least one second drying device (14) for drying the calendered web (3), which second drying device (14) is located after the calender (12) in the direction of travel of the web (3).


8. Method according to according to the Claim 7, **characterized in that** the first drying device (8, 10) is arranged to dry the web (3) coming to the calender (12) to a moisture content of 20-50 percent by weight, typically 30-40 percent by weight.

9. Method according to Claim 7 or 8, **characterized in that** the web (3) is formed by a wet-spreading device, for example a headbox, which is arranged to feed a watery fibre suspension onto the forming base (4).

10. Method according to any of the above Claims 7 - 9, **characterized in that** the web-forming base (4) is a wire.

11. Method according to any of the above Claims 7 - 10, **characterized in that** the first drying device (8, 10) is located, in the direction of travel of the web (3), after the spunlacing unit (5) and/or at the spunlacing unit (5).

12. Method according to any of the above Claims 7 - 11, **characterized in that** the second drying device (14) is the last drying device on the manufacturing line (1).

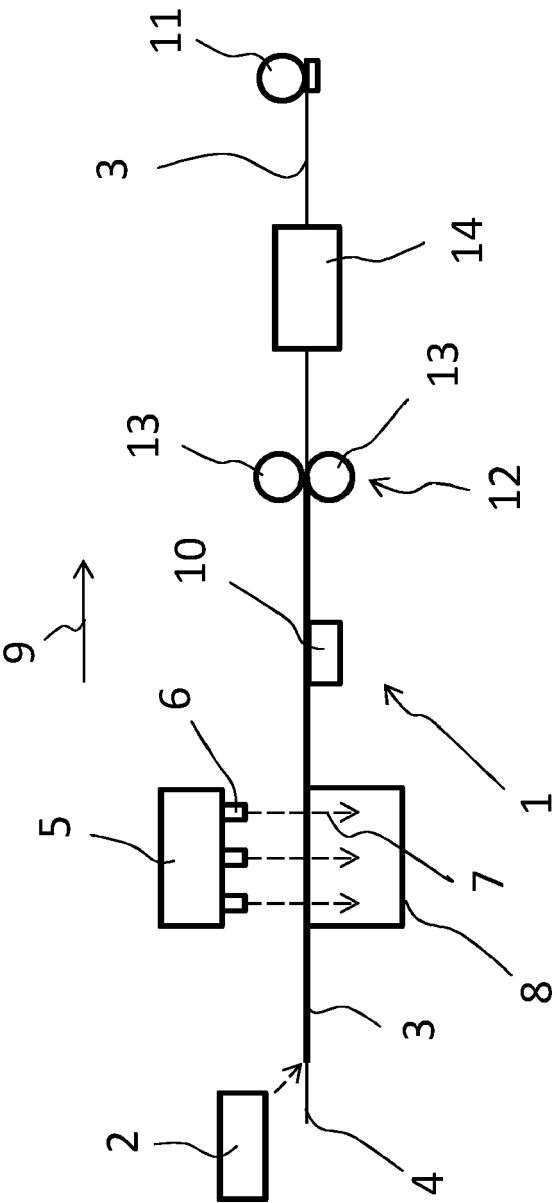



EUROPEAN SEARCH REPORT

 Application Number
EP 20 39 7512

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 0 373 974 A2 (JAMES RIVER CORP [US]) 20 June 1990 (1990-06-20) * example 7 *	1-12	INV. D04H1/49 D04H1/732
A	EP 2 692 924 A1 (SUOMINEN CORP [FI]) 5 February 2014 (2014-02-05) * paragraph [0040] *	1-12	
A,D	WO 2019/115875 A1 (SUOMINEN CORP [FI]) 20 June 2019 (2019-06-20) * page 6, lines 14-22 *	1-12	
			TECHNICAL FIELDS SEARCHED (IPC)
			D04H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 15 February 2021	Examiner Saunders, Thomas
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 39 7512

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-02-2021

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0373974 A2	20-06-1990	NONE	
EP 2692924 A1	05-02-2014	EP 2692924 A1	05-02-2014
		ES 2662147 T3	05-04-2018
		US 2014037906 A1	06-02-2014
WO 2019115875 A1	20-06-2019	EP 3724390 A1	21-10-2020
		WO 2019115875 A1	20-06-2019

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- FI 2018050902 W [0003]
- EP 19397518 [0005]