

(19)



(11)

**EP 3 800 160 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**23.04.2025 Bulletin 2025/17**

(21) Application number: **19201579.0**

(22) Date of filing: **04.10.2019**

(51) International Patent Classification (IPC):  
**B67D 3/00 (2006.01) B67D 3/04 (2006.01)**

(52) Cooperative Patent Classification (CPC):  
**B67D 3/0035; B67D 3/0038; B67D 3/0045;  
B67D 3/007; B67D 3/043**

(54) **LIQUID DISPENSER COMPRISING A SECOND RESERVOIR AND A RECEIVER FOR A FIRST RESERVOIR**

FLÜSSIGKEITSSPENDER MIT EINEM ZWEITEN BEHÄLTER UND EINER AUFNAHME FÜR EINEN ERSTEN BEHÄLTER

DISTRIBUTEUR DE LIQUIDE COMPRENANT UN SECOND RÉSERVOIR ET RÉCEPTEUR POUR UN PREMIER RÉSERVOIR

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**07.04.2021 Bulletin 2021/14**

(73) Proprietor: **Hydro Systems Europe Ltd.**  
**Hook RG29 1RP (GB)**

(72) Inventor: **DYER, Christopher James**  
**Hook, RG29 1RP (GB)**

(74) Representative: **Reddie & Grose LLP**  
**The White Chapel Building**  
**10 Whitechapel High Street**  
**London E1 8QS (GB)**

(56) References cited:  
**WO-A1-2006/063773 DE-A1- 102008 059 642**  
**US-A- 1 858 758 US-A- 3 843 021**

**EP 3 800 160 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention belongs to the field of liquid dispensers.

**[0002]** Liquid dispensers typically comprise a liquid reservoir and a release valve through which the liquid is selectively released from the liquid reservoir out of the liquid dispenser. Liquid dispensers normally comprise an actuator which can be actuated to open and/or close the release valve so as to release a certain amount of liquid during a given period of time.

**[0003]** WO 2006/063773 A1 provides a drinks dispenser for offices and small communities comprising, on the same support, a plurality of seats for drinks containers of the replaceable canister-like type, each seat being provided with at least one dispensing pipe. All the dispensing pipes converge in the same dispensing collector.

**[0004]** US 3843021 A provides a disposable reservoir for water-coolers, or similar liquid dispensers, comprising a package preferably consisting of a bag, box and valve assembly, the valve being of such a nature that when the package is mounted on a water-cooler or the like as its reservoir, the valve opens automatically to supply water into the well of the cooler and is closed by a float in that well whenever necessary to maintain a predetermined level of water in the well.

**[0005]** However, the control of the volume of liquid which is released out of the liquid dispenser might need for the provision of a dedicated system in the liquid dispenser, such as an electronic system, which may lead to more expensive and difficult to maintain liquid dispensers. Likewise, it might not be possible to accurately control the volume of liquid that is released.

**[0006]** It is therefore desirable to provide a liquid dispenser that may overcome at least some of these disadvantages.

**[0007]** In a disclosure of the invention, a liquid dispenser is provided. The liquid dispenser comprises:

- a receiver for receiving a first reservoir, the receiver comprising a fluid passageway;
- a second reservoir comprising a release valve which can be arranged in an open position and in a closed position;
- wherein the fluid passageway is configured to allow fluid communication between the first reservoir and the second reservoir, when the first reservoir is received in the receiver; and,
- wherein the release valve is configured to allow the release of liquid from the second reservoir out of the liquid dispenser when the release valve is arranged in the open position.

**[0008]** The liquid dispenser comprises a receiver for receiving a first reservoir. The receiver is advantageous in that it can be configured to receive different first reservoirs, thus allowing for multiple uses of the liquid dispenser.

**[0009]** Likewise, the liquid dispenser comprises a second reservoir. The liquid contained in a first reservoir can flow to the second reservoir through a fluid passageway when the first reservoir is received in the receiver.

**[0010]** The second reservoir may be filled with liquid from the first reservoir until the volume of the second reservoir is filled with the liquid. Such volume of liquid may be released out of the liquid dispenser through a release valve.

**[0011]** Therefore, the liquid dispenser of the present invention may advantageously release a predetermined volume of liquid, which can be chosen by choosing the volume of the second reservoir. Such determination of the released amount of liquid is independent from the type and volume of the first reservoir, which may be externally provided to the user or operator of the liquid dispenser. Likewise, the liquid dispenser might not require complex dedicated components to determine the volume of the released liquid, such as electronic components or sensors which may be expensive to operate and maintain.

**[0012]** The provision of a second reservoir which is provided between the receiver and the release valve may also be beneficial to prevent the liquid contained in the first reservoir from dripping out of the liquid dispenser during reception or removal of the first reservoir in the receiver.

**[0013]** As used herein, "volume of the second reservoir" is construed as the volume defined by the elements which constitute the internal walls of the second reservoir minus the volume occupied by any non-permeable component disposed at the interior of the second reservoir.

**[0014]** The receiver may comprise a receiver wall. The second reservoir may be defined by the receiver wall and a second reservoir housing.

**[0015]** The liquid dispenser may comprise at least one movable part. The at least one movable part may be movable with respect to the second reservoir housing between a first position and a second position, such that the volume of the second reservoir varies from a first volume to a second volume different from the first volume.

**[0016]** This may be advantageous in that a single liquid dispenser may be easily and quickly adjustable to dispense different predetermined volumes of liquid. Hence, the liquid dispenser may be used for different applications which may require the release of different volumes of liquid.

**[0017]** The at least one movable part may comprise a removable part such that, in a second position of the removable part, the removable part is disposed at the interior of the second reservoir, such that the second reservoir has a second volume; and, in a first position of the removable part, the removable part is removed from the interior of the second reservoir, such that the second reservoir has a first volume which is greater than the second volume.

**[0018]** The provision of a removable part that can be

arranged inside the second reservoir in a second position and outside the second reservoir in a first position provides for an efficient and simple manner of dispensing different predetermined volumes of liquid.

**[0019]** The removable part may be a hollow fillable part. Such hollow fillable part may be configured to be filled with materials which are denser than the liquids that are intended to be contained in the second reservoir. This way, the removable part may be disposed at a bottom of the second reservoir and may remain at the bottom even when the second reservoir is filled with the liquid. In an embodiment, the hollow fillable part is configured to be filled with sand.

**[0020]** The liquid dispenser may comprise a detachable wall configured to enable the removal and insertion of the removable part from and into the second reservoir. In an embodiment, the detachable wall is the receiver wall.

**[0021]** The at least one movable part may comprise the receiver wall. The receiver wall may be movable with respect to the second reservoir housing between a first position and a second position, such that the volume of the second reservoir varies from a first volume to a second volume different from the first volume.

**[0022]** In this embodiment, the second reservoir is defined by the second reservoir housing and the receiver wall. The receiver wall is movable with respect to the second reservoir housing, which allows a variation of the volume of the second reservoir.

**[0023]** This may be advantageous in that a single liquid dispenser may be easily and quickly adjusted to dispense different predetermined volumes of liquid, without a need for any additional part dedicated to achieve the variation of volume. Hence, the liquid dispenser may be used for different applications which may require the release of different volumes of liquid while having a compact and simple design.

**[0024]** The receiver wall may also be movable to a plurality of intermediate positions between the first position and the second position. The number and location of the intermediate positions may be selected depending on the predetermined volumes of liquid that may be intended to be dispensed.

**[0025]** In an embodiment, the at least one movable part comprises both the removable part and the receiver wall.

**[0026]** This provides for more versatility in the adjustment of the volume of the second reservoir.

**[0027]** The receiver wall may be configured to rotate with respect to the second reservoir housing between the first position and the second position. The receiver wall may be configured to move linearly with respect to the second reservoir housing between the first position and the second position. The receiver wall may be configured to rotate and to move linearly with respect to the second reservoir housing between the first position and the second position.

**[0028]** Such combination of linear and rotational relative movement between the receiver wall and the second

reservoir housing may be advantageous to allow for a quick and robust movement of the receiver wall between the first position and the second position.

**[0029]** The second reservoir housing may comprise at least one helical slot and the receiver wall may comprise at least one stem configured to slide between a first point and a second point of the at least one helical slot, such that the receiver wall moves from the first position to the second position when the at least one stem slides from the first point to the second point.

**[0030]** The at least one helical slot and the at least one stem may advantageously allow for the combination of linear and rotational relative movement between the receiver wall and the second reservoir housing.

**[0031]** In an embodiment, the at least one helical slot comprises three helical slots and the at least one stem comprises three stems, each of the three stems being configured to slide along a different helical slot.

**[0032]** The provision of three helical slots and three stems enhances the robustness of the liquid dispenser to withstand the relative movement between the receiver wall and the second reservoir housing.

**[0033]** The first volume and the second volume may be comprised in a range from 20 millilitres to 600 millilitres, the first volume being greater than the second volume. In a preferred embodiment, the first and the second volume may be comprised in a range from 150 millilitres to 500 millilitres.

**[0034]** This allows the liquid dispenser to release a volume of liquid between 20 millilitres and 600 millilitres, more preferably between 150 millilitres and 500 millilitres, when the release valve is in the open position. Such volumes of liquid may be adequate when the liquid is used for hygienic or cleaning purposes.

**[0035]** The liquid dispenser may comprise a lock configured to lock the receiver wall in the first position and/or in the second position.

**[0036]** Therefore, the volume of the second reservoir can be set at the first volume and/or to the second volume. This may allow for the first volume and/or the second volume to be fixed before the liquid dispenser is used by an operator or a user, thus minimizing the risk of an incorrect volume of a certain liquid being applied.

**[0037]** The lock may also be configured to lock the receiving wall in any intermediate positions that may be provided between the first position and the second position.

**[0038]** The liquid dispenser may comprise an actuator configured to move the release valve from the closed position to the open position.

**[0039]** This may provide for an efficient manner of initiating the release of liquid from the second reservoir out of the liquid dispenser. Typically, the release valve is moved from the closed position to the open position when the second reservoir is filled with the liquid. Hence, the volume of liquid released through the release valve out of the liquid dispenser may correspond to the volume of the second reservoir.

**[0040]** In an embodiment, the actuator is configured to manually move the release valve from the closed position to the open position.

**[0041]** This may enable the operator or user to initiate the release of liquid from the second reservoir out of the liquid dispenser when they wish so.

**[0042]** The actuator may comprise a button. The button may be mechanically connected to the release valve by means of at least one arm such that, when the button is moved from a released position to a pressed position, the at least one arm moves the release valve from the closed position to the open position.

**[0043]** Such arrangement may constitute a robust mechanism to enable the movement of the release valve from the closed position to the open position. Likewise, the actuator may allow the release valve to be moved to the open position without requiring a considerable force by the user or operator, even when the volume of liquid to be released is above 20 millilitres, above 150 millilitres or above 500 millilitres.

**[0044]** In an embodiment, the actuator may comprise an electronic activator configured to be electronically programmed to move the button to the pressed position at a pre-set time or when the electronic activator receives an activating signal from an external device. Preferably, the electronic activator comprises a solenoid.

**[0045]** This embodiment permits to set up the release of liquid out of the liquid dispenser at predetermined times, without requiring the intervention of an operator or user.

**[0046]** In an embodiment, the electronic activator may be provided in an actuator not comprising a button. In an example, the electronic activator may be connected to the release valve by means of the at least one arm.

**[0047]** The actuator may be configured to impede fluid communication through the fluid passageway when the release valve is in the open position.

**[0048]** This may be helpful to ensure that no liquid flows from the first reservoir to the second reservoir when the first reservoir is received in the receiver and the release valve is in the open position. Therefore, the release valve may release only the volume of liquid corresponding to the volume of the second reservoir when the release valve is moved to the open position after the second reservoir is filled with the liquid. This may guarantee that the precise amount of liquid required for a certain use is released.

**[0049]** As an alternative or in addition to this embodiment, the fluid passageway and the release valve may be configured such that the time needed to fill in the second reservoir (that is, the fill time) is at least about 3 times greater than the time needed to release the whole volume of liquid contained in the second reservoir through the release valve (that is, the release time). Accordingly, even if the fluid passageway is open, the amount of liquid introduced into the second reservoir during the release time is significantly lower than the amount of liquid released during the release time. The liquid released during

the release time may thus substantially correspond to the volume of the second reservoir.

**[0050]** The release valve may comprise a buoyant element configured to float in the liquid contained in the second reservoir when the valve is in the open position and the second reservoir contains liquid. The buoyant element may be configured to move the release valve to the closed position when the second reservoir does not contain liquid.

**[0051]** In the open position, the release valve is arranged in such a way that it allows for the flow of the liquid through a fluid aperture comprised in the release valve. The buoyant element may be arranged to impede the flow of liquid through the fluid aperture when the valve is in the closed position. Likewise, the buoyant element may be configured such that, when the release valve is in the open position and the second reservoir contains liquid, the buoyant element floats in the liquid and therefore the buoyant element is away from the fluid aperture, so that the flow of liquid through the fluid aperture is allowed. When all the liquid is released from the second reservoir out of the liquid dispenser through the fluid aperture of the release valve, the buoyant element may be configured to return to the position in which it impedes the flow of liquid through the fluid aperture (for example, due to gravity and/or by means of an actuator), that is, to the closed position of the release valve.

**[0052]** The buoyant element may comprise any suitable material which ensures that no flow of liquid is permitted through the fluid aperture when the release valve is in the closed position. In an embodiment, the buoyant material comprises EPDM (Ethylene Propylene Diene Monomer).

**[0053]** EPDM may be advantageous in that the resulting buoyant element is durable and sufficiently soft to provide for a reliable fluid seal.

**[0054]** The buoyant element may be configured to float on the surface of the liquid contained in the second reservoir as soon as the buoyant element is completely surrounded by the liquid.

**[0055]** This may allow for a reduction of the force exerted by the actuator, the button or any other suitable feature to open the release valve, since the buoyance force generated by the buoyant element soon after actuation to open the release valve helps moving the release valve to the open position.

**[0056]** The buoyant element may be configured to float partially or completely below the surface of the liquid contained in the second reservoir once the buoyant element is completely surrounded by the liquid.

**[0057]** The release valve may comprise a magnetic seal configured to retain the release valve in the closed position.

**[0058]** The magnetic seal may generate a magnetic force that retains (or contributes to retaining in cooperation with other forces) the release valve in the closed position. In an embodiment, the magnetic seal comprises a magnet in a first part of the release valve and a ferrous

element in a second part of the release valve. Similarly, the magnetic seal may comprise the magnet in the second part and the ferrous element in the first part. The first part and the second part may be configured to move with respect to one another. When the release valve is in the closed position, the first part and the second part may be sufficiently close to one another such that the magnetic force helps retain the first part and the second part stationary with respect to one another. The first part and the second part may be disposed to impede the flow of liquid through the fluid aperture of the release valve when the release valve is in the closed position. Therefore, the magnetic force retains the valve in the closed position. In this embodiment, in order to arrange the release valve from the closed position to the open position, a force exerted on the release valve (such as the force which, in an embodiment, exerts the actuator) should be greater than the magnetic force.

**[0059]** In an example of this embodiment, the first part is the buoyant element and the second part is integral with the second reservoir housing.

**[0060]** Alternatively or in addition to the provision of the magnetic seal, the first part or the second part may be configured to be retained in a position in which the first part or the second part block the flow of liquid through the fluid aperture by means of the hydrostatic pressure exerted by the liquid when the liquid is contained in the second reservoir.

**[0061]** The receiver may comprise a one way valve configured to control the flow of liquid through the fluid passageway.

**[0062]** The one way valve may be adequate to ensure that the liquid may only flow from the first reservoir to the second reservoir when the first reservoir is received in the receiver, that is, to impede the flow of liquid from the second reservoir to the first reservoir. This may enhance the accuracy of the volume of liquid released from the second reservoir out of the liquid dispenser.

**[0063]** The one way valve may be configured to open to allow fluid communication between the first reservoir and the second reservoir by arranging the first reservoir in the receiver.

**[0064]** This may be a quick and efficient manner to start the flow of liquid from the first reservoir to the second reservoir immediately after the first reservoir is received in the receiver, without a need for a specific actuation on the one way valve. Since the release of liquid out of the liquid dispenser is controlled by the release valve, specific actuation on the one way valve is not necessary to control the release of liquid out of the liquid dispenser. Besides, by immediately starting the flow of liquid from the first reservoir to the second reservoir when the first reservoir is received in the receiver, it may be ensured that the second reservoir is filled in after a period of time corresponding to the fill time from the reception of the first reservoir in the receiver.

**[0065]** The liquid dispenser may comprise an electronic controller. The electronic controller may be configured

to gather and display data regarding the use of the liquid dispenser. In an embodiment, the liquid dispenser may comprise an electronic display configured to display the data gathered by the electronic controller.

**[0066]** The electronic controller may be useful to inform the operator or user about parameters such as the fill time, the release time, the type of first reservoir received in the first reservoir, the volume of liquid released in each release out of the liquid dispenser, the number of liquid releases performed by the liquid dispenser within a given period or with the same first reservoir, among others.

**[0067]** When the actuator comprises an electronic activator, the electronic controller may be advantageously configured to operate the electronic activator.

**[0068]** The liquid dispenser may comprise a power supply. The power supply may be configured to supply electric current to the electronic controller. The power supply may be configured to supply electric current to the electronic display. The power supply may also be configured to supply electric current to the electronic activator. The power supply may comprise a battery, such as a rechargeable battery.

**[0069]** In a disclosure, a liquid assembly is provided, the liquid assembly comprising any of the above described liquid dispensers and a first reservoir received in the receiver.

**[0070]** The liquid assembly of this disclosure may be advantageous for the same reasons as detailed above for the liquid dispensers.

**[0071]** The first reservoir may comprise a first engagement element and the receiver may comprise a second engagement element complementary to the first engagement element, such that the first engagement element and the second engagement element are configured to fit one another when the first reservoir is received in the receiver.

**[0072]** This may be advantageous to ensure that the correct first reservoir is received in the receiver.

**[0073]** The first reservoir may comprise a cap having a first shape. The first shape may be the first engagement element. The receiver may comprise a one way valve having a second shape. The second shape may be the second engagement element. The first shape and the second shape may fit each other when the first reservoir is received in the receiver.

**[0074]** This may be beneficial to incorporate the first engagement element and the second engagement element respectively in components of the first reservoir and the receiver that also have other functions. Therefore, the advantages relative to the first engagement element and the second engagement element may be achieved without falling back on a more complex first reservoir or receiver.

**[0075]** In a disclosure, a method to release a liquid from a liquid dispenser is provided, the method comprising the steps of:

adjusting the position of at least one movable part

with respect to a second reservoir housing, thus defining a volume of a second reservoir;  
 providing a first reservoir in a receiver, the first reservoir comprising a liquid, such that the liquid flows to the second reservoir through a fluid passageway, the liquid filling the second reservoir in a fill time, the second reservoir comprising a release valve arranged in a closed position;  
 when the second reservoir is filled with the liquid, arranging the release valve in an open position such that the liquid is released out of the liquid dispenser in a release time.

**[0076]** The method of this disclosure may be advantageous for the same reasons as detailed above for the liquid dispensers.

**[0077]** In an embodiment, the at least one movable part comprises a removable part. In an embodiment, the at least one movable part comprises a receiver wall in turn comprised in the receiver. In an embodiment, the at least one movable part comprises the removable part and the receiver wall.

**[0078]** The fill time may be at least about 3 times greater than the release time.

**[0079]** In a disclosure, a liquid assembly kit is provided. The liquid assembly kit may comprise a plurality of liquid assemblies, each comprising a first reservoir and a liquid dispenser. The liquid assembly kit may comprise a retaining frame in which the liquid assemblies are received, for example by snap fitting.

**[0080]** The liquid assembly kit may be beneficial to easily carry and provide a plurality of liquid assemblies.

**[0081]** In a disclosure, a liquid dispenser unit is provided. The liquid dispenser unit may comprise a liquid assembly kit and a structure in which the liquid assembly kit is received.

**[0082]** Preferably, the structure may comprise a frame receiver which may be helpful to receive the retaining frame of the liquid assembly kit when the liquid assembly kit comprises such retaining frame.

**[0083]** The structure may be a fixed structure, such as a panel fixedly disposed in the premises of an operator or user.

**[0084]** The liquid dispenser unit comprising a fixed structure may be advantageously arranged such that the liquid assemblies are capable of releasing liquid onto a given external structure or device, such as an external cleaning structure or cleaning device.

**[0085]** The volume of the second reservoir of each liquid dispenser in the liquid dispenser unit may be chosen such that the appropriate volume of liquid is released through the release valve of the liquid dispenser. The volume may be chosen in function of the type of liquid of the first reservoir that is assembled with each liquid dispenser in each liquid assembly. The volume may be chosen in function of the intended use of the liquid dispenser unit.

**[0086]** These and other features and advantages of the

invention will become more evident in the light of the following detailed description of preferred embodiments, given only by way of illustrative and non-limiting example, in reference to the attached figures:

Figure 1 shows a perspective cross section of a liquid dispenser.

Figure 2 depicts an embodiment of the liquid dispenser.

Figure 3 illustrates a cross section of a liquid assembly comprising the liquid dispenser of figure 1 and a first reservoir.

Figure 4 depicts the liquid assembly of figure 3, in which a release valve is in an open position.

Figure 5 represents an embodiment of a release valve.

Figure 6 is a perspective view of a liquid dispenser in which the second reservoir housing comprises a helical slot and the receiver wall comprises a stem. Figure 7 shows a liquid assembly kit.

Figure 8 depicts a liquid dispenser unit.

**[0087]** Figure 1 illustrates a liquid dispenser 1. The liquid dispenser 1 comprises a receiver 2, in turn comprising a receiver wall 21 and a fluid passageway 22. The receiver 2 is configured to receive a first reservoir, which is not represented in figure 1.

**[0088]** A second reservoir 3 is defined by the receiver wall 21 and a second reservoir housing 6. The second reservoir 3 comprises a release valve 4 which, in figure 1, is arranged in a closed position.

**[0089]** The fluid passageway 22 is configured to allow fluid communication between the first reservoir and the second reservoir 3, when the first reservoir is received in the receiver 2.

**[0090]** The release valve 4 is configured to allow the release of liquid from the second reservoir 3 out of the liquid dispenser 1 when the release valve 4 is arranged in an open position and to retain liquid within the second reservoir 3 when the release valve 4 is in the closed position, as shown in figure 1.

**[0091]** The receiver wall 21 of the embodiment of figure 1 is movable with respect to the second reservoir housing 6. The second reservoir housing 6 comprises a helical slot 61 and the receiver wall 21 comprises a stem 23 configured to slide between a first point 62 of the helical slot 61 and a second point 63 of the helical slot 61, at which the stem 23 is arranged in figure 1. In the arrangement of figure 1, the receiver wall 21 is in a second position such that the volume of the second reservoir 3, defined by the receiver wall 21 and the second reservoir housing 6, is a second volume. The stem 23 can slide along the helical slot 61 from the second point 63 to the first point 62, so that the receiver wall 21 rotates and moves linearly with respect to the second reservoir housing 6 to a first position. When the receiver wall 21 is at the first position, the volume of the second reservoir 3 is a first volume, which is greater than the second volume. Figure

6 shows a view from the outside of the liquid dispenser 1 of the helical slot 61 and the stem 22 when the receiver wall 21 is in the second position, that is, when the stem 23 is at the second point 63.

**[0092]** The liquid dispenser comprises a lock 7 which, in figure 1, locks the receiver wall 21 in the second position.

**[0093]** The stem 23 may also be disposed at intermediate points between the first point 62 and the second point 63 of the helical slot 61, such that the receiver wall 21 is arranged at intermediate positions between the first position and the second position. Thus, intermediate volumes of the second reservoir 3, between the first volume and the second volume, may be defined. The lock 7 may lock the receiver wall 21 at any intermediate position.

**[0094]** The liquid dispenser 1 comprises an actuator 8 configured to move the release valve 4 from the closed position, represented in figure 1, to the open position.

**[0095]** The actuator 8 of figure 1 comprises a button 81 in a released position. The button 81 is mechanically connected to the release valve 4 by means of a first arm 82, a second arm 83 and a third arm 86 such that, when the button 81 is moved from the released position to a pressed position, the first arm 82, the second arm 83 and the third arm 86 move the release valve 4 from the closed to the open position.

**[0096]** In order to move the button 81 from the released position to the pressed position, the actuator 8 comprises a longitudinal shaft 84 integral with the button and configured to move longitudinally when the button is pressed or released. A spring 85 is provided to calibrate the force that needs to be applied to move the button 81 from the released position to the pressed position.

**[0097]** In the embodiment of figure 1, the release valve 4 comprises a buoyant element 41. The buoyant element 41 is arranged to impede the flow of liquid through a fluid aperture 42 of the release valve 4 in the closed position represented in figure 4.

**[0098]** The release valve 4 of figure 1 comprises a magnetic seal which helps retain the release valve 4 in the closed position. The magnetic seal comprises a magnet 44 arranged integrally with the fluid aperture 42 and a ferrous element 43 which is integral with the buoyant element 41. In the closed position represented in figure 1, the buoyant element 41 is sufficiently close to the fluid aperture 42 such that the magnetic force generated by the ferrous element 43 and the magnet 44 retains the buoyant element 41 in the position in which it impedes the flow of liquid through the fluid aperture 42, that is, in the closed position of the release valve 4. The release valve 4 of figure 1 comprises EPDM.

**[0099]** In order to move the release valve 4 from the closed position to the open position, the force exerted by the actuator 8 when the button 81 is pressed should be greater than the magnetic force generated by the magnet 44 and the ferrous element 43.

**[0100]** Figure 2 depicts an embodiment of the liquid dispenser 1.

**[0101]** The liquid dispenser 1 of figure 2 comprises a removable part 9. In figure 2, the removable part 9 is disposed at the interior of the second reservoir 3, that is, in a second position of the removable part 9, such that the second reservoir 3 has a second volume. The removable part 9 may be removed from the interior of the second reservoir 3, that is, the removable part 9 may be moved to a first position. When the removable part 9 is outside the second reservoir 3, the second reservoir 3 has a first volume which is greater than the second volume in a volume that corresponds to the volume of the removable part 9.

**[0102]** The receiver wall 21 of the embodiment of figure 2 is similar to that of figure 1, that is, movable between the first position and the second position. In figure 2, the receiver wall is locked at the first position. However, in an example, the receiver wall 21 may be configured to be fixed at a fixed position, such that the adjustment of the volume of the second reservoir 3 is exclusively achieved by means of the removable part 9.

**[0103]** In the embodiment of figure 2, the actuator 8 comprises an electronic activator 88 configured to be electronically programmed to move the button 81 to the pressed position at pre-set times or when the electronic activator 88 receives an activating signal from an external device. The electronic activator of figure 2 comprises a solenoid 89.

**[0104]** The liquid dispenser 1 of figure 2 comprises an electronic controller 40. The electronic controller 40 gathers data regarding the use of the liquid dispenser 1, such as the fill time, the release time, the type of first reservoir 10 received in the receiver 2, the volume of liquid released in each release out of the liquid dispenser 1 and the number of liquid releases performed by the liquid dispenser 1 within a given period or with the same first reservoir 10. The liquid dispenser 1 of figure 2 comprises an electronic display 41 configured to display the data gathered by the electronic controller 40.

**[0105]** The electronic controller 40 of figure 2 is also configured to operate the electronic activator 88.

**[0106]** In the embodiment of figure 2, the liquid dispenser 1 comprises a battery 42 configured to supply electric current to the electronic controller 40, the electronic display 41 and the electronic activator 88.

**[0107]** Figure 3 represents a liquid assembly 100 comprising the liquid dispenser 1 of figure 1 and a first reservoir 10 received in the receiver.

**[0108]** The first reservoir 10 comprises a cap 11 having a first shape, which constitutes a first engagement element, and the receiver 2 comprises a one way valve 24 having a second shape, which forms a second engagement element. The first shape and the second shape fit each other when the first reservoir 10 is received in the receiver 2, as shown in figure 3. This may be advantageous to ensure that the correct first reservoir 10 is received in the receiver 2.

**[0109]** The one way valve 24 is provided in the receiver 2 to control the flow of liquid from the first reservoir 10 to

the second reservoir 3 through the fluid passageway 22.

**[0110]** In the embodiment of figure 3, when the first reservoir 10 is received in the receiver 2, the one way valve 24 opens to allow fluid communication between the first reservoir 10 and the second reservoir 3. In particular, the cap 11 exerts a pressure on the one way valve 24 such that a spring 241 of the one way valve 24 is compressed, thus allowing for the flow of liquid 200 through the fluid passageway 22.

**[0111]** Liquid 200 flows to the second reservoir 3 during a fill time until the second reservoir 3 is filled with a volume of liquid defined by the second reservoir housing 6 and the receiver wall 21, which in the embodiment of figure 3 is in the second position, as explained for figure 1.

**[0112]** In the embodiment of figures 1 and 3, the release valve 4 is in the closed position. The hydrostatic pressure exerted by the liquid 200 on the buoyant element 41 contributes to maintaining the release valve 4 in the closed position, in addition to the magnetic force explained above. Preferably, the magnetic force is sufficient to keep the release valve 4 in the closed position. In order not to open the release valve 4 during the fill time, the button 81 is in the released position during the fill time. By keeping the release valve 4 in the closed position until the second reservoir 3 is filled with the liquid 200, it is possible to then release an amount of liquid 200 which corresponds to the volume of the second reservoir 3.

**[0113]** Several arrangements known in the prior art may be provided to indicate to an operator or user when the second reservoir 3 is filled with the liquid 200. In an example, the second reservoir 3 may be at least partially transparent or semi-transparent, so the operator or user can see when the second reservoir 3 is filled with the liquid 200. In an example, a counter may be provided so that the user or operator can determine when the fill time has lapsed. In another example, a sensor or indicator may be provided to detect and display when the second reservoir 3 is filled with the liquid 200. When the liquid dispenser 1 comprises an electronic controller 40, as in the embodiment of figure 2, the electronic controller 40 may comprise the counter. The electronic controller 40 may also comprise the sensor or indicator. The electronic display 41 may display a message to indicate the fill time has lapsed.

**[0114]** Figure 4 illustrates the liquid assembly 100 of figure 3 at an instant in which the liquid 200 which filled the second reservoir 3 after the fill time is being released out of the liquid dispenser 1 through the release valve 4.

**[0115]** In order to arrange the release valve 4 in the open position shown in figure 4, the button 81 was moved to a pressed position in which the spring 85 is compressed and the longitudinal shaft 84 moves longitudinally to actuate on the third arm 86. The third arm 86 is articulated to the second arm 83 which is in turn articulated to the first arm 82. The first arm 82 is integrally attached to the buoyant element 41 on one end and attached to the second reservoir housing 6 on an opposite end by means of a hinge 831. The hinge 831 permits

a rotation of the first arm 82 with respect to the second reservoir housing 6. Such rotation causes a displacement of the buoyant element 41 when the second arm 83 is actuated by the third arm 86, the longitudinal shaft 84 and the button 81. The force exerted by the components of the actuator 8 overcomes the hydrostatic pressure and the magnetic force that kept the release valve 4 in the closed position.

**[0116]** In the open position represented in figure 4, the buoyant element 41 floats in the liquid 200 and therefore the buoyant element 41 is away from the fluid aperture 42, so that the flow of liquid 200 through the fluid aperture 42 is allowed. The fluid aperture 42 and the other components of the release valve 4 are configured such that the liquid 200 is released from the second reservoir 3 out of the liquid dispenser 1 in a given release time.

**[0117]** Likewise, the fluid passageway 22 and the one way valve 24 may be configured to calibrate the fill time. The fill time is at least about 3 times greater than the release time, so that, even if the fluid passageway 22 is open, the amount of liquid 200 introduced into the second reservoir 3 during the release time is significantly lower than the amount of liquid released during the release time. Alternatively or in addition to this arrangement, a fourth arm (not represented) may be provided in the actuator 8 such that, when the button 81 is in the pressed position, the fourth arm blocks the fluid passageway 22. This way, no liquid is introduced into the second reservoir 3 during the release time, thus enhancing the accuracy of the released amount of liquid out of the liquid dispenser 1.

**[0118]** When all the liquid 200 is released from the second reservoir 3 out of the liquid dispenser 1 through the fluid aperture 42 of the release valve 4, such that the buoyant element 41 no longer floats on liquid, the button 81 moves back to the released position and the first 82, second 83 and third 86 arms move the buoyant element 41 back to the position in which it blocks the flow of liquid through the fluid aperture 42, such that the release valve 4 is arranged in the closed position shown in figures 1 and 3. The magnetic force of the ferrous element 43 and the magnet 44 intervenes to ensure the release valve 4 is retained in the closed position. The second reservoir 3 is then ready to be filled in again with liquid from a first reservoir, which can be the same as or different to the first reservoir used for the previous charge.

**[0119]** In figures 5(A) and 5(B), an alternative embodiment of a release valve 4 is depicted. Differently to the release valve 4 of figures 1 to 4, the liquid dispenser 1 of this embodiment comprises an actuator 8 which comprises a bar 87. The bar 87 extends from the buoyant element 41 out of the liquid dispenser 1 such that, by pulling the bar 87, the buoyant element 41 is moved away from the fluid aperture 42 as shown in figure 5(B). The release valve 4 of this embodiment comprises a tapered wall 45 which helps the buoyant element 41 return to the position in which it blocks the flow of liquid through the fluid aperture 42 when all the liquid contained in the second reservoir 3 is released out of the liquid dispenser 1.



**[0120]** Figure 7 shows a liquid assembly kit 300 comprising three liquid dispensers 1 with their corresponding first reservoirs 10, thus forming three liquid assemblies 100. The liquid assemblies 100 snap fit in a retaining frame 30. The liquid assembly kit 300 enables that a plurality of liquid dispensers 1 may be easily incorporated into a liquid dispenser unit in which one or more liquids are needed, typically for hygienic or cleaning purposes.

**[0121]** Figure 8 illustrates a liquid dispenser unit 600. The unit 600 comprises the liquid assembly kit 300 of figure 7 and a structure 400. The structure 400 comprises a frame receiver 401 in which the retaining frame 30 of the liquid assembly kit 300 can be arranged, as shown in figure 8. Likewise, the structure 400 comprises a base 403 and vertical supports 402 which join the frame receiver 401 to the base 403. The structure 400 of figure 8 is arranged such that the liquid assemblies 100 of the liquid assembly kit 300 are capable of releasing liquid onto a sink 500 arranged on the base 403.

**[0122]** The liquid dispenser unit 600 may be advantageously used in combination with a cleaning article. The receiver wall 21 and/or the removable part 9 of each liquid dispenser 1 can be adjusted so that the volume of the second reservoir 3 of each liquid dispenser 1 has the adequate volume, which corresponds to the volume of liquid that is set to be released through the release valve 4 of the liquid dispenser 1. The chosen volume of liquid is released by pressing the button 81 as shown in the preceding figures.

## Claims

### 1. A liquid dispenser (1) comprising:

a receiver (2) for receiving a first reservoir (10), the receiver (2) comprising a receiver wall (21) and a fluid passageway (22);  
a second reservoir (3) defined by the receiver wall (21) and a second reservoir housing (6), the second reservoir (3) comprising a release valve (4) which can be arranged in an open position and in a closed position;  
wherein the fluid passageway (22) is configured to allow fluid communication between the first reservoir (10) and the second reservoir (3), when the first reservoir (10) is received in the receiver (2);  
wherein the release valve (4) is configured to allow the release of liquid from the second reservoir (3) out of the liquid dispenser (1) when the release valve (4) is arranged in the open position; **characterised in that**  
the liquid dispenser (1) comprises at least one movable part, the at least one movable part being movable with respect to the second reservoir housing (6) between a first position and a second position, such that the volume of the

second reservoir (3) varies from a first volume to a second volume different from the first volume.

2. The liquid dispenser (1) of claim 1, wherein the at least one movable part comprises a removable part (9) such that, in a second position of the removable part (9), the removable part (9) is disposed at the interior of the second reservoir (3), such that the second reservoir (3) has a second volume; and, in a first position of the removable part (9), the removable part (9) is removed from the interior of the second reservoir (3), such that the second reservoir (9) has a first volume which is greater than the second volume.
3. The liquid dispenser (1) of any one of the preceding claims, wherein the at least one movable part comprises the receiver wall (21), such that the receiver wall (21) is movable with respect to the second reservoir housing (6) between a first position of the receiver wall (21) and a second position of the receiver wall (21), such that the volume of the second reservoir (3) varies from a first volume to a second volume.
4. The liquid dispenser (1) of claim 3, wherein the receiver wall (21) is configured to rotate and to move linearly with respect to the second reservoir housing (6) between the first position and the second position.
5. The liquid dispenser (1) of claim 4, wherein the second reservoir housing (6) comprises a helical slot (61) and the receiver wall comprises a stem (23) configured to slide between a first point (62) and a second point (63) of the helical slot (61), such that the receiver wall (21) moves from the first position to the second position when the stem (23) slides from the first (62) point to the second point (63).
6. The liquid dispenser (1) of any one of claims 3 to 5, wherein the liquid dispenser (1) comprises a lock (7) configured to lock the receiver wall (21) in the first position and/or in the second position.
7. The liquid dispenser (1) of any one of the preceding claims, wherein the liquid dispenser (1) comprises an actuator (8) configured to move the release valve (4) from the closed position to the open position.
8. The liquid dispenser (1) of claim 7, wherein the actuator (8) comprises a button (81), the button (81) being mechanically connected to the release valve (4) by means of at least one arm (82, 83, 86) such that, when the button (81) is moved from a released position to a pressed position, the at least one arm (82, 83, 86) moves the release valve (4)

from the closed position to the open position.

9. The liquid dispenser (1) of claims 7 or 8, wherein the actuator (8) is configured to impede fluid communication through the fluid passageway (22) when the release valve (4) is in the open position. 5
10. The liquid dispenser (1) of any one of the preceding claims, wherein the release valve (4) comprises a buoyant element (41) configured to float in the liquid (200) contained in the second reservoir (3) when the release valve (4) is in the open position and the second reservoir (3) contains liquid, the buoyant element (41) being configured to move the release valve (4) to the closed position when the second reservoir (3) does not contain liquid. 10 15
11. The liquid dispenser (1) of any one of the preceding claims, wherein the release valve (4) comprises a magnetic seal (43, 44) configured to retain the release valve (4) in the closed position. 20
12. The liquid dispenser (1) of any one of the preceding claims, wherein the receiver (2) comprises a one way valve (24) configured to control the flow of liquid through the fluid passageway (22), the one way valve (24) being preferably configured to open to allow fluid communication between the first reservoir (10) and the second reservoir (3) by arranging the first reservoir (10) in the receiver (2). 25 30
13. A liquid assembly (100) comprising:
  - the liquid dispenser (1) of any one of the preceding claims, 35
  - a first reservoir (10) received in the receiver.
14. The liquid assembly (100) of claim 13, wherein the first reservoir (10) comprises a first engagement element and the receiver comprises a second engagement element, such that the first engagement element and the second engagement element are configured to fit each other when the first reservoir (10) is received in the receiver (2). 40 45
15. The liquid assembly (100) of claim 14, wherein the first reservoir (10) comprises a cap (11) having a first shape, the first shape being the first engagement element, and the receiver comprises a one way valve (24) having a second shape, the second shape being the second engagement element, such that the first shape and the second shape fit each other when the first reservoir (10) is received in the receiver (2). 50

## Patentansprüche

1. Flüssigkeitsspender (1), der Folgendes aufweist:

eine Aufnahme (2) zum Aufnehmen eines ersten Behälters (10), wobei die Aufnahme (2) eine Aufnahmewand (21) und einen Fluiddurchgang (22) aufweist;  
einen zweiten Behälter (3), der von der Aufnahmewand (21) und einem Gehäuse des zweiten Behälters (6) definiert wird, wobei der zweite Behälter (3) ein Ablassventil (4) aufweist, das in einer offenen Stellung und in einer geschlossenen Stellung angeordnet werden kann;  
wobei der Fluiddurchgang (22) zum Ermöglichen der Fluidverbindung zwischen dem ersten Behälter (10) und dem zweiten Behälter (3) konfiguriert ist, wenn der erste Behälter (10) in der Aufnahme (2) aufgenommen ist;  
wobei das Ablassventil (4) zum Ermöglichen des Ablassens von Flüssigkeit von dem zweiten Behälter (3) aus dem Flüssigkeitsspender (1), wenn das Ablassventil (4) in der offenen Stellung angeordnet ist, konfiguriert ist, **dadurch gekennzeichnet, dass**  
der Flüssigkeitsspender (1) mindestens einen bewegbaren Teil aufweist, wobei der mindestens eine bewegbare Teil in Bezug auf das Gehäuse des zweiten Behälters (6) zwischen einer ersten Stellung und einer zweiten Stellung bewegbar ist, so dass das Volumen des zweiten Behälters (3) sich von einem ersten Volumen in ein von dem ersten Volumen verschiedenes, zweites Volumen verändert.

2. Flüssigkeitsspender (1) nach Anspruch 1, wobei der mindestens eine bewegbare Teil einen entfernbarer Teil (9) aufweist, so dass der entfernbarer Teil (9), in einer zweiten Stellung des entfernbar Teils (9), am Inneren des zweiten Behälters (3) positioniert ist, so dass der zweite Behälter (3) ein zweites Volumen hat; und der entfernbarer Teil (9), in einer ersten Stellung des entfernbar Teils (9), aus dem Inneren des zweiten Behälters (3) entfernt ist, so dass der zweite Behälter (9) ein erstes Volumen hat, das größer als das zweite Volumen ist.
3. Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche, wobei der mindestens eine bewegbare Teil die Aufnahmewand (21) aufweist, so dass die Aufnahmewand (21) in Bezug auf das Gehäuse des zweiten Behälters (6) zwischen einer ersten Stellung der Aufnahmewand (21) und einer zweiten Stellung der Aufnahmewand (21) bewegbar ist, so dass das Volumen des zweiten Behälters (3) sich von einem ersten Volumen in ein zweites Volumen verändert.
4. Flüssigkeitsspender (1) nach Anspruch 3, wobei die Aufnahmewand (21) zum Drehen und linearen Bewegen in Bezug auf das Gehäuse des zweiten Behälters (6) zwischen der ersten Stellung und der

zweiten Stellung konfiguriert ist.

5. Flüssigkeitsspender (1) nach Anspruch 4, wobei das zweite Behältergehäuse (6) einen wendelförmigen Schlitz (61) aufweist und die Aufnahmewand einen Zapfen (23) aufweist, der zum Gleiten zwischen einem ersten Punkt (62) und einem zweiten Punkt (63) des wendelförmigen Schlitzes (61), so dass die Aufnahmewand (21) sich von der ersten Stellung in die zweite Stellung bewegt, wenn der Zapfen (23) von dem ersten (62) Punkt zum zweiten Punkt (63) gleitet, konfiguriert ist. 10
6. Flüssigkeitsspender (1) nach einem der Ansprüche 3 bis 5, wobei der Flüssigkeitsspender (1) eine Arretierung (7) aufweist, die zum Arretieren der Aufnahmewand (21) in der ersten Stellung und/oder in der zweiten Stellung konfiguriert ist. 15
7. Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche, wobei der Flüssigkeitsspender (1) ein Stellglied (8) aufweist, das zum Bewegen des Ablassventils (4) von der geschlossenen Stellung in die offene Stellung konfiguriert ist. 20
8. Flüssigkeitsspender (1) nach Anspruch 7, wobei das Stellglied (8) einen Knopf (81) aufweist, wobei der Knopf (81) mittels mindestens eines Arms (82, 83, 86) mechanisch mit dem Ablassventil (4) verbunden ist, so dass, wenn der Knopf (81) von einer ausgelösten Stellung in eine gepresste Stellung bewegt wird, der mindestens eine Arm (82, 83, 86) das Ablassventil (4) von der geschlossenen Stellung in die offene Stellung bewegt. 25
9. Flüssigkeitsspender (1) nach Anspruch 7 oder 8, wobei das Stellglied (8) zum Verhindern der Fluidverbindung durch den Fluiddurchgang (22), wenn das Ablassventil (4) in der offenen Stellung ist, konfiguriert ist 30
10. Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche, wobei das Ablassventil (4) ein schwimmfähiges Element (41) aufweist, das, wenn das Ablassventil (4) in der offenen Stellung ist und der zweite Behälter (3) Flüssigkeit enthält, zum Schwimmen in der in dem zweiten Behälter (3) enthaltenen Flüssigkeit (200) konfiguriert ist, wobei das schwimmfähige Element (41), wenn der zweite Behälter (3) keine Flüssigkeit enthält, zum Bewegen des Ablassventils (4) in die geschlossene Stellung konfiguriert ist. 35
11. Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche, wobei das Ablassventil (4) einen magnetischen Dichtverschluss (43, 44) aufweist, der zum Halten des Ablassventils (4) in der geschlossenen Stellung konfiguriert ist. 40

12. Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche, wobei die Aufnahme (2) ein Einwegventil (24) aufweist, das zum Steuern des Durchflusses von Flüssigkeit durch den Fluiddurchgang (22) konfiguriert ist, wobei das Einwegventil (24) vorzugsweise konfiguriert ist zum Öffnen, um eine Fluidverbindung zwischen dem ersten Behälter (10) und dem zweiten Behälter (3) zuzulassen, durch Anordnen des ersten Behälters (10) in der Aufnahme (2). 5

13. Flüssigkeitsanordnung (100), die Folgendes aufweist:

den Flüssigkeitsspender (1) nach einem der vorhergehenden Ansprüche,  
einen in der Aufnahme aufgenommenen ersten Behälter (10). 10

14. Flüssigkeitsanordnung (100) nach Anspruch 13, wobei der erste Behälter (10) ein erstes Eingriffselement aufweist und die Aufnahme ein zweites Eingriffselement aufweist, so dass das erste Eingriffselement und das zweite Eingriffselement so konfiguriert sind, dass sie zusammenpassen, wenn der erste Behälter (10) in der Aufnahme (2) aufgenommen ist. 25

15. Flüssigkeitsanordnung (100) nach Anspruch 14, wobei der erste Behälter (10) eine Kappe (11) mit einer ersten Form hat, wobei die erste Form das erste Eingriffselement ist, und die Aufnahme ein Einwegventil (24) aufweist, das eine zweite Form hat, wobei die zweite Form das zweite Eingriffselement ist, so dass die erste Form und die zweite Form zusammenpassen, wenn der erste Behälter (10) in der Aufnahme (2) aufgenommen ist. 30

## Revendications 35

1. Distributeur de liquide (1) comprenant :

un récepteur (2) pour recevoir un premier réservoir (10), le récepteur (2) comprenant une paroi de récepteur (21) et un passage de fluide (22) ;  
un deuxième réservoir (3) défini par la paroi de récepteur (21) et un boîtier de deuxième réservoir (6), le deuxième réservoir (3) comprenant une soupape de décharge (4) qui peut être arrangée dans une position ouverte et dans une position fermée ;  
dans lequel le passage de fluide (22) est configuré pour permettre une communication de fluide entre le premier réservoir (10) et le deuxième réservoir (3), dans lequel le premier réservoir (10) est reçu dans le récepteur (2) ;  
dans lequel la soupape de décharge (4) est 40

configurée pour permettre la décharge de liquide du deuxième réservoir (3) hors du distributeur de liquide (1) lorsque la soupape de décharge (4) est arrangée dans la position ouverte ;

**caractérisé en ce que**

le distributeur de liquide (1) comprend au moins une pièce amovible, la au moins une pièce amovible étant déplaçable par rapport au boîtier de deuxième réservoir (6) entre une première position et une deuxième position, de sorte que le volume du deuxième réservoir (3) varie d'un premier volume à un deuxième volume différent du premier volume.

2. Distributeur de liquide (1) selon la revendication 1, dans lequel la au moins une pièce amovible comprend une pièce démontable (9) de sorte que, dans une deuxième position de la pièce démontable (9), la pièce démontable (9) est disposée à l'intérieur du deuxième réservoir (3), de sorte que le deuxième réservoir (3) a un deuxième volume ; et, dans une deuxième position de la pièce démontable (9), la pièce démontable (9) est retirée de l'intérieur du deuxième réservoir (3), de sorte que le deuxième réservoir (9) a un premier volume qui est plus grand que le deuxième volume.
3. Distributeur de liquide (1) selon l'une quelconque des revendications précédentes, dans lequel la au moins une pièce amovible comprend la paroi de récepteur (21), de sorte que la paroi de récepteur (21) est amovible par rapport au boîtier de deuxième réservoir (6) entre une première position de la paroi de récepteur (21) et une deuxième position de la paroi de récepteur (21), de sorte que le volume du deuxième réservoir (3) varie d'un premier volume à un deuxième volume.
4. Distributeur de liquide (1) selon la revendication 3, dans lequel la paroi de récepteur (21) est configurée pour tourner et se déplacer de manière linéaire par rapport au boîtier de deuxième réservoir (6) entre la première position et la deuxième position.
5. Distributeur de liquide (1) selon la revendication 4, dans lequel le boîtier de deuxième réservoir (6) comprend une fente hélicoïdale (61) et la paroi de récepteur comprend une tige (23) configurée pour glisser entre un premier point (62) et un deuxième point (63) de la fente hélicoïdale (61), de sorte que la paroi de récepteur (21) se déplace de la première position à la deuxième position lorsque la tige (23) glisse du premier point (62) au deuxième point (63).
6. Distributeur de liquide (1) selon l'une quelconque des revendications 3 à 5, dans lequel le distributeur de liquide (1) comprend un verrou (7) configuré pour

verrouiller la paroi de récepteur (21) dans la première position et/ou dans la deuxième position.

7. Distributeur de liquide (1) selon l'une quelconque des revendications précédentes, où le distributeur de liquide (1) comprend un actionneur (8) configuré pour déplacer la soupape de décharge (4) de la position fermée à la position ouverte.
8. Distributeur de liquide (1) selon la revendication 7, dans lequel l'actionneur (8) comprend un bouton (81), le bouton (81) étant raccordé mécaniquement à la soupape de décharge (4) au moyen d'au moins un bras (82, 83, 86) de sorte que, lorsque le bouton (81) est déplacé d'une position relâchée à une position enfoncée, le au moins un bras (82, 83, 86) déplace la soupape de décharge (4) de la position fermée à la position ouverte.
9. Distributeur de liquide (1) selon les revendications 7 ou 8, dans lequel l'actionneur (8) est configuré pour empêcher la communication de fluide à travers le passage de fluide (22) lorsque la soupape de décharge (4) est dans la position ouverte.
10. Distributeur de liquide (1) selon l'une quelconque des revendications précédentes, dans lequel la soupape de décharge (4) comprend un élément flottant (41) configuré pour flotter dans le liquide (200) contenu dans le deuxième réservoir (3) lorsque la soupape de décharge (4) est dans la position ouverte et que le deuxième réservoir (3) contient du liquide, l'élément flottant (41) étant configuré pour déplacer la soupape de décharge (4) à la position fermée lorsque le deuxième réservoir (3) ne contient pas de liquide.
11. Distributeur de liquide (1) selon l'une quelconque des revendications précédentes, dans lequel la soupape de décharge (4) comprend un joint magnétique (43, 44) configuré pour retenir la soupape de décharge (4) dans la position fermée.
12. Distributeur de liquide (1) selon l'une quelconque des revendications précédentes, dans lequel le récepteur (2) comprend une soupape unidirectionnelle (24) configurée pour contrôler l'écoulement de liquide à travers le passage de fluide (22), la soupape unidirectionnelle (24) étant configurée de préférence pour s'ouvrir afin de permettre une communication de fluide entre le premier réservoir (10) et le deuxième réservoir (3) en arrangeant le premier réservoir (10) dans le récepteur (2).
13. Ensemble de liquide (100) comprenant :  
le distributeur de liquide (1) selon l'une quelconque des revendications précédentes,

un premier réservoir (10) reçu dans le récepteur.

- 14.** Ensemble de liquide (100) selon la revendication 13, dans lequel le premier réservoir (10) comprend un premier élément d'engagement et le récepteur comprend un deuxième élément d'engagement, de sorte que le premier élément d'engagement et le deuxième élément d'engagement sont configurés pour s'ajuster l'un avec l'autre lorsque le premier réservoir (10) est reçu dans le récepteur (2). 5 10
- 15.** Ensemble de liquide (100) selon la revendication 14, dans lequel le premier réservoir (10) comprend un capuchon (11) ayant une première forme, la première forme étant le premier élément d'engagement, et le récepteur comprend une soupape unidirectionnelle (24) ayant une deuxième forme, la deuxième forme étant le deuxième élément d'engagement, de sorte que la première forme et la deuxième forme s'ajustent l'une avec l'autre lorsque le premier réservoir (10) est reçu dans le récepteur (2). 15 20

25

30

35

40

45

50

55

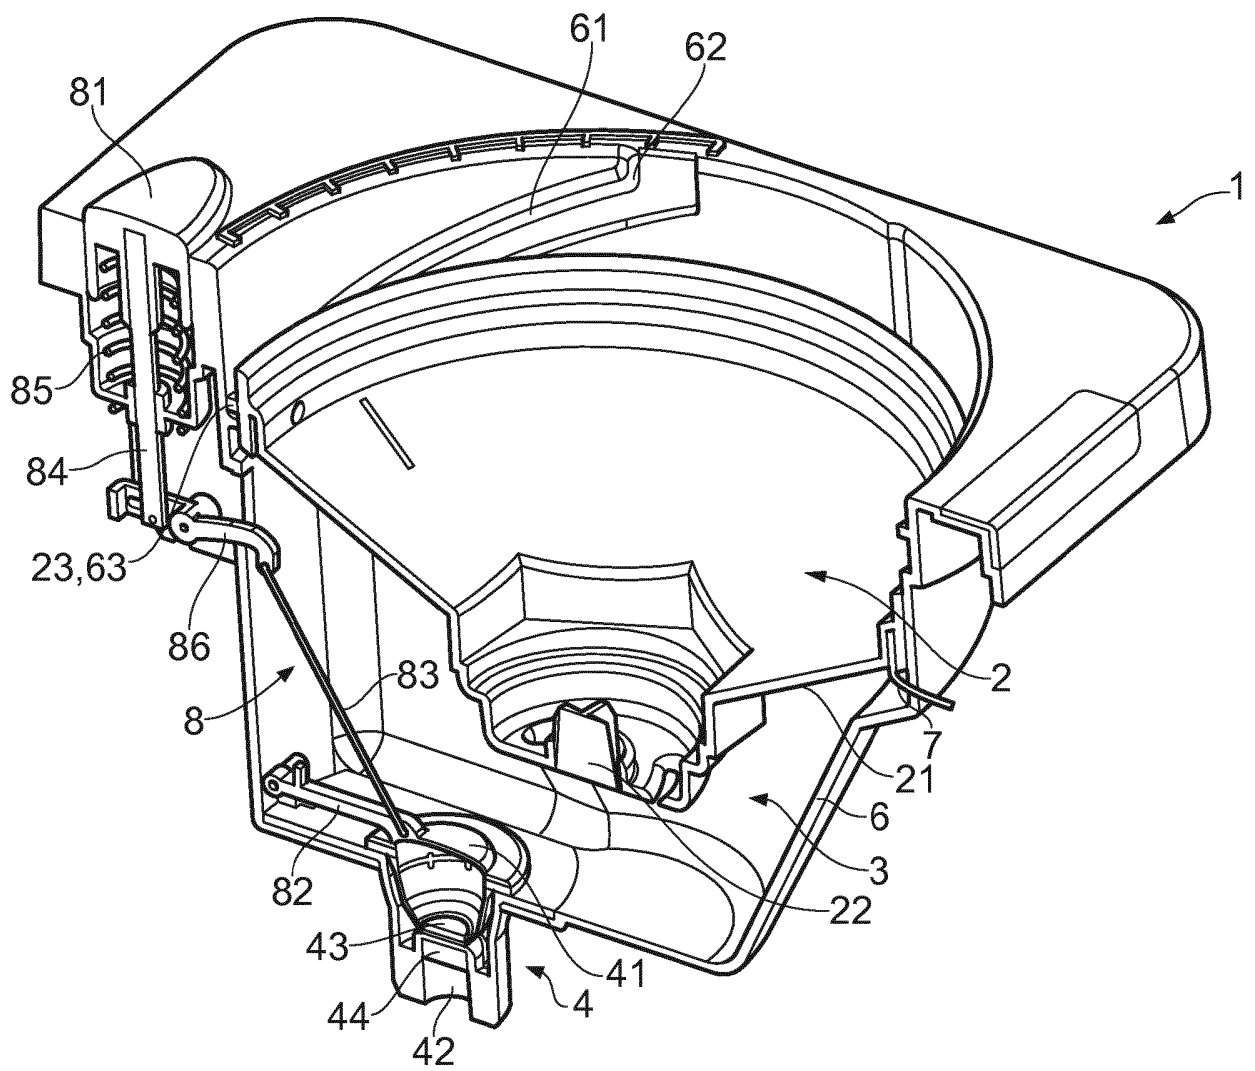


FIG. 1

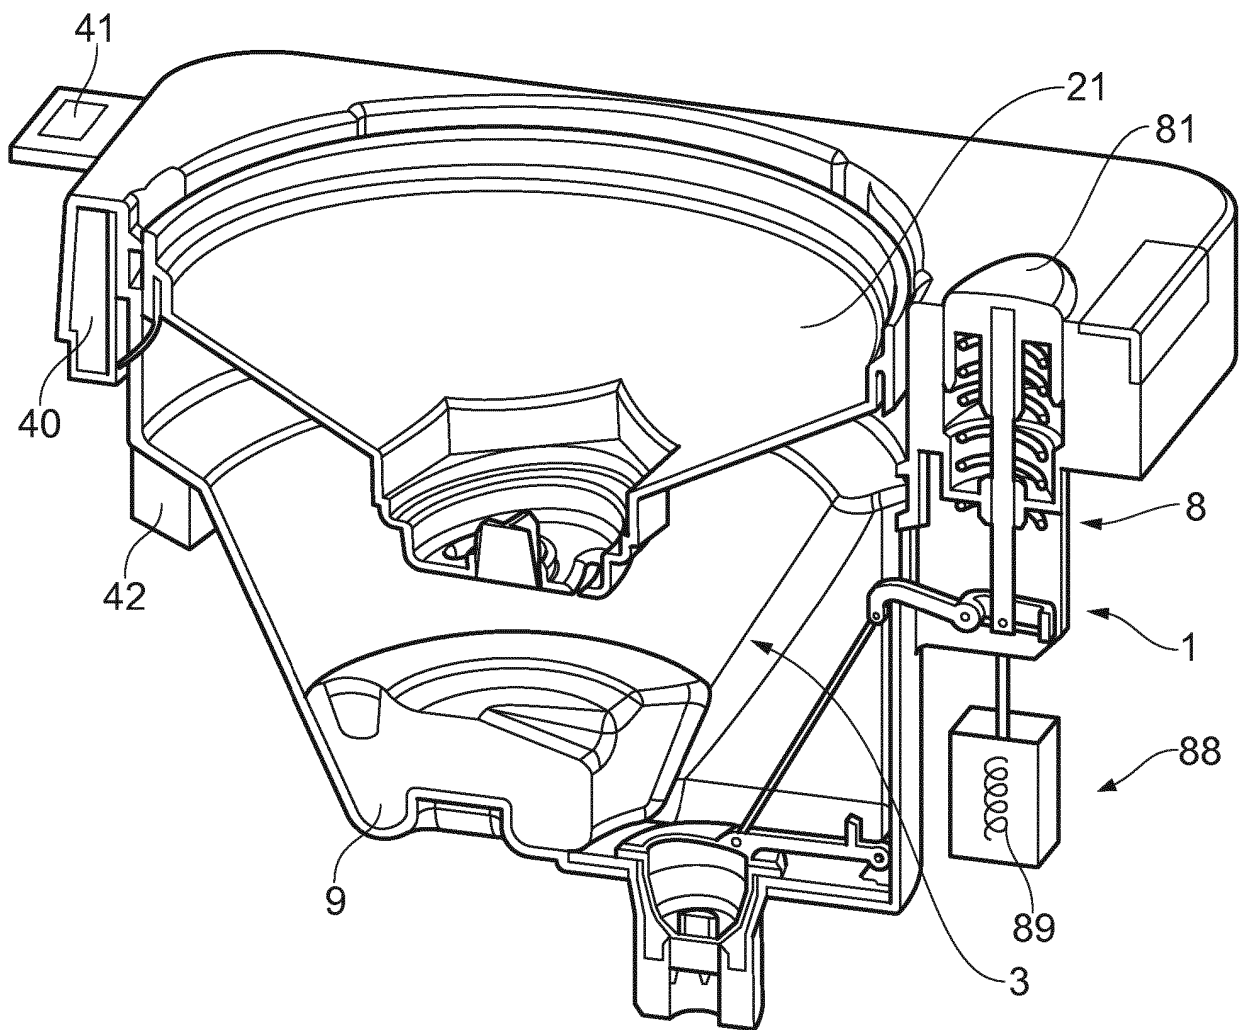


FIG. 2

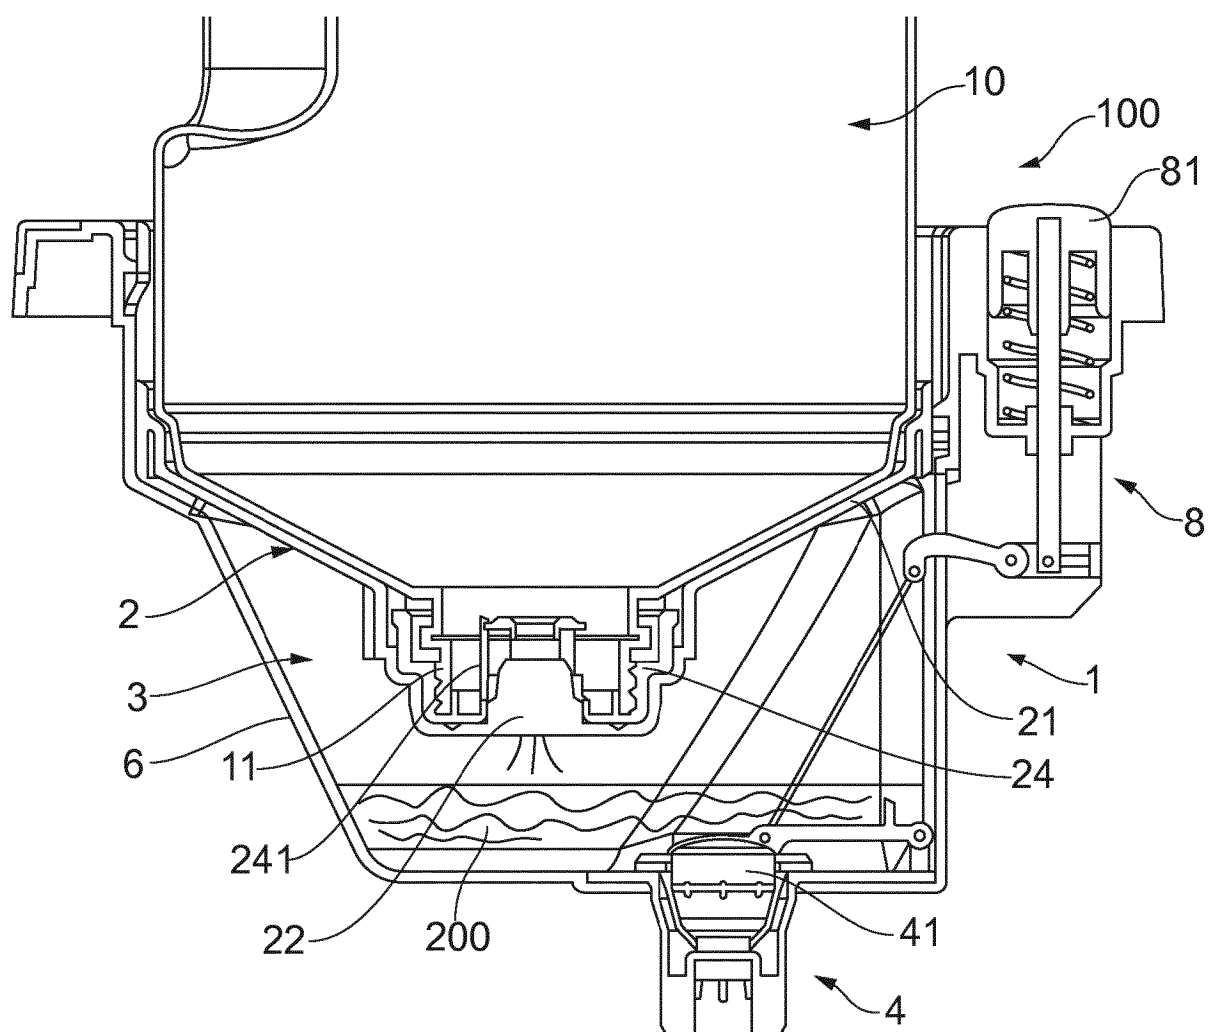


FIG. 3



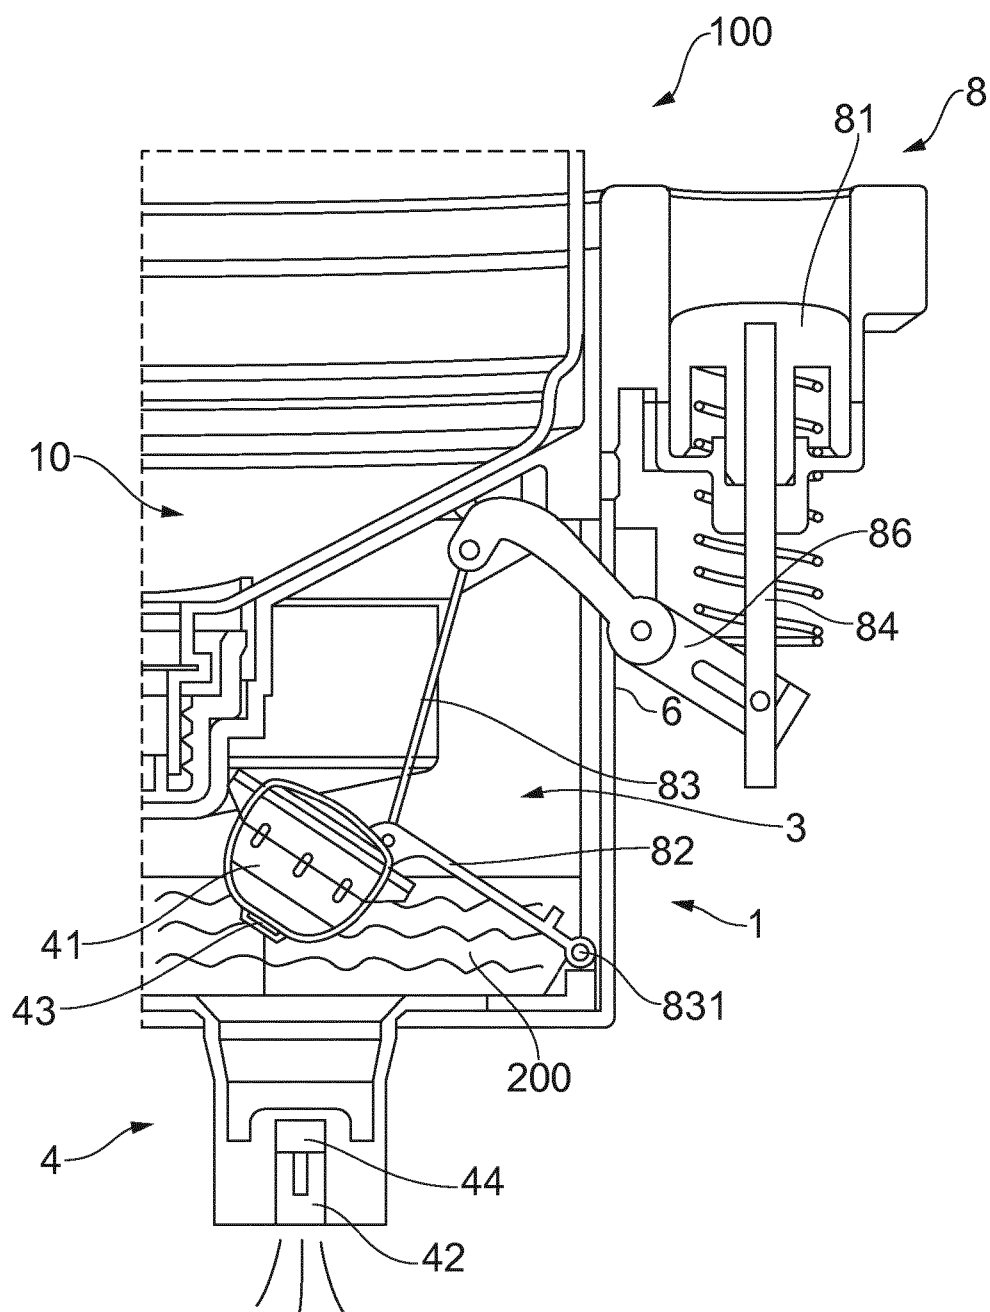


FIG. 4

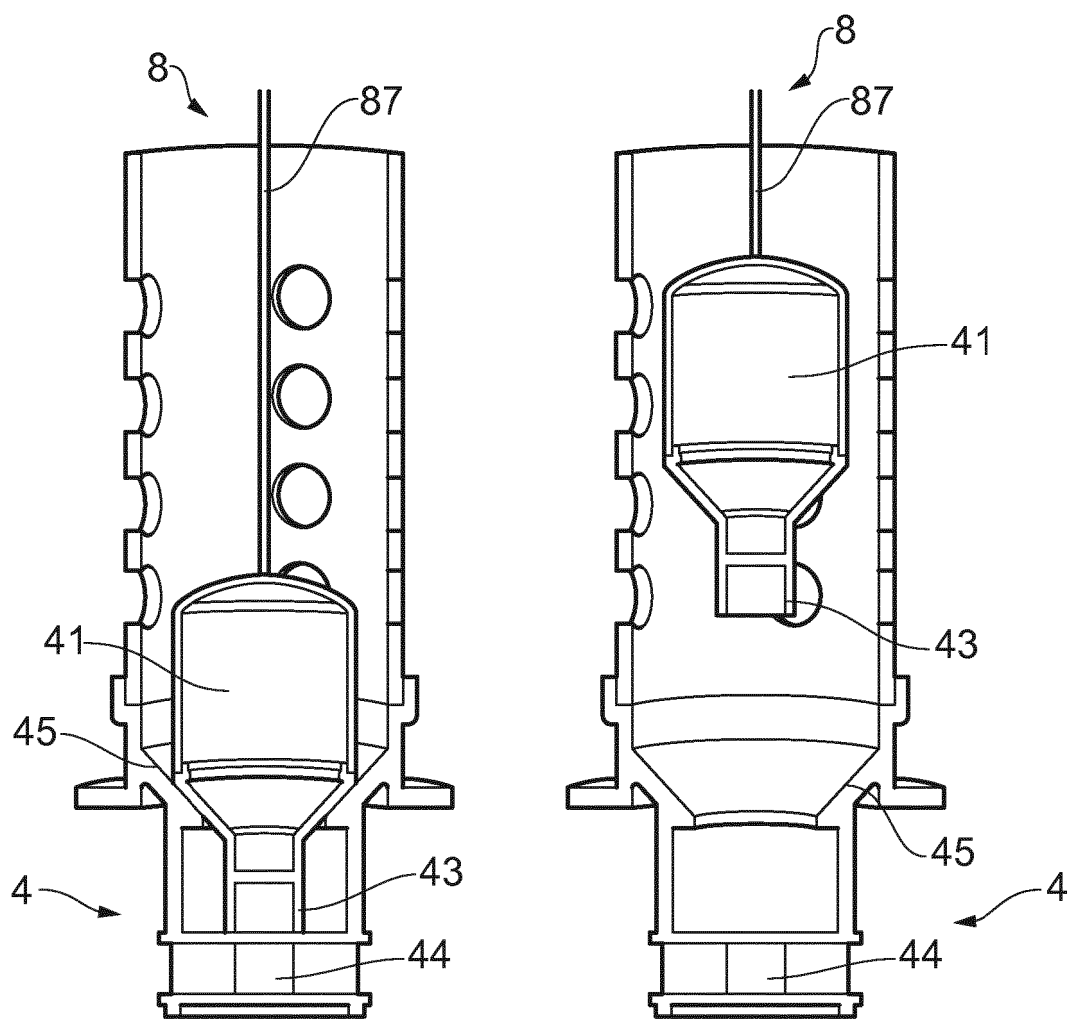


FIG. 5

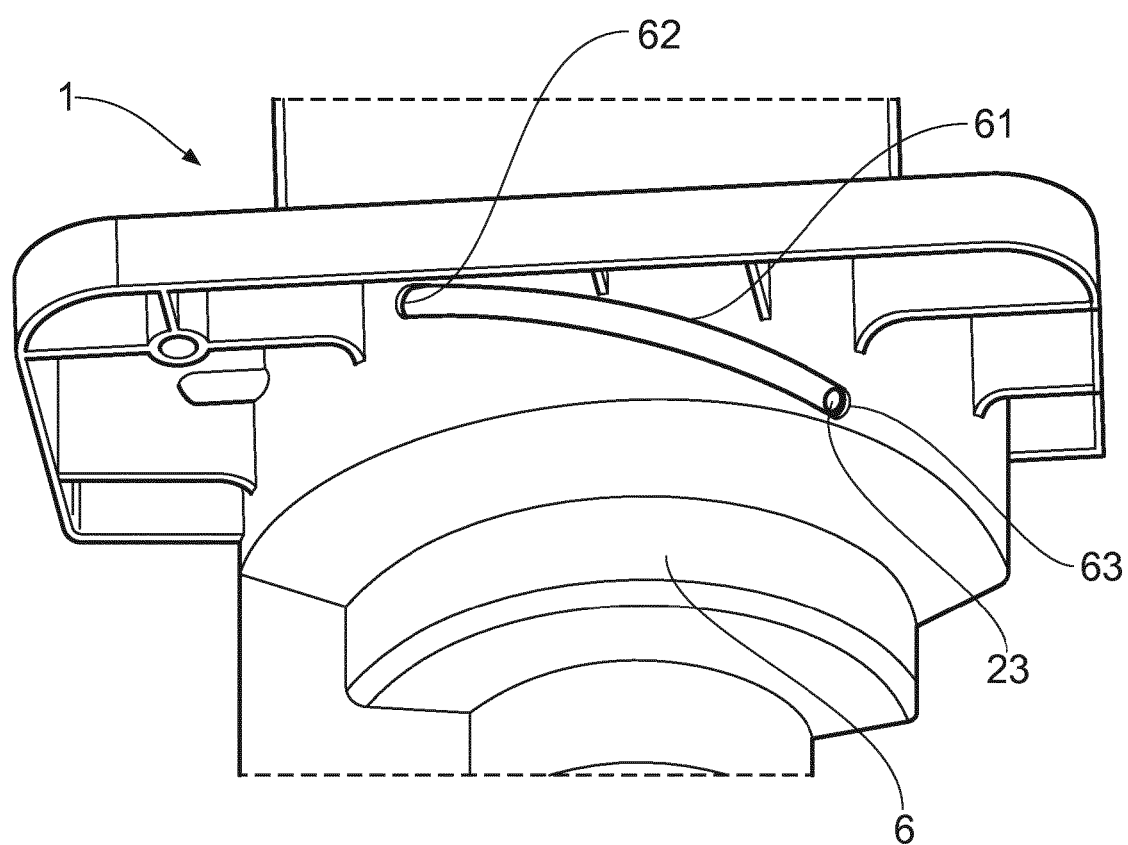


FIG. 6

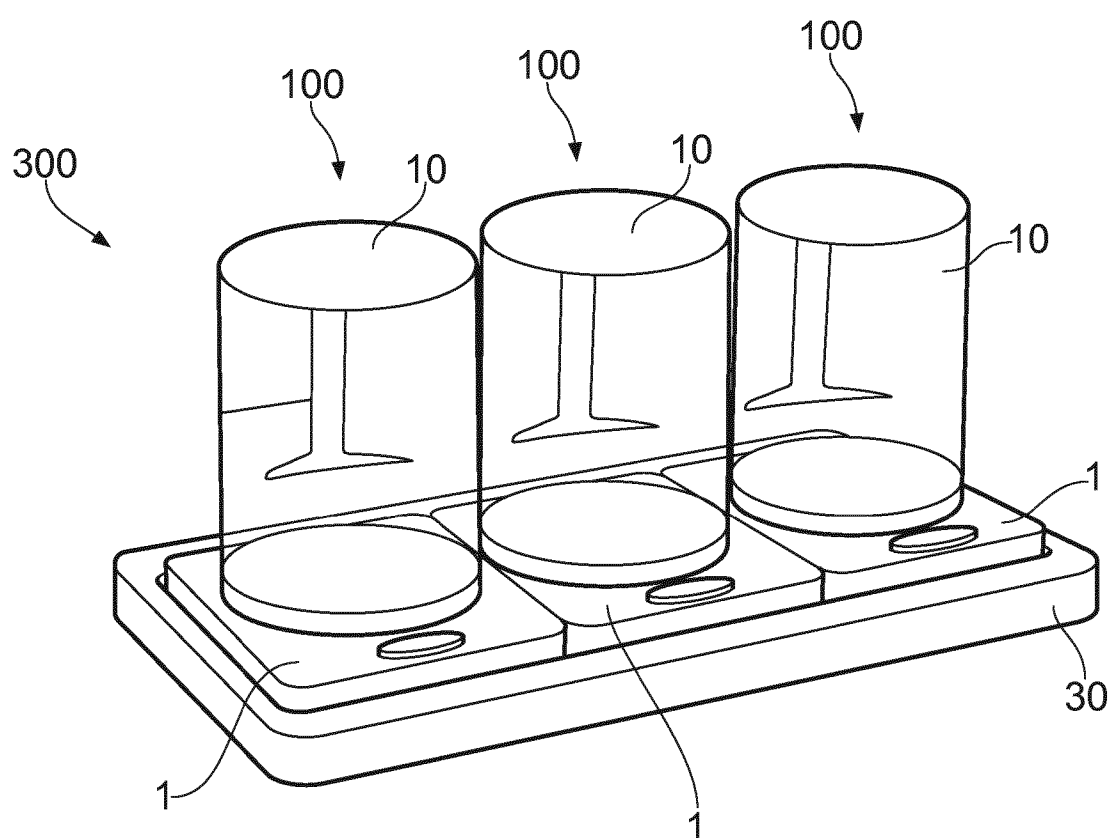


FIG. 7

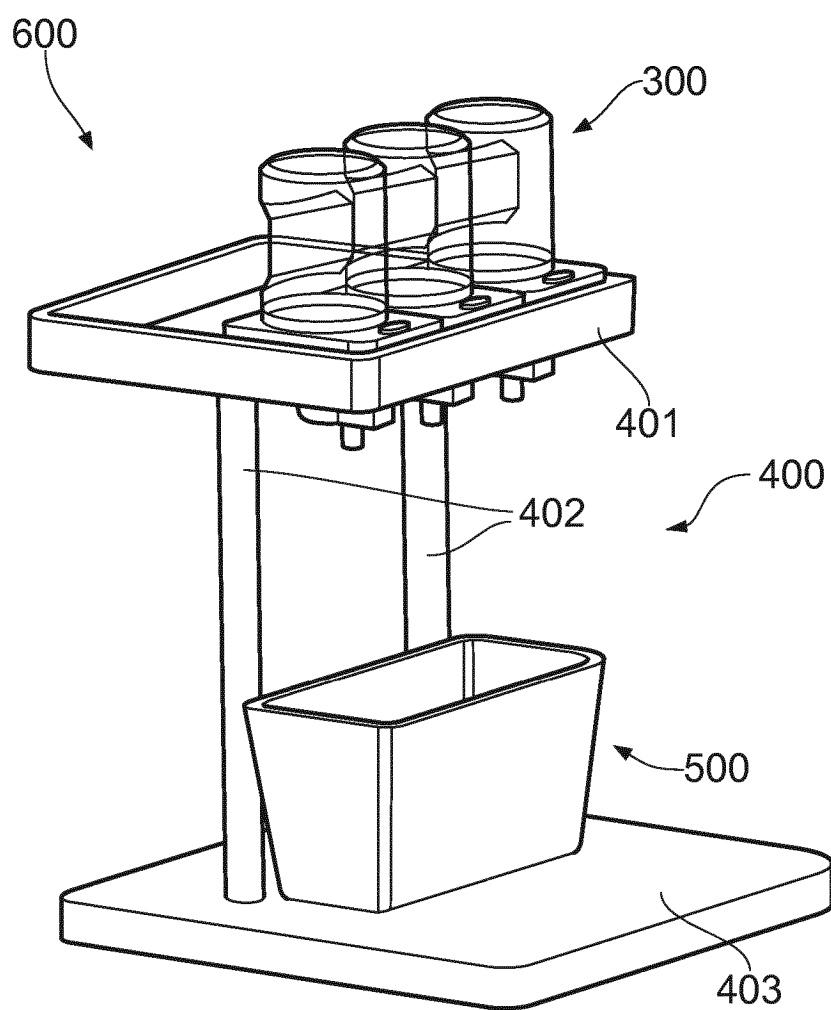


FIG. 8

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2006063773 A1 [0003]
- US 3843021 A [0004]