

(19)



(11)

**EP 3 835 648 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:  
**30.03.2022 Bulletin 2022/13**

(21) Application number: **20210678.7**

(22) Date of filing: **30.11.2020**

(51) International Patent Classification (IPC):

**F21S 8/04** <sup>(2006.01)</sup> **F21V 21/03** <sup>(2006.01)</sup>  
**F21V 23/00** <sup>(2015.01)</sup> **F21V 27/00** <sup>(2006.01)</sup>  
**F21V 27/02** <sup>(2006.01)</sup> **F21S 8/02** <sup>(2006.01)</sup>  
**F21V 21/04** <sup>(2006.01)</sup> **F21Y 107/10** <sup>(2016.01)</sup>  
**F21Y 115/10** <sup>(2016.01)</sup>

(52) Cooperative Patent Classification (CPC):

**F21V 21/03; F21S 8/026; F21V 21/045;**  
**F21V 23/002; F21V 27/00; F21V 27/02;**  
**F21Y 2107/10; F21Y 2115/10**

(54) **DOWNLIGHT**

DOWNLIGHT

APPAREIL D'ÉCLAIRAGE VERS LE BAS

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(30) Priority: **11.12.2019 CN 201922207586 U**  
**11.12.2019 CN 201922209083 U**

(43) Date of publication of application:  
**16.06.2021 Bulletin 2021/24**

(73) Proprietor: **Xiamen Leedarson Lighting Co., Ltd.**  
**Xiamen, Fujian 361010 (CN)**

(72) Inventors:

- **LI, Wenpei**  
**Xiamen, Fujian (CN)**
- **LIANG, Dingwei**  
**Xiamen, Fujian (CN)**

(74) Representative: **Zacco Sweden AB**

**P.O. Box 5581**  
**114 85 Stockholm (SE)**

(56) References cited:

**EP-A1- 3 073 186 WO-A1-2014/030277**  
**GB-A- 2 452 637 US-A1- 2014 029 258**  
**US-A1- 2015 131 301**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### TECHNICAL FIELD

**[0001]** This application relates to the field of lighting equipment, in particular to a downlight.

### BACKGROUND

**[0002]** Lamps such as downlights are usually installed on a ceiling with a certain height, and it is difficult to assemble and disassemble, during which a certain interaction exists between the wire and the lamp body, easily causing loose connection between the wire and the lamp body and creating poor contacts at the wire-welding place, resulting in failure to the downlights. WO2014030277 disclosed -an illumination instrument, provided with: a light source substrate on which a solid-state light-emitting element is mounted: a main instrument body: and a light source holder joined to the main instrument body so as to sandwich the light source substrate therebetween. Two leads are connected to the light source substrate, the leads being inserted through a cladding tube made from a flexible material. The light source holder has, for each of the leads, a convex holding part functioning as a holding part for sandwiching the cladding tube against the peripheral wall. The cladding tube deforms to come into intimate contact with the convex holding part and the peripheral wall: therefore, compared to an instance in which the leads are not covered by a cladding tube, the holding force is greater and the position of the lead wire is more stable. It is therefore possible to minimize positional displacement of the light source substrate caused by the elastic force of the lead. The existing anti-stretching method is to be fixed in a combination of gluing and a pressure block, with a high cost of materials with the anti-stretching structure to be fixed in a combination of gluing and a pressure block, and there are too many operation procedures, which leads to high labor costs. When fixing the electric wire with glue, the electric wire runs a long distance inside the lamp body and takes up a lot of space. In addition, the existing embedded lamps are installed in the mounting holes in the ceiling and other locations by means of plastic or metal bayonet. When the lamp is installed, the precision requirement of the opening size is very high. Too large or too small opening is impossible to be installed. Therefore, when the lamp is installed, the mounting hole often needs to be processed temporarily and adapted to the installation of the lamp, which will increase the complexity of the installation process.

### BRIEF SUMMARY

**[0003]** The purpose of the present application is to provide a downlight, which aims to solve the problems in the prior art of the operation difficulty and complexity of the lamp during assembly and disassembly, and easily loos-

ening of wires which causes failure to the downlight.

**[0004]** To achieve this purpose, this disclosure adopts the following technical solution:

A downlight comprising: a lamp body; a cover plate with a first winding structure and a second winding structure, wherein the first winding structure and the second winding structure are opposite and spaced apart; the light-emitting element covers the first winding structure and the second winding structure, the first winding structure comprises a first winding plate connected with the cover plate, and a first baffle arranged at a distance from the first winding plate; a gap between the first baffle and the first winding plate is provided for the first connecting part to pass through, the second winding structure comprises a second winding plate connected with the cover plate, and a second baffle arranged at a distance from the second winding plate; a gap between the second baffle and the second winding plate is provided for the second connecting part to pass through, the cover plate is provided with a relief hole for the electric wire to pass through; the relief hole is located between the first winding plate and the second winding plate; the electric wire runs through the relief hole and is located between the first winding plate and the second winding plate; a light-emitting element installed on the cover plate; an electric wire connected with the cover plate, wherein the electric wire comprises a first wire, a second wire, and a protecting layer sheathed outside the first wire and the second wire, the first wire has a first connecting part located outside the protecting layer, and the second wire has a second connecting part located outside the protecting layer; the first connecting part is wound around the first winding structure, and the second connecting part is wound around the second winding structure; and a deformable mounting member on the lamp body; wherein the first winding plate comprises a first limiting part, and a second limiting part connected with one end of the first limiting part away from the relief hole; the second winding plate comprises a third limiting part, and a fourth limiting part connected with one end of the third limiting part away from the relief hole; the gap between the first limiting part and the third limiting part is greater than the outer diameter of the protecting layer; the gap between the second limiting part and the fourth limiting part is smaller than the outer diameter of the outer diameters of the first wire and the second wire is smaller than the gap between the second limiting part and the fourth limiting part.

**[0005]** Preferably, the first winding structure further includes a first pre-tensioning plate connected with the first winding plate; the first pre-tensioning plate and the first baffle are parallel to each other; a gap between the first pre-tensioning plate and the first baffle is provided for the first connecting part to pass through.

**[0006]** Preferably, the first pre-tensioning plate and the first winding plate are perpendicular to each other; the distance between the first baffle and the first winding plate is smaller than the length of the first pre-tensioning plate.

**[0007]** Preferably, the second winding structure further includes a second pre-tensioning plate connected with the second winding plate; the second pre-tensioning plate and the second baffle are parallel to each other; a gap between the second pre-tensioning plate and the second baffle is provided for the second connecting part to pass through.

**[0008]** Preferably, the second pre-tensioning plate and the second winding plate are perpendicular to each other; the distance between the second baffle and the second winding plate is smaller than the length of the second pre-tensioning plate.

**[0009]** Preferably, the mounting member includes an abutting sheet and an elastic sheet arranged oppositely and spaced apart on the lamp body, and the elastic sheet includes a first connecting plate connected with the lamp body, and deformable plates at two opposite ends of the first connecting plate; one end of the deformable plate away from the first connecting plate is provided with a first abutting protrusion; the abutting sheet includes a second connecting plate, and abutting plates at two opposite ends of the second connecting plate; one end of the abutting plate away from the second connecting plate is provided with a second abutting protrusion.

**[0010]** Preferably, the deformable plate includes a first arc part connected with the first connecting plate, a second arc part connected with one end of the first arc part away from the first connecting plate and a third arc part connected with one end of the second arc part away from the first arc part; the center of the first arc part is located on one side of the elastic sheet away from the lamp body, the center of the second arc part and the center of the first arc part are respectively located on two opposite sides of the elastic sheet; the center of the third arc part and the center of the second arc part are respectively located on two opposite sides of the elastic sheet.

**[0011]** Preferably, the deformable plate further includes a first force-applying part connected with the third arc part, the first abutting protrusion is provided on the first force-applying part, and the first abutting protrusion is zigzag-shaped, the first force-applying part and the first connecting plate are perpendicular to each other, and the first abutting protrusion is located on one end of the first force applying part away from the third arc part.

**[0012]** Preferably, the abutting plate includes a connecting part connected with the second connecting plate, and a second force-applying part connected with one end of the connecting part away from the second connecting plate, the second abutting protrusion is located on the second force-applying part; the second abutting protrusion is zigzag-shaped.

**[0013]** Preferably, the abutting plate further includes a fourth arc part connected between the connecting part and the second force-applying part; the center of the fourth arc part is located on one side of the abutting sheet away from the lamp body; the second force-applying part and the second connecting plate are perpendicular to each other.

**[0014]** The beneficial effect of the present application is: the protecting layer at the end of the electric wire is cut off and parts of the first wire and the second wire, which are referred to as the first connecting part and the second connecting part, are exposed, and the sum of the outer diameters of the first wire and the second wire is smaller than the outer diameter of the protecting layer. Therefore, when the first connecting part is wound on the first winding structure and the second connecting part is wound on the second winding structure, the space occupied by the first connecting part of the first wire and the second connecting part of the second wire is smaller than the space occupied by the electric wire wound as a whole, so that the volume occupied by the anti-tensile structure of the downlight is sufficiently small. Moreover, when the downlight is installed in the mounting hole on the ceiling, etc., the elastic sheet on the lamp body is put into the mounting hole first, so that the elastic sheet is in contact with the inner wall of the mounting hole, and the lamp body applies force to the elastic sheet, deforming the elastic sheet in a direction close to the lamp body. After the elastic sheet is deformed, the farthest distance between the elastic sheet and the abutting sheet is reduced, so that the side where the abutting sheet is installed on the lamp body can also be put into the mounting hole, and then when the force applied to the lamp body is released, the elastic sheet is tend to return to its original shape. At this time, the elastic sheet and the abutting sheet are in contact with the inner wall of the mounting hole on the opposite sides of the lamp body, respectively; since the elastic sheet can be deformed to a certain level, the mounting hole is not required to have a high accuracy, and only needs to be larger than the size of the lamp body.

#### DETAILED DESCRIPTION OF THE DRAWINGS

**[0015]** In order to more clearly illustrate the technical solutions in the embodiments of the present application, the following will briefly introduce the accompanying drawings that need to be used in the description of the embodiments or the prior art. Obviously, the accompanying drawings in the following description are only some embodiments of the present application. Those skilled in the art can obtain other drawings based on these drawings without creative efforts.

Fig. 1 is a structural schematic diagram of a downlight in an embodiment of the application;

Fig. 2 is a structural schematic diagram of the cover plate in Fig. 1;

Fig. 3 is a partial schematic diagram of the cover plate in Fig. 2;

Fig. 4 is a cross-sectional view of the downlight in Fig. 1;

Fig. 5 is a structural schematic diagram of the elastic sheet in an embodiment of the application;

Fig. 6 is a structural schematic diagram of the abutting sheet in an embodiment of the application.

**[0016]** In the figures:

1. Cover plate; 11. Relief hole;
2. First winding structure; 21. First winding plate;
211. First limiting part; 212. Second limiting part; 22. First baffle; 23. First pre-tensioning plate;
3. Second winding structure; 31. Second winding plate; 311. Third limiting part; 312. Fourth limiting part; 32. Second baffle; 33. Second pre-tensioning plate;
4. Light-emitting element; 41. Reflective paper; 42. Light-guiding plate; 43. Annular light source plate;
44. Light-emitting part; 45. Light-diffusing plate; 46. Light-shielding plate; 47. Annular decorative surface;
5. Electric wire; 51. First wire; 511. First connecting part; 52. Second wire; 521. Second connecting part; 53. Protecting layer;
6. Abutting sheet; 61. Second connecting plate; 611. Second buckle part; 62. Abutting plate; 621. Second abutting protrusion; 622. Connecting part; 623. Second force-applying part; 624. Fourth arc part;
7. Elastic sheet; 71. First connecting plate; 711. First buckle part; 72. Deformable plate; 721. First abutting protrusion; 722. First arc part; 723. Second arc part; 724. Third arc part; 725. First force-applying part;
8. Lamp body.

#### DETAILED DESCRIPTION OF THE EMBODIMENTS

**[0017]** In order to make the purpose, technical solutions, and advantages of this application clearer, the following further describes the application in detail with reference to the accompanying drawings and embodiments. It should be understood that the specific embodiments described here are only used to explain the application, and are not used to limit the application.

**[0018]** It should be noted that when an element is referred to as being "fixed to" or "disposed on" another element, it can be directly on the other element or indirectly above the other element. When an element is said to be "connected with" another element, it can be directly connected with the other element or indirectly connected with the other element.

**[0019]** It should be understood that the orientation or positional relationship indicated by the terms "length", "width", "upper", "lower", "front", "back", "left", "right", "vertical", "horizontal", "top", "bottom", "inner", "outer", etc. is based on the orientation or positional relationship shown in the drawings, and is only for the convenience of describing the application and simplifying the description, and does not indicate or imply the device or the element referred to must have a specific orientation, be constructed and operated in a specific orientation, and therefore cannot be understood as a limitation of the present application.

**[0020]** In addition, the terms "first" and "second" are only used to describe, and cannot be understood as in-

dicating or implying relative importance or implicitly indicating the number of indicated technical features. Thus, the features defined with "first" and "second" may explicitly or implicitly include one or more of these features. In the description of this application, "multiple" means two or more than two, unless otherwise specifically defined.

**[0021]** The implementation of this application will be described in detail below in conjunction with specific embodiments.

**[0022]** As shown in Figs. 1 to 3, an embodiment of the present application proposes a downlight, which includes a lamp body 8, a cover plate 1 with a first winding structure 2 and a second winding structure 3, a light-emitting element 4 installed on the cover plate 1, a deformable mounting member (6, 7) on the lamp body, and an electric wire 5 connected with the cover plate 1; the electric wire 5 includes a first wire 51, a second wire 52, and a protecting layer 53 sheathed outside the first wire 51 and the second wire 52; the first wire 51 has a first connecting part 511 located outside the protecting layer 53, and the second wire 52 has a second connecting part 521 located outside the protecting layer 53; the first connecting part 511 is wound around the first winding structure 2, and the second connecting part 521 is wound around the second winding structure 3.

**[0023]** In the embodiment of the present application, the electric wire 5 includes a first wire 51, a second wire 52, and a protecting layer 53 sheathed outside the first wire 51 and the second wire 52, so the outer diameter of the electric wire 5 is the outer diameter of the protecting layer 53. The protecting layer 53 at the end of the electric wire is cut off and parts of the first wire 51 and the second wire 52, which are referred to as the first connecting part 511 and the second connecting part 521 respectively, are exposed, and the sum of the outer diameters of the first wire 51 and the second wire 52 is smaller than the outer diameter of the protecting layer 53. Therefore, when the first connecting part 511 is wound on the first winding structure 2 and the second connecting part 521 is wound on the second winding structure 3, the space occupied by the first connecting part 511 of the first wire 51 and the second connecting part 521 of the second wire 52 is smaller than the space occupied by the electric wire 5 wound as a whole, so that the volume occupied by the anti-tensile structure of the downlight is sufficiently small.

**[0024]** The first connecting part 511 is wound around the first winding structure 2, and the second connecting part 521 is wound around the second winding structure 3. Compared with the fixing method of gluing combined with press block, the material cost and labor cost are reduced.

**[0025]** Further, as shown in Fig. 2, as another specific embodiment of the downlight provided by the present application, the first winding structure 2 and the second winding structure 3 are opposite and spaced apart, so the first connecting part 511 and the second connecting part 521 can be wound on opposite sides respectively,

and the overlapping area of the two is small, which makes the internal structure of the cover plate 1 more compact; as shown in Fig. 4, the light-emitting element 4 covers the first winding structure 2 and the second winding structure 3 to limit the first connecting part 511 and the second connecting part 521 in the first winding structure 2 and the second winding structure 3 respectively by the light-emitting element 4, so as to avoid the first connecting part 511 and the second connecting part 521 detaching from the first winding structure 2 and the second winding structure 3 and improve the stability of the anti-tensile structure.

**[0026]** Further, as shown in Figs 2 to 3, as another specific embodiment of the downlight provided by the present application, the first winding structure 2 includes a first winding plate 21 connected with the cover plate 1, and a first baffle 22 arranged at a distance from the first winding plate 21; a gap between the first baffle 22 and the first winding plate 21 is provided for the first connecting part 511 to pass through. The first connecting part 511 is wound from one side of the first winding plate 21 to the other side, and then is wound on the first baffle 22, so the first connecting part 511 is not easy to be pulled, and a better anti-tensile effect is achieved.

**[0027]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the first winding structure 2 further includes a first pre-tensioning plate 23 connected with the first winding plate 21; the first pre-tensioning plate 23 and the first baffle 22 are parallel to each other; a gap between the first pre-tensioning plate 23 and the first baffle 22 is provided for the first connecting part 511 to pass through. The first pre-tensioning plate 23 can be matched with the first baffle 22, and the first connecting part 511 passes through the gap between the first pre-tensioning plate 23 and the first baffle 22 to further enhance the pre-tensioning and limiting effect of the first connecting part 511, so the first connecting part 511 is not easy to be pulled, and a better anti-tensile effect is achieved after winding.

**[0028]** Further, as shown in Figs 2 to 3, as another specific embodiment of the downlight provided by the present application, the first pre-tensioning plate 23 and the first winding plate 21 are perpendicular to each other; the distance between the first baffle 22 and the first winding plate 21 is smaller than the length of the first pre-tensioning plate 23. Further, the first connecting part 511 in the first winding structure 2 is limited by the double vertical structure, which further improves the anti-tension effect after winding.

**[0029]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the second winding structure 3 includes a second winding plate 31 connected with the cover plate 1, and a second baffle 32 arranged at a distance from the second winding plate 31; a gap between the second baffle 32 and the second winding plate 31 is provided for the second connecting part 521 to pass

through. The second connecting part 521 is wound from one side of the second winding plate 31 to the other side, and then is wound on the second baffle 32, so the second connecting part 521 is not easy to be pulled, and a better anti-tensile effect is achieved.

**[0030]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the second winding structure 3 further includes a second pre-tensioning plate 33 connected with the second winding plate 31; the second pre-tensioning plate 33 and the second baffle 32 are parallel to each other; a gap between the second pre-tensioning plate 33 and the second baffle 32 is provided for the second connecting part 521 to pass through. The second pre-tensioning plate 33 can be matched with the second baffle 32, and the second connecting part 521 passes through the gap between the second pre-tensioning plate 33 and the second baffle 32 to further enhance the pre-tensioning and limiting effect of the second connecting part 521, so the second connecting part 521 is not easy to be pulled, and a better anti-tensile effect is achieved after winding.

**[0031]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the second pre-tensioning plate 33 and the second winding plate 31 are perpendicular to each other; the distance between the second baffle 32 and the second winding plate 31 is smaller than the length of the second pre-tensioning plate 33. Further, the second connecting part 521 in the second winding structure 3 is limited by the double vertical structure, which further improves the anti-tension effect after winding.

**[0032]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the cover plate 1 is provided with a relief hole 11 for the electric wire 5 to pass through; the relief hole 11 is located between the first winding plate 21 and the second winding plate 31; the electric wire 5 passes through the relief hole 11 and is located between the first winding plate 21 and the second winding plate 31. The electric wire 5 is inserted into the cover plate 1 through the relief hole 11, and passes through the gap between the first winding plate 21 and the second winding plate 31 to achieve a preliminary limit, and then the first connecting part 511 and the second connecting part 521 are respectively separated to both sides and enter the first winding structure 2 and the second winding structure 3 respectively.

**[0033]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the first winding plate 21 includes a first limiting part 211, and a second limiting part 212 connected with one end of the first limiting part 211 away from the relief hole 11; the second winding plate 31 includes a third limiting part 311, and a fourth limiting part 312 connected with one end of the third limiting part 311 away from the relief hole 11; the gap between the first limiting part 211 and the third limiting part 311 is greater

than the outer diameter of the protecting layer 53; the gap between the second limiting part 212 and the fourth limiting part 312 is smaller than the outer diameter of the protecting layer 53; the sum of the outer diameters of the first wire 51 and the second wire 52 is smaller than the gap between the second limiting part 212 and the fourth limiting part 312. Therefore, the main body of the electric wire 5 is located between the first limiting part 211 and the third limiting part 311, and the first connecting part 511 and the second connecting part 521 extending from the protecting layer 53 of the electric wire 5 pass through the gap between the second limiting part 212 and the fourth limiting part 312, then reach the other side of the first winding plate 21 and the second winding plate 31 respectively. Since the gap between the second limiting part 212 and the fourth limiting part 312 is smaller than the outer diameter of the protecting layer 53, the second limiting part 212 and the fourth limiting part 312 can be used as elements to abut and limit the electric wire 5, making the electric wire 5 unable to move along its axial direction.

**[0034]** Further, as shown in Figs. 2 to 3, as another specific embodiment of the downlight provided by the present application, the light-emitting element 4 includes a reflective paper 41 arranged in contact with the first winding structure 2 and the second winding structure 3, a light-guiding plate 42 located on one side of the reflective paper 41 away from the first winding structure 2, an annular light source plate 43 surrounding the light-guiding plate 42, a light-emitting element 44 installed on the annular light source plate 43, a light-diffusing plate 45 located on one side of the light-guiding plate 42 away from the reflective paper 41, a light-shielding plate 46 arranged around the light-diffusing plate 45, and an annular decorative surface 47 installed on the light-shielding plate 46. The light-guiding plate 42 is pressed on the first winding structure 2 and the second winding structure 3 by the reflective paper 41, so that the first connecting part 511 and the second connecting part 521 are not easily detached from the first winding structure 2 and the second winding structure 3.

**[0035]** As shown in Figs. 1, 5 and 6, the embodiment of the present application proposes a downlight, which includes a lamp body 8, a light-emitting element 4 arranged in the lamp body 8, an abutting sheet 6 arranged on the lamp body 8, and an elastic sheet 7 arranged on the lamp body 8; the abutting sheet 6 and the elastic sheet 7 are arranged oppositely and spaced apart; the elastic sheet 7 includes a first connecting plate 71 connected with the lamp body 8, and deformable plates 72 at two opposite ends of the first connecting plate 71; one end of the deformable plate 72 away from the first connecting plate 71 is provided with a first abutting protrusion 721; the abutting sheet 6 includes a second connecting plate 61, and abutting plates 62 at two opposite ends of the second connecting plate 61; one end of the abutting plate 62 away from the second connecting plate 61 is provided with a second abutting protrusion 621.

**[0036]** In the embodiment of the present application, when the downlight is installed in the mounting hole of the ceiling, etc., the elastic sheet 7 on the lamp body 8 is put into the mounting hole first, so that the elastic sheet 7 is in contact with the inner wall of the mounting hole, and the lamp body 8 applies force to the elastic sheet 7, deforming the elastic sheet 7 in a direction close to the lamp body 8. After the elastic sheet 7 is deformed, the farthest distance between the elastic sheet 7 and the abutting sheet 6 is reduced, so that the side where the abutting sheet 6 is installed on the lamp body 8 can also be put into the mounting hole, and then when the force applied to the lamp body 8 is released, the elastic sheet 7 is tend to return to its original shape. At this time, the elastic sheet 7 and the abutting sheet 6 are in contact with the inner wall of the mounting hole on the opposite sides of the lamp body 8, respectively, and the installation of the downlight is completed; since the elastic sheet 7 can be deformed to a certain level, the mounting hole is not required to have a high accuracy, and only needs to be larger than the size of the lamp body.

**[0037]** The first abutting protrusion 721 can increase the force of friction between the elastic sheet 7 and the inner wall of the mounting hole, and improve the mounting stability. The second abutting protrusion 621 can increase the force of friction between the abutting sheet 6 and the inner wall of the mounting hole, and cooperates with the first abutting protrusion 721 to further improve the mounting stability of the lamp body 8.

**[0038]** When the elastic sheet 7 is deformed, the first connecting plate 71 is fixedly connected with the lamp body 8, and the deformable plates 72 at both ends of the first connecting plate 71 are deformed.

**[0039]** Further, as shown in Fig. 5, as another specific embodiment of the downlight provided by the present application, the deformable plate 72 includes a first arc part 722 connected with the first connecting plate 71, a second arc part 723 connected with one end of the first arc part 722 away from the first connecting plate 71, and a third arc part 724 connected with one end of the second arc part 723 away from the first arc part 722; the center of the first arc part 722 is located on one side of the elastic sheet 7 away from the lamp body 8, the center of the second arc part 723 and the center of the first arc part 722 are respectively located on two opposite sides of the elastic sheet 7; the center of the third arc part 724 and the second arc part 723 are respectively located on two opposite sides of the elastic sheet 7.

**[0040]** The second arc part 723 serves as a transition element between the first arc part 722 and the third arc part 724. The first arc part 722 and the third arc part 724 are the main deformable parts, and two deformable parts provided, i.e. the first arc part 722 and the third arc part 724 can effectively improve the stability of the deformable plate 72 to return to its original size after being deformed. The elastic member usually has a certain range of deformation. When the certain range of deformation is exceeded, that is, the elastic member cannot return to its original

shape after the force exceeds its own yield strength; therefore, the external force can be shared between the first arc part 722 and the third arc part 724, further increasing the overall yield strength of the deformable plate 72, and the deformable plate 72 still has sufficient ability to return to its original shape after being stressed, which can ensure that the elastic sheet 7 is in close contact with the inner wall of the mounting hole. The provision of the two deformable parts, i.e. the first arc part 722 and the third arc part 724 has the following effects: when one of the deformable parts is excessively deformed, the other can still apply sufficient pressure to the inner wall of the mounting hole, thereby realizing the installation of the lamp body 8.

**[0041]** Further, as shown in Fig. 5, as another specific embodiment of the downlight provided by the present application, the deformable plate 72 further includes a first force-applying part 725 connected with the third arc part 724, the first abutting protrusion 721 is provided on the first force-applying part 725. The deformation caused by the deformation of the first arc part 722 and the third arc part 724 is applied to the inner wall of the mounting hole through the first force-applying part 725, and the first abutting protrusion 721 can ensure the close contact of the first force-applying part 725 with the inner wall of the mounting hole.

**[0042]** Further, as shown in Fig. 5, as another specific embodiment of the downlight provided by the present application, the first abutting protrusion 721 is zigzag-shaped and can be pressed into the surface of the inner wall of the mounting hole; the first force-applying part 725 and the first connecting plate 71 are perpendicular to each other, so that the pressure transmitted by the first force-applying part 725 is directed to the lamp body 8, and the stability of the lamp body 8 is improved; the first abutting protrusion 721 is located on one end of the first force-applying part 725 away from the third arc part 724.

**[0043]** Further, as shown in Fig. 5, as another specific embodiment of the downlight provided by the present application, the first connecting plate 71 is provided with a first buckle part 711; the first buckle part 711 is located inside the lamp body 8. This can effectively prevent the detachment between the first connecting plate 71 and the lamp body 8.

**[0044]** Further, as shown in Figs. 1 to 5, as another specific embodiment of the downlight provided by the present application, the elastic sheet 7 is a metal member, and the first connecting plate 71 and the lamp body 8 are integrally injection-molded. The first connecting plate 71 of the elastic sheet 7 is used as an insert to be integrally injection-molded with the lamp body 8.

**[0045]** Further, as shown in Fig. 6, as another specific embodiment of the downlight provided by the present application, the abutting plate 62 includes a connecting part 622 connected with the second connecting plate 61, and a second force-applying part 623 connected with one end of the connecting part 622 away from the second connecting plate 61, the second abutting protrusion 621

is located on the second force-applying part 623; the second abutting protrusion 621 is zigzag-shaped, and can be inserted into the surface of the inner wall of the mounting hole to improve the mounting stability.

**[0046]** Further, as shown in Fig. 6, as another specific embodiment of the downlight provided by the present application, the abutting plate 62 further includes a fourth arc part 624 connected between the connecting part 622 and the second force-applying part 623; the center of the fourth arc part 624 is located on one side of the abutting sheet 6 away from the lamp body 8; the second force-applying part 623 and the second connecting plate 61 are perpendicular to each other. The fourth arc part 624 provides a certain level of deformation between the connecting part 622 and the second force-applying part 623, so that the second force-applying part 623 better contacts the inner wall of the mounting hole.

**[0047]** Further, as shown in Fig. 6, as another specific embodiment of the downlight provided by the present application, the second connecting plate 61 is provided with a second buckle part 611, and the second buckle part 611 is located inside the lamp body 8, to prevent the detachment between the second connecting plate and the lamp body 8.

**[0048]** Further, as shown in Figs. 1 and 6, as another specific embodiment of the downlight provided by the present application, the abutting sheet 6 is a metal member; the second connecting plate 61 and the lamp body 8 are integrally injection-molded. The second connecting plate 61 of the abutting sheet 6 is used as an insert to be injection-molded with the lamp body 8.

**[0049]** Further, as shown in Fig. 1, as another specific embodiment of the downlight provided by the present application, the lamp body 8 is circular; the elastic sheet 7 and the abutting sheet 6 are located on the same diameter of the lamp body 8, so the force exerted by the elastic sheet 7 and the abutting sheet 6 on the lamp body 8 is relatively symmetric, which ensures the mounting stability of the lamp body 8.

**[0050]** It can be understood that the solution in another specific implementation may be an embodiment which can be achieved by further improving on the basis of other embodiments.

**[0051]** Obviously, the above-mentioned embodiments of the present application are only used to clearly illustrate the examples of the present application, and are not intended to limit the implementation of the present application. For those skilled in the art, other changes or modifications in different forms can be made on the basis of the above description. It is unnecessary and impossible to list all the implementation here.

## Claims

1. A downlight, comprising  
a lamp body (8);

a cover plate (1) with a first winding structure (2) and a second winding structure (3), wherein the first winding structure (2) and the second winding structure (3) are opposite and spaced apart; a light-emitting element (4) covers the first winding structure (2) and the second winding structure (3), the first winding structure (2) comprises a first winding plate (21) connected with the cover plate (1), and a first baffle (22) arranged at a distance from the first winding plate (21); a gap between the first baffle (22) and the first winding plate (21) is provided for a first connecting part (511) to pass through, the second winding structure (3) comprises a second winding plate (31) connected with the cover plate (1), and a second baffle (32) arranged at a distance from the second winding plate (31); a gap between the second baffle (32) and the second winding plate (31) is provided for a second connecting part (521) (521) to pass through, the cover plate (1) is provided with a relief hole (11) for the electric wire (5) to pass through; the relief hole (11) is located between the first winding plate (21) and the second winding plate (31); the electric wire (5) runs through the relief hole (11) and is located between the first winding plate (21) and the second winding plate (31); wherein the light-emitting element (4) is installed on the cover plate (1); further comprising

an electric wire (5) connected with the cover plate (1), wherein the electric wire (5) comprises a first wire (51), a second wire (52), and a protecting layer (53) sheathed outside the first wire (51) and the second wire (52), the first wire (51) has the said first connecting part (511) located outside the protecting layer (53), and the second wire (52) has the said second connecting part (521) located outside the protecting layer (53); the first connecting part (511) is wound around the first winding structure (2), and the second connecting part (521) is wound around the second winding structure (3); and a deformable mounting member on the lamp body (8);

wherein

the first winding plate (21) comprises a first limiting part (211), and a second limiting part (212) connected with one end of the first limiting part (211) away from the relief hole (11); the second winding plate (31) comprises a third limiting part (311), and a fourth limiting part (312) connected with one end of the third limiting part (311) away from the relief hole (11); the gap between the first limiting part (211) and the third limiting part

(311) is greater than the outer diameter of the protecting layer (53); the gap between the second limiting part (212) and the fourth limiting part (312) is smaller than the outer diameter of the protecting layer (53); the sum of the outer diameters of the first wire (51) and the second wire (52) is smaller than the gap between the second limiting part (212) and the fourth limiting part (312).

2. The downlight according to claim 1, wherein the first winding structure (2) further comprises a first pre-tensioning plate (23) connected with the first winding plate (21); the first pre-tensioning plate (23) and the first baffle (22) are parallel to each other; a gap between the first pre-tensioning plate (23) and the first baffle (22) is provided for the first connecting part (511) to pass through.
3. The downlight according to claim 2, wherein the first pre-tensioning plate (23) and the first winding plate (21) are perpendicular to each other; the distance between the first baffle (22) and the first winding plate (21) is smaller than the length of the first pre-tensioning plate (23).
4. The downlight according to claim 1, wherein the second winding structure (3) further comprises a second pre-tensioning plate (33) connected with the second winding plate (31); the second pre-tensioning plate (33) and the second baffle (32) are parallel to each other; a gap between the second pre-tensioning plate (33) and the second baffle (32) is provided for the second connecting part (521) to pass through.
5. The downlight according to claim 4, wherein the second pre-tensioning plate (33) and the second winding plate (31) are perpendicular to each other; the distance between the second baffle (32) and the second winding plate (31) is smaller than the length of the second pre-tensioning plate (33).
6. The downlight according to any one of claims 1-5, wherein the mounting member comprises an abutting sheet (6) and an elastic sheet (7) arranged oppositely and spaced apart on the lamp body (8), and the elastic sheet (7) comprises a first connecting plate (71) connected with the lamp body (8), and deformable plates (72) at two opposite ends of the first connecting plate (71); one end of the deformable plates (72) away from the first connecting plate (71) is provided with a first abutting protrusion (721); the abutting sheet (6) comprises a second connecting plate (61), and abutting plate (62)s at two opposite ends of the second connecting plate (61); one end of the abutting plate (62) away from the second connecting plate (61) is provided with a second abutting protrusion (621).



7. The downlight according to claim 6, wherein the deformable plates (72) comprise a first arc part (722) connected with the first connecting plate (71), a second arc part (723) connected with one end of the first arc part (722) away from the first connecting plate (71), and a third arc part (724) connected with one end of the second arc part (723) away from the first arc part (722); the center of the first arc part (722) is located on one side of the elastic sheet (7) away from the lamp body (8), the center of the second arc part (723) and the center of the first arc part (722) are respectively located on two opposite sides of the elastic sheet (7); the center of the third arc part (724) and the center of the second arc part (723) are respectively located on two opposite sides of the elastic sheet (7).
8. The downlight according to claim 7, wherein the deformable plates (72) further comprise a first force-applying part (725) connected with the third arc part (724), the first abutting protrusion (721) is provided on the first force-applying part (725), and the first abutting protrusion (721) is zigzag-shaped, the first force-applying part (725) and the first connecting plate (71) are perpendicular to each other, and the first abutting protrusion (721) is located on one end of the first force-applying part (725) away from the third arc part (724).
9. The downlight according to claim 6, wherein the abutting plate (62) comprises a connecting part (622) connected with the second connecting plate (61), and a second force-applying part (623) connected with one end of the connecting part (622) away from the second connecting plate (61), the second abutting protrusion (621) is located on the second force-applying part (623); the second abutting protrusion (621) is zigzag-shaped.
10. The downlight according to claim 9, wherein the abutting plate (62) further comprises a fourth arc part (624) connected between the connecting part (622) and the second force-applying part (623); the center of the fourth arc part (624) is located on one side of the abutting sheet (6) away from the lamp body (8); the second force-applying part (623) and the second connecting plate (61) are perpendicular to each other.

## Patentansprüche

### 1. Downlight umfassend

einen Lampenkörper (8);  
eine Abdeckplatte (1) mit einer ersten Wicklungsstruktur (2) und einer zweiten Wicklungsstruktur (3), wobei die erste Wicklungsstruktur

(2) und die zweite Wicklungsstruktur (3) entgegengesetzt und voneinander beabstandet sind; ein lichtemittierendes Element (4) die erste Wicklungsstruktur (2) und die zweite Wicklungsstruktur (3) abdeckt, die erste Wicklungsstruktur (2) eine erste Wicklungsplatte (21), die mit der Abdeckplatte (1) verbunden ist, und ein erstes Leitblech (22), das beabstandet von der ersten Wicklungsplatte (21) angeordnet ist, umfasst; ein Zwischenraum zwischen dem ersten Leitblech (22) und der ersten Wicklungsplatte (21) vorgesehen ist, damit ein erster Verbindungsteil (511) dadurch passieren kann, die zweite Wicklungsstruktur (3) eine zweite Wicklungsplatte (31), die mit der Abdeckplatte (1) verbunden ist, und ein zweites Leitblech (32), das beabstandet von der zweiten Wicklungsplatte (31) angeordnet ist, umfasst; ein Zwischenraum zwischen dem zweiten Leitblech (32) und der zweiten Wicklungsplatte (31) vorgesehen ist, damit ein zweiter Verbindungsteil (521) dadurch passieren kann, die Abdeckplatte (1) mit einem Hilfsloch (11) versehen ist, durch welches die elektrische Leitung (5) passieren kann; das Hilfsloch (11) zwischen der ersten Wicklungsplatte (21) und der zweiten Wicklungsplatte (31) angeordnet ist; die elektrische Leitung (5) durch das Hilfsloch (11) durchgeht und zwischen der ersten Wicklungsplatte (21) und der zweiten Wicklungsplatte (31) angeordnet ist; wobei das lichtemittierende Element (4) auf der Abdeckplatte (1) installiert ist; weiter umfassend eine elektrische Leitung (5), die mit der Abdeckplatte (1) verbunden ist, wobei die elektrische Leitung (5) eine erste Leitung (51), eine zweite Leitung (52) und eine Schutzschicht (53) umfasst, die außen um die erste Leitung (51) und die zweite Leitung (52) ummantelt ist, die erste Leitung (51) den ersten Verbindungsteil (511) angeordnet außerhalb der Schutzschicht (53) aufweist, und die zweite Leitung (52) den zweiten Verbindungsteil (521) angeordnet außerhalb der Schutzschicht (53) aufweist; der erste Verbindungsteil (511) um die erste Wicklungsstruktur (2) herum gewickelt ist, und der zweite Verbindungsteil (521) um die zweite Wicklungsstruktur (3) herum gewickelt; und ein verformbares Montierungselement auf dem Lampenkörper (8); wobei die erste Wicklungsplatte (21) einen ersten Begrenzungsteil (211) und einen zweiten Begrenzungsteil (212), der mit einem Ende des ersten Begrenzungsteils (211) vom Hilfsloch (11) weg verbunden ist, umfasst; die zweite Wicklungsplatte (31) einen dritten Begrenzungsteil (311) und einen vierten Begrenzungsteil (312), der mit einem Ende des dritten Begrenzungsteils (311)

- vom Hilfsloch (11) weg verbunden ist, umfasst; der Zwischenraum zwischen dem ersten Begrenzungsteil (211) und dem dritten Begrenzungsteil (311) größer als der Außendurchmesser der Schutzschicht (53) ist; der Zwischenraum zwischen dem zweiten Begrenzungsteil (212) und dem vierten Begrenzungsteil (312) kleiner als der Außendurchmesser der Schutzschicht (53) ist; die Summe der Außendurchmesser der ersten Leitung (51) und der zweiten Leitung (52) kleiner als der Zwischenraum zwischen dem zweiten Begrenzungsteil (212) und dem vierten Begrenzungsteil (312) ist.
2. Downlight nach Anspruch 1, wobei die erste Wicklungsstruktur (2) weiter eine erste Vorspannplatte (23) umfasst, die mit der ersten Wicklungsplatte (21) verbunden ist; die erste Vorspannplatte (23) und das erste Leitblech (22) zueinander parallel sind; ein Zwischenraum zwischen der ersten Vorspannplatte (23) und dem ersten Leitblech (22) vorgesehen ist, damit der erste Verbindungsteil (511) dadurch passieren kann.
  3. Downlight nach Anspruch 2, wobei die erste Vorspannplatte (23) und die erste Wicklungsplatte (21) zueinander senkrecht sind; der Abstand zwischen dem ersten Leitblech (22) und der ersten Wicklungsplatte (21) kleiner als die Länge der ersten Vorspannplatte (23) ist.
  4. Downlight nach Anspruch 1, wobei die zweite Wicklungsstruktur (3) weiter eine zweite Vorspannplatte (33) umfasst, die mit der zweiten Wicklungsplatte (31) verbunden ist; die zweite Vorspannplatte (33) und das zweite Leitblech (32) zueinander parallel sind; ein Zwischenraum zwischen der zweiten Vorspannplatte (33) und dem zweiten Leitblech (32) vorgesehen ist, damit der zweite Verbindungsteil (521) dadurch passieren kann.
  5. Downlight nach Anspruch 4, wobei die zweite Vorspannplatte (33) und die zweite Wicklungsplatte (31) zueinander senkrecht sind; der Abstand zwischen dem zweiten Leitblech (32) und der zweiten Wicklungsplatte (31) kleiner als die Länge der zweiten Vorspannplatte (33) ist.
  6. Downlight nach einem der Ansprüche 1-5, wobei das Montierungselement ein Stoßblech (6) und ein elastisches Blech (7) umfasst, die auf dem Lampenkörper (8) gegenüber einander angeordnet und voneinander beabstandet sind, und das elastische Blech (7) eine erste Verbindungsplatte (71), die mit dem Lampenkörper (8) verbunden ist, und verformbare Platten (72) an zwei entgegengesetzten Enden der ersten Verbindungsplatte (71) aufweist; ein Ende der verformbaren Platten (72) von der ersten Verbindungsplatte (71) weg mit einem ersten Stoßvorsprung (721) versehen ist; das Stoßblech (6) eine zweite Verbindungsplatte (61) und Stoßplatten (62) an zwei entgegengesetzten Enden der zweiten Verbindungsplatte (61) aufweist; ein Ende der Stoßplatte (62) von der zweiten Verbindungsplatte (61) weg mit einem zweiten Stoßvorsprung (621) versehen ist.
  7. Downlight nach Anspruch 6, wobei die verformbaren Platten (72) einen ersten bogenförmigen Teil (722), der mit der ersten Verbindungsplatte (71) verbunden ist, einen zweiten bogenförmigen Teil (723), der mit einem Ende des ersten bogenförmigen Teils (722) von der ersten Verbindungsplatte (71) weg verbunden ist, und einen dritten bogenförmigen Teil (724), der mit einem Ende des zweiten bogenförmigen Teils (723) vom ersten bogenförmigen Teil (722) weg verbunden ist, aufweisen; das Zentrum des ersten bogenförmigen Teils (722) auf einer Seite des elastischen Blechs (7) vom Lampenkörper weg (8) angeordnet ist, das Zentrum des zweiten bogenförmigen Teils (723) und das Zentrum des ersten bogenförmigen Teils (722) jeweils auf zwei entgegengesetzten Seiten des elastischen Blechs (7) angeordnet sind; das Zentrum des dritten bogenförmigen Teils (724) und das Zentrum des zweiten bogenförmigen Teils (723) jeweils auf zwei entgegengesetzten Seiten des elastischen Blechs (7) angeordnet sind.
  8. Downlight nach Anspruch 7, wobei die verformbaren Platten (72) weiter einen ersten kraftauftragenden Teil (725) umfassen, der mit dem dritten bogenförmigen Teil (724) verbunden ist, der erste Stoßvorsprung (721) auf dem ersten kraftauftragenden Teil (725) vorgesehen ist, und der erste Stoßvorsprung (721) zickzackförmig ist, der erste kraftauftragende Teil (725) und die erste Verbindungsplatte (71) zueinander senkrecht sind, und der erste Stoßvorsprung (721) an einem Ende des ersten kraftauftragenden Teils (725) vom dritten bogenförmigen Teil (724) weg angeordnet ist.
  9. Downlight nach Anspruch 6, wobei die Stoßplatte (62) einen Verbindungsteil (622), der mit der zweiten Verbindungsplatte (61) verbunden ist, und einen zweiten kraftauftragenden Teil (623), der mit einem Ende des Verbindungsteils (622) von der zweiten Verbindungsplatte (61) weg verbunden ist, aufweist, der zweite Stoßvorsprung (621) auf dem zweiten kraftauftragenden Teil (623) angeordnet ist; der zweite Stoßvorsprung (621) zickzackförmig ist.
  10. Downlight nach Anspruch 9, wobei die Stoßplatte (62) weiter einen vierten bogenförmigen Teil (624) aufweist, der zwischen dem Verbindungsteil (622) und dem zweiten kraftauftragenden Teil (623) ver-

bunden ist; das Zentrum des vierten bogenförmigen Teils (624) auf einer Seite des Stoßblechs (6) vom Lampenkörper (8) angeordnet ist; der zweite kraftauftragende Teil (623) und die zweite Verbindungsplatte (61) zueinander senkrecht sind.

## Revendications

### 1. Plafonnier, comprenant

un corps de lampe (8) ;  
une plaque de couverture (1) avec une première structure d'enroulement (2) et une deuxième structure d'enroulement (3), dans lequel la première structure d'enroulement (2) et la deuxième structure d'enroulement (3) sont opposées et espacées ; un élément électroluminescent (4) recouvre la première structure d'enroulement (2) et la deuxième structure d'enroulement (3), la première structure d'enroulement (2) comprend une première plaque d'enroulement (21) reliée à la plaque de couverture (1), et un premier déflecteur (22) arrangé à distance de la première plaque d'enroulement (21) ; un espace entre le premier déflecteur (22) et la première plaque d'enroulement (21) est prévu pour le passage d'une première partie de liaison (511), la deuxième structure d'enroulement (3) comprend une deuxième plaque d'enroulement (31) reliée à la plaque de couverture (1), et un deuxième déflecteur (32) arrangé à distance de la deuxième plaque d'enroulement (31); un espace entre le deuxième déflecteur (32) et la deuxième plaque d'enroulement (31) est prévu pour le passage d'une deuxième partie de liaison (521), la plaque de couvercle (1) est pourvue d'un trou de décharge (11) pour le passage du fil électrique (5) ; le trou de décharge (11) est situé entre la première plaque d'enroulement (21) et la deuxième plaque d'enroulement (31) ; le fil électrique (5) s'étend à travers le trou de décharge (11) et est situé entre la première plaque d'enroulement (21) et la deuxième plaque d'enroulement (31) ;  
dans lequel l'élément électroluminescent (4) est installé sur la plaque de couverture (1) ;  
comprenant en outre un fil électrique (5) relié à la plaque de couverture (1), le fil électrique (5) comprenant un premier fil (51), un deuxième fil (52), et une couche de protection (53) gainée à l'extérieur du premier fil (51) et du deuxième fil (52), le premier fil (51) ayant ladite première partie de liaison (511) située à l'extérieur de la couche de protection (53), et le deuxième fil (52) ayant ladite deuxième partie de liaison (521) située à l'extérieur de la couche de protection (53); la première partie de liaison (511) est enroulée

autour de la première structure d'enroulement (2), et la deuxième partie de liaison (521) est enroulée autour de la deuxième structure d'enroulement (3) ; et

un élément de montage déformable situé sur le corps de lampe (8) ;

dans lequel la première plaque d'enroulement (21) comprend une première partie de limitation (211), et une deuxième partie de limitation (212) reliée à une extrémité de la première partie de limitation (211) à l'écart du trou de décharge (11) ; la deuxième plaque d'enroulement (31) comprend une troisième partie de limitation (311), et une quatrième partie de limitation (312) reliée à une extrémité de la troisième partie de limitation (311) à l'écart du trou de décharge (11) ; l'espace entre la première partie de limitation (211) et la troisième partie de limitation (311) est supérieur au diamètre extérieur de la couche de protection (53) ; l'espace entre la deuxième partie de limitation (212) et la quatrième partie de limitation (312) est inférieur au diamètre extérieur de la couche de protection (53) ; la somme des diamètres extérieurs du premier fil (51) et du deuxième fil (52) est inférieure à l'espace entre la deuxième partie de limitation (212) et la quatrième partie de limitation (312).

2. Plafonnier selon la revendication 1, dans lequel la première structure d'enroulement (2) comprend en outre une première plaque de précontrainte (23) reliée à la première plaque d'enroulement (21) ; la première plaque de précontrainte (23) et le premier déflecteur (22) sont parallèles entre eux; un espace entre la première plaque de précontrainte (23) et le premier déflecteur (22) est prévu pour le passage de la première pièce de liaison (511).

3. Plafonnier selon la revendication 2, dans lequel la première plaque de précontrainte (23) et la première plaque d'enroulement (21) sont perpendiculaires l'une à l'autre ; la distance entre le premier déflecteur (22) et la première plaque d'enroulement (21) est inférieure à la longueur de la première plaque de précontrainte (23).

4. Plafonnier selon la revendication 1, dans lequel la deuxième structure d'enroulement (3) comprend en outre une deuxième plaque de précontrainte (33) reliée à la deuxième plaque d'enroulement (31) ; la deuxième plaque de précontrainte (33) et le deuxième déflecteur (32) sont parallèles entre eux; un espace entre la deuxième plaque de précontrainte (33) et le deuxième déflecteur (32) est prévu pour le passage de la deuxième partie de liaison (521).

5. Plafonnier selon la revendication 4, dans lequel la deuxième plaque de précontrainte (33) et la deuxième

me plaque d'enroulement (31) sont perpendiculaires l'une à l'autre ; la distance entre le deuxième déflecteur (32) et la deuxième plaque d'enroulement (31) est inférieure à la longueur de la deuxième plaque de précontrainte (33).

6. Plafonnier selon l'une quelconque des revendications 1 à 5, dans lequel l'élément de montage comprend une feuille de butée (6) et une feuille élastique (7) disposées de manière opposée et espacées sur le corps de lampe (8), et la feuille élastique (7) comprend une première plaque de liaison (71) reliée au corps de lampe (8), et des plaques déformables (72) à deux extrémités opposées de la première plaque de liaison (71) ; une extrémité des plaques déformables (72) à l'écart de la première plaque de liaison (71) est munie d'une première protubérance de butée (721) ; la feuille de butée (6) comprend une deuxième plaque de liaison (61), et une plaque de butée (62) située à deux extrémités opposées de la deuxième plaque de liaison (61) ; une extrémité de la plaque de butée (62) à l'écart de la deuxième plaque de liaison (61) est pourvue d'une deuxième protubérance de butée (621).
7. Plafonnier selon la revendication 6, dans lequel les plaques déformables (72) comprennent une première partie en arc (722) reliée à la première plaque de liaison (71), une deuxième partie en arc (723) reliée à une extrémité de la première partie en arc (722) à l'écart de la première plaque de liaison (71), et une troisième partie en arc (724) reliée à une extrémité de la deuxième partie en arc (723) à l'écart de la première partie en arc (722) ; le centre de la première partie en arc (722) est situé sur un côté de la feuille élastique (7) à l'écart du corps de lampe (8), le centre de la deuxième partie en arc (723) et le centre de la première partie en arc (722) sont respectivement situés sur deux côtés opposés de la feuille élastique (7) ; le centre de la troisième partie en arc (724) et le centre de la deuxième partie en arc (723) sont respectivement situés sur deux côtés opposés de la feuille élastique (7).
8. Plafonnier selon la revendication 7, dans lequel les plaques déformables (72) comprennent en outre une première partie d'application de force (725) reliée à la troisième partie en arc (724), la première protubérance de butée (721) est prévue sur la première partie d'application de force (725), et la première protubérance de butée (721) est en forme de zigzag, la première partie d'application de force (725) et la première plaque de liaison (71) sont perpendiculaires l'une à l'autre, et la première protubérance de butée (721) est située sur une extrémité de la première partie d'application de force (725) à l'écart de la troisième partie en arc (724).

9. Plafonnier selon la revendication 6, dans lequel la plaque de butée (62) comprend une partie de liaison (622) reliée à la deuxième plaque de liaison (61), et une deuxième partie d'application de force (623) reliée à une extrémité de la partie de liaison (622) à l'écart de la deuxième plaque de liaison (61), la deuxième protubérance de butée (621) est située sur la deuxième partie d'application de force (623) ; la deuxième protubérance de butée (621) est en forme de zigzag.
10. Plafonnier selon la revendication 9, dans lequel la plaque de butée (62) comprend en outre une quatrième partie en arc (624) reliée entre la partie de liaison (622) et la deuxième partie d'application de force (623) ; le centre de la quatrième partie en arc (624) est situé sur un côté de la feuille de butée (6) à l'écart du corps de lampe (8) ; la deuxième partie d'application de force (623) et la deuxième plaque de liaison (61) sont perpendiculaires l'une à l'autre.

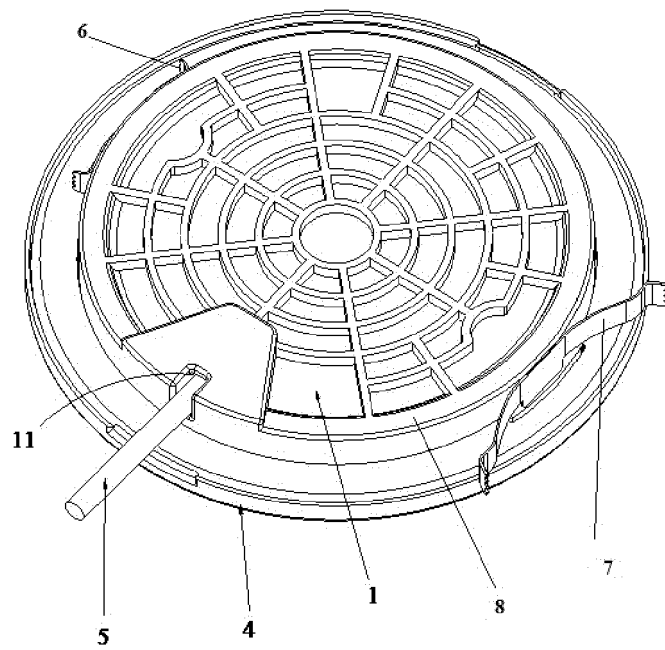


Fig. 1

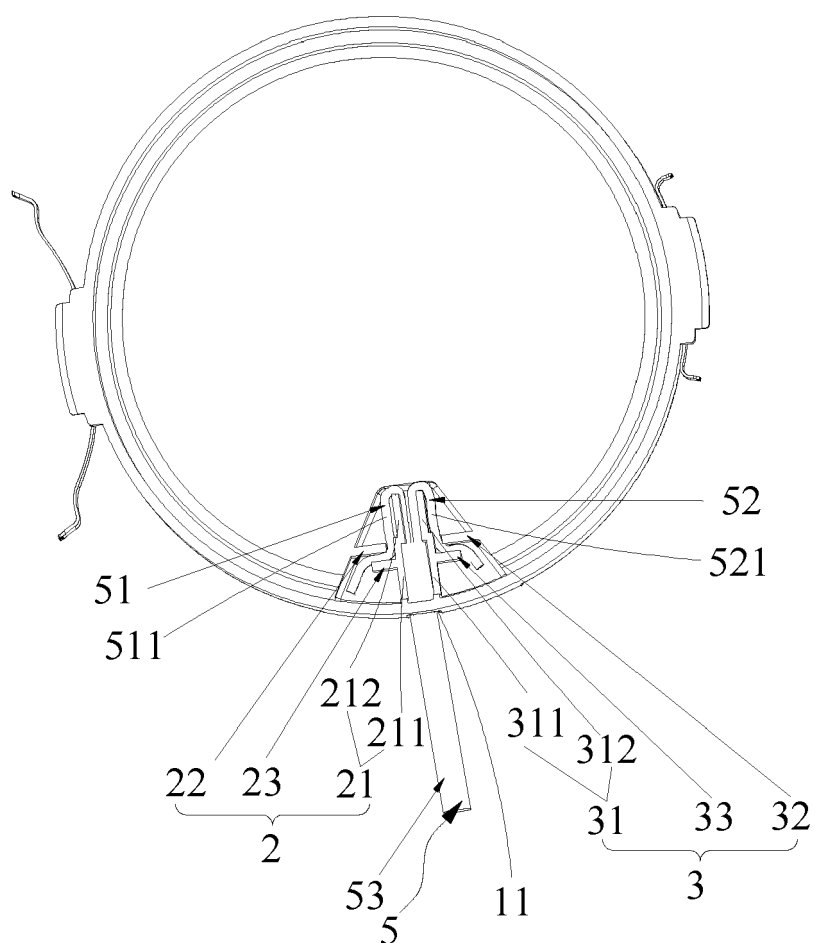


Fig. 2

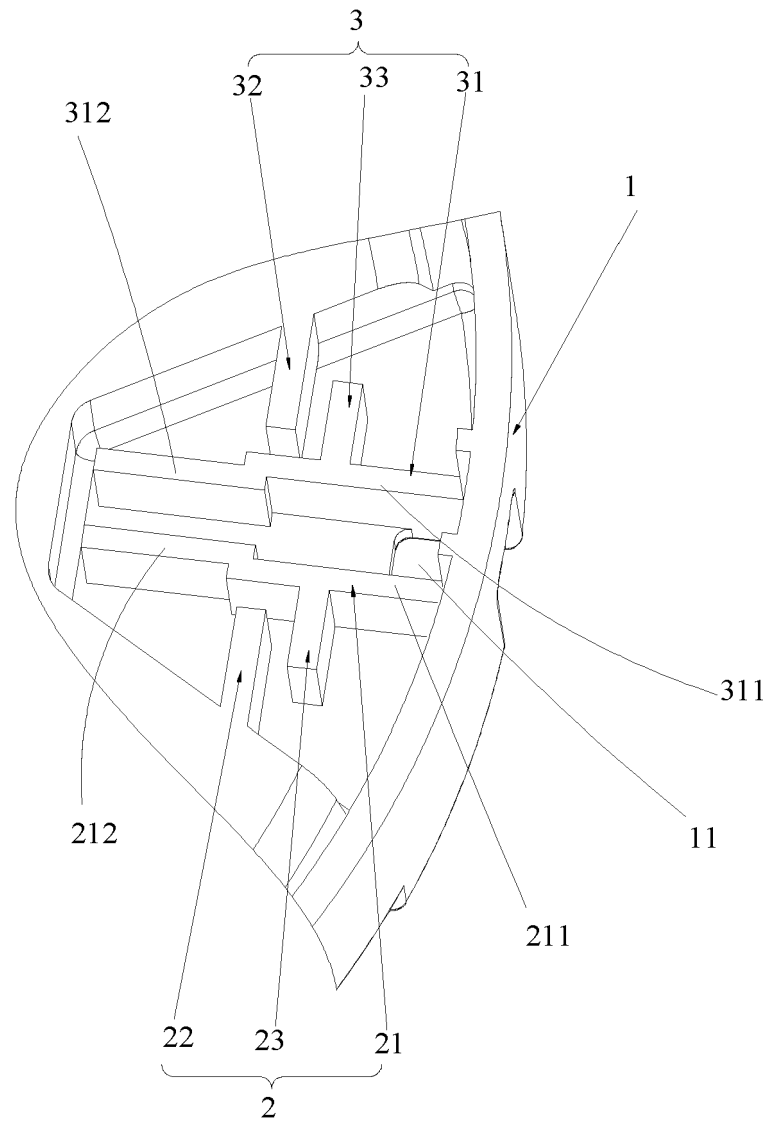


Fig. 3

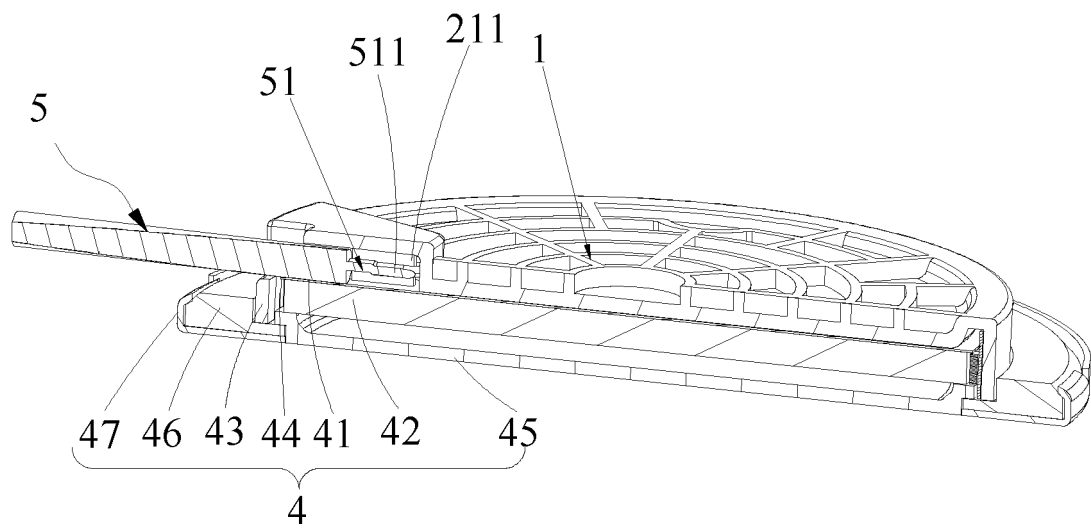


Fig. 4

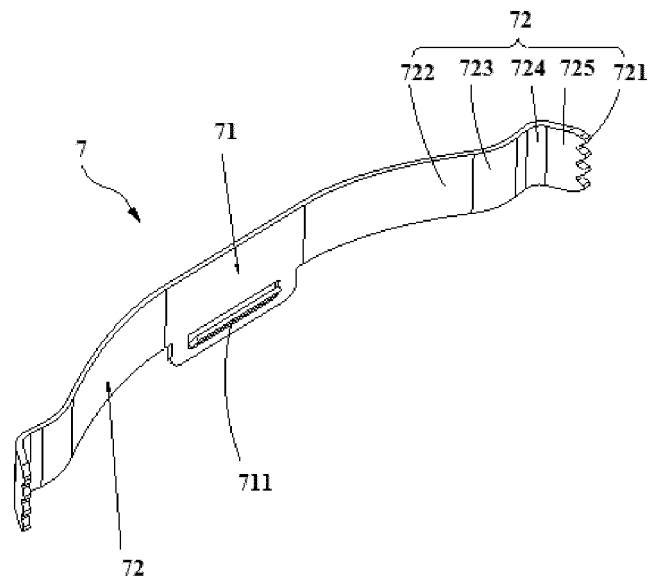


Fig. 5



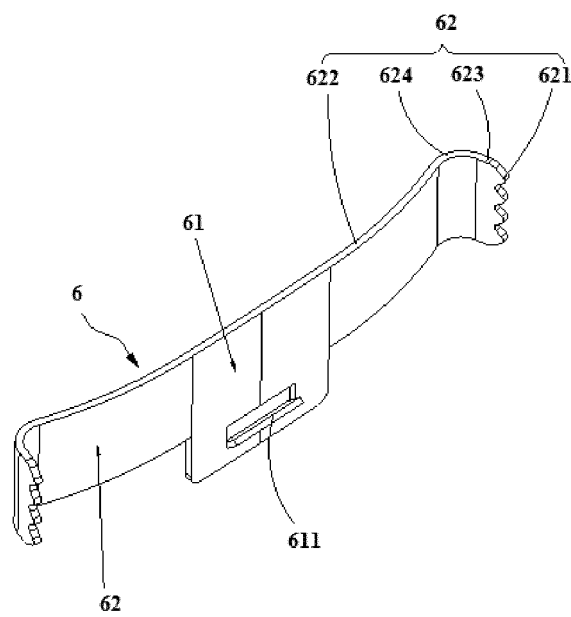


Fig. 6

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2014030277 A [0002]