

(19)



(11)

EP 3 862 053 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.08.2021 Bulletin 2021/32

(51) Int Cl.:
A62B 35/04 (2006.01)

(21) Application number: **20156019.0**

(22) Date of filing: **07.02.2020**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **CARROCCIA, John J.**
Orchard Park, NY 14127 (US)
• **MURRAY, Jeffery L.**
Hamburg, NY 14075 (US)


(74) Representative: **Reichert & Lindner**
Partnerschaft Patentanwälte
Stromerstr. 2A
93049 Regensburg (DE)

(71) Applicant: **On Top Safety, Inc.**
Cheektowaga, NY 14227 (US)

(54) IMPROVED FORCE DAMPER

(57) A force damper arranged to progressively arrest a first force imparted by an object moving in a first direction is disclosed. The force damper includes a housing enclosure having a first housing end and a second housing end. The first housing end includes a first connection point, and the second housing end includes an opening. A driving member is disposed within the housing enclosure and includes a first shaft end, a second shaft end,

and a shaft therebetween. The first shaft end includes a stop and the second shaft end includes a second connection point. A compressible member is disposed within the housing enclosure between the stop and the opening. The compressible member is formed from a material that at least partially undergoes plastic deformation when the first force is arrested and imparts a second force on the stop toward first housing end.

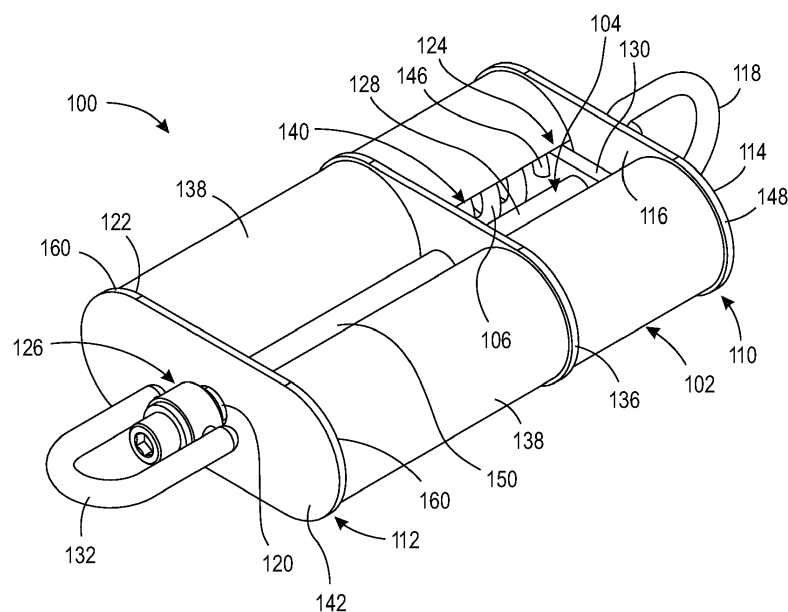**FIG. 2****EP 3 862 053 A1**

Description

FIELD

[0001] The invention broadly relates to a force damper, more specifically to a force damper used as a fall mitigation device, and even more particularly to a force damper used as a fall mitigation device having a single use, collapsible/compressible/compactable resilient member arranged to prevent reuse of the force damper after arresting a falling object, e.g., a roofing construction worker.

BACKGROUND

[0002] Fall prevention and fall arrest systems are known in the art. For example, one such system includes a stretchable shock absorbing lanyard, e.g., Model No. 1340101 PRO™ Stretch Shock Absorbing Lanyard manufactured by Protecta®. The inner core of the device extends from about four and a half feet to about six feet while absorbing energy of a falling object. Although this device may be suitable in some situations, it cannot ensure safety in situations where the falling height is similar to the height of the object falling, e.g., a worker that is six feet falling off an elevated level of seven feet. However, heretofore, such damper devices were arranged to be reused over and over again.

[0003] Regulations and/or a desire to ensure worker safety have created a need for force damping systems that cannot be used more than a single time as the integrity of a previously used force damper cannot be verified. For example, a force damper used to slow the fall of a three hundred pound object may not perform effectively while slowing the fall of a three hundred pound object a second time, while the same force damper may perform repeatably when slowing the fall of a one hundred fifty pound object. Thus, there is a long-felt need for a force damper that is easy to operate, inexpensive to build, safe for its intended use and that precludes subsequent uses.

SUMMARY

[0004] The present invention broadly comprises a force damper arranged to progressively arrest a first force imparted by an object moving in a first direction, the force damper including a housing, a driving member and a resilient member. The housing includes a first end and a second end, the first end having a first surface, a second surface opposite the first surface and a first connection point secured to the first surface, and the second end having a through bore and a third surface opposingly disposed relative to the second surface. The driving member includes a first end, a second end and a shaft therebetween, the first end comprises a stop and the second end comprises a second connection point. The resilient member is formed from a material that at least partially undergoes plastic deformation when the first

force is arrested. The resilient member is disposed between the stop and the third surface and imparts a second force on the stop toward the second surface.

[0005] The present invention also broadly comprises a force damper arranged to progressively arrest a first force imparted by an object moving in a first direction, the force damper including a housing, a driving member and first and second resilient members. The housing includes a first end and a second end, the first end having a first surface, a second surface opposite the first surface and a first connection point secured to the first surface, and the second end having a through bore and a third surface opposingly disposed relative to the second surface. The driving member includes a first end, a second end and a shaft therebetween, the first end having a stop and the second end having a second connection point. At least one of the first and second resilient members is formed from a material that at least partially undergoes plastic deformation when the first force is arrested. The first and second resilient members are disposed between the stop and the third surface and impart a second force on the stop toward the second surface.

[0006] These and other objects and advantages of the present invention will be readily appreciable from the following description of preferred embodiments of the invention and from the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The nature and mode of operation of the present invention will now be more fully described in the following detailed description of the invention taken with the accompanying drawing figures, in which:

Figure 1 is a side cross sectional view of an embodiment of a present force damper;

Figure 2 is a top perspective view of an embodiment of a present force damper;

Figure 3 is a front perspective, a side elevational and a front elevational view of an embodiment of a plate included in some embodiments of a present force damper;

Figure 4 is a front perspective, a side elevational and a front elevational view of an embodiment of a plate included in some embodiments of a present force damper;

Figure 5 is a front perspective, a side elevational and a front elevational view of an embodiment of a plate included in some embodiments of a present force damper;

Figure 6 is a front perspective, a side elevational and a front elevational view of an embodiment of a tube included in some embodiments of a present force damper;

Figure 7 is a front perspective, a side elevational and a front elevational view of an embodiment of a stop included in some embodiments of a present force

damper;

Figure 8 is a front perspective, a side elevational and a front elevational view of an embodiment of a tube included in some embodiments of a present force damper;

Figure 9 is a front perspective, a side elevational and a front elevational view of an embodiment of a shaft included in some embodiments of a present force damper;

Figure 10 is a front perspective and a front elevational view of an embodiment of a resilient member included in some embodiments of a present force damper;

Figure 11 is a front perspective view of an embodiment of a connection point included in some embodiments of a present force damper;

Figure 12 is a front perspective view of an embodiment of a connection point included in some embodiments of a present force damper;

Figure 13 is a side cross sectional view of an embodiment of a present force damper;

Figure 14 is a front elevational view of an embodiment of a present force damper;

Figure 15 is a back elevational view of an embodiment of a present force damper;

Figure 16 is a top perspective view of an embodiment of a present force damper;

Figure 17 is a side cross sectional view of an embodiment of a present force damper;

Figures 18A and 18B are side cross-sectional views of embodiments of a present force damper before (FIG. 18A) and after (FIG. 18B) application of a force upon a driving member shaft;

Figure 19 is a side cross sectional view of an embodiment of a present force damper;

Figure 20 is a side cross sectional view of an embodiment of a present force damper;

Figures 21A and 21B are side cross-sectional views of embodiments of a present force damper before (FIG. 21A) and after (FIG. 21B) application of a force upon a driving member shaft; and,

Figures 22 - 24 are graphical representations of results of drop tests of present embodiments of force dampers described herein.

DETAILED DESCRIPTION

[0008] At the outset, it should be appreciated that like drawing numbers on different drawing views identify identical, or functionally similar, structural elements of the invention. While the present invention is described with respect to what is presently considered to be the preferred aspects, it is to be understood that the invention as claimed is not limited to the disclosed aspects.

[0009] Furthermore, it is understood that this invention is not limited to the particular methodologies, materials and modifications described and as such may, of course, vary. It is also understood that the terminology used here-

in is for the purpose of describing particular aspects only, and is not intended to limit the scope of the present invention, which is limited only by the appended claims.

[0010] Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this invention belongs. Although any methods, devices or materials similar or equivalent to those described herein can be used in the practice or testing of the invention, the preferred methods, devices, and materials are now described.

[0011] It should be understood that use of "or" in the present application is with respect to a "non-exclusive" arrangement, unless stated otherwise. For example, when saying that "item x is A or B," it is understood that this can mean one of the following: (1) item x is only one or the other of A and B; (2) item x is both A and B. Alternately stated, the word "or" is not used to define an "exclusive or" arrangement. For example, an "exclusive or" arrangement for the statement "item x is A or B" would require that x can be only one of A and B. Moreover, as used herein, the phrases "comprises at least one of" and "comprising at least one of" in combination with a system or element is intended to mean that the system or element includes one or more of the elements listed after the phrase. For example, a device comprising at least one of: a first element; a second element; and, a third element, is intended to be construed as any one of the following structural arrangements: a device comprising a first element; a device comprising a second element; a device comprising a third element; a device comprising a first element and a second element; a device comprising a first element and a third element; a device comprising a first element, a second element and a third element; or, a device comprising a second element and a third element. A similar interpretation is intended when the phrase "used in at least one of:" is used herein. Furthermore, as used herein, "and/or" is intended to mean a grammatical conjunction used to indicate that one or more of the elements or conditions recited may be included or occur. For example, a device comprising a first element, a second element and/or a third element, is intended to be construed as any one of the following structural arrangements: a device comprising a first element; a device comprising a second element; a device comprising a third element; a device comprising a first element and a second element; a device comprising a first element and a third element; a device comprising a first element, a second element and a third element; or, a device comprising a second element and a third element.

[0012] It should be appreciated that the term "substantially" is synonymous with terms such as "nearly," "very nearly," "about," "approximately," "around," "bordering on," "close to," "essentially," "in the neighborhood of," "in the vicinity of," etc., and such terms may be used interchangeably as appearing in the specification and claims. It should be appreciated that the term "proximate" is synonymous with terms such as "nearby," "close," "adja-

cent," "neighboring," "immediate," "adjoining," etc., and such terms may be used interchangeably as appearing in the specification and claims. The term "approximately" is intended to mean values within ten percent of the specified value.

[0013] By "non-rotatably connected" elements, we mean that: the elements are connected so that whenever one of the elements rotate, all the elements rotate; and relative rotation between the elements is not possible. Radial and/or axial movement of non-rotatably connected elements with respect to each other is possible, but not required. Additionally, "plastic deformation" is intended to mean instances when a sufficient load is applied to a material that causes a permanent change in shape to that material.

[0014] Adverting now to the figures, it should be appreciated that the figures depict various embodiments of the present force damper. The elevated work surface, e.g., roof, the falling object, e.g., a worker, a tool, a container filled with materials, etc., are not shown in the figures. One of ordinary skill in the art will readily appreciate the type, form and arrangement of each of the foregoing structures and therefore depiction in the figures is unnecessary. For the purpose of clarity in the detailed description, these structures are not included in the figures; however, the structures are discussed herebelow.

[0015] The present invention broadly includes force damper **50** arranged to progressively arrest a first force imparted by an object moving in a first direction, i.e., the direction depicted by arrow **51**. Force damper **50** comprises housing **52**, driving member **54** and resilient member **56**. Housing **52** comprises first end **58** and second end **60**. First end **58** includes first surface **62**, second surface **64** opposite first surface **62** and first connection point **66** secured to first surface **62**. Second end **60** includes through bore **68** and third surface **70** opposingly disposed relative to second surface **64**. Driving member **54** comprises first end **72**, a second end **74** and shaft **76** therebetween. First end **72** comprises stop **78** and second end **74** comprises second connection point **80**. Resilient member **56** is formed from a material that at least partially undergoes plastic deformation when the first force is arrested. Resilient member **56** is disposed between stop **78** and third surface **70**, and imparts a second force on stop **78** toward second surface **64** and on second end **60** toward third surface **70**, as depicted by bi-directional arrow **82**.

[0016] In some embodiments, housing **52** encloses resilient member **56**. In some embodiments, second end **60** of housing **52** comprises block **84**. Block **84** comprises through bore **68** and third surface **70**. In some of these embodiments, block **84** is formed from a urethane material. Thus, block **84** may provide force damping in addition to that of resilient member **56**. It should be appreciated that block **84** may also be formed from a rigid material, e.g., a metal, and in those embodiments block **84** does not provide additional force damping.

[0017] In some embodiments, resilient member **56** is

a resilient polymer, a leaf spring, a shock absorber, and/or a compression spring, e.g., compression spring **86**. In some of these embodiments, resilient member **56** is compression spring **86**, and in some of these embodiments, compression spring **86** is formed from a chrome silicon steel material. In some embodiments, the compression springs described herein are between 4 - 12". In some embodiments, the compression springs described herein may be formed from elastomeric compounds such as elastomeric plastics, etc.

[0018] In some embodiments, force damper **50** further comprises securing line **88** selected from the group of: a rope, a cable, and/or a tether, and securing line **88** may in turn be connected to a harness and/or a belt. Subsequently, the object to be secured, e.g., a worker, a tool, a container, etc., is secured directly to the rope, cable and/or tether, or alternatively, secured directly to the harness and/or belt. It should be appreciated that securing line **88** is depicted as a rope only and that the structure and form of a cable and/or a tether are readily apparent to one having ordinary skill in the art and therefore depiction in the figures is unnecessary. Similarly, depiction of a subsequent harness and/or belt is also unnecessary. It should be further appreciated that various types of securing lines are more suitable for the present force damper, e.g., stretchable and/or shock absorbing ropes, as additional force may be damped by these types of securing lines. However, including such types of securing lines is not required.

[0019] In other embodiments, the present invention broadly includes force damper **100** arranged to progressively arrest a first force imparted by an object moving in a first direction, i.e., the direction depicted by arrow **101**. Force damper **100** comprises housing **102**, driving member **104** and first and second resilient members **106** and **108**, respectively. Housing **102** comprises first end **110** and second end **112**. First end **110** includes first surface **114**, second surface **116** opposite first surface **114** and first connection point **118** secured to first surface **114**. Second end **112** includes through bore **120** and third surface **122** opposingly disposed relative to second surface **116**. Driving member **104** comprises first end **124**, second end **126** and shaft **128** therebetween. First end **124** comprises stop **130** and second end **126** comprises second connection point **132**. At least one of first and second resilient members **106** and **108**, respectively, is formed from a material that at least partially undergoes plastic deformation when the first force is arrested. In other terms, one or both of first and second resilient members **106** and **108**, respectively, undergoes plastic deformation while arresting the first force. Thus, one of the resilient members may be arranged to arrest a portion of the force and display visible, permanent deformation while the other resilient member provides force damping while undergoing only elastic deformation, i.e., temporary shape change with restoration to its original shape after damping is complete. First and second resilient members **106** and **108**, respectively, are disposed between stop

130 and third surface **122**, and impart a second force on stop **130** toward second surface **116** and on second end **112** toward third surface **122**, as depicted by bi-directional arrow **134**.

[0020] In some embodiments, housing **102** further comprises reinforcement plate **136** arranged between first and second ends **110** and **112**, respectively, of housing **102**. In some embodiments, housing **102** at least partially encloses first and second resilient members **106** and **108**, respectively. It should be appreciated that "partially encloses" is depicted in the figures in that tubes **138** include open portions **140** which permit the linear actuation of stop **130** as force damper **100** arrests the first force imparted by the object moving in the first direction. In some embodiments, second end **112** of housing **102** comprises plate **142**. Plate **142** comprises through bore **120**. In some embodiments, force damper **100** further comprises securing line **144** selected from the group of: a rope, a cable, and/or a tether, and securing line **144** may in turn be connected to a harness and/or a belt. Subsequently, the object to be secured, e.g., a worker, a tool, a container, etc., is secured directly to the rope, cable and/or tether, or alternatively, secured directly to the harness and/or belt. It should be appreciated that securing line **144** is depicted as a rope only and that the structure and form of a cable and/or a tether are readily apparent to one having ordinary skill in the art and therefore depiction in the figures is unnecessary. Similarly, depiction of a subsequent harness and/or belt is also unnecessary. It should be further appreciated that various types of securing lines are more suitable for the present force damper, e.g., stretchable and/or shock absorbing ropes, as additional force may be damped by these types of securing lines. However, including such types of securing lines is not required.

[0021] In some embodiments, stop **130** extends perpendicularly from shaft **128** towards first and second resilient members **106** and **108**, respectively. As such, it should be appreciated that stop **130** is positioned between first and second resilient members **106** and **108**, respectively, and second surface **116**.

[0022] In some embodiments, first and second resilient members **106** and **108**, respectively, are formed from a resilient polymer, a leaf spring, a shock absorber, and/or a compression spring, e.g., compression spring **146**. In some of these embodiments, resilient members **106** and **108** are compression spring **146**, and in some of these embodiments, compression spring **146** is formed from a chrome silicon steel material. In some embodiments, the compression springs described herein are between 4 - 12". In some embodiments, the compression springs described herein may be formed from elastomeric compounds such as elastomeric plastics, etc.

[0023] Although the foregoing clearly sets forth the structure and function of various embodiments of the present force damper, a further description of the components of one of the embodiments may be helpful to further understand how the device functions. In various

embodiments, force damper **100** may include a variety of additional components and such components are not required in all embodiments. However, it should be appreciated that it is possible to include all or some of the components described below in a single embodiment if desired.

[0024] In view of the foregoing, force damper **100** may include plate **148**, reinforcement plate **136**, plate **142**, tubes **138**, stop **130**, tube **150**, shaft **128**, resilient members **106** and **108**, and connection points **118** and **132**. When all of the foregoing components are included in force damper **100**, the following non-limiting arrangement is just one of the possibilities. Tubes **138** partially enclose resilient members **106** and **108**. Tubes **138** are passed through openings **152** and **154** in plate **148** and subsequently through openings **156** and **158** in reinforcement plate **136** until ends **160** of tubes **138** abut plate **142**. Connection point **118** is fixedly secured to plate **148**. Stop **130**, which is secured to end **124** of shaft **128**, is positioned within openings **140** of tubes **138** and between resilient members **106** and **108** and plate **148**. The foregoing arrangement permits the linear movement of stop **130** against resilient members **106** and **108** when force damper **100** is arresting a first force imparted by an object moving in a first direction. Reinforcement plate **136** may further include opening **162** wherein tube **150** is passed until it abuts plate **142**. Tube **150** provides an unrestricted passage for shaft **128** during its linear displacement. Moreover, the combination of reinforcement plate **136**, tube **150** and plate **142** strengthens the overall structure of force damper **100**. Plate **142** may include through bore **120** adjacent to the abutment of tube **150**. Through bore **120** provides access to second end **126** of shaft **128** and thereby a means to secure connection point **132** to shaft **128**. As can be appreciated in view of the foregoing, the pathway of force through the device is: connection point **118** to plate **148** to tubes **138** to plate **142** to resilient members **106** and **108** to stop **130** to shaft **128** to connection point **132**. It is this arrangement that permits the damping of force between connection points **118** and **132**, in this particular embodiment.

[0025] The foregoing arrangement results in a force damper that solves problems presented by regulatory agencies and worker safety concerns, i.e., a force damper in a fall mitigation system should only be used one time. The foregoing embodiments provide force damping over a reduced range of travel, e.g., the present force damper travels approximately three to six inches while absorbing the force of a falling object. Heretofore, existing force damping systems required far greater distance to damp the force of a falling object, e.g., two and a half to three feet. It should be appreciated that the present force damper system may be configured to travel lesser or greater lengths depending on the needs of the system. All the various resilient members described above may provide some elastic deformation, the resilient members are selected for particular falling masses that will always impart plastic deformation on at least one of the resilient

members while they arrest a first force imparted by an object moving in a first direction. For example, one set of resilient members may be rated for arresting the force created by a falling object ranging from 100 kilograms (kg) to 150 kg, while a different set of resilient members may be rated for falling objects ranging from 150 kg to 200 kg. It is critical that at least one of the resilient members experiences plastic deformation so that single use of each the devices can be ensured. The plastic deformation of at least one of the resilient members with no return to its original shape/size provides a readily observable characteristic of the present force damper that ensures a user of the device can determine if it has been previously used for its intended purpose, i.e., arresting the force created by an object moving in a first direction.

[0026] Referring now to FIGS. 17 - 24, further present embodiments of a force damper can include, for example, one or more resilient members used in association with a so-called Belleville washer having a frustoconical shape, driving member shafts including accordian-like sinusoidal-like, or helical-like portions that may be elongated and plastically deformed upon application of a force to thereby attenuate the force applied thereto, or so-called compressible/collapsible/compactible crumple zones configured to be compressed/collapsed/compactied to thereby absorb/attenuate a force applied to the driving member shaft. It should be appreciated that while FIGS. 17 - 24 primarily illustrate embodiments of a force damper comprising a single housing and single driving member, etc., such embodiments comprise can more than a single housing and driving member shaft, and, for example, may comprise so-called dual-housing type embodiments.

[0027] As shown in FIG. 17, for example, force damper 200A is arranged to progressively arrest a first force imparted by an object moving in a first direction, i.e., the direction depicted by arrow 202. Force damper 200A comprises housing 204, driving member 206 and resilient member 208. Housing 204 comprises first end 216 and second end 218 and may be fabricated from materials such as steel, aluminum, other lightweight metals, fiberglass, carbon fiber, composites, or combinations thereof. First end 216 includes first surface 220, second surface 222 opposite first surface 220 and first connection point 224 connected to housing 204, for purposes of, for example, securing the force damper to a fixed structure or a fall arrest apparatus. Second end 218 includes through bore 226 and third surface 230 opposingly disposed relative to second surface 222. Driving member 206 comprises first end 232, a second end 234 and driving member shaft 236 therebetween. First end 232 comprises driving member stop 238 and second end 234 comprises second connection point 240 for purposes of, for example, securing an object or person thereto by means of a rope, cable, webbing, lanyard, tear-away lanyard, etc. (not shown). Resilient member 208 is formed from a material that at least partially undergoes plastic deformation when the first force is arrested. Resilient member 208 is

disposed between driving member stop 238 and third surface 230 of housing end wall 228 and imparts a second force on driving member stop 238 toward second surface 222 and on second end 218 toward third surface 230, as depicted by bi-directional arrow 242.

[0028] In some embodiments, housing 204 encloses resilient member 208. In some embodiments, one or more of first end 216 and second end 218 of housing 204 can comprise one or more semi-resilient members 212. Semi-resilient members 212 comprise a through bore allowing driving member shaft 236 to pass therethrough. In some of these embodiments, semi-resilient members 212 are formed from a urethane material which serves to further attenuate a force applied to the driving member 206. In some embodiments, semi-resilient member 212 is composed of 60 durometer urethane, or like compound, having a thickness between 3/8 and 1/2". Thus, semi-resilient members 212 may provide force damping in addition to that of resilient member 208. As shown in FIG. 17, a force damper may further include a so-called Belleville washer 214, which is disposed within housing 204 between driving member stop 238 and end wall 228 of housing 204. Belleville washer 214 has a frustoconical shape and includes a through bore allowing the driving member shaft 236 to pass therethrough. Belleville washer 214 can be formed from a plastically deformable material with no return to its original shape/size, such as a metal, plastics, polymers, from sacrificial/fracturable/frangible materials, or combinations thereof so as to provide a readily observable characteristic as to whether the force damper has been subject to prior use. Along this line, housing 204 may include a viewing window or slit proximate the location of Belleville washer 214 so to allow ready inspection thereof. It should be appreciated that while FIG. 17 illustrates Belleville washer 214 as being disposed between semi-resilient member 212 and end wall 228 of second end 218 of housing 204, it may be positioned otherwise within housing 204 and at any position between end wall 228 and driving member stop 238. In some cases, Belleville washer 214 can be formed of an elastically deformable material that returns to its original shape. Additionally, while FIG. 17 illustrates Belleville washer 214 being positioned such that its concave side is disposed toward end wall 218, it may be positioned such that its concave side is oppositely positioned toward driving member stop 238. Also, while only a single Belleville washer 214 is shown in FIG. 17, more than one Belleville washer 214 may be utilized depending upon the specific application, i.e., the object and/or the amount of force to be attenuated/arrested. Where more than one Belleville washer 214 is utilized, they may be positioned to contact one another in a stacked, or nested-type arrangement, positioned such that they contact one another but do not nest with one another, positioned in such a way that that they do not contact one another, e.g. on opposite ends of housing 204, or combinations thereof depending upon the specific application.

[0029] In some embodiments, resilient member 208 is

a resilient polymer, a leaf spring, a shock absorber, and/or a compression spring, e.g., compression spring **210**. In some of these embodiments, resilient member **208** is compression spring **210**, and in some of these embodiments, compression spring **210** is formed from a chrome silicon steel material. In some embodiments, the compression springs described herein are between 4 - 12". In some embodiments, the compression springs described herein may be formed from elastomeric compounds such as elastomeric plastics, etc.

[0030] In some embodiments, force damper **220A** further comprises a securing line (not shown) selected from the group of: rope, cable, webbing, tether, lanyard, tear-away lanyard, combinations thereof, etc., and the securing line may in turn be connected to a harness and/or a belt. Subsequently, the object to be secured, e.g., a worker, a tool, a container, etc., is secured directly to the securing line rope, cable and/or tether, or alternatively, secured directly to the harness and/or belt. It should be further appreciated that various types of securing lines may be more suitable for the present force damper, e.g., stretchable and/or shock absorbing ropes, tear away lanyards, as additional force may be damped by these types of securing lines. However, including such types of securing lines is not required.

[0031] As shown in FIGS. 18A - 20, force dampers **200B - 200D** are substantially similar to force damper **220A**, but are primarily different in that they can include differently configured driving member shafts **236**, which are configured to be elongated upon application of a sufficient force in the first direction **202**. That is, as force dampers **200A - 200D** include similar structural elements, discussion of such similar structural elements is not re-presented herein, and the following description is substantially limited to a discussion of the differences between embodiments **200A - 200D**.

[0032] As shown in FIGS. 18A - 20 force dampers **200B - 200D** are generally configured to comprise plastically deformable and elongatable driving member shafts **236** including accordian/sinusoidal/helical-like portions **237** positioned between driving member first end **232** and driving member second end **234**. As may be appreciated, in such embodiments, the driving member shaft **236** can be formed from a plastically deformable material that does not allow return to its original shape/size, such as a metal or certain polymers, from other sacrificial/non-reusable materials, or combinations thereof so as to provide a readily observable characteristic as to whether the force damper has been subject to prior use. As may be further appreciated, housing **204** may include a viewing window or slit proximate location of accordian/sinusoidal/helical-like portions **237** so to allow ready inspection thereof (not shown) such that operational state may be readily determined. In some aspects, however, driving member shafts **236** may be elastically deformable such that they substantially return to their original shapes.

[0033] As also shown in FIGS. 18A - 20, in the case of plastically deformable driving member shafts, the driving

member shafts **236** including accordian/sinusoidal/helical-like portions **237** can be formed from a generally flat stock and include accordian-like folded/pleated portions **237** in the case of FIGS. 18A and 18B, square sinusoidal-type portions **237** in the case of FIG. 19, and helical-type portions **237** in the case of FIG 20. As may be appreciated from FIGS. 18A and 18B, for example, prior to a force being applied to driving member shaft **236** including accordian-like folded/pleated portions **237** in first direction **202**, accordian-like folded/pleated portions **237** are maintained in a so-called start position. However, as shown in FIG. 18B, upon application of a sufficient force, accordian-like folded/pleated portions **237** become elongated and are plastically deformed at the ending position shown by way of example in FIG. 18B. Such elongation and plastic deformation serves to both further attenuate/dampen the force applied in the first direction, that may result from a falling object or person, and in the case of plastic deformation, also serves as an indicator that the force damper has been previously utilized. While not shown in any of FIGS 18A - 20, driving member shafts **236** including accordian-like folded/pleated portions **237** can also be configured to include, for example, markings, colored markings, knurling, etching, etc. along a length thereof, for example, proximate through bore **226** of housing, to show whether the force damper has been previously utilized and the driving member shafts **236** elongated and subject to plastic deformation. For example, where the force damper has not been utilized, a colored marking proximate through bore **226** could be green in color to show that the force damper remains available for use, or red to indicate that it has been previously used and should be discarded. Additionally, it should be further appreciated that driving member shafts **236** including accordian/sinusoidal/helical-like portions **237** can be formed of stock of varying thickness and/or varying number of folds/pleats/turns based on the particular application and/or object that is secured thereto. In some embodiments, the driving member shafts **236** are formed from 1/8" steel. Furthermore, as shown in FIGS 18A - 20, force dampers including driving member shafts **236** including accordian/sinusoidal/helical-like portions **237** can also optionally include semi-resilient members **212** and/or Belleville washers **214** (as shown by the dashed lines in such figures).

[0034] Turning now to FIGS. 21A and 21B, force damper **200E**, and other embodiments of force dampers described herein, may be configured to comprise a so-called collapsible/compressible/compactable crush zone configured to reduce or attenuate the amount of force applied in first direction **202**. As shown by way of example in FIGS 21A and 21B, force damper **200E** can be configured to include driving member **206** having a driving member stop **238** having a tapered shape for purposes of contacting a collapsible/compressible/compactable tapered wall **244** of housing **204**. As shown in such figures, collapsible/compressible/compactable tapered wall **244** can include, for example, channels or interstitial

portions **248** disposed between structural portions **244** thereof such that upon action by the tapered driving member stop **238**, such walls may collapse/compress/compact upon themselves and/or may be partially directionally disposed toward second end **218** as shown in FIG. 21B. As may be appreciated, such so-called collapsible/compressible/compactable crush zones may be configured to comprise a structural member of the housing, e.g., a wall of the housing itself, or may be configured to comprise a member or zone secured, disposed on, or adhered to an inner wall of housing **204**. As may be further appreciated, collapsible/compressible/compactable zone **244** may be formed of metals, polymers, foams, resilient materials, fracturable or frangible materials, or combinations thereof. Additionally, while FIGS. 21A and 21B illustrate a force damper as comprising a so-called collapsible/compressible/compactable crush zone only, such zones may be used in association with one or more of the force damper embodiments or aspects thereof previously discussed herein. Walls of the housing and/or tapered wall **244** may also be configured in a stepped fashion, for example, to ensure that a collapsible/compressible/compactable member or zone secured, disposed on, or adhered to an inner wall of housing **204** is not dislodged as a result of the application of a force in the first direction.

[0035] Referring now to FIGS. 22 - 24, which are graphical illustrations of drop tests performed according ANSI Z359 requirements in order to assess the dampening or attenuation of force provided by force dampers in accordance with the instant disclosure. In each of the drop tests of FIGS 22 - 24, a 282 pound weight was utilized, the weight dropped from a same height free and clear of obstructions, and each force damper included a driving member shaft including an accordion-like folded portion as shown, for example, in FIGS. 18A and 18B. In some tests, one or more of a Belleville washer and/or one or more urethane semi-resilient members were utilized. As shown in FIG. 22, a dual housing/double spring force damper utilizing a 10" tear away/ripstop-type lanyard exhibited a Maximum Arresting Force (MAF) = 1728.1 pounds and an Average Arresting Force (AAF) = 854.6 pounds. As shown in FIG. 23, a single housing/single spring force damper utilizing a 10" tear away/ripstop-type lanyard exhibited a Maximum Arresting Force (MAF) = 1240.8 pounds and an Average Arresting Force (AAF) = 808.9 pounds. Finally, as shown in FIG. 24, a dual housing/double spring force damper utilizing a 12" tear away/ripstop-type lanyard exhibited a Maximum Arresting Force (MAF) = 1172.1 pounds and an Average Arresting Force (AAF) = 781.4 pounds. The aforementioned tests indicate that a force damper in accordance with instant disclosure comprises an improvement over currently known force dampers.

[0036] Thus, it is seen that the objects of the present invention are efficiently obtained, although modifications and changes to the invention should be readily apparent to those having ordinary skill in the art, which modifica-

tions are intended to be within the spirit and scope of the invention as claimed. It also is understood that the foregoing description is illustrative of the present invention and should not be considered as limiting. Therefore, other embodiments of the present invention are possible without departing from the spirit and scope of the present invention.

Parts List

[0037]

50	Force Damper
51	1 st Direction/Force
52	Housing
54	Driving Member
56	Resilient Member
58	1 st End
60	2 nd End
62	1 st Surface
64	2 nd Surface
66	1 st Connection Point
68	Through bore
70	3 rd Surface
72	Driving Member 1 st End
74	Driving Member 2 nd End
76	Driving Member Shaft
78	Driving Member Stop
80	2 nd Connection Point
82	2 nd Direction/Force
84	Block
86	Compression Spring
88	Securing Line
100	Force Damper
101	Direction/Force
102	Housing
104	Driving Member
106	1 st Resilient Member
108	2 nd Resilient Member
110	Housing 1 st End
112	Housing 2 nd End
114	1 st Surface
116	2 nd Surface
118	1 st Connection Point
120	Through bore
122	3 rd Surface
124	Driving Member 1 st End
126	Driving Member 2 nd End
128	Driving Member Shaft
130	Driving Member Stop
132	2 nd Connection Point
134	2 nd Direction/Force
136	Reinforcement Plate
138	Tube(s)
140	Tube Open Portion
142	2 nd End Plate
144	Securing Line
146	Compression Spring

148 1st End Plate
 150 Tube
 152 Opening
 154 Opening
 156 Opening
 158 Opening
 160 Tube 138 End
 162 Opening
 200A - 200E Force Damper
 202 1st Direction/Force
 204 Housing
 206 Driving Member
 208 Resilient Member
 210 Compression Spring
 212 Semi-Resilient Member (Washer)
 214 Belleville Washer
 216 1st End
 218 2nd End
 220 1st Surface
 222 2nd Surface
 224 1st Connection Point
 226 Through Bore
 228 End Wall
 230 3rd Surface
 232 Driving Member 1st End
 234 Driving Member 2nd End
 236 Driving Member Shaft
 237 Accordion/Sinusoidal/Helical-like Portion
 238 Driving Member stop
 240 2nd Connection Point
 242 2nd Direction/Force
 244 Collapsible/Compressible/Compactable Portion
 246 Structural Portion
 248 Interstitial Portion

Claims

1. A force damper arranged to progressively arrest a first force imparted by an object moving in a first direction, the force damper comprising:
- a housing enclosure comprising a first housing end and a second housing end, the first housing end including a first connection point, and the second housing end including an opening;
- a driving member disposed within the housing enclosure and comprising a first shaft end, a second shaft end, and a shaft therebetween, the first shaft end comprising a stop and the second shaft end comprising a second connection point; and,
- a compressible member disposed within the housing enclosure between the stop and the opening, the compressible member formed from a material that at least partially undergoes plastic deformation when the first force is arrested

and imparts a second force on the stop toward first housing end.

2. The force damper of Claim 1, wherein the compressible member comprises one or more of a compression spring, a semi-resilient member, a Belleville-type washer, or a collapsible/compressible/compactable crush zone.
3. The force damper of Claim 2, comprising a compression spring, a semi-resilient member, and a Belleville-washer, the second housing end opening comprising a through bore in an end wall thereof, and the second shaft end passes through the through bore.
4. The force damper of Claim 3, wherein the semi-resilient member and the Belleville washer are disposed between the stop and the end wall.
5. The force damper of claim 4 comprising first and second semi-resilient members, wherein the first semi-resilient member is disposed between a first terminal end of the compression spring and the stop, and the second semi-resilient member is disposed between a second terminal end of the compression spring opposite the first end, and the endwall.
6. The force damper of claim 1, wherein the driving member shaft includes an elongatable portion disposed between the first shaft end and the second shaft end, which is elongatable in the first direction upon application of sufficient force in the first direction to deform the elongatable portion.
7. The force damper of claim 6, wherein the elongatable portion comprises one or more of an accordion-like portion, a sinusoidal-like portion, or a helical-like portion.
8. The force damper of claim 7, wherein the elongatable portion is plastically deformable.
9. The force damper of claim 8, wherein the compressible member comprises a compression spring disposed about the shaft.
10. The force damper of claim 9, further comprising first and second semi-resilient members, wherein the first semi-resilient member is disposed between a first terminal end the compression spring and the stop, and the second semi-resilient member is disposed between a second terminal end of the compression spring opposite the first end and an endwall of the second housing end.
11. The force damper of claim 1, wherein the compressible member comprises a collapsible/compressible

ble/compactable crush zone composed of a structurally normal portion and a structurally weakened portion that is weakened relative to the structurally normal portion.

5

12. The force damper of claim 1, wherein the compressible member comprises a collapsible/compressible/compactable crush zone composed of a structural portion and an interstitial portion.

10

13. The force damper of claim 12, wherein the structural portion and the interstitial portion form a cellular matrix formed of one or more materials that are frangible, or plastically or elastically deformable by the stop upon application of sufficient force in the first direction.

15

14. The force damper of claim 13, wherein the cellular matrix comprises a tapered wall structure disposed on an inner wall of the housing, the stop includes a tapered surface having a shape complementary to the tapered wall structure, and the cellular matrix is formed of one or more materials that are plastically deformable by the stop upon application of sufficient force in the first direction.

20

25

15. The force damper of claim 13, wherein the cellular matrix is formed of one or more a metal, a polymer, rubber, foam, or combinations thereof.

30

35

40

45

50

55

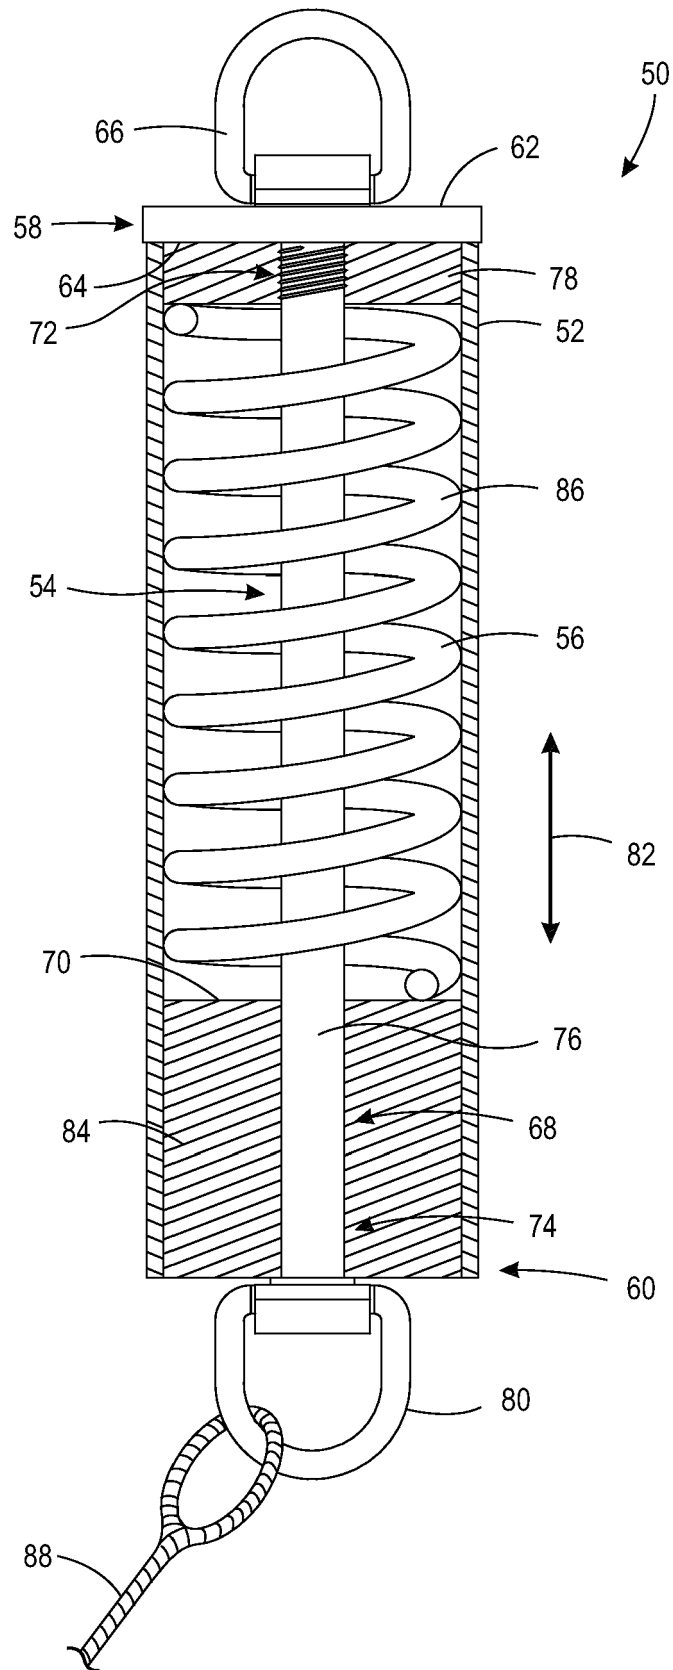


FIG. 1

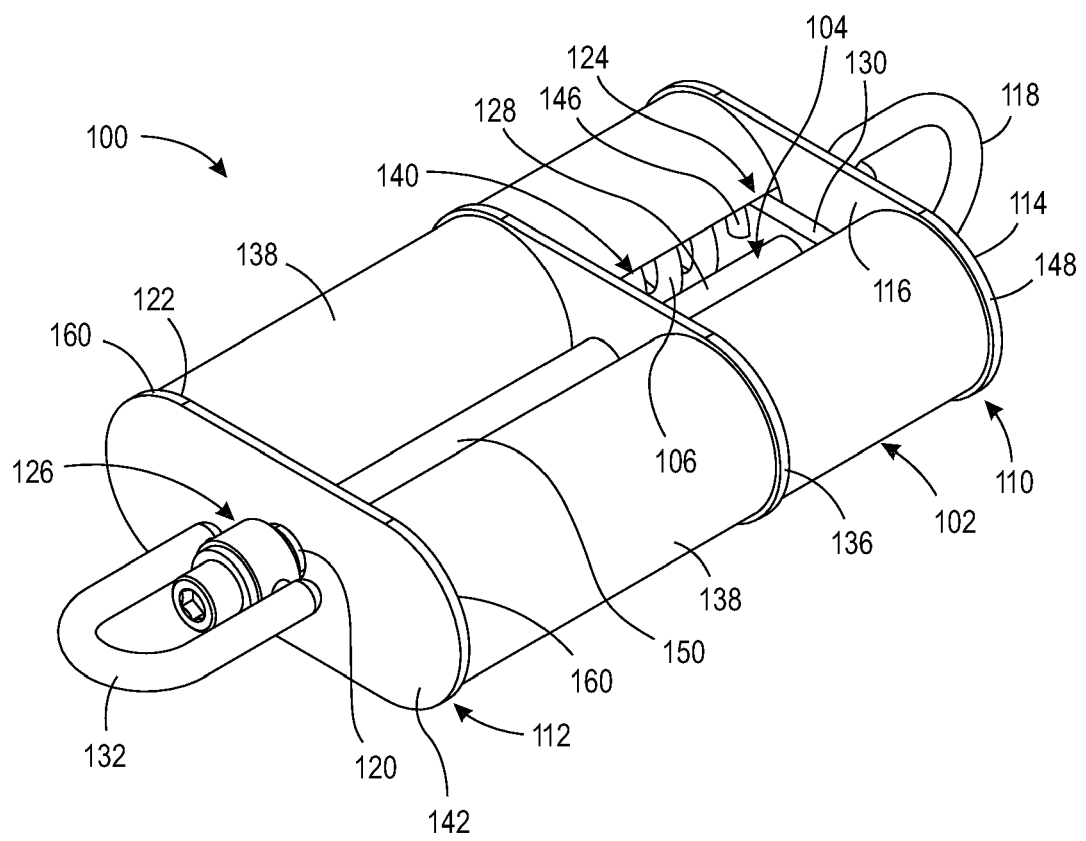


FIG. 2

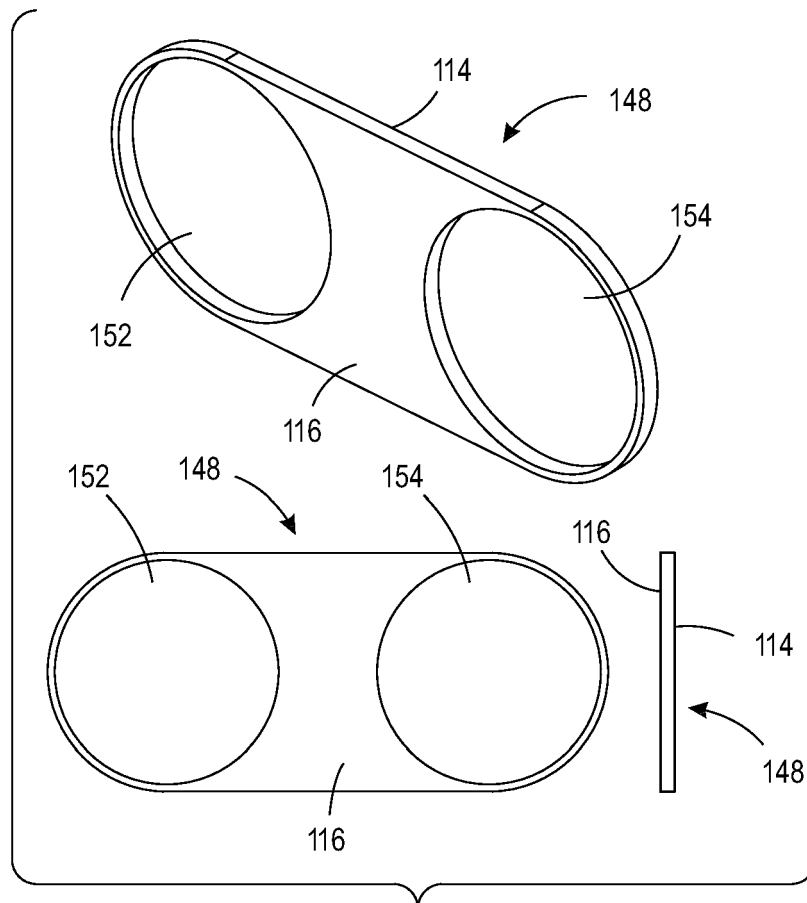


FIG. 3

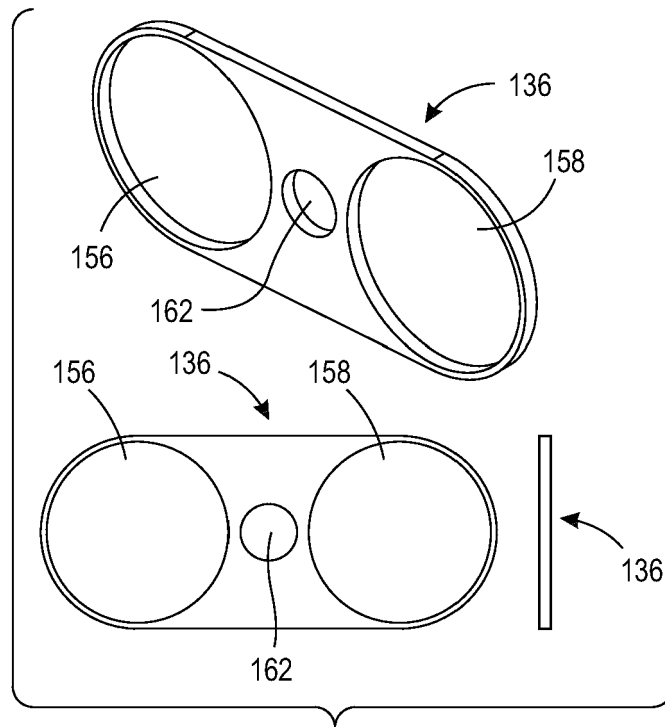


FIG. 4

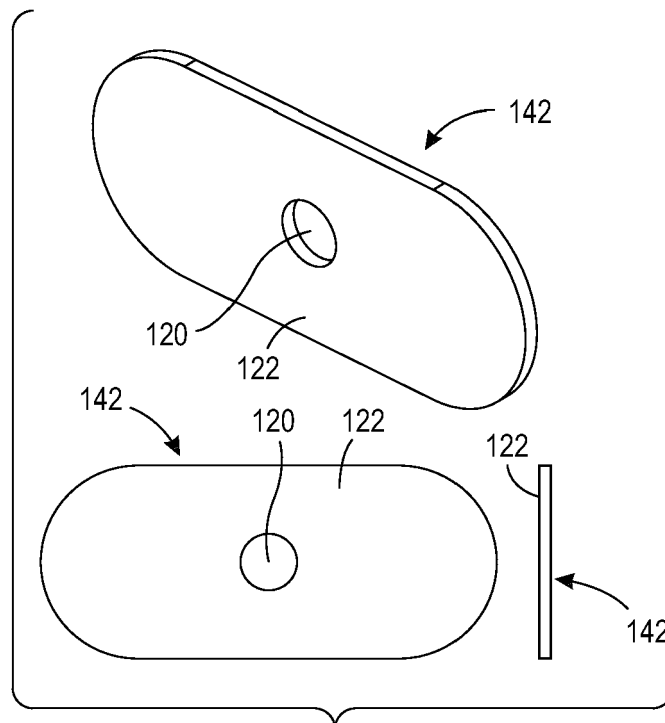


FIG. 5

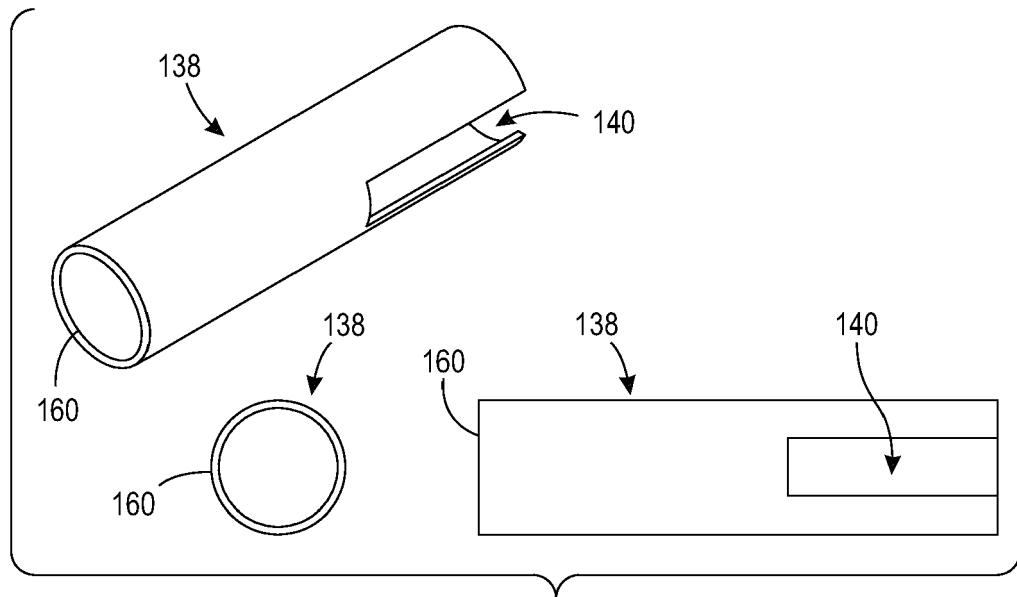


FIG. 6

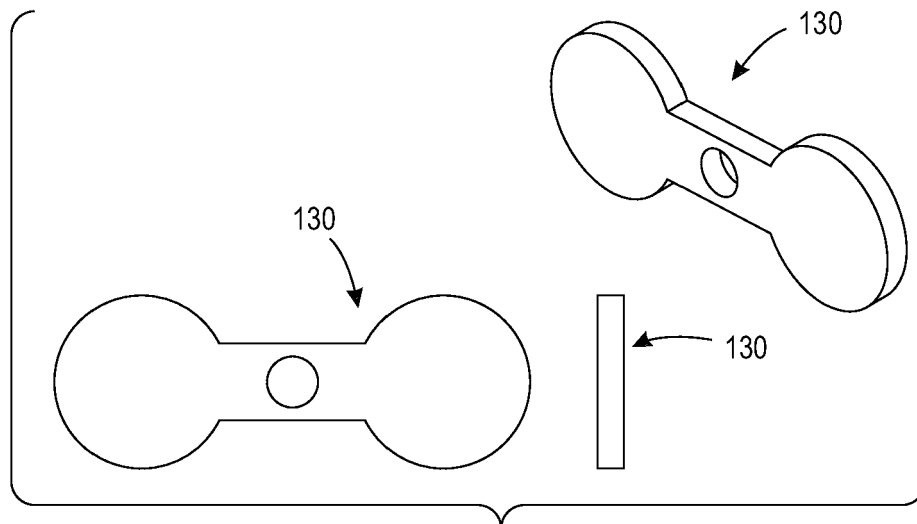


FIG. 7

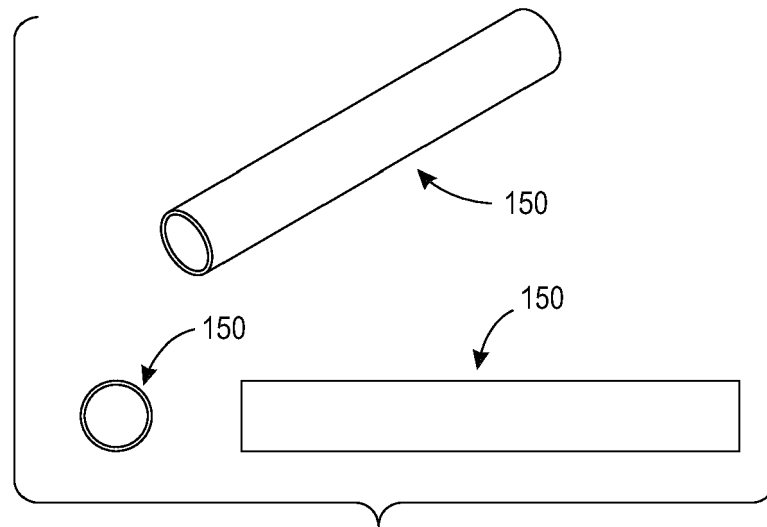


FIG. 8

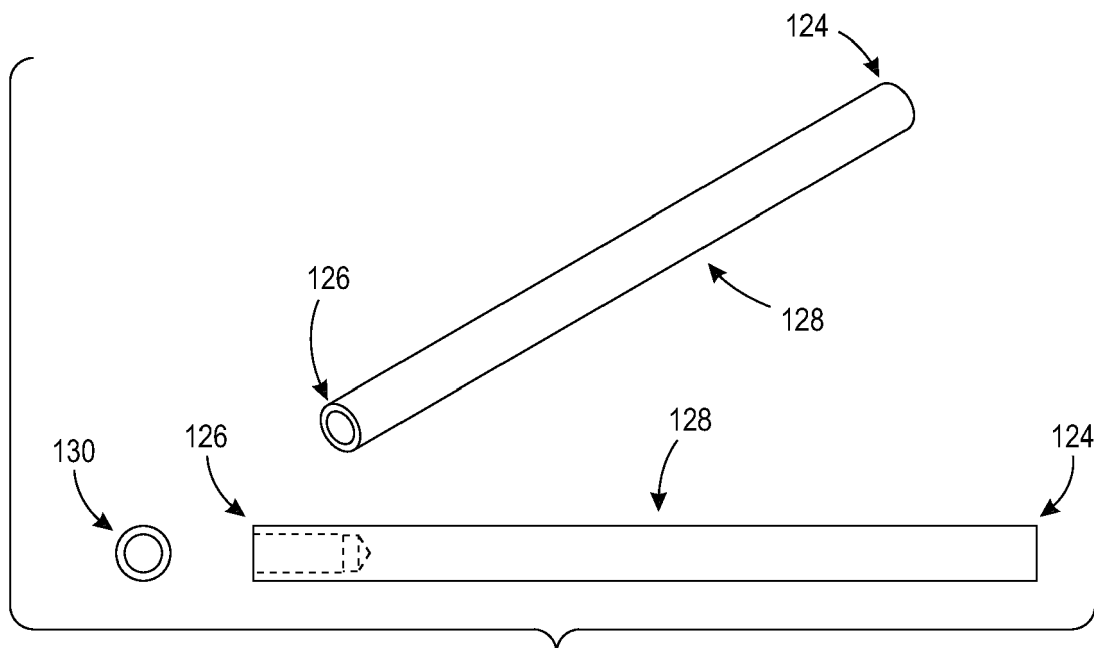


FIG. 9

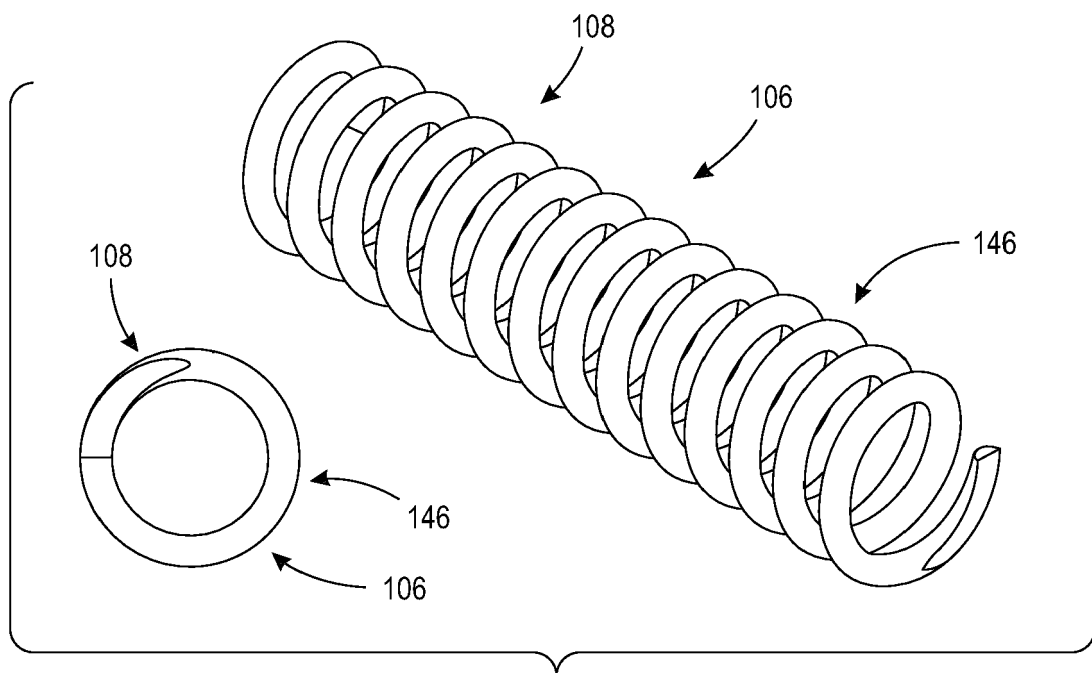


FIG. 10

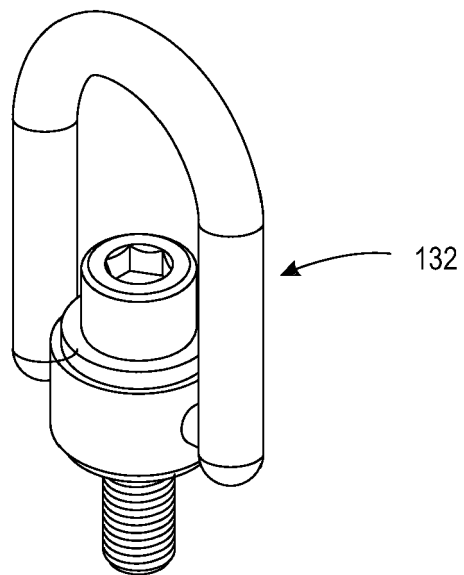


FIG. 11

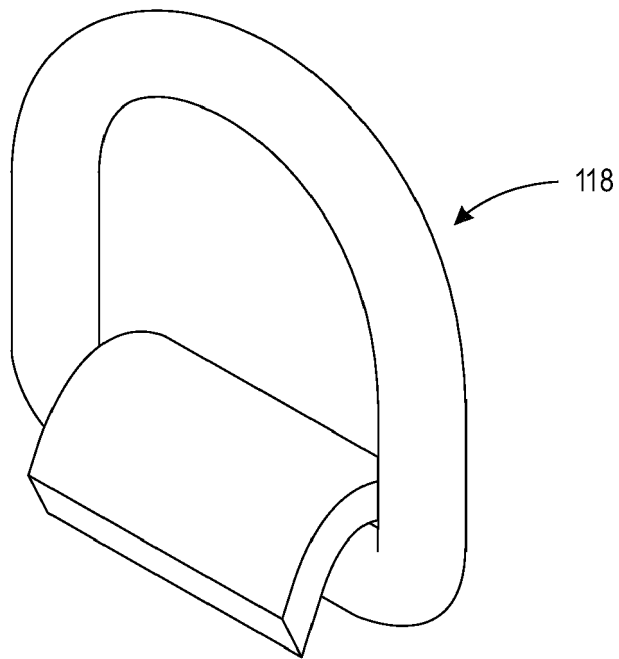


FIG. 12

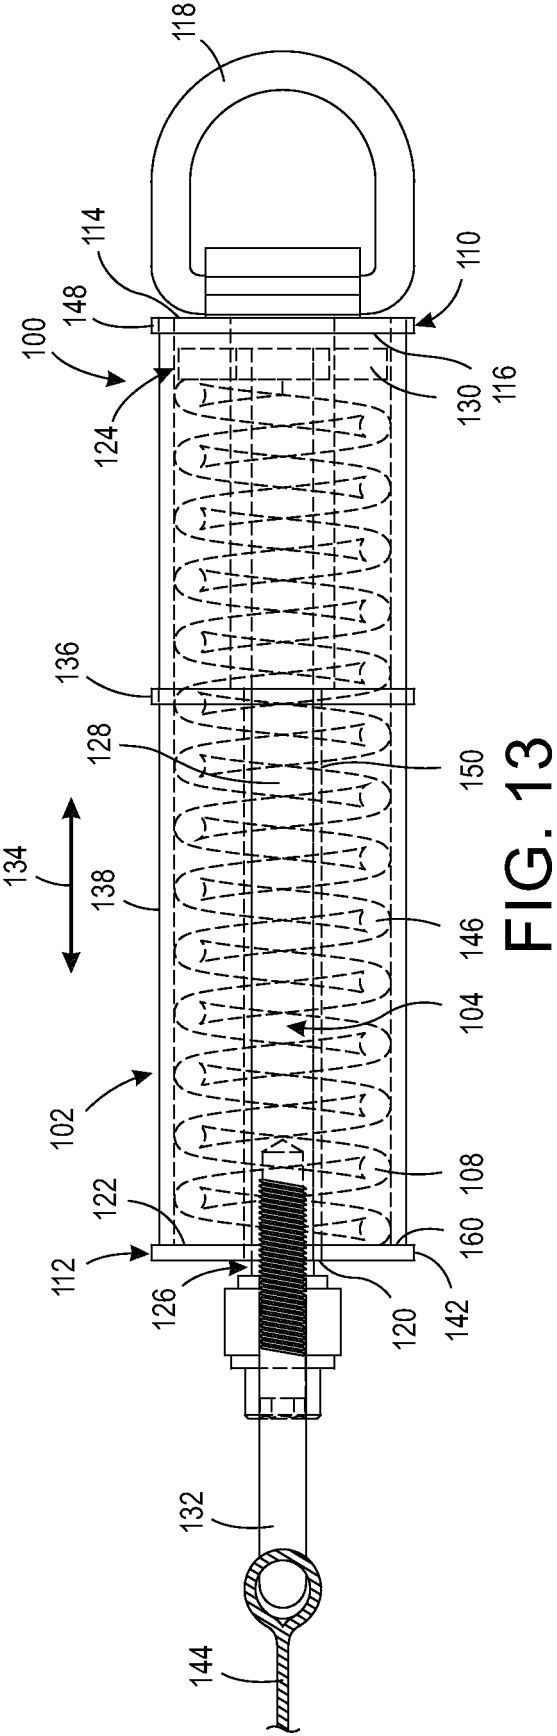


FIG. 13

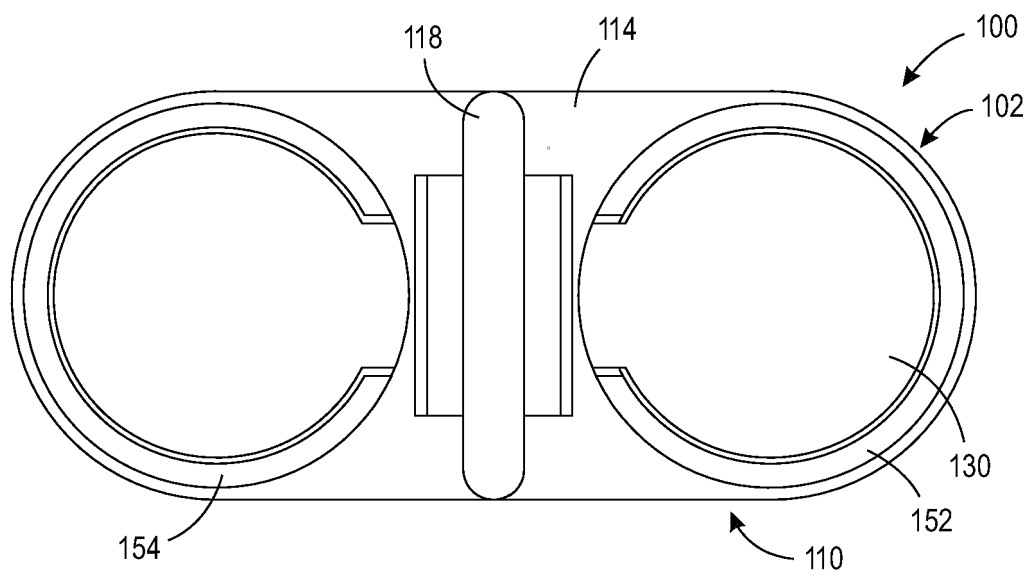


FIG. 14

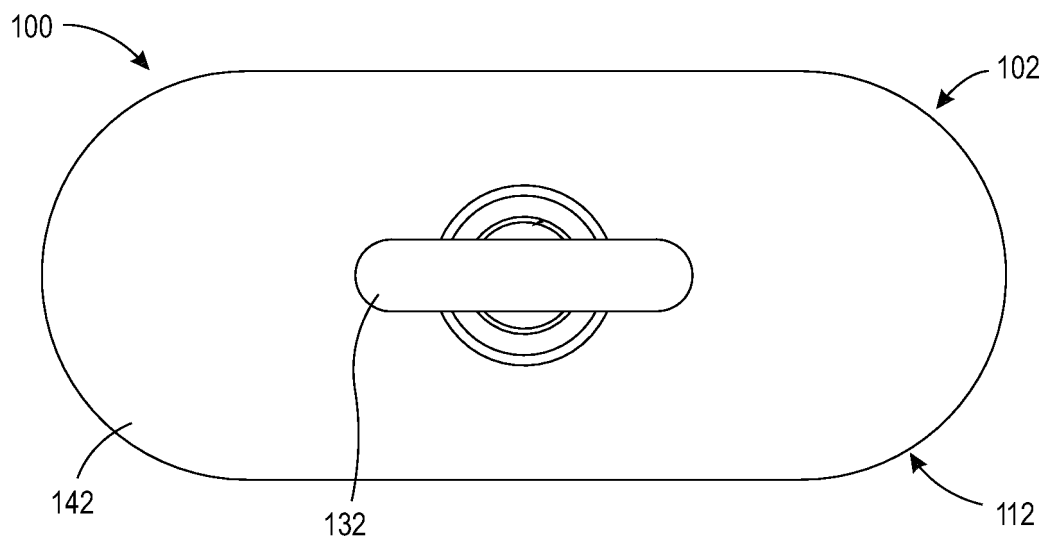


FIG. 15

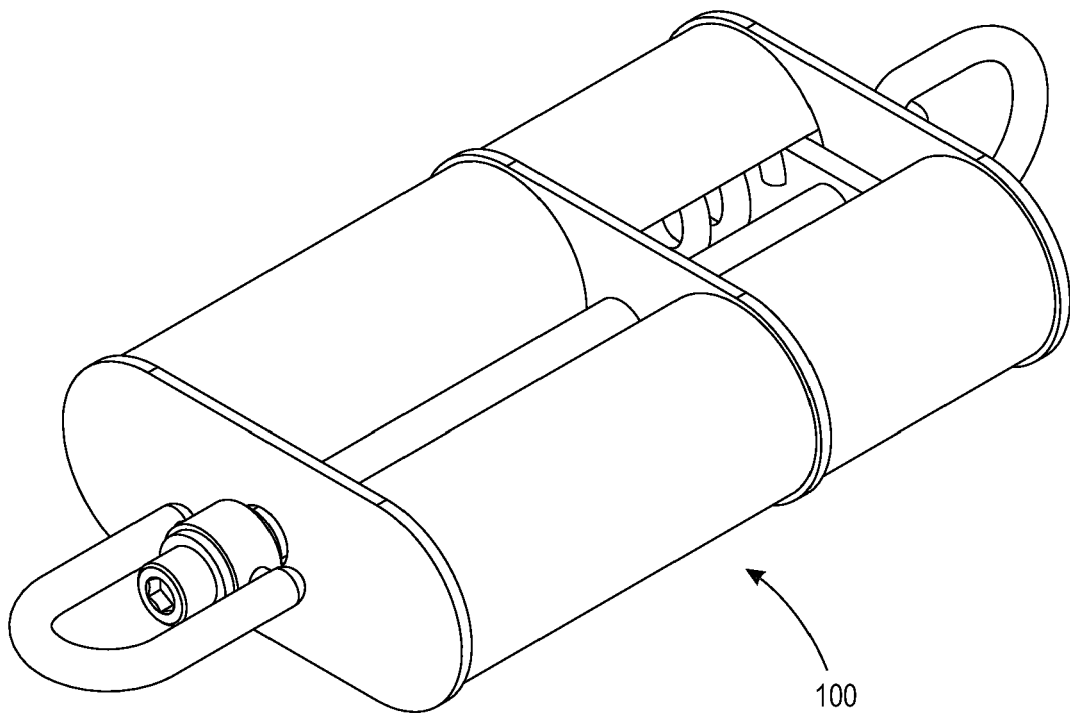


FIG. 16

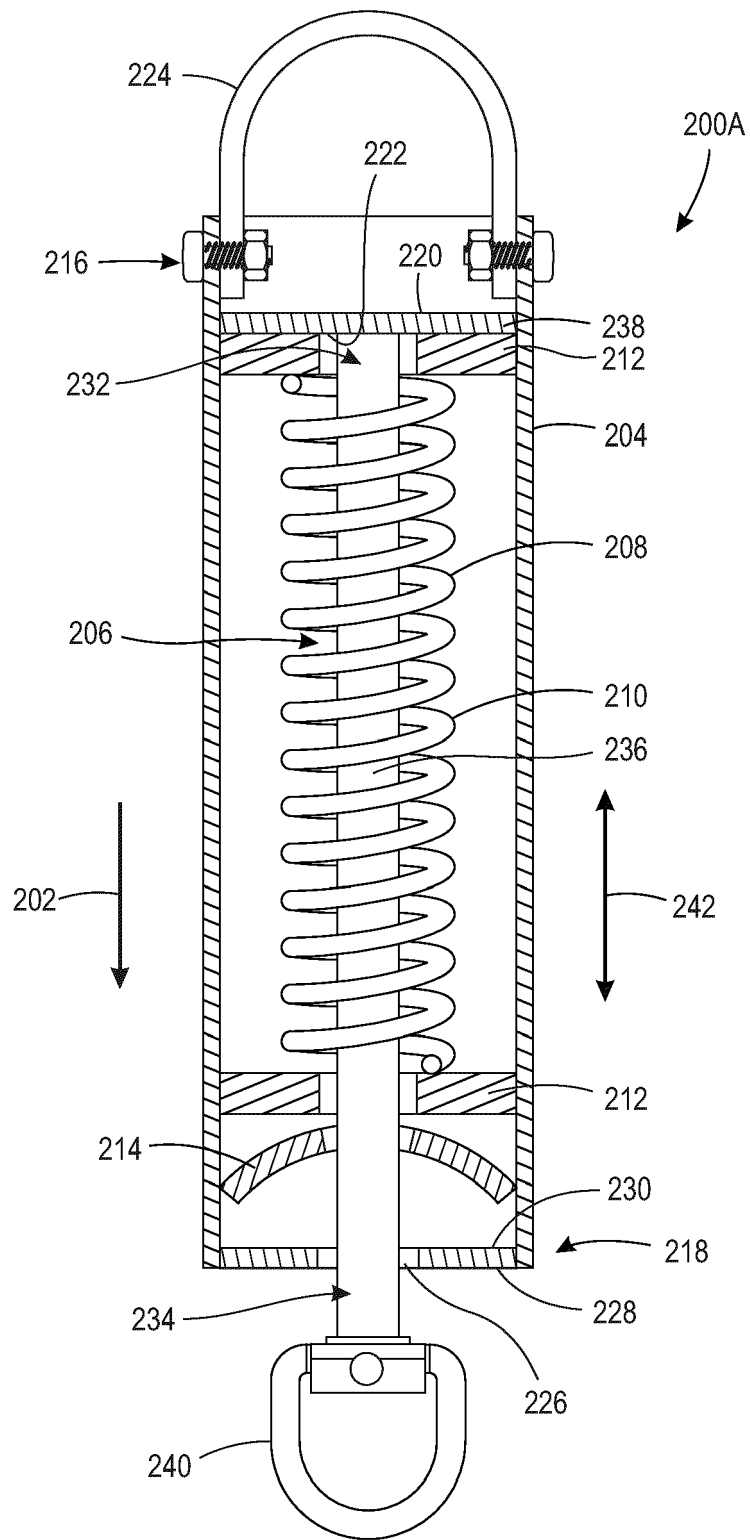


FIG. 17

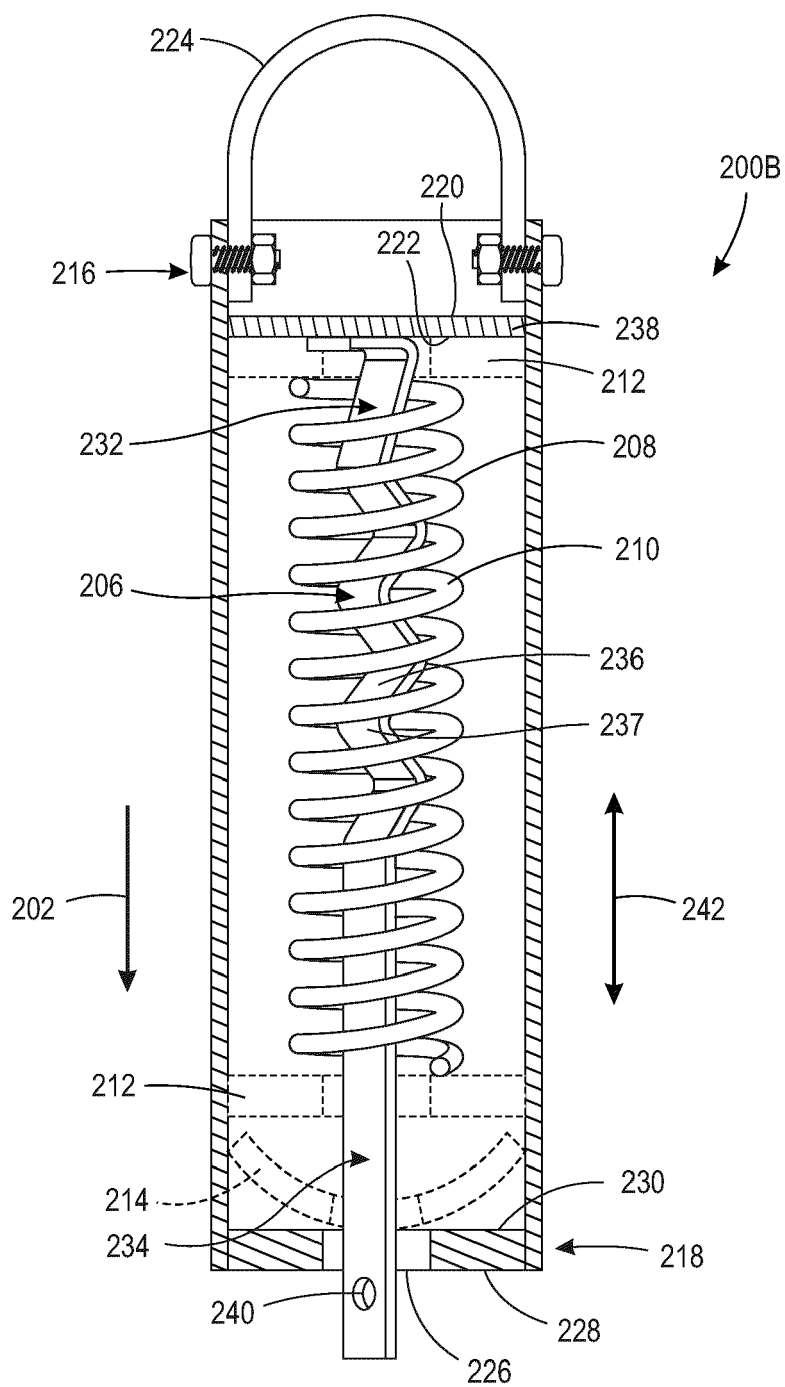


FIG. 18A

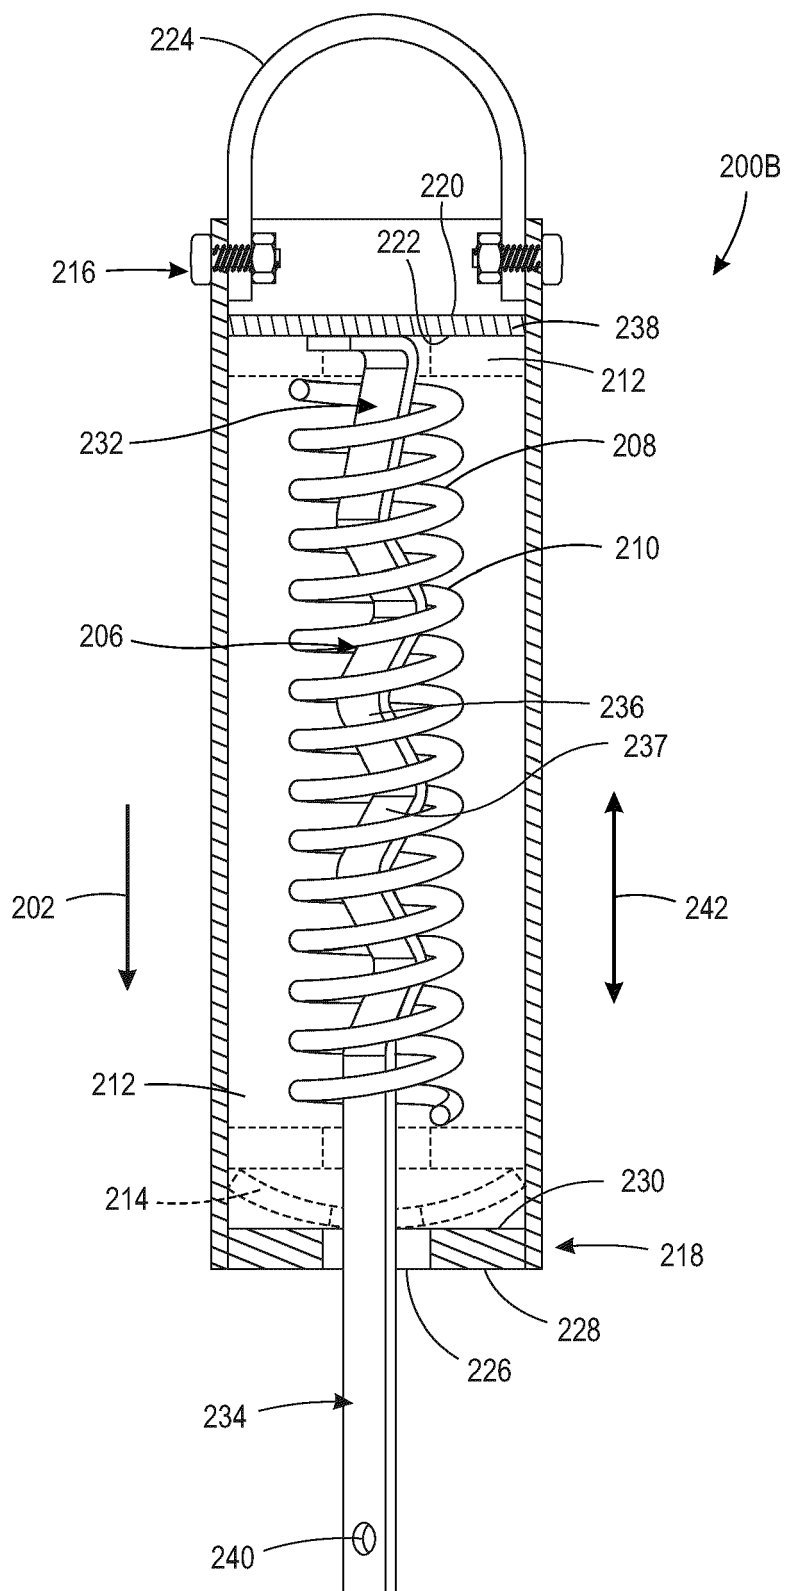


FIG. 18B

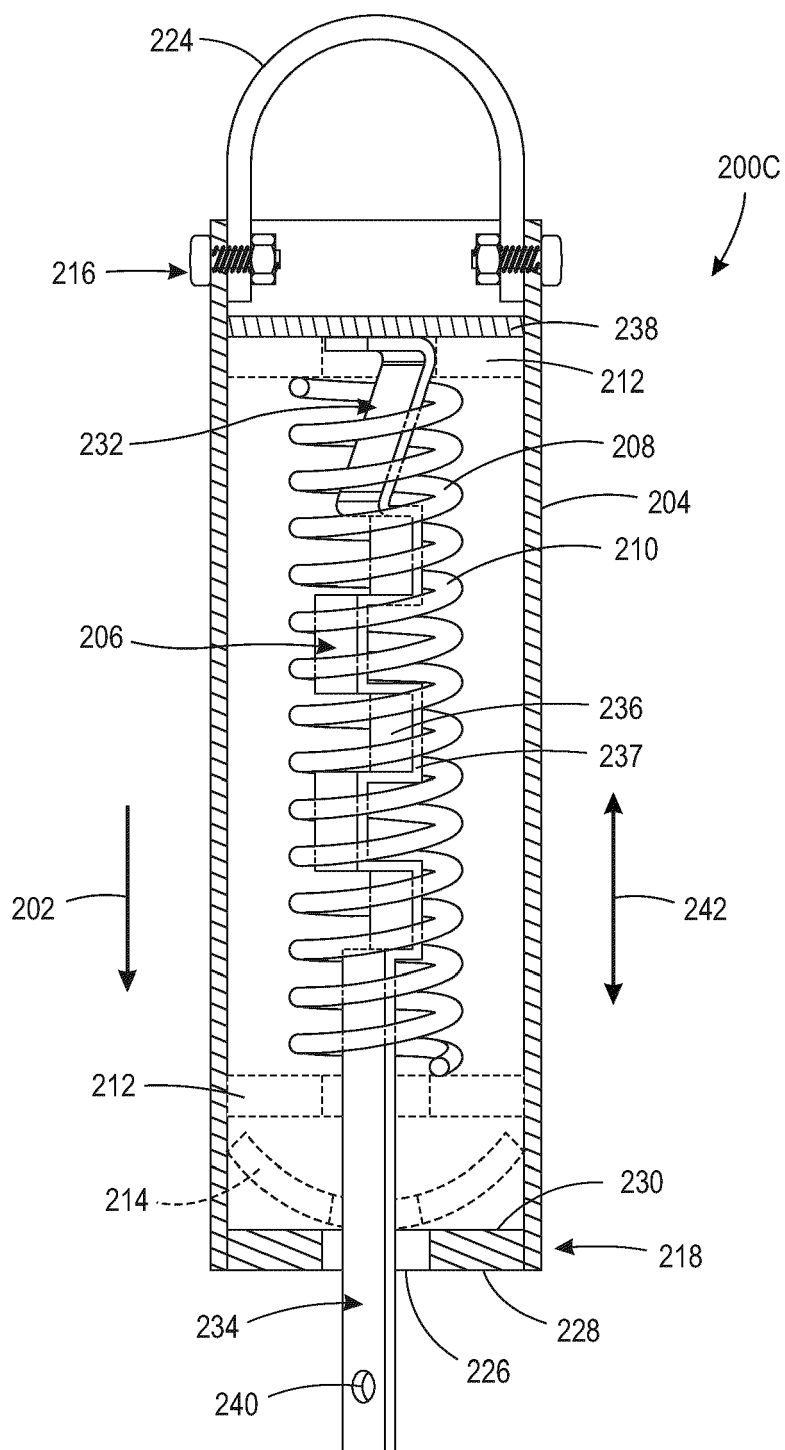


FIG. 19

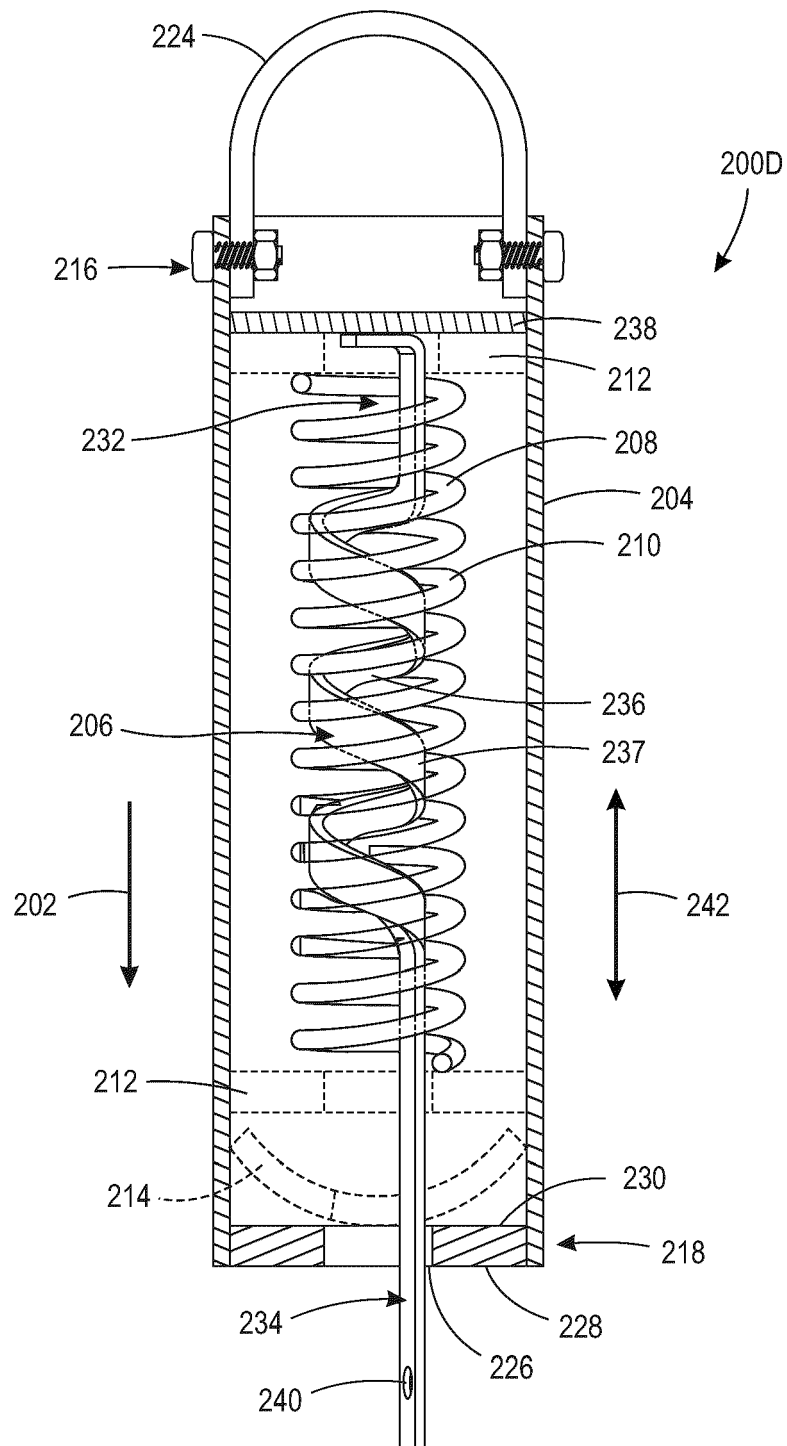


FIG. 20

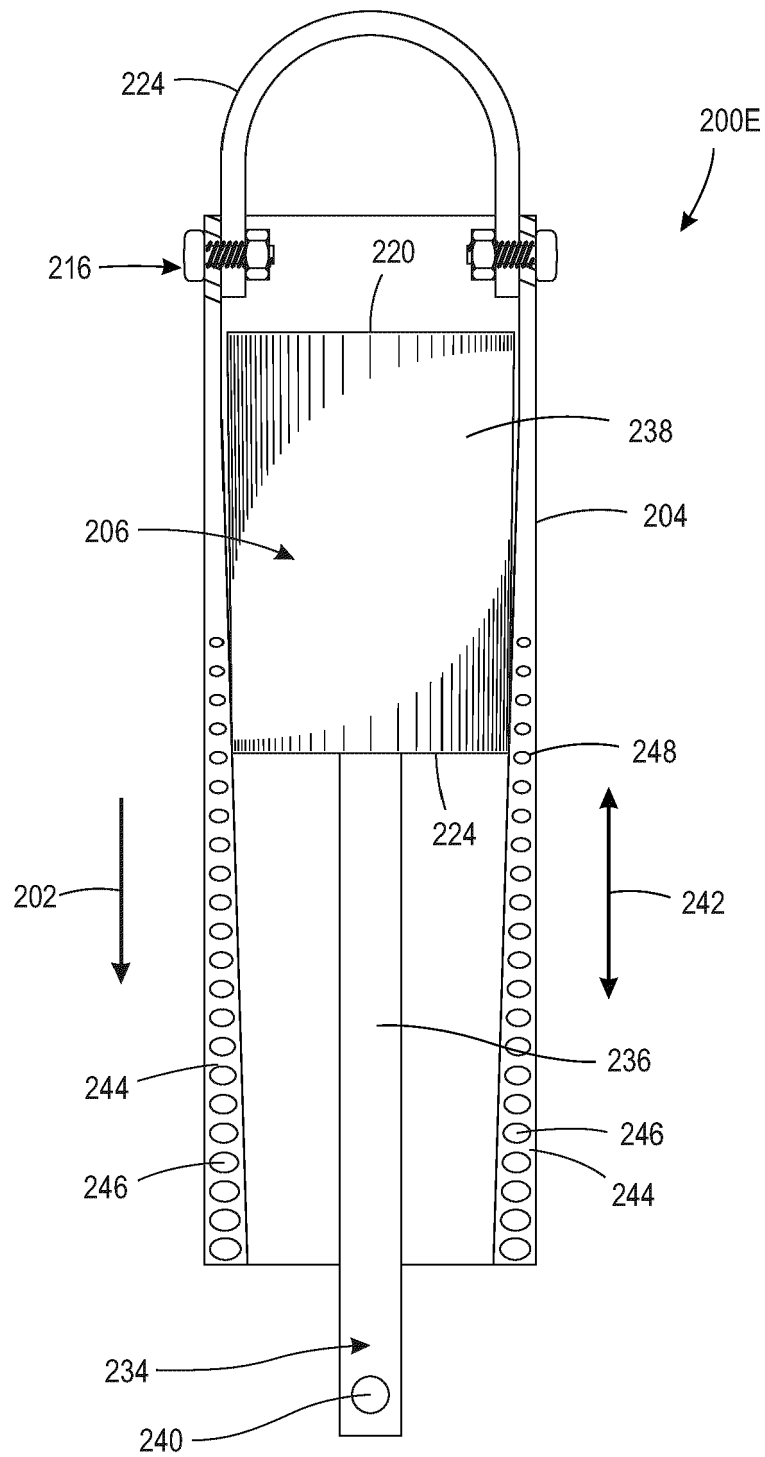


FIG. 21A

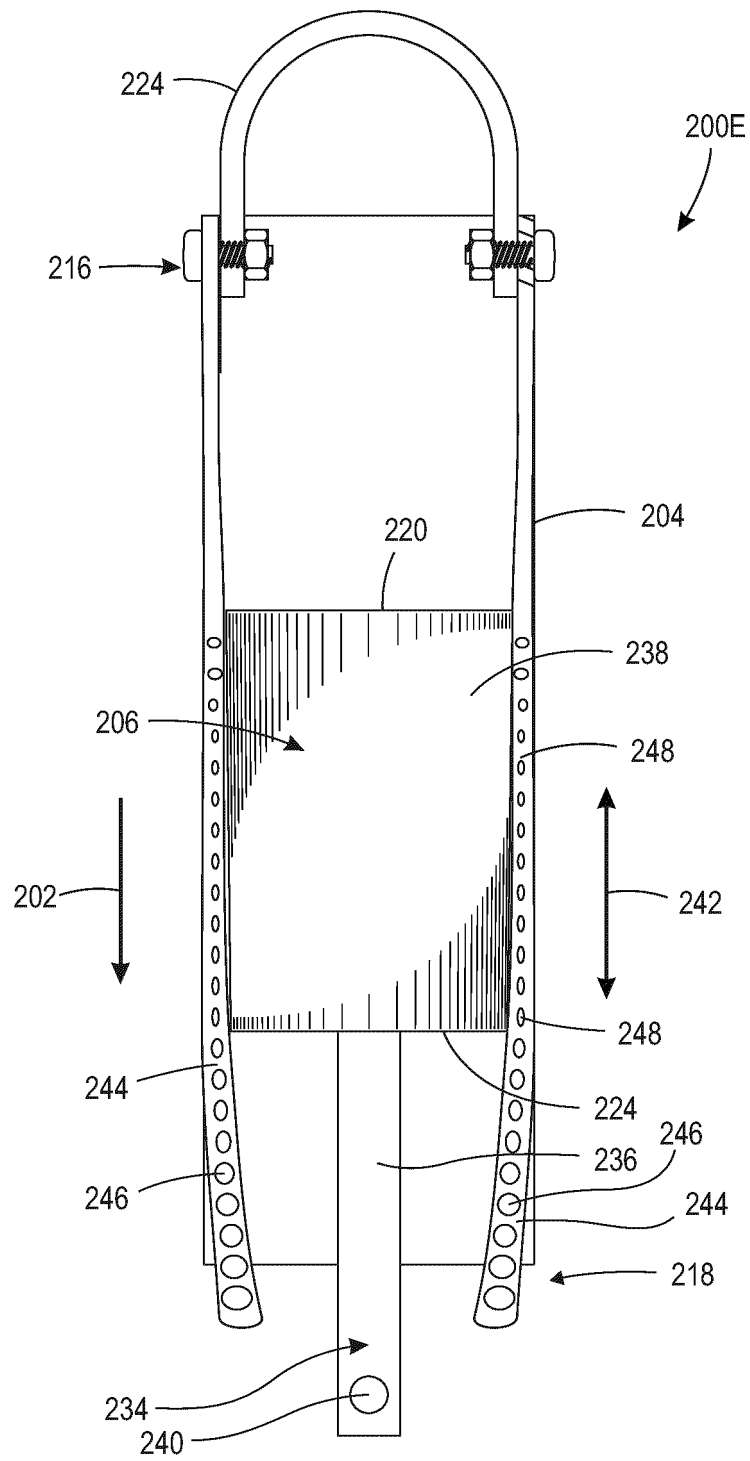


FIG. 21B

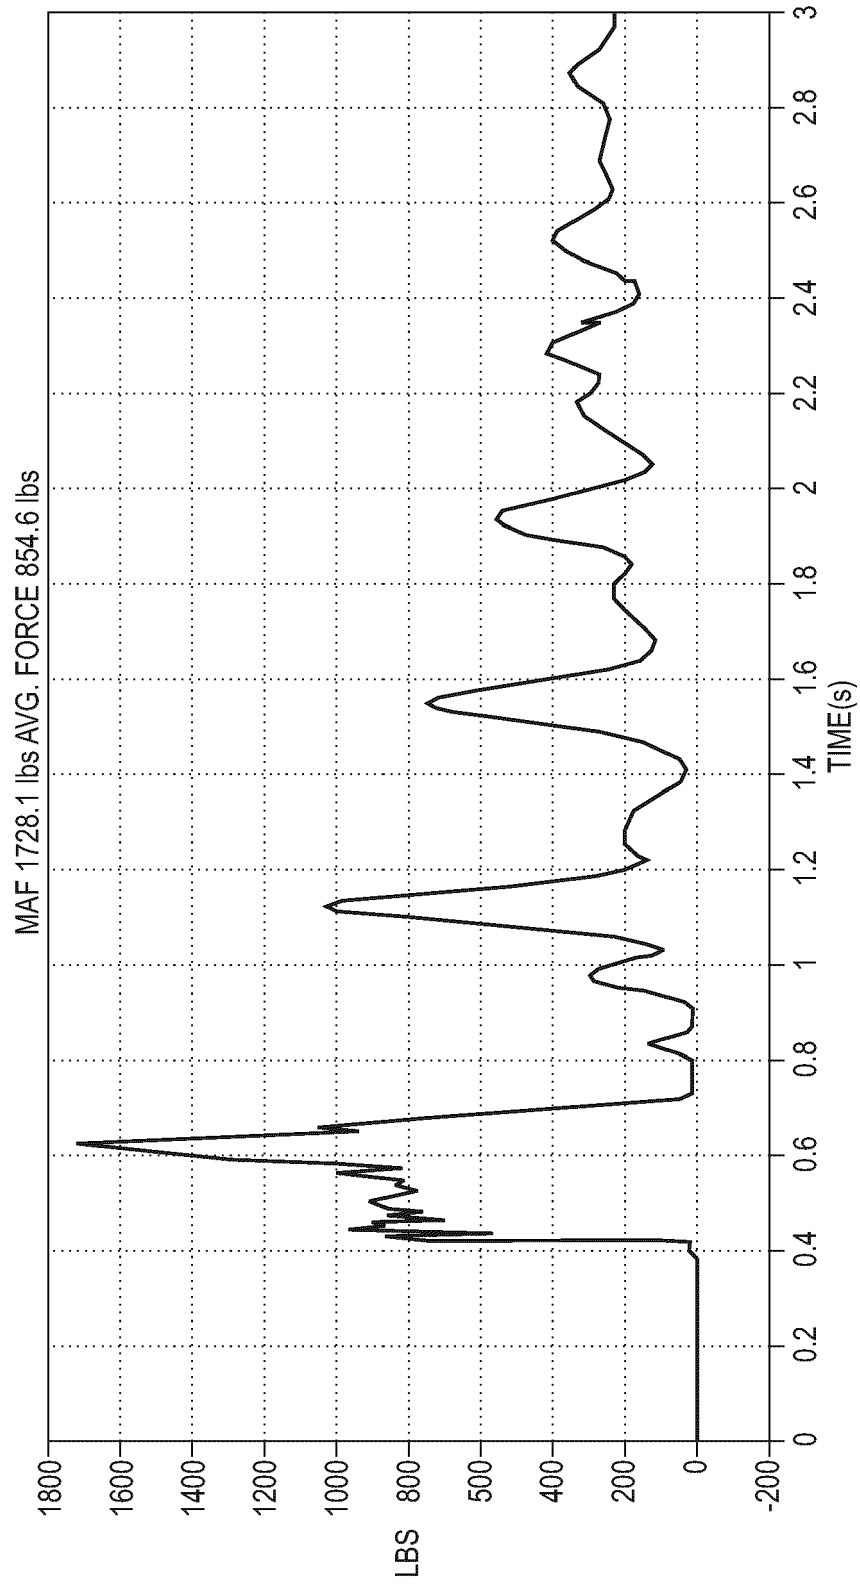


FIG. 22

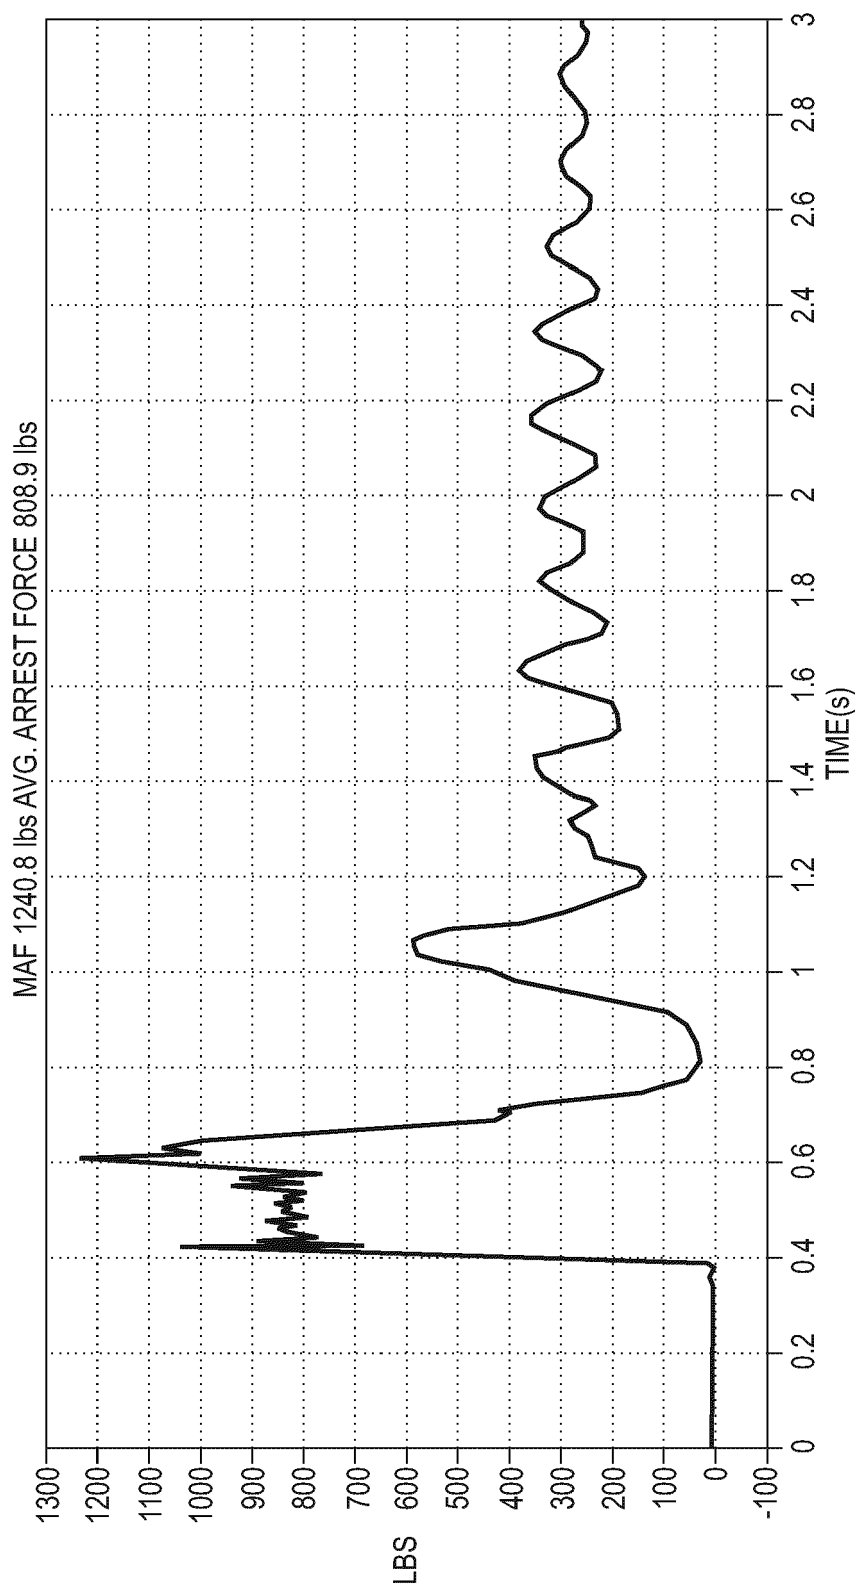


FIG. 23

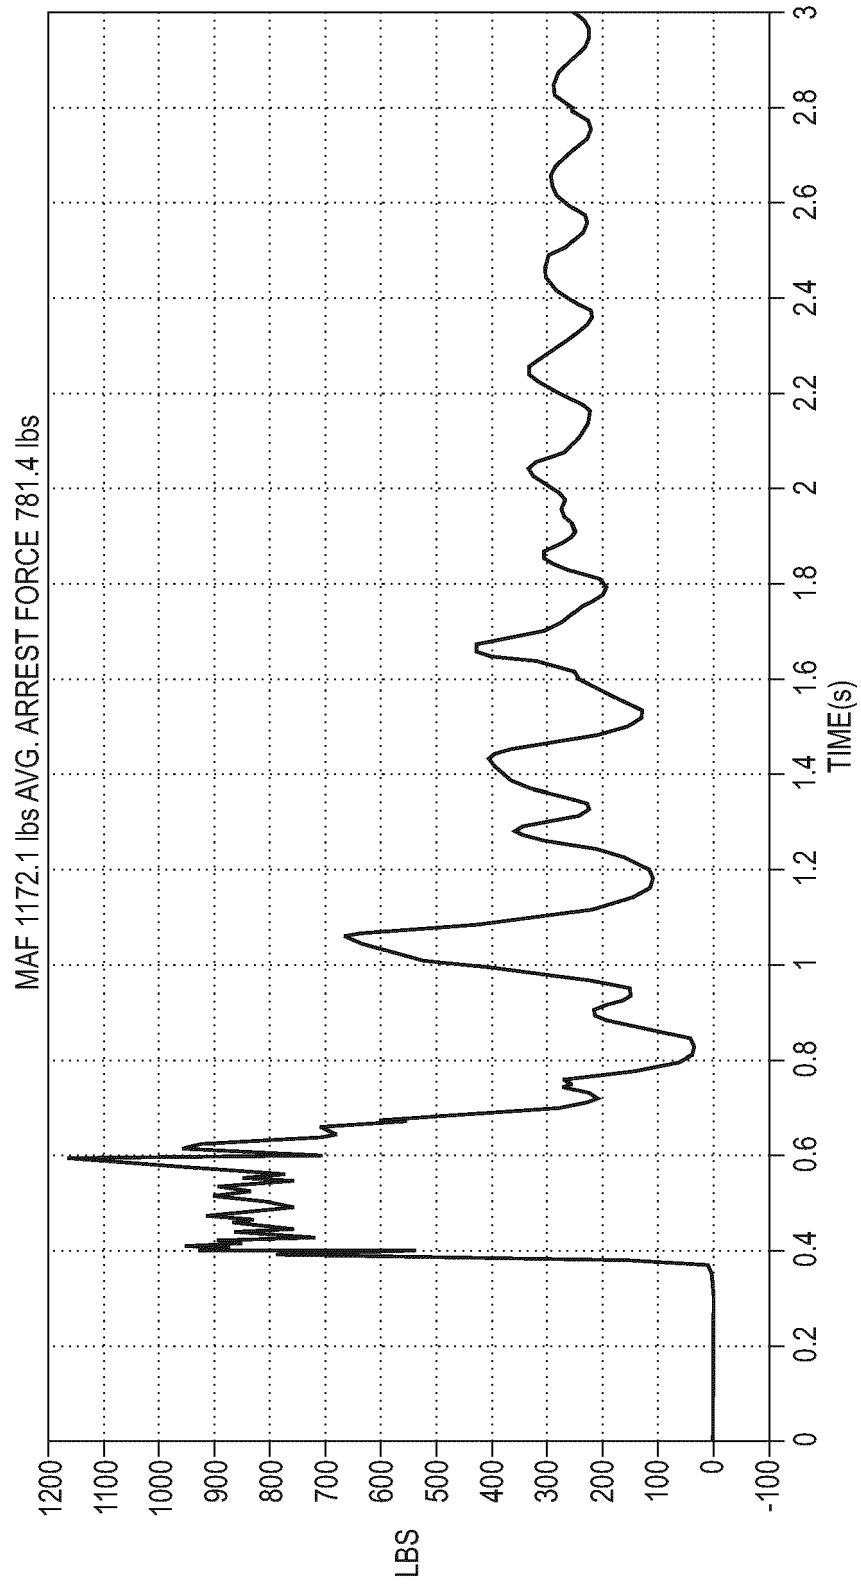


FIG. 24



EUROPEAN SEARCH REPORT

Application Number
EP 20 15 6019

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2019/195310 A1 (CARROCCIA JOHN J [US] ET AL) 27 June 2019 (2019-06-27) * the whole document *	1-15	INV. A62B35/04
X	US 2004/145098 A1 (THALER KEN [CA]) 29 July 2004 (2004-07-29) * figures 5-8, 11-14 * * paragraph [0045] - paragraph [0056] * * claims *	1,2,6,7, 11-15	
X	DE 20 2008 002704 U1 (SKYLOTEC GMBH [DE]) 15 May 2008 (2008-05-15) * figures 1-5 * * paragraph [0024] - paragraph [0028] * * claims *	1,2,6, 11-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			A62B F16F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 20 July 2020	Examiner Cardin, Aurélie
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 15 6019

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-07-2020

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2019195310 A1	27-06-2019	CA 3015766 A1	27-06-2019
		US 2019195310 A1	27-06-2019

US 2004145098 A1	29-07-2004	CA 2417592 A1	28-07-2004
		US 2004145098 A1	29-07-2004

DE 202008002704 U1	15-05-2008	DE 202008002704 U1	15-05-2008
		EP 2095847 A1	02-09-2009

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82