



(11) **EP 3 862 055 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.08.2021 Bulletin 2021/32

(51) Int Cl.:
A62C 5/02 (2006.01) A62C 31/12 (2006.01)

(21) Application number: **21155804.4**

(22) Date of filing: **08.02.2021**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Uniteq S.A.**
7022 Harmignies (BE)

(72) Inventors:
• **RACHIDI, Saïd**
7022 Hyon (BE)
• **BOUZID, Hobalah**
93000 Bobigny (FR)

(30) Priority: **10.02.2020 BE 202002077**
06.07.2020 BE 202005501
10.02.2020 DE 202020000557 U
06.07.2020 DE 202020103898 U
10.02.2020 AT 5002320 U
06.07.2020 AT 5013720 U

(74) Representative: **Brantsandpatents bvba**
Pauline Van Pottelsberghelaan 24
9051 Ghent (BE)

(54) **FIRE EXTINGUISHING NOZZLE AND FIRE EXTINGUISHER**

(57) A first aspect of the present invention concerns a fire extinguishing nozzle comprising a mixing, a ventilation and a foaming chamber, wherein said ventilation chamber comprises a first hollow cylindrical body comprising at least three air inlet holes, said foaming chamber comprises a second hollow cylindrical body having an axial length (L) and an inner diameter (d), and said ventilation chamber and/or said foaming chamber comprise a mesh, wherein the ratio of the axial length over the

inner diameter (L:d) is comprised between 4:5 and 9:5 for extinguishing class A fires, or between 6:1 and 10:1 for extinguishing class B fires.

A second and third aspect respectively relate to a fire extinguisher comprising a fire extinguishing composition and a fire extinguishing nozzle, and to the use of a nozzle or fire extinguisher for extinguishing class A or class B fires.

EP 3 862 055 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to fire extinguishing equipment. More in particular the invention concerns fire extinguishing nozzles.

BACKGROUND

[0002] Fire extinguishing compositions generally contain mixtures of surfactants that act as foaming agents, together with solvents and other additives that provide the desired mechanical and chemical properties to the foam. There is a general desire to improve the foaming characteristics of known fire extinguishing compositions, in order to obtain a fire extinguishing process that is faster, more efficient, and in particular, specifically tailored towards a certain fire class.

[0003] One way of improving the foaming characteristics of fire extinguishing compositions, is by altering the composition itself. For this purpose, fluorinated surfactants have long been used to improve foaming properties, however they have recently come under scrutiny in the light of environmental safety.

[0004] Another way of improving foaming characteristics lies in altering the discharging equipment, i.e. the fire extinguisher that is used. E.g. EP 3 337 576 describes a fire extinguisher comprising a nozzle with a number of perforated plates for influencing foaming characteristics of a fire extinguishing composition. The effect of these 'hardware alterations' on foam formation is however rather small, resulting in a limited performance, especially for extinguishing class A and B fires. Furthermore, FR 2 303 605 and US 4 830 790 both relate to fire extinguishing nozzles. The nozzles therein described however do not show beneficial effects regarding foam formation with the purpose of extinguishing class A and B fires.

[0005] Accordingly, there remains a need in the art for a fire extinguisher which drastically improves foaming characteristics of fire extinguishing compositions, and which can improve performance for extinguishing either class A or class B fires, independently of the fire extinguishing composition used.

[0006] The present invention aims to resolve at least some of the problems and disadvantages mentioned above.

SUMMARY OF THE INVENTION

[0007] The present invention and embodiments thereof serve to provide a fire extinguishing nozzle suitable for extinguishing class A or class B fires according to claim 1.

The fire extinguishing nozzle according to the present invention has the advantage of improving the foaming characteristics of a fire extinguishing composition. It is submitted that, by using the nozzle according to the

present invention, the foaming characteristics of a fire extinguishing composition are altered as such, that the fire extinguishing composition can be optimally used to extinguish class A or class B fires in a fast and efficient way.

[0008] Preferred embodiments of the fire extinguishing nozzle are shown in any of the claims 2 to 11.

[0009] In a second aspect, the present invention relates to a fire extinguisher according to claim 12. Dependent claim 13 discloses a preferred embodiment of said fire extinguisher.

[0010] A last aspect of the present invention concerns the use of a fire extinguishing nozzle or a fire extinguisher as herein described for extinguishing class A or class B fires, according to claim 14. Dependent claim 15 discloses a preferred embodiment of said use.

FIGURES

[0011]

Figure 1 shows a perspective view of an embodiment of a fire extinguishing nozzle according to the present invention, which nozzle comprises a single, indivisible body.

Figure 2 shows a perspective view of an embodiment of a fire extinguishing nozzle according to the present invention, which nozzle comprises a single, indivisible body.

Figure 3a shows a perspective view of an embodiment of an assembled fire extinguishing nozzle according to the present invention, which nozzle comprises three separate and/or detachable parts.

Figure 3b shows a perspective view of an embodiment of a disassembled fire extinguishing nozzle according to the present invention, which nozzle comprises three separate and/or detachable parts.

Figure 4a shows a perspective view of an embodiment of an assembled fire extinguishing nozzle according to the present invention, which nozzle comprises three separate and/or detachable parts.

Figure 4b shows a perspective view of an embodiment of a disassembled fire extinguishing nozzle according to the present invention, which nozzle comprises three separate and/or detachable parts.

Figure 5 shows a perspective view of an embodiment of a ventilation chamber according to the present invention.

Figure 6 shows a perspective view of an embodiment of a ventilation chamber and a foaming chamber according to the present invention, which venti-

lation and foaming chamber form a single, indivisible body.

Figure 7 shows a perspective view and a cross-sectional inlet view of an embodiment of a mixing chamber according to the present invention.

Figure 8 shows a sectional representation according to a central, axial axis of an embodiment of a ventilation chamber according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0012] The present invention relates to a fire extinguishing nozzle suitable for extinguishing class A or class B fires. Although the nozzle according to the present invention can be used for extinguishing fires of all fire classes, the advantages as herein discussed are substantially focused on fire classes A and B.

[0013] Unless otherwise defined, all terms used in disclosing the invention, including technical and scientific terms, have the meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. By means of further guidance, term definitions are included to better appreciate the teaching of the present invention.

[0014] As used herein, the following terms have the following meanings:

"A", "an", and "the" as used herein refers to both singular and plural referents unless the context clearly dictates otherwise. By way of example, "a compartment" refers to one or more than one compartment.

[0015] "About" as used herein referring to a measurable value such as a parameter, an amount, a temporal duration, and the like, is meant to encompass variations of $\pm 20\%$ or less, preferably $\pm 10\%$ or less, more preferably $\pm 5\%$ or less, even more preferably $\pm 1\%$ or less, and still more preferably $\pm 0.1\%$ or less of and from the specified value, in so far such variations are appropriate to perform in the disclosed invention. However, it is to be understood that the value to which the modifier "about" refers is itself also specifically disclosed.

[0016] The recitation of numerical ranges by endpoints includes all numbers and fractions subsumed within that range, as well as the recited endpoints.

[0017] In a first aspect, the present invention relates to a fire extinguishing nozzle suitable for extinguishing class A or class B fires. The fire extinguishing nozzle herein described comprises a mixing chamber, a ventilation chamber and a foaming chamber. The mixing chamber is configured to introduce a fire retardant composition inside the nozzle. The ventilation chamber is coupled to said mixing chamber, and comprises a first hollow cylindrical body comprising at least three air inlet holes. Said air inlet holes are arranged on the circumference of, and are directed into the first hollow cylindrical body, wherein said ventilation chamber is configured to introduce ambient air into the nozzle and subsequently

to mix said ambient air with the fire retardant composition. The foaming chamber of the nozzle comprises a second hollow cylindrical body having an axial length (L) and an inner diameter (d), and is coupled to the ventilation chamber. Herein, the foaming chamber is configured to provide in the formation of a fire extinguishing foam. Furthermore, the ventilation chamber and/or foaming chamber comprise a mesh, wherein said mesh is oriented in the radial plane of the inner cross-section of the ventilation chamber and/or foaming chamber. The fire extinguishing nozzle as herein described is characterized by the ratio of the axial length over the inner diameter (L:d) of the foaming chamber. Said ratio is comprised between 4:5 and 9:5 for extinguishing class A fires, or is comprised between 6:1 and 10:1 for extinguishing class B fires.

[0018] A "fire extinguisher" is an active fire protection device used to extinguish or control small or medium-sized fires, often in emergency situations. Typically, a fire extinguisher consists of a hand-held cylindrical pressure vessel containing a fire extinguishing composition which can be discharged in order to extinguish a fire. A fire extinguisher as described herein comprises a "fire extinguishing nozzle", also referred to as "nozzle", which is a device designed to control the direction or characteristics of a fluid flow. In light of the present invention, the fluid flow is a fire extinguishing composition.

[0019] Regarding the terminology "fire class", according to EN 2 there are six classes of fire. "Fire class A" relates to fires in combustible solids, mainly solids of organic nature such as coal, wood, paper, and fabrics. "Class B fires" relate to fires in flammable liquids, such as gasoline, petroleum, tars, oils, oil-based paints and solvents. "Class C fires" indicate fires in flammable gases, like hydrogen, propane, butane or methane. "Class D fires" are specifically directed towards combustible metals, especially alkali metals such as lithium, sodium and potassium, alkaline earth metals such as magnesium, and group 4 elements such as titanium and zirconium. "Class F fires" relate to fires in cooking oils and fats, e.g. kitchen fires.

[0020] The nozzle as herein described comprises a mixing chamber, a ventilation chamber and a foaming chamber, wherein the wordings "mixing", "ventilation" and "foaming" specifically indicate the function said chambers perform. As such, they respectively function to (pre)mix a fire extinguishing composition in the nozzle, to allow ventilation and/or aeration of the fire extinguishing composition, and to optimize the process of foaming, i.e. producing a fire extinguishing foam from the liquid fire extinguishing composition as provided to the mixing chamber.

[0021] The term "mesh" as herein described refers to a barrier made of connected strands of metal, fiber, or other flexible or ductile materials. A mesh can also be referred to as a "screen". Meshes are generally characterized by their "mesh size", particularly their "U.S. Mesh Size", which is defined as the number of openings in one square inch of a mesh. For example, a 36 mesh screen

will have 36 openings per one square inch. Through the nature of this expression, the average diameter of the openings is however dependent on the thickness of the connected strands. In light of the present invention, the mesh size is preferably expressed as a micron-value indicating the average diameter of the openings of the mesh. For example, a mesh size of 1000 μm indicates a mesh wherein the average diameter of the openings is 1000 μm .

[0022] The term "axial length" represents the length of a cylindrical body along its rotational axis. Accordingly, the "inner diameter" is measured in the perpendicular plane to the rotational axis and extends along the inside of the hollow cylindrical body.

[0023] The fire extinguishing nozzle according to the present invention has the advantage of improving the foaming characteristics of a fire extinguishing composition for fire class A or fire class B situations. Relating to the fire extinguishing nozzle whereby the ratio L:d is comprised between 4:5 and 9:5, it is observed that the discharged fire extinguishing foam is of a less compact nature and is thinner than fire extinguishing foams which are discharged through nozzles as generally known in the art. This is particularly advantageous for class A fires, wherein the fire extinguishing foam needs to be applied on the surface of a burning material, which has to be covered as quickly and completely as possible. Generally, where denser foams exhibit slower spreading of the fire extinguishing foam over a burning object, the fire extinguishing nozzle according to the present invention allows faster spreading of a fire extinguishing foam, thus resulting in the highly efficient and highly fast extinguishing of class A fires. Relating to the fire extinguishing nozzle whereby the ratio L:d is comprised between 6:1 and 10:1, it is observed that the discharged fire extinguishing foam is more compact and thicker than fire extinguishing foams which are discharged through nozzles as generally known in the art. This is particularly advantageous for class B fires, as the fire extinguishing foam is intended to form a substantive layer on top of the burning liquid surface. The resulting compact and thick foam layer is able to better contain the flames in a certain area, and thus prevents the further spreading of the fire. Meanwhile, contact between the burning liquid and ambient air is efficiently reduced and/or eliminated, resulting in the liquid fire being more rapidly extinguished. As a result, it is submitted that the fire extinguishing nozzle as herein described provides in a more efficient and a faster extinguishing of class A or class B fires. The foaming characteristics of a fire extinguishing composition are altered as such, that the fire extinguishing composition can be optimally used to extinguish class A or class B fires in a more efficient and faster way.

[0024] By preference, said ratio of the axial length over the inner diameter (L:d) of the foaming chamber is comprised between 4:5 and 8:5 for extinguishing class A fires, or between 7:1 and 9:1 for extinguishing class B fires. Within the preferred ranges herein disclosed, a broad

range of fire extinguishing compositions gives rise to the formation of two distinct fire extinguishing foams which have the optimal foaming characteristics for class A or class B fires respectively.

[0025] In some embodiments, said ratio of the axial length over the inner diameter (L:d) of the foaming chamber is comprised between 4:5 and 9:5, preferably between 4:5 and 8:5 for extinguishing class A fires.

[0026] In some embodiments, said ratio of the axial length over the inner diameter (L:d) of the foaming chamber is comprised between 6:1 and 10:1, preferably between 7:1 and 9:1 for extinguishing class B fires.

[0027] According to a further or another embodiment, said axial length (L) of the foaming chamber is comprised between 10,0 and 30,0 mm for extinguishing class A fires, or between 100,0 and 170,0 mm for extinguishing class B fires.

[0028] By preference, the axial length (L) of the foaming chamber is comprised between 11,0 and 29,0 mm for extinguishing class A fires, or between 110,0 and 160,0 mm class B fires. Said ranges of the axial length (L) of the foaming chamber have shown to be particularly effective in extinguishing class A or class B fires. Furthermore, regarding connectivity of the nozzle to default fire extinguishers and/or fire extinguisher tubes as available on the market, said ranges of the axial length (L) provide for optimal axial length over inner diameter (L:d) ratios compatible with most known extinguishers and/or extinguisher tubes. In some preferred embodiments, the axial length (L) of the foaming chamber for extinguishing class A fires is comprised between 12,0 and 28,0 mm, between 13,0 and 27,0 mm, between 14,0 and 26,0 mm, or between 15,0 and 25,0 mm. In some preferred embodiments, the axial length (L) of the foaming chamber for extinguishing class B fires is comprised between 110,0 and 150,0 mm, between 120,0 and 140,0 mm, between 121,0 and 139,0 mm, between 122,0 and 138,0 mm, between 123,0 and 137,0 mm, between 124,0 and 136,0 mm, or between 125,0 and 135,0 mm.

[0029] According to a further or another embodiment, said mesh has a mesh size of between 700 and 1200 μm . It is submitted that the mesh size impacts various foaming characteristics, such as the discharge time, the discharge flow, foam expansion, foam bubble size, foam discharge angle etc. The inventors have found that the mesh size range as herein described finds a delicate balance between all of the aforementioned foaming characteristics. In particular, smaller meshes give rise to a foam with a smaller bubble size, which is beneficial for the control of e.g. hydrocarbon fires. However, by using a smaller mesh size the amount of foam expansion is reduced, which is suboptimal regarding the extinguishing of class B fires. On the other hand, using a bigger mesh size increases the amount of foam expansion and improves the foam discharge angle, while the resulting bubble size is suboptimal regarding the extinguishing of class A fires. A mesh size of between 700 and 1200 μm exhibits all of the aforementioned advantages, and allows the nozzle

as herein described to further optimize foam characteristics for class A or class B fires.

[0030] In the context of the present invention, especially when the fire extinguishing nozzle as herein described is to be used where live electrical equipment is present, reference is made to the terminology "dielectric test". A "dielectric test" indicates a test that verifies the ability of a fire extinguisher to extinguish a fire on a live electrical apparatus without inflicting damage and/or causing danger to the operator of the fire extinguisher. During such dielectric test, the electrical conductivity of the liquid flow is measured, which preferably stays under a given limit. Limits and suitable measuring methods for dielectric tests are subject to national or regional regulation and/or standardization, e.g. EN 3-7:2007-10: "Portable fire extinguishers - Part 7: Characteristics, performance requirements and test methods". It is submitted that the fire extinguishing nozzle as herein described has the additional advantage of passing EN 3-7:2007-10 dielectric tests, and as a result can be safely used for extinguishing class A or class B fires where live electrical equipment is present.

[0031] By preference, said mesh has a mesh size of between 800 and 1100 μm . More by preference, said mesh has a mesh size of between 900 and 1100 μm , even more by preference between 950 and 1050 μm , between 960 and 1040 μm , between 970 and 1030 μm , between 980 and 1020 μm , or between 990 and 1010 μm .

[0032] According to a further or another embodiment, the inner cross-section of the ventilation chamber comprises a cross-sectional constriction. The term "cross-sectional constriction" herein refers to any technical means of limiting the cross-sectional area through which a fire extinguishing composition can freely flow. As a result of said constriction, the liquid flow through the ventilation chamber exhibits higher velocity and increased turbulence, wherein mixing of the fire extinguishing composition and ambient air is improved. As a result of said better mixing, foam expansion and foam bubble size of the resulting foam are further optimized for class A or class B fires. By preference, said cross-sectional constriction is shaped as a venturi-like necking, which induces the venturi effect inside the first hollow cylindrical body of the ventilation chamber, thereby drawing air through the air inlet holes of the ventilation chamber. Better mixing of the fire extinguishing composition and ambient air is achieved, thereby further improving foam characteristics of the resulting fire extinguishing foam. In some embodiments, the cross-sectional constriction has a minimal inner diameter of between 6,0 and 14,0 mm, by preference between 7,0 and 13,0 mm, more by preference between 8,0 and 12,0 mm, even more by preference between 9,0 and 10,0 mm.

[0033] According to a further or another embodiment, the mixing chamber comprises at least two constricted inlet holes which allow for further enhancing velocity and turbulence of the liquid flow before entering the ventila-

tion chamber. Said constricted inlet holes by preference have an opening diameter of between 0,5 and 2,0 mm, more by preference of between 0,6 and 1,5 mm, even more by preference of between 0,7 and 1,2 mm.

[0034] Further or other embodiments of the invention relate to a nozzle wherein the mixing chamber comprises an elongated outlet. The elongated outlet is configured as such that it efficiently guides a fire extinguishing composition inside and/or at least halfway through the ventilation chamber. Said configuration provides for optimal mixing of the fire extinguishing composition and ambient air, which is sucked in through the air inlet hole of the ventilation chamber, thereby further enhancing the foam characteristics for class A or class B fires. By preference, said elongated outlet extends at least partially past the air inlet holes. In some embodiments, said elongated outlet is shaped as a circular truncated cone, which enables even better mixing of the fire extinguishing composition and ambient air.

[0035] According to a further or another embodiment, the elongated outlet has an inner diameter of between 6,0 and 12,0 mm, by preference between 7,0 and 11,0 mm, more by preference between 7,0 and 11,0 mm, or between 8,0 and 10,0 mm.

[0036] According to a further or another embodiment of the present invention, the mixing chamber, the ventilation chamber and the foaming chamber form a single, indivisible body. Herein, the nozzle as a whole determines its applicability for extinguishing of either class A or class B fires. A person using the nozzle does not need to perform any matching and/or assembling of separate parts and can directly couple the nozzle as such to a fire extinguisher, therefore saving valuable time in extinguishing a class A or class B fire in an emergency situation.

[0037] According to a further or another embodiment, the mixing chamber, the ventilation chamber and the foaming chamber comprise at least two separate and/or detachable parts of the nozzle. This allows for mixing and matching of separate and/or detachable parts, thus fine-tuning the nozzle for specific fires and/or emergency situations. By preference, the mixing chamber, the ventilation chamber and the foaming chamber comprise three separate and/or detachable parts of the nozzle.

[0038] In a second aspect, the present invention concerns a fire extinguisher comprising a fire extinguishing composition, said fire extinguisher is provided with a nozzle, wherein said nozzle is a nozzle according to any of the previous embodiments. The fire extinguisher as described herein, exhibits all of the advantages as already discussed, and optimizes the speed and efficiency wherein class A or class B fires can be extinguished.

[0039] By preference, said fire extinguishing composition is fluorine-free. Generally, non-fluorinated fire extinguishing compositions are preferred over fluorinated compositions, as fluorinated compositions have recently come under scrutiny in the light of environmental safety. However, fire extinguishing compositions generally con-

tain fluorinated compounds, e.g. as surfactants, that act as foaming agents in order to provide the desired mechanical and chemical properties to the foam. This is especially the case in the light of class A or class B fires. The fire extinguisher as herein described now provides for the formation of a comparable or even better quality foam, using a fluorine-free fire extinguishing composition.

[0040] A third aspect relates to use of the fire extinguishing nozzle or fire extinguisher as described herein for extinguishing class A or class B fires, exhibiting all of the advantages as already discussed. In particular relating to class A fires, it is observed that the discharged fire extinguishing foam is of a less compact nature and is thinner than fire extinguishing foams which are discharged with fire extinguishing nozzles or fire extinguishers as generally known in the art. This is particularly advantageous as the fire extinguishing foam needs to be applied on the surface of a burning material, which has to be covered as quickly and completely as possible. In particular relating to class B fires, it is observed that the discharged fire extinguishing foam is more compact and thicker than fire extinguishing foams which are discharged with fire extinguishing nozzles or fire extinguishers as generally known in the art. This is particularly advantageous as the fire extinguishing foam is intended to form a substantive layer on top of the burning liquid surface. The resulting compact and thick foam layer is able to better contain the flames in a certain area, and thus prevents the further spreading of the fire. Meanwhile, contact between the burning liquid and ambient air is efficiently reduced and/or eliminated, resulting in the liquid fire being more rapidly extinguished.

[0041] It is submitted that the present use provides in a more efficient and a faster extinguishing of class A or class B fires. The foaming characteristics of a fire extinguishing composition are altered as such, that the fire extinguishing composition can be optimally used to extinguish class A or class B fires in a more efficient and faster way.

[0042] Notwithstanding present use of the nozzle as herein described vastly improves foam characteristics of all fire extinguishing compositions, a preferred use relates to said fire extinguishing compositions being fluorine-free. While fire extinguishing compositions generally contain fluorinated compounds in order to provide the desired mechanical and chemical properties to the foam, use of the fire extinguishing nozzle or the fire extinguisher as herein described now provides for the formation of a comparable or even better quality foam, using a fluorine-free fire extinguishing composition.

DESCRIPTION OF FIGURES

[0043] The following description of the figures of specific embodiments of the invention is merely exemplary in nature and is not intended to limit the present teachings, their application or uses. Throughout the drawings,

corresponding reference numerals indicate like or corresponding parts and features.

[0044] Fig. 1 shows a perspective view of an embodiment of a fire extinguishing nozzle 1 according to the present invention, which nozzle 1 comprises a single, indivisible body. The nozzle 1 is especially useful for extinguishing class A fires and is to be understood having an inlet a and an outlet b. Herein, the inlet a is to be coupled to a fire extinguisher and the outlet b concerns the passage through which the fire extinguishing composition is discharged. The nozzle 1 comprises a mixing chamber 2, a ventilation chamber 3 and a foaming chamber 4. Notwithstanding the mixing chamber 2, the ventilation chamber 3 and the foaming chamber 4 are formed as a single, indivisible body, the ratio of the axial length over the inner diameter (L:d) of the foaming chamber 4 is unambiguously determined between 4:5 and 9:5. The ventilation chamber 3 comprises four air inlet holes 6, allowing for contact between ambient air and the fire extinguishing composition passing through the nozzle 1. For ease of coupling and/or decoupling the nozzle 1 to a fire extinguisher or fire extinguisher hose, an outer thread 12 is provided at the inlet a. By using the nozzle 1 as herein described, the discharged fire extinguishing foam is of a less compact nature and is thinner than fire extinguishing foams which are discharged through nozzles as generally known in the art. This is particularly advantageous for class A fires, wherein the fire extinguishing foam needs to be applied on the surface of a burning material, which has to be covered as quickly and completely as possible.

[0045] Fig. 2 shows a perspective view of an embodiment of a fire extinguishing nozzle 1 according to the present invention, which nozzle 1 comprises a single, indivisible body. The nozzle 1 is especially useful for extinguishing class B fires and is to be understood having an inlet a and an outlet b. Herein, the inlet a is to be coupled to a fire extinguisher and the outlet b concerns the passage through which the fire extinguishing composition is discharged. The nozzle 1 comprises a mixing chamber 2, a ventilation chamber 3 and a foaming chamber 4. Notwithstanding the mixing chamber 2, the ventilation chamber 3 and the foaming chamber 4 are formed as a single, indivisible body, the ratio of the axial length over the inner diameter (L:d) of the foaming chamber 4 is unambiguously determined between 6:1 and 10:1. The ventilation chamber 3 comprises four air inlet holes 6, allowing for contact between ambient air and the fire extinguishing composition passing through the nozzle 1. For ease of coupling and/or decoupling the nozzle 1 to a fire extinguisher or fire extinguisher hose, an outer thread 12 is provided at the inlet a. By using the nozzle 1 as herein described, the discharged fire extinguishing foam is more compact and thicker than fire extinguishing foams which are discharged through nozzles as generally known in the art. This is particularly advantageous for class B fires, as the fire extinguishing foam is intended to form a substantive layer on top of the burning liquid

surface. The resulting compact and thick foam layer is able to better contain the flames in a certain area, and thus prevents the further spreading of the fire. Meanwhile, contact between the burning liquid and ambient air is efficiently reduced and/or eliminated, resulting in liquid fires being more rapidly extinguished.

[0046] Fig. 3a shows a perspective view of an embodiment of an assembled fire extinguishing nozzle 1 according to the present invention, which nozzle 1 comprises three separate and/or detachable parts, i.e. a mixing chamber 2, a ventilation chamber 3 and a foaming chamber 4. The nozzle 1 is especially useful for extinguishing class A fires and is to be understood having an inlet a and an outlet b. Fig. 3b shows a perspective view of the same embodiment of the fire extinguishing nozzle 1 in a disassembled state. The mixing chamber 2, the ventilation chamber 3 and the foaming chamber 4 are herein recognizable as three separate entities. For ease of coupling and/or decoupling said parts, outer threads 12 are provided at the inlet a of the mixing chamber 2, at the outlet of the mixing chamber 2, and at the outlet of the ventilation chamber 3. Compatible inner threads 11 are provided at the inlet of the ventilation chamber 2 and at the inlet of the foaming chamber 4. The ratio of the axial length over the inner diameter (L:d) of the foaming chamber 4 is furthermore unambiguously determined between 4:5 and 9:5. The ventilation chamber 3 comprises four air inlet holes 6, allowing for contact between ambient air and the fire extinguishing composition passing through the nozzle 1. The ventilation chamber 3 further comprises a mesh 7, which impacts various foaming characteristics, such as the discharge time, the discharge flow, foam expansion, foam bubble size, foam discharge angle etc. By using the nozzle 1 as herein described, the foaming characteristics of a fire extinguishing composition are altered as such, that the fire extinguishing composition can be optimally used to extinguish class A fires in a fast and efficient way.

[0047] Fig. 4a shows a perspective view of an embodiment of an assembled fire extinguishing nozzle 1 according to the present invention, which nozzle 1 comprises three separate and/or detachable parts, i.e. a mixing chamber 2, a ventilation chamber 3 and a foaming chamber 4. The nozzle 1 is especially useful for extinguishing class B fires and is to be understood having an inlet a and an outlet b. Fig. 4b shows a perspective view of the same embodiment of the fire extinguishing nozzle 1 in a disassembled state. The mixing chamber 2, the ventilation chamber 3 and the foaming chamber 4 are herein recognizable as three separate entities. For ease of coupling and/or decoupling said parts, outer threads 12 are provided at the inlet a of the mixing chamber 2, at the outlet of the mixing chamber 2, and at the outlet of the ventilation chamber 3. Compatible inner threads 11 are provided at the inlet of the ventilation chamber 2 and at the inlet of the foaming chamber 4. The ratio of the axial length over the inner diameter (L:d) of the foaming chamber 4 is furthermore unambiguously determined between

6:1 and 10:5. The ventilation chamber 3 comprises four air inlet holes 6, allowing for contact between ambient air and the fire extinguishing composition passing through the nozzle 1. The ventilation chamber 3 further comprises a mesh 7, which impacts various foaming characteristics, such as the discharge time, the discharge flow, foam expansion, foam bubble size, foam discharge angle etc. By using the nozzle 1 as herein described, the foaming characteristics of a fire extinguishing composition are altered as such, that the fire extinguishing composition can be optimally used to extinguish class B fires in a fast and efficient way.

[0048] Fig. 5 shows a perspective view of an embodiment of a ventilation chamber 3 according to the present invention, comprising air inlet holes 6 and a mesh 7. For ease of coupling and/or decoupling the ventilation chamber 3 to other parts of the nozzle, an outer thread 12 is provided.

[0049] Fig. 6 shows a perspective view of an embodiment of a ventilation chamber 3 and a foaming chamber 4 according to the present invention, which ventilation 3 and foaming chamber 4 form a single, indivisible body. Notwithstanding the ventilation chamber 3 and the foaming chamber 4 are formed as a single, indivisible body, the ratio of the axial length over the inner diameter (L:d) of the foaming chamber 4 is unambiguously determined between 4:5 and 9:5. Fig. 6 further serves to illustrate the first hollow cylindrical body 5 of the ventilation chamber 3, which internally is provided with an inner thread 11, to provide for easy coupling and/or decoupling to a mixing chamber, and comprises four air inlet holes 6.

[0050] Fig. 7 shows a perspective view and a cross-sectional inlet view of an embodiment of a mixing chamber 2 according to the present invention. The mixing chamber 2 comprises two constricted inlet holes 8, which allow for enhancing the velocity and the turbulence of the liquid flow of a fire extinguishing composition before entering a ventilation chamber. Easy coupling of said mixing chamber 2 to an upstream fire extinguisher and a downstream ventilation chamber is provided for by the outer threads 12. The mixing chamber further comprises an elongated outlet 9 which is configured as such that it efficiently guides a fire extinguishing composition inside and/or at least halfway through a ventilation chamber coupled thereto.

[0051] Fig. 8 shows a sectional representation according to a central, axial axis of an embodiment of a ventilation chamber 3 according to the present invention. The ventilation chamber 3 comprises air inlet holes 6 and is provided with a mesh 7 and an outer thread 12, for easy coupling to a foaming chamber. The first hollow cylindrical body 5, in particular the inner cross-section of the ventilation chamber 3, comprises a cross-sectional constriction 10, which is shaped as a venturi-like necking. This induces the venturi effect inside the first hollow cylindrical body 5, thereby drawing air through the air inlet holes 6 of the ventilation chamber 3.

List of numbered elements:

[0052]

- 1 fire extinguishing nozzle
- 2 mixing chamber
- 3 ventilation chamber
- 4 foaming chamber
- 5 first hollow cylindrical body
- 6 air inlet hole
- 7 mesh
- 8 constricted inlet hole
- 9 elongated outlet
- 10 cross-sectional constriction
- 11 inner thread
- 12 outer thread
- a inlet
- b outlet
- L axial length
- d inner diameter

Claims

1. A fire extinguishing nozzle, the fire extinguishing nozzle (1) comprising a mixing chamber (2), a ventilation chamber (3) and a foaming chamber (4), wherein

- said ventilation chamber is coupled to said mixing chamber, and comprises a first hollow cylindrical body (5) comprising at least three air inlet holes (6), said air inlet holes are arranged on the circumference of, and are directed into the first hollow cylindrical body,

- said foaming chamber comprises a second hollow cylindrical body having an axial length (L) and an inner diameter (d), which foaming chamber is coupled to said ventilation chamber, and

- said ventilation chamber and/or said foaming chamber comprise a mesh (7), wherein said mesh is oriented in the radial plane of the inner cross-section of the ventilation chamber and/or foaming chamber,

characterized in that, the ratio of the axial length over the inner diameter (L:d) of the foaming chamber is comprised between 4:5 and 9:5 for extinguishing class A fires, or between 6:1 and 10:1 for extinguishing class B fires.

2. The fire extinguishing nozzle according to claim 1, **characterized in that**, said ratio of the axial length over the inner diameter (L:d) of the foaming chamber (3) is comprised between 4:5 and 8:5 for extinguishing class A fires, or between 7:1 and 9:1 for extinguishing class B fires.

3. The fire extinguishing nozzle according to claim 1 or 2, **characterized in that** said axial length (L) of the foaming chamber (3) is comprised between 10,0 and 30,0 mm for extinguishing class A fires, or between 100,0 and 170,0 mm for extinguishing class B fires.

4. The fire extinguishing nozzle according to any of the preceding claims 1-3, **characterized in that**, said mesh (7) has a mesh size of between 700 and 1200 μm , preferably between 800 and 1100 μm .

5. The fire extinguishing nozzle according to any of the preceding claims 1-4, **characterized in that**, the inner cross-section of the ventilation chamber (3) comprises a cross-sectional constriction (10).

6. The fire extinguishing nozzle according to claim 5, **characterized in that**, said cross-sectional constriction (10) is shaped as a venturi-like necking.

7. The fire extinguishing nozzle according to any of the preceding claims 1-6, **characterized in that**, the mixing chamber (2) comprises at least two constricted inlet holes (8).

8. The fire extinguishing nozzle according to any of the preceding claims 1-7, **characterized in that**, the mixing chamber (2) comprises an elongated outlet (9).

9. The fire extinguishing nozzle according to claim 8, **characterized in that**, said elongated outlet (9) is shaped as a circular truncated cone.

10. The fire extinguishing nozzle according to any of the preceding claims 1-9, **characterized in that**, said mixing chamber (2), said ventilation chamber (3) and said foaming chamber (4) are a single, indivisible body.

11. The fire extinguishing nozzle according to any of the preceding claims 1-10, **characterized in that**, said mixing chamber (2), said ventilation chamber (3) and said foaming chamber (4) comprise at least two separate and/or detachable parts of the nozzle, by preference three separate and/or detachable parts of the nozzle.

12. A fire extinguisher comprising a fire extinguishing composition, said fire extinguisher is provided with a nozzle, wherein said nozzle is a nozzle according to any one of the claims 1-11.

13. The fire extinguisher according to claim 12, **characterized in that**, said fire extinguishing composition is fluorine-free.

14. Use of the fire extinguishing nozzle according to any

one of the claims 1-11 or of the fire extinguisher according to claim 12 or 13 for extinguishing class A or class B fires.

15. Use according to claim 14, **characterized in that**, 5
said fire extinguishing composition is fluorine-free.

10

15

20

25

30

35

40

45

50

55

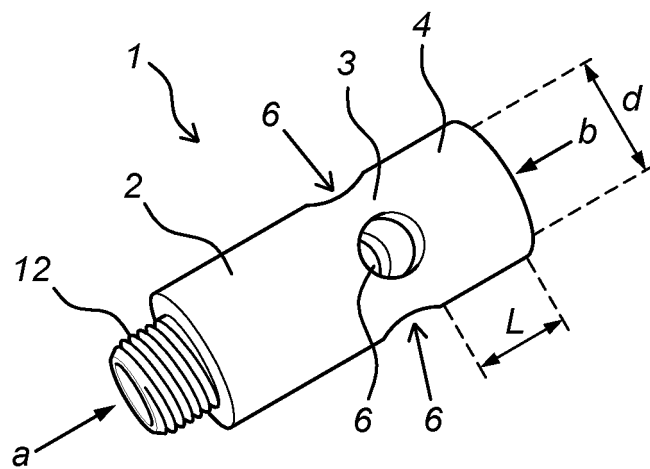


Fig. 1

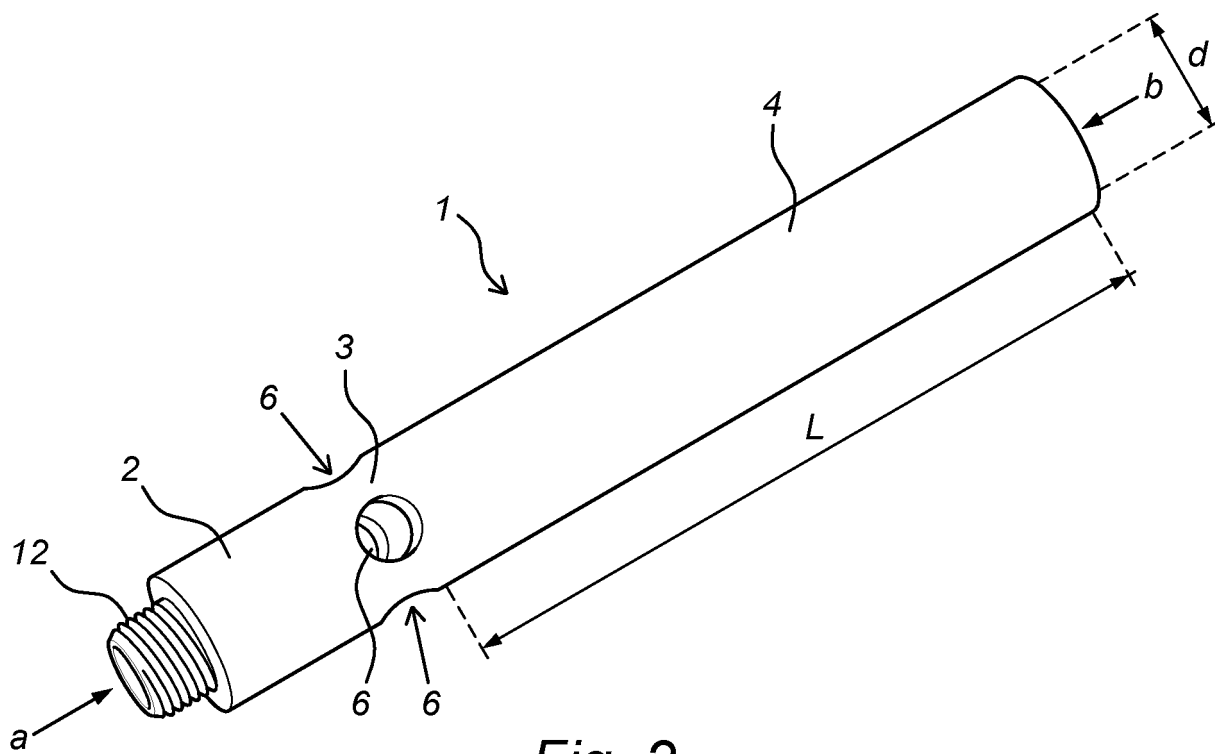


Fig. 2

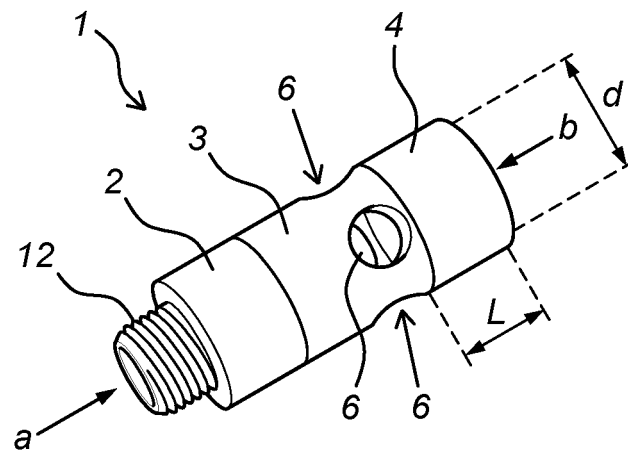


Fig. 3a

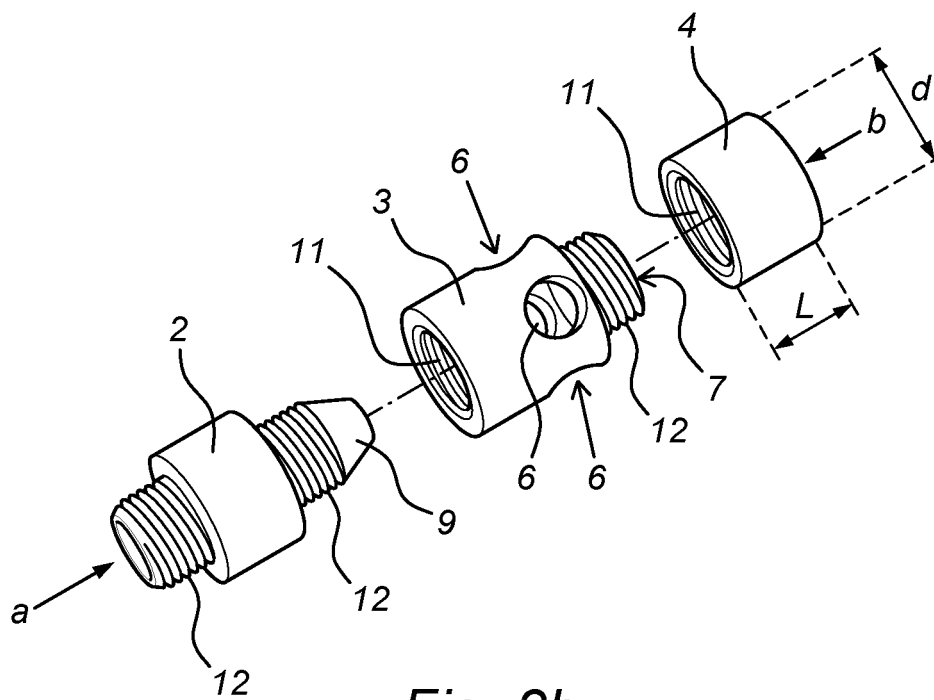
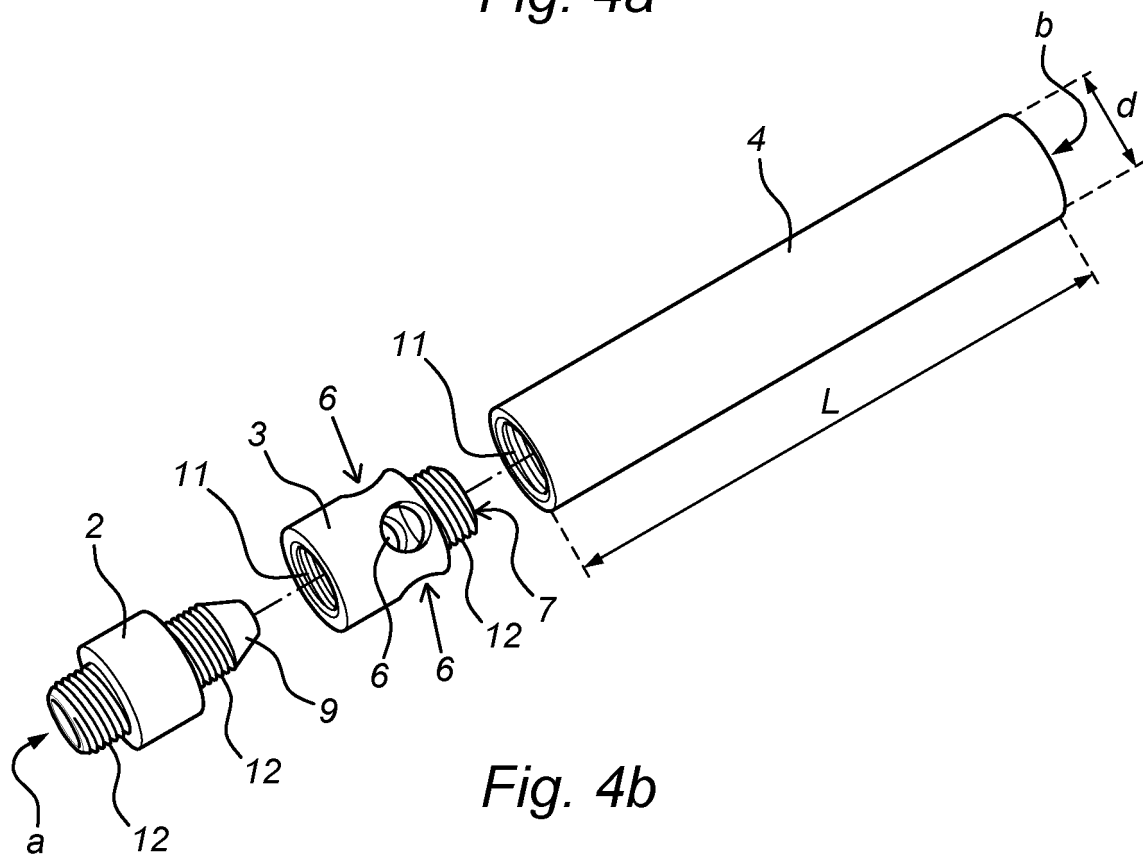
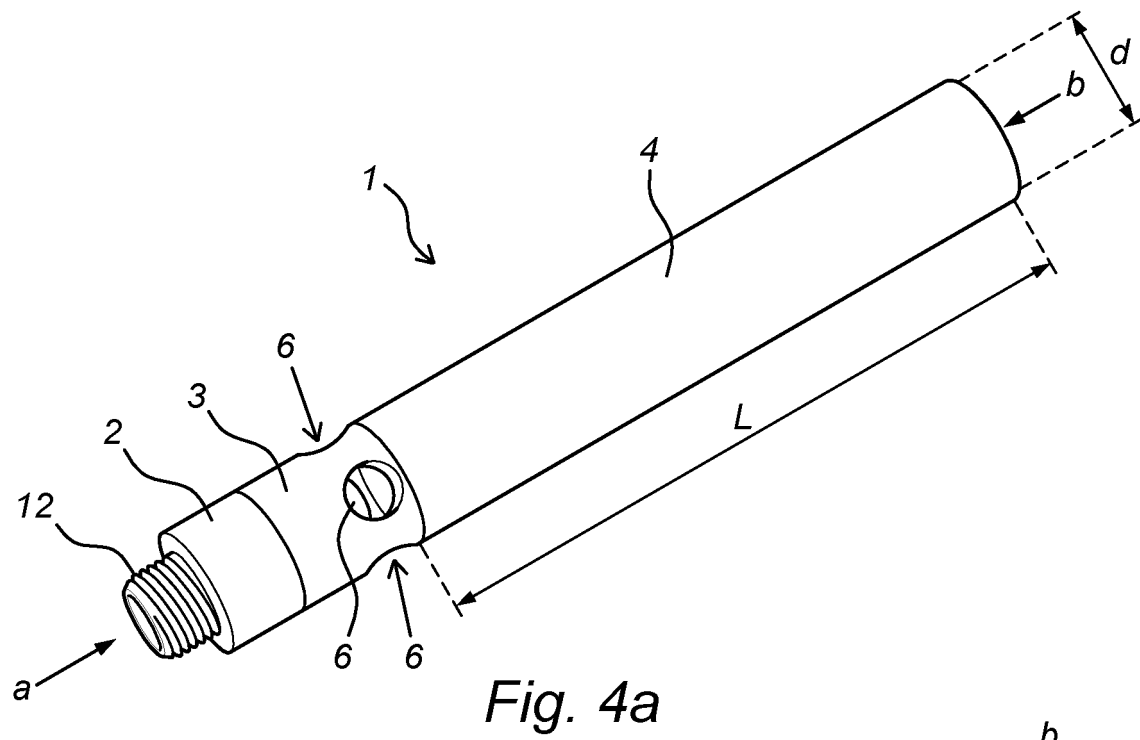


Fig. 3b



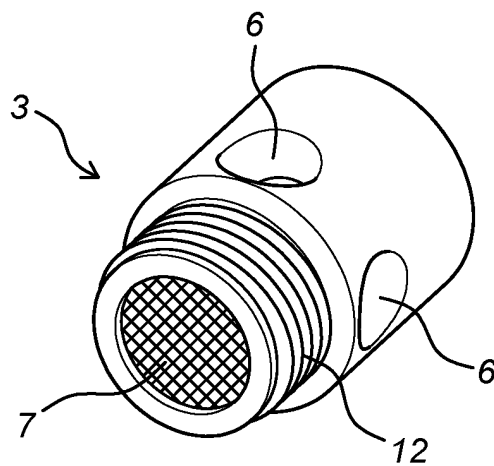


Fig. 5

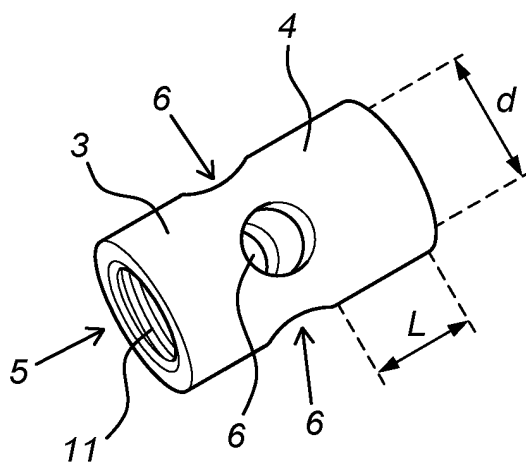


Fig. 6

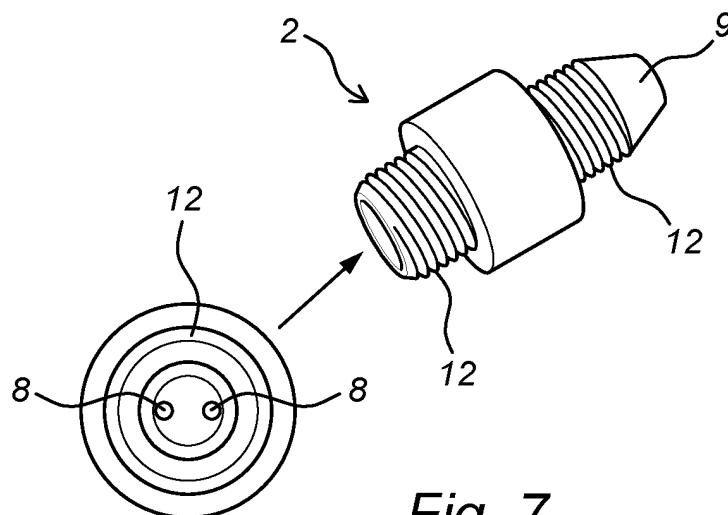


Fig. 7

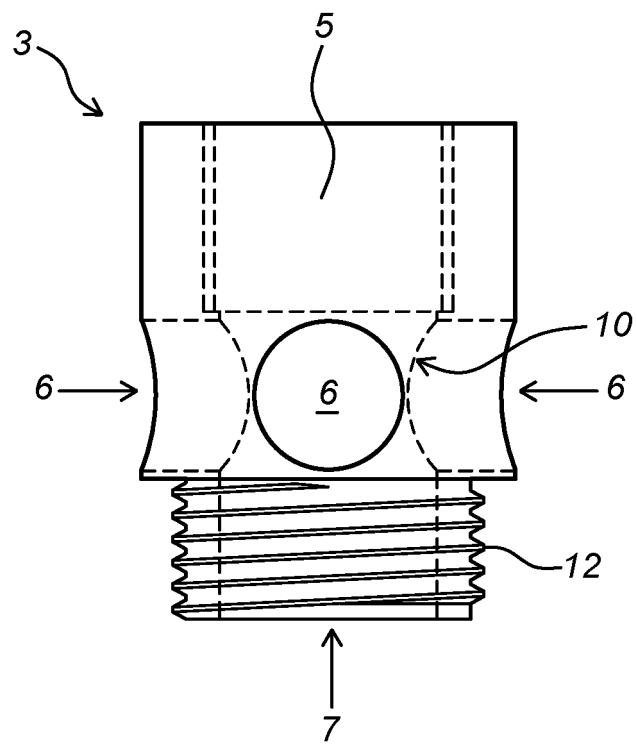


Fig. 8

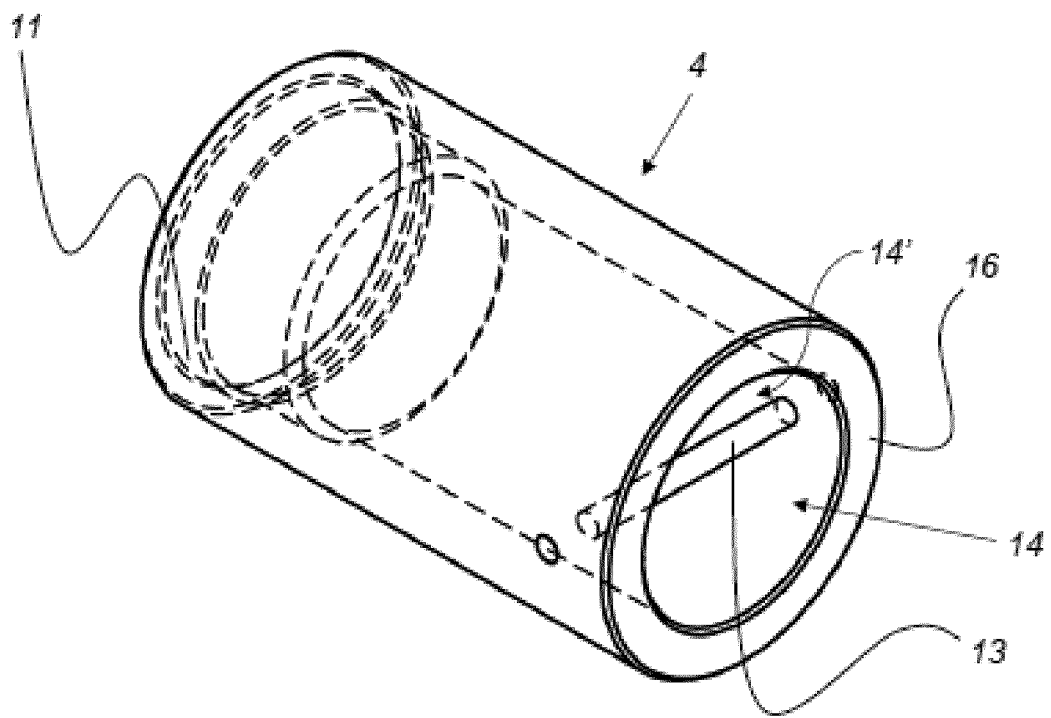


Fig. 9

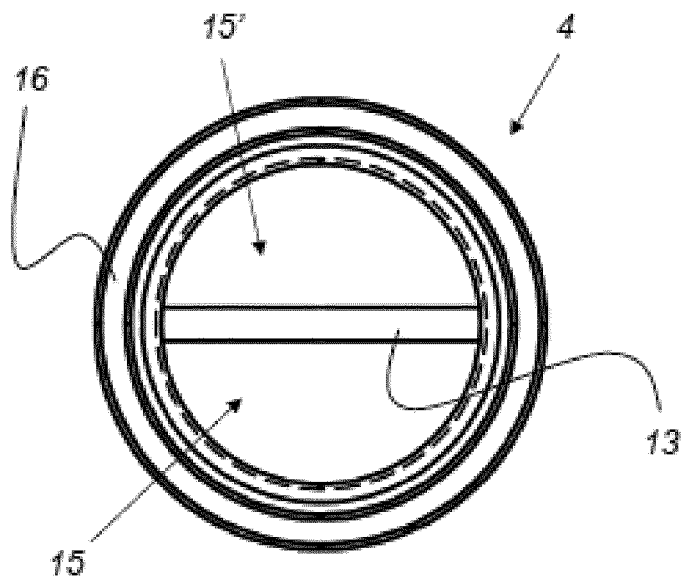


Fig. 10



EUROPEAN SEARCH REPORT

 Application Number
 EP 21 15 5804

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	FR 2 303 605 A1 (ROTVAND GEORGES [FR]) 8 October 1976 (1976-10-08) * the whole document * * figures *	1-3,5-9, 11-15	INV. A62C5/02 A62C31/12
X,D	US 4 830 790 A (STEVENSON DOUGLAS E [CA]) 16 May 1989 (1989-05-16) * example 1 * * figures 1,4 * * claims *	1-3, 5-10, 12-15	
Y	GB 2 294 415 A (WARNSTAR LTD [GB]) 1 May 1996 (1996-05-01) * page 7, paragraph trois - paragraph quatre * * figures * * claims * * page 5, paragraph deux *	1-15	
Y	WO 2017/012601 A1 (FEUERSCHUTZ JOCKEL GMBH & CO KG [DE]) 26 January 2017 (2017-01-26) * figures 2,3,4 * * page 9, line 10 - page 11, line 17 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) A62C B01F B05B
Y	US 5 848 752 A (KOLACZ DAVID J [US] ET AL) 15 December 1998 (1998-12-15) * column 7, paragraph 54 - paragraph 67 * * figures *	1-15	
A	US 5 820 027 A (SZCZUREK NORBERT [US]) 13 October 1998 (1998-10-13) * figures * * column 3, line 1 - line 6 *	1-15	
A	US 4 219 159 A (WESNER WALTER H [US]) 26 August 1980 (1980-08-26) * column 8, line 63 - column 9, line 23 * * figures 4-7 *	1-15	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 June 2021	Examiner Cardin, Aurélie
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 15 5804

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-06-2021

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2303605 A1	08-10-1976	FR 2303605 A1	08-10-1976
		GB 1461044 A	13-01-1977
US 4830790 A	16-05-1989	NONE	
GB 2294415 A	01-05-1996	GB 2294415 A	01-05-1996
		US 5857627 A	12-01-1999
WO 2017012601 A1	26-01-2017	DE 112016003293 A5	26-04-2018
		EP 3337576 A1	27-06-2018
		WO 2017012601 A1	26-01-2017
US 5848752 A	15-12-1998	NONE	
US 5820027 A	13-10-1998	NONE	
US 4219159 A	26-08-1980	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 3337576 A [0004]
- FR 2303605 [0004]
- US 4830790 A [0004]

Non-patent literature cited in the description

- Portable fire extinguishers - Part 7: Characteristics, performance requirements and test methods. *EN 3-7:2007-10* [0030]