



(11) **EP 3 869 289 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(15) Correction information:  
**Corrected version no 1 (W1 A1)**  
**Corrections, see**  
**Bibliography INID code(s) 71**

(51) Int Cl.:  
**G05D 1/02 (2020.01)**

(86) International application number:  
**PCT/CN2019/111771**

(48) Corrigendum issued on:  
**03.11.2021 Bulletin 2021/44**

(87) International publication number:  
**WO 2020/119247 (18.06.2020 Gazette 2020/25)**

(43) Date of publication:  
**25.08.2021 Bulletin 2021/34**

(21) Application number: **19894680.8**

(22) Date of filing: **17.10.2019**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

(30) Priority: **14.12.2018 CN 201811531605**

(71) Applicant: **Guangzhou Xaircraft Technology Co., Ltd.**  
**Tianhe District**  
**Guangzhou**  
**Guangdong 510000 (CN)**

(72) Inventors:  
• **QIU, Yongheng**  
**Guangzhou, Guangdong 510000 (CN)**  
• **PENG, Bin**  
**Guangzhou, Guangdong 510000 (CN)**

(74) Representative: **Dilg, Haeusler, Schindelmann**  
**Patentanwalts-gesellschaft mbH**  
**Leonrodstraße 58**  
**80636 München (DE)**

(54) **METHOD AND CONTROL DEVICE FOR SETTING OPERATION ROUTE FOR OPERATION DEVICE**

(57) Provided are a method and control device for setting an operation route for an operation device, belonging to the field of agricultural crop protection operations. The method comprises: displaying a map on a display interface, displaying target land plot information on the map, displaying a planned route for the target land plot on the map, and displaying a movable identifier on the map, the target land plot information comprising boundary information of the target land plot (S110); in response to a drag operation by a user on the movable identifier, changing the position at which the movable identifier remains (S120); according to the remain position, determining an operation route from the planned route (S130). On the map displayed by the display interface, the user can directly set the operation route by means of dragging the movable identifier, the entire human-computer interaction process is intuitive and con-

venient, and easy for the user to learn and operate.

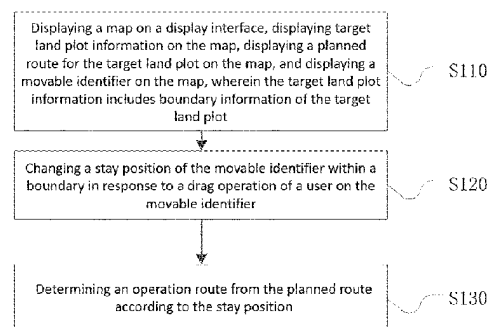


FIG. 1

EP 3 869 289 A8