



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.09.2021 Bulletin 2021/37

(51) Int Cl.:
G02B 6/38 (2006.01) G02B 6/44 (2006.01)

(21) Application number: **21169195.1**

(22) Date of filing: **30.11.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **28.06.2017 US 201762526011 P**
28.06.2017 US 201762526018 P
28.06.2017 US 201762526195 P

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
17817583.2 / 3 646 074

(71) Applicant: **Corning Research & Development Corporation**
Corning, New York 14831 (US)

(72) Inventor: **Rosson, Joel Christopher Hickory, 28601 (US)**

(74) Representative: **Sturm, Christoph**
Patentanwälte Sturm Weilnau Franke Partnerschaft mbB
Unter den Eichen 5 (Haus C-Süd)
65195 Wiesbaden (DE)

Remarks:

This application was filed on 19-04-2021 as a divisional application to the application mentioned under INID code 62.

(54) **FIBER OPTIC CONNECTORS HAVING A KEYING STRUCTURE**

(57) Fiber optic connectors, cable assemblies and methods for making the same are disclosed. In one embodiment, the optical connector comprises a housing and a multifiber ferrule. The housing comprises a longitudinal

passageway between a rear end and a front end, and a rear portion of the housing comprises a keying portion and at least one locking feature integrally formed in the rear portion of the housing.

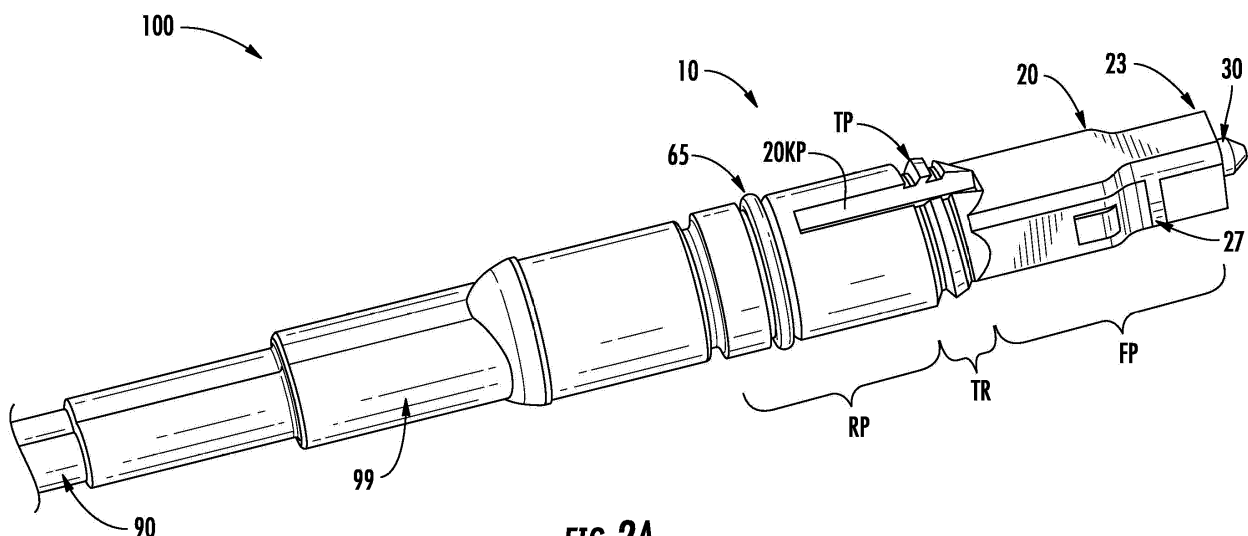


FIG. 2A

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Application No. 62/428,212, filed on November 30, 2016, U.S. Application No. 62/428,219, filed on November 30, 2016, U.S. Application No. 62/428,224, filed on November 30, 2016, U.S. Application No. 62/428,230, filed on November 30, 2016, U.S. Application No. 62/428,234, filed on November 30, 2016, U.S. Application No. 62/428,244, filed on November 30, 2016, U.S. Application No. 62/428,252, filed on November 30, 2016, U.S. Application No. 62/451,221, filed on January 27, 2017, U.S. Application No. 62/451,234, filed on January 27, 2017, U.S. Application No. 62/526,011, filed on June 28, 2017, U.S. Application No. 62/526,018, filed on June 28, 2017, and U.S. Application No. 62/526,195, filed on June 28, 2017, the content of which is relied upon and incorporated herein by reference in entirety.

BACKGROUND

[0002] The disclosure is directed to fiber optic connectors along with methods for making fiber optic connectors. More specifically, the disclosure is directed to fiber optic connectors having improved or simplified designs along with methods of making.

[0003] Optical fiber is increasingly being used for a variety of applications, including but not limited to broadband voice, video, and data transmission. As bandwidth demands increase optical fiber is migrating toward subscribers in outdoor communication networks such as in fiber to the premises applications such as FTTx and the like. To address this need for making optical connections in communication networks for outdoor environments hardened fiber optic connectors were developed. One of the most commercially successful hardened fiber optic connector is the OptiTap® connector sold by Corning Optical Communications LLC of Hickory, North Carolina, such as disclosed in U.S. Pat. Nos. 7,090,406 and 7,113,679 (the '406 and '679 patents). The OptiTap® connector is a hardened male plug connector for terminating a fiber optic cable and the assembly is configured for optical connection such as with a complementary receptacle. As used herein, the term "hardened" describes a connector or receptacle port intended for making an environmentally sealed optical connection suitable for outdoor use, and the term "non-hardened" describes a connector or receptacle port that is not intended for making an environmentally sealed optical connection such as the well-known SC connector.

[0004] **FIGS. 1A-1C** are prior art depictions showing various stages of mating of a preconnectorized cable 1 having a plug connector 5 such as an OptiTap® connector with a receptacle 3. Receptacle 3 mates plug connector 5 with a standard SC connector (i.e., a non-hardened connector) at a second end (not visible in these views)

using an adapter sleeve for aligning ferrules when mating plug connector 5 with the a non-hardened connector. Protection of the non-hardened connector side of the receptacle is typically accomplished by mounting the receptacle 3 through a wall of an enclosure or the like so that the non-hardened end of the receptacle is disposed inside the enclosure for environmental protection of the non-hardened connector. As shown by **FIGS. 1A-1C**, the other end of the receptacle 3 is accessible for receiving the plug connector 5 at the wall of the enclosure. Other applications may mount the receptacle 3 inside an enclosure on a bracket or the like.

[0005] Receptacle 3 allows an optical connection between the hardened connector such as the OptiTap® male plug connector with a non-hardened connector such as the SC connector at nodes in the optical network that typically transition from an outdoor space to an enclosed and protected space. Receptacle 3 is described in further detail in US Pat. No. 6,579,014. Receptacle 3 includes a receptacle housing and an adapter sleeve disposed therein. The receptacle 3 receives a non-hardened connector at a second end as represented by the arrow pointing to the left. The receptacle 3 typically requires mounting through a wall of a closure, or inside the closure, such as a closure mounted on the side of subscribers premises, disposed in an underground vault or on a pole for protecting the non-hardened connector for outside plant deployments.

[0006] Network operators face many challenges for building, deploying and connecting subscribers to outside plant communication networks such as Fiber-to-the-Home (FTTH) or Fiber-to-the-location (FTTx) networks. Besides right of way access for the communication networks, network operators may have limited space to available on existing poles or in existing vaults for mounting devices. Initially, conventional hardened fiber optic connectors were typically mounted on robust and relatively stiff fiber optic cables, and slack storage for these fiber optic cables may also consume limited space or become unsightly in aerial deployments. Further as outside plant deployments evolved many network operators desired to route the fiber optic cable assembly with the connector through an existing wall of a subscriber premises and into the building or route the fiber optic cable assembly with the connector through a buried duct. Thus, network operators became sensitive to the size of the fiber optic connector for these types of deployment applications.

[0007] Consequently, there exists an unresolved need for fiber optic connectors that allow quickly and easy deployment and connectivity in a simple and efficient manner while still being cost-effective.

SUMMARY

[0008] The disclosure is directed to fiber optic connectors and methods of making fiber optic connectors as described and recited in the claim. The concepts dis-

closed allow a compact form-factor for an optical fiber connector suitable for numerous applications and variations as desired.

[0009] One aspect of the disclosure is directed to a fiber optic connector comprising a housing and a ferrule comprising at least one fiber bore. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end. The housing comprises a front portion and a rear portion, where the rear portion of the housing comprises a keying portion, and at least one locking feature integrally formed in the rear portion of the housing.

[0010] Another aspect of the disclosure is directed to a fiber optic connector comprising a housing and a ferrule comprising at least one fiber bore. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end. The housing comprises a front portion and a rear portion, where the rear portion of the housing comprises a female key and at least one locking feature integrally formed in the rear portion of the housing.

[0011] Still another aspect of the disclosure is directed to a fiber optic connector comprising a housing and a ferrule comprising at least one fiber bore. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end. The housing comprises a front portion and a rear portion, where the rear portion of the housing comprises a female key and at least one locking feature integrally formed in the rear portion of the housing, and the at least one locking feature is disposed about 180 degrees from the female key.

[0012] Yet another aspect of the disclosure is directed to a fiber optic connector comprising a housing and a ferrule comprising at least one fiber bore. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end. The housing comprises a front portion, a rear portion, and a transition region disposed between the front portion and the rear portion of the housing, where the rear portion of the housing comprises a keying portion that extends into a portion of the transition region, and at least one locking feature integrally formed in the rear portion of the housing, and the at least one locking feature is disposed about 180 degrees from the keying portion.

[0013] A further aspect of the disclosure is directed to a fiber optic connector comprising a housing and a ferrule comprising at least one fiber bore. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end. The housing comprises a front portion, a rear portion, and a transition region disposed between the front portion and the rear portion of the housing, where the rear portion of the housing comprises a female key that extends into a portion of the transition region, and at least one locking feature integrally formed in the rear portion of the housing, the transition region comprising a threaded portion and the at least one locking feature is disposed about

180 degrees from the female key.

[0014] Another aspect of the disclosure is directed to a fiber optic connector comprising a housing, a ferrule comprising at least one fiber bore, a cable adapter, a boot attached to the cable adapter, and a sealing element. The housing comprises a rear end and a front end with a longitudinal passageway extending from the rear end to the front end, and the rear end comprising a rear opening. The cable adapter is sized for fitting into the rear opening of the housing, and the sealing element disposed about a portion of the boot and a part of a rear portion of the housing.

[0015] Additional features and advantages will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the same as described herein, including the detailed description that follows, the claims, as well as the appended drawings.

[0016] It is to be understood that both the foregoing general description and the following detailed description present embodiments that are intended to provide an overview or framework for understanding the nature and character of the claims. The accompanying drawings are included to provide a further understanding of the disclosure, and are incorporated into and constitute a part of this specification. The drawings illustrate various embodiments and together with the description serve to explain the principles and operation.

BRIEF DESCRIPTION OF THE FIGURES

[0017]

FIGS. 1A-1C are prior art depictions showing various stages of mating of a prior art preconnectorized cable having a conventional hardened plug connector with a receptacle;

FIG. 2 is a perspective view of a fiber optic cable assembly having a fiber optic connector with a housing according to one aspect of the disclosure;

FIG. 2A is a perspective view of another fiber optic cable assembly having a fiber optic connector with a keying portion according to one aspect of the disclosure;

FIG. 3 is an exploded view of the fiber optic cable assembly of **FIG. 2**;

FIG. 4 is a close-up perspective view of a fiber optic connector having a housing that is similar to the housing of **FIG. 2** and depicting geometric features of the housing according to one aspect of the disclosure;

FIGS. 4A-4D are respective cross-sectional views of the housing of **FIG. 4** taken along respective planes defined by lines 4A-4A, line 4B-4B, line 4C-4C and line 4D-4D;

FIG. 4E is a side view of an explanatory housing that is similar to housing shown in the fiber optic connector **FIG. 4** and further include threads that are dis-

continuous on the front portion;

FIG. 5 is an exploded view of a ferrule subassembly of the fiber optic connector of **FIG. 3**;

FIGS. 6 and 7 are longitudinal sectional views of the ferrule subassembly cable assembly of **FIG. 3**;

FIG. 8 is a perspective view of the ferrule carrier of the ferrule subassembly of **FIG. 3**;

FIG. 9 is a close-up perspective view of the front end of the ferrule carrier of **FIG. 8**;

FIG. 10 is a perspective view of an alternative ferrule carrier that may be used with the ferrule subassemblies disclosed herein;

FIGS. 11 and 12 respectively are a partially exploded view and an assembled view of the alternative ferrule carrier depicted in **FIG. 10**;

FIGS. 13 and 14 respectively are a partial sectional view and a cross-sectional view of the alternative ferrule carrier of **FIGS. 10-12** depicted assembled in a housing of a fiber optic connector;

FIGS. 15 and 16 are longitudinal sectional views of the fiber optic cable assembly of **FIG. 2** showing details of the construction;

FIG. 17 is an exploded view of another fiber optic cable assembly that is similar to the fiber optic cable assembly of **FIG. 2** with a fiber optic connector having a different ferrule subassembly;

FIG. 18 is a partially exploded view of the fiber optic cable assembly of **FIG. 17** with the fiber optic cable attached to the ferrule subassembly;

FIG. 19 is a perspective view of another cable assembly having a different fiber optic connector with a housing that is similar to the housing shown with the fiber optic connector of **FIG. 2** according to another aspect of the disclosure;

FIG. 20 is a close-up perspective view of the fiber optic connector of **FIG. 19** depicting geometric features of the housing;

FIG. 21 is an exploded view of another fiber optic cable assembly similar to that of **FIG. 19** with a fiber optic connector having a housing having threads that are discontinuous according to another aspect of the disclosure;

FIG. 22 is an perspective assembled view of the fiber optic cable assembly of **FIG. 21**;

FIG. 23 is a perspective view of the cable assembly of **FIG. 22** with a dust cap installed on the fiber optic connector;

FIG. 24 is a longitudinal sectional view of the cable assembly of **FIG. 22** in a vertical direction;

FIG. 25 is a detailed exploded view of the front end and of the fiber optic connector of **FIG. 22**;

FIG. 26 is a cross-sectional view taken at an opening of the housing and showing a transverse ferrule retention member securing the ferrule of the fiber optic connector of **FIG. 22**;

FIGS. 27 and 28 respectively are a detail view of an alternative transverse ferrule retention member and cross-sectional view showing the alternative trans-

verse ferrule retention member for securing the ferrule;

FIG. 29 is a longitudinal sectional view of a front portion of the fiber optic connector of **FIG. 22** in a horizontal direction;

FIG. 30 is a front end sectional view of a housing having a tuning pocket that allows rotational tuning of the ferrule during manufacture for improving optical performance;

FIGS. 31 and 32 depict explanatory ferrules having at least one selectively tunable surface;

FIGS. 33-36 are various views of depicting the housing of the fiber optic connector of **FIG. 23**;

FIG. 37 is a perspective view of another fiber optic cable assembly with still another alternative fiber optic connector having a nosepiece;

FIG. 38 is a perspective view of the fiber optic cable assembly of **FIG. 37** showing a sectional view of a dust cap having a pulling eye and that may be secured to the threads disposed on the housing;

FIG. 39 is an exploded view of the cable assembly of **FIG. 37**;

FIG. 40 is a front end sectional view of the fiber optic connector of **FIG. 37** showing the nosepiece attached to the front end of the housing;

FIG. 41 is a front end view of the housing of **FIG. 37** showing a securing surface such as a weld interface on the housing so that the nosepiece may be attached to the housing so that it covers an opening for the transverse ferrule retention member;

FIGS. 42 and 43 are perspective and side views of a fiber optic connector similar to **FIG. 37** having an alternative housing with a keying feature for fiber optic connectors;

FIGS. 44 and 45 are perspective views of alternative housings depicting other locking feature designs for use with the fiber optic connectors disclosed;

FIG. 46 is a perspective view of still another fiber optic cable assembly having a cable adapter that fits into a rear opening of a housing that can be changed for different types of fiber optic cables;

FIGS. 47 and 48 respectively are a perspective view and a cross-sectional view the cable adapter of **FIG. 46**;

FIGS. 47A and 48A respectively are a perspective view and a cross-sectional view of another cable adapter;

FIG. 49 is a sectional view of the rear portion of an explanatory fiber optic cable assembly showing the fiber optic cable within the cable adapter taken in a vertical direction to depict how the cable may be attached to the fiber optic connectors disclosed herein;

FIG. 50 is a sectional view of the rear portion of the cable assembly of **FIG. 46** showing the fiber optic cable within the cable adapter taken in a horizontal direction;

FIGS. 51-54 are various views of another fiber optic cable assembly having a keying portion configured

as a female key; **FIG. 51A-53A** are various views of a portion of another fiber optic cable assembly having a cable adapter with flexures for cable bend-strain relief;

FIG. 54A is a front perspective view of another housing that may be used with the fiber optic connector concepts disclosed herein;

FIG. 55 depicts a distribution cable having a fiber optic connector according to the concepts disclosed disposed on a tether;

FIG. 56 is a perspective view of an explanatory fiber optic connector that further comprise a conversion housing attached about the housing for changing the fiber optic connector from a first connector footprint to a second connector footprint;

FIG. 57 is a sectional view of the fiber optic connector of **FIG. 56**;

FIG. 58 is a partially exploded view of an explanatory fiber optic connector showing the fiber optic connector with a first connector footprint along with a conversion housing for changing the fiber optic connector to a second connector footprint that is a hardened connector footprint;

FIG. 59 is an assembled view of the fiber optic connector of **FIG. 58** showing the second connector footprint as a hardened connector footprint with the dust cap removed for clarity;

FIG. 60 is an assembled view of the fiber optic connector of **FIG. 58** showing the second connector footprint with the dust cap installed;

FIG. 61 is a sectional view of the fiber optic connector of **FIG. 60**.

FIG. 62 is a perspective view of an explanatory fiber optic connector that may have a conversion housing attached about the housing for changing the fiber optic connector from a first connector footprint to a second connector footprint;

FIG. 63 is an assembled view of the fiber optic connector of **FIG. 62** after conversion to a second connector footprint configured as a hardened connector footprint with the dust cap removed for clarity;

FIG. 64 is a partially exploded view of the fiber optic connector of **FIG. 63**;

FIG. 65 is a sectional view of the conversion housing and coupling nut of the fiber optic connector of **FIG. 63**;

FIGS. 66 and 67 are sectional views of the fiber optic connector of **FIG. 63**;

FIGS. 68 and 69 are perspective views of the retaining member of the fiber optic connector of **FIG. 63**;

FIGS. 70 and 71 respectively are perspective and sectional views of another connector having a ferrule disposed within a ferrule holder that is loaded from the front end of the connector 10 and having a SC housing attached;

FIG. 72 is a perspective view of the connector housing of **FIGS. 70 and 71**;

FIGS. 73 and 74 are cross-sectional views of the

housing of the connector of **FIGS. 70 and 71**;

FIG. 75 is a partially exploded view of the front end of the connector depicted in **FIGS. 70 and 71**;

FIG. 76 is a cross-sectional view of the front end of the connector depicted in **FIGS. 70 and 71**;

FIG. 77 is a perspective view of the ferrule and ferrule holder of the connector depicted in **FIGS. 70 and 71**;

FIG. 78 is a front end view of the connector depicted in **FIGS. 70 and 71** without the SC housing showing the details for the retention of the ferrule holder assembly;

FIG. 79 is an assembled perspective view of a cable assembly comprising a multifiber optic connector comprising a housing with a transition region with a threaded portion;

FIG. 80 is a perspective view of the multifiber optic connector of **FIG. 79** with a dust cap attached;

FIG. 81 is an exploded view of the cable assembly having the multifiber optic connector of **FIG. 79**;

FIGS. 82 and 83 respectively are a detailed exploded and assembled view showing a pre-assembly of components of the multifiber optic connector of **FIG. 79** before the fiber optic cable is threaded through the pre-assembly;

FIG. 84 is a perspective view of the fiber optic cable prepared for insertion into the pre-assembly of **FIG. 83**;

FIGS. 85 and 86 respectively are a perspective view and a sectional view of the fiber optic cable thread through the pre-assembly of **FIG. 83**;

FIG. 87 depicts a perspective view of the assembly of **FIG. 83** after a portion of the coating of the optical fibers is removed in preparation for inserting the ends of the optical fibers into the multifiber ferrule;

FIGS. 88 and 89 respectively are a perspective view and a sectional view of the multifiber ferrule attached to the optical fibers of the fiber optic cable;

FIG. 90 shows the housing of the connector before being attached to a cable adapter of the multifiber connector;

FIGS. 91 and 92 respectively show a perspective view and sectional view of the housing of the multifiber connector after being attached to the cable adapter; and

FIG. 93 depicts a perspective view of the assembled multifiber connector after the nosepiece is attached; and

FIGS. 94 and 94A respectively are a perspective view and a cross-sectional view of another connector housing comprising a non-round rear portion.

DETAILED DESCRIPTION

[0018] Reference will now be made in detail to the embodiments of the disclosure, examples of which are illustrated in the accompanying drawings. Whenever possible, like reference numbers will be used to refer to like components or parts.

[0019] The concepts disclosed advantageously provide fiber optic connectors that allow streamlined manufacture and assembly along with easy and intuitive connectivity with other devices while still having a compact footprint. The fiber optic connectors disclosed are explained and depicted with several different embodiments and various other alternative components or optional features that may be incorporated into one or more of the fiber optic connector concepts having a keying portion as desired. By way of explanation, several different variations of housings are disclosed that can be modified to use with connector constructions where the ferrule loads from either the rear end of the housing or the ferrule load from the front end of the housing. Some embodiments may advantageously use fewer parts while providing robust and reliable optical performance. For instance, some of the embodiments disclosed may have the ferrule cooperate directly with an housing (e.g., assembled) without using a ferrule holder like conventional fiber optic connectors. Other constructions may increase the part count of the connectors for various reasons or could use a ferrule holder if desired.

[0020] In one aspect the fiber optic connectors (hereinafter "connector") disclosed advantageously comprise a housing with a rear portion comprising a keying portion and a ferrule. The housing provides a first connector footprint that interfaces with other devices for making an optical connection and various different first connector footprints are disclosed herein that may be used with the connector constructions disclosed. The first connector footprints may be defined by a housings having a rear portion (RP) with a keying portion and a front portion (FP). First connector footprints may also be further defined by a transition region (TR) disposed between the rear portion (RP) and the front portion (FP) of the housing.

[0021] In one explanatory example, the housing comprises a part of the rear portion (RP) having a round cross-section (RCS) comprising with a keying portion and a part of the front portion having a non-round cross-section (NRCS). The front portion (FP) or the rear portion (RP) of the housing may be further defined in various configurations as disclosed herein while retaining a part of the rear portion (RP) with the round cross-section (RCS) and a part of the front portion (FP) having a non-round cross-section (NRCS). By way of explanation, the rear portion (RP) comprising a keying portion and the front portion (FP) may have a rectangular cross-section that also provides a first orientation feature for the connectors for alignment during mating and inhibit insertion into a non-compliant device or port. The keying portion of the connector cooperates with a key on a complimentary port to inhibit damage to the port by inhibiting the insertion of a non-compliant connector. The keying portion may also aids the user during blind insertion of the connector into a port to determine the correct rotational orientation when a line of sight is not possible or practical.

[0022] However, other variations of housings according to the concepts disclosed are possible. As an example

of another housing disclosed herein for use with the connector constructions disclosed, the housing may be defined as comprising a part of the rear portion (RP) having a polygonal cross-section (PCS) and a part of the front portion having a non-round cross-section (NRCS). The front portion (FP) or the rear portion (RP) of this explanatory housing may be further defined in various configurations as disclosed herein while retaining a part of the rear portion (RP) with the polygonal cross-section (PCS) and a part of the front portion (FP) having a non-round cross-section (NRCS) such as shown in **FIG. 79 and 79A**. By way of example, the polygonal cross-section (PCS) may be a hexagon, a rectangle, a square or other suitable polygon as desired.

[0023] Housings disclosed herein define the mating interface for a complimentary device suitable for mating with the connector and the connector footprints disclosed are useful for inhibiting insertion into a non-compliant port or device and damaging either the connector or the device along with assuring a suitable optical operation for the optical connection since the connector and device are matched. Moreover, the housings may have features that aid in the proper alignment or orientation of the connector with the complimentary device such as markings, keys, keyways, etc. without significantly changing the primitive form-factors of the housings that are disclosed and claimed herein. By way of example, even though a round cross-section may include another feature such as a key or a keyway it is still considered to be a round cross-section. Additionally, housing may have other features such as locking features for securing the optical mating with a complimentary device or threads for securing a dust cap. The locking feature may provide a predetermined retention force of 50 pounds or more with a complimentary device.

[0024] The housing footprints disclosed herein may be further defined by other geometry of the housing(s). By way of example, the transition region (TR) disposed between the rear portion (RP) and the front portion (FP). The transition region (TR) may have different configurations according to the concepts disclosed. In one embodiment, the transition region (TR) may comprise a first transition portion (TP1) disposed on a first side of the housing and a second transition portion (TP2) disposed on a second side of the housing. The first transition portion (TP1) and the second transition portion (TP2) may be spaced apart by an offset distance (OD) in the longitudinal direction. However, other embodiments of housings disclosed herein may have all of the transition portions of the transition region (TR) aligned along a common transverse plane of the connector as desired. In still other embodiments, the transition region (TR) of the housing may comprise a threaded portion (TP).

[0025] Other variations may further define the housing footprints disclosed herein. By way of example and explanation for use with appropriate housings disclosed, the first transition portion (TP1) comprises a first riser dimension (FRD) from the non-round cross-section

(NRCS) to the round cross-section (RCS), and the second transition portion (TP2) comprises a second riser dimension (SRD) from the non-round cross-section (NRCS) to the round cross-section (RCS), where the first riser dimension (FRD) is different than the second riser dimension (SRD).

[0026] By way of another example of non-round cross-section (NRCS) for use with appropriate housings disclosed herein, a part of the front portion (FP) of the housing having the non-round cross-section (NRCS) comprises a rectangular cross-section having rounded corners (RC). The rectangular cross-section with rounded corners (RC) is a non-round cross-section (NRCS) due to the rectangular cross-section. The rounded corners (RC) may be sized so they have a similar outer dimension (OD) as a dimension (D) for the round cross-section (RCS) or not. The rounded corners (RC) may provide stability and snug fit for the mated connector within a port or device when side-pull forces are experienced to inhibit undue optical attenuation by having the round corners transition between the front portion (FP) to the rear portion (RP). However, other geometry is possible such as chamfers or the like such as when the rear portion (RP) has a polygon cross-section (PCS).

[0027] The housing footprints disclosed herein may be still further defined by other geometry of the housing(s). For instance, the front portion (FP) of the housing may comprise another cross-section portion (ACSP). By way of explanation, the another cross-sectional portion (ACSP) may comprise a SC footprint. The SC footprint can, in part, be similar to the inner housing of a conventional SC connector. This particular housing footprint is useful for allowing the connectors disclosed to be backwards compatible into existing devices or ports using well-established connector footprints as desired.

[0028] Housings may also define further features such as a transition region disposed between the rear portion and the front portion with the transition region comprising an asymmetric transition with respect to a longitudinal axis of the housing. Likewise, other features on the housing may define the housing as asymmetric for orientation or mating with compliant devices or ports.

[0029] Another aspect for some of the advantageous connectors disclosed herein comprise one or more features allowing for rotation of the ferrule during assembly for tuning the connector and improving optical performance. Some of the connector designs disclosed also offer multi-stage tuning of the ferrule/assembly or infinite tuning of the ferrule/assembly to any desired rotational position for improving optical performance.

[0030] The concepts described herein are suitable for making both indoor and outdoor fiber optic cable assemblies using the connectors disclosed such as drop or distribution cables. Further, the fiber optic connectors disclosed may allow for the use of one or more additional components for changing the connector form-factor defined by the particular housing. By way of example, a conversion housing may cooperate with the housing of

the connector for changing the fiber optic connector from the first connector footprint defined by the housing to a second connector footprint at least partially defined by the conversion housing. Consequently, the connectors disclosed herein may be converted to be compatible as other well-known commercial connectors for Fiber-to-the-Home applications such as an SC connector or an OptiTap® connector such as available from Corning Optical Communications of Hickory, NC. Of course the concepts disclosed herein may be used with other fiber optic connector types whether hardened or not and are not limited to these particular connector conversions. Likewise, the connector designs disclosed may be hybrid designs with both optical and electrical connectivity. Electrical connectivity may be provided by contacts on or in a portion of the housing of the connector and may be useful for power or data as desired for applications such as FTTx, 5G networks, industrial applications or the like. These and other additional concepts are discussed and disclosed in illustrative detail with reference to FIGS. herein.

[0031] Several different constructions of fiber optic cable assemblies 100 (hereinafter "cable assemblies") comprising connector 10 and variations of connector 10 are disclosed herein. The connectors 10 may use any of the suitable housings or different connector constructions as desired and appropriate. By way of explanation, **FIGS. 2, 2A, 3 and 5-17** disclose connectors where a ferrule 30 is inserted from a rear end 21 of housing 20, and **FIGS. 19-43 and FIGS. 46-53** disclose connectors where ferrule 30 is inserted from a front end 23 of the connector 10. **FIG. 2A** is representative housing according to the concepts showing keying portion 20KP disposed in the rear portion RP of housing 20. As shown, the keying portion 20KP is a subtractive keying portion from the primitive geometric round shape such as the female key (not labeled) or keyway shown in **FIG. 2A**. However, the concepts for the housings 20 may be modified for using connector designs disclosed, and not all of the subtractive keying portion need to be a keyway. For instance, the keying portion 20KP may be defined as a cut section from a part of the rear portion RP of the housing 20 such as cutting a side to be flat, thereby providing a generally D-shaped cross-section to part of the rear portion RP of the housing 20.

[0032] **FIGS. 4A-4E** depict an explanatory housing 20 for discussing geometry that generally speaking may be used with any appropriate connector construction as well as have the housing modified or altered for the desired housing design or connector construction. As shown, housing 20 comprises a keyway portion 20KP. Further, the dashed line 20KP' illustrates that the keying portion may be formed by slicing a side portion of the housing 20, instead of the keyway shape. The keyway portion 20KP may extend into the transition region TR as well. Likewise, housing 20 of **FIG. 2A** shows the keying portion 20KP with the threaded transition portion (TP), and the housing may be modified or altered as desired for other

housing designs or connector constructions. For instance, the keying portion 20KP may be used with a key on the front portion of the housing 20. Illustratively, FIG. 73 depicts the concept of a male key 20K used with the keying portion 20KP. In this instance, the male key 20K is aligned with the keying portion 20KP in the longitudinal direction of the connector. The concepts disclosed herein may be used with multifiber connectors as well. **FIGS. 44 and 45** disclose concepts related to alternative locking features 20L for use with housings 20 as appropriate. **FIGS. 46-53** disclose another cable assembly 100 comprising connector 10 concepts disclosing another cable adapter that may be used with appropriate connectors 10 disclosed herein. **FIG. 54** depicts connector 10 according to the concepts disclosed having another housing footprint. **FIGS. 56-61** disclose cable assemblies 100 comprising connectors 10 having a first connector footprint where the connectors 10 may be convertible to connectors 10' having a second connector footprint using a conversion housing 80,82. **FIGS. 62-69** disclose cable assemblies 100 comprising connectors 10 having a first connector footprint where the connectors 10 may be convertible to connectors 100" having a second connector footprint using a different conversion housing 82. **FIGS. 70-78** disclose a connectors where ferrule 30 is disposed within a ferrule holder 49 and inserted from a front end 23 of the connector 10.

[0033] **FIG. 2** is a perspective view and **FIG. 3** is an exploded view of cable assembly 100 having connector 10 and a fiber optic cable 90 (hereinafter "cable"). **FIGS. 15 and 16** are longitudinal sectional views of the cable assembly 100 of **FIG. 2** showing details of the construction. **FIG. 2A** depicts cable assembly 100 having connector 10 with a housing 20 that is similar to the housing 20 for connector 10 of **FIG. 2**, but the housing 20 of **FIG. 2A** has a different transition region TR. Specifically, the housing 20 of **FIG. 2A** has a transition region TR with a threaded portion TP and may be used with the connector constructions disclosed herein as appropriate.

[0034] Connector 10 comprises housing 20 and a ferrule 30. Housing 20 comprises a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23. As best shown in **FIG. 7**, ferrule 30 comprises a fiber bore 32 extending from a rear end 31 to a front end 33. Passageway 22 allows one or more optical fibers of cable 90 to pass through the housing 20 for insertion into fiber bore 32 of ferrule 30 such as depicted in **FIG. 7**. Cable 90 comprises at least one optical fiber 92, one or more strength components 94 and a cable jacket 98.

[0035] Connector 10 or components of connector 10 as depicted in **FIGS. 2, 2A, 3 and 5-17** allows ferrule 30 to be inserted into housing 20 from rear end 21 of housing 20. Specifically, ferrule 30 is inserted into an opening 21A at the rear end 21 of housing 20. Housing 20 depicted in **FIG. 2A** is similar to the housing 20 **FIG. 2**, except it has a different transition region (TR). Specifically, the transition region (TR) of the housing 20 of **FIG. 2A** comprises

a threaded portion; otherwise the concepts of the connector are similar to the other disclosed herein. The thread portion (TR) allows the securing of an appropriate dust cap 70 and also allows for the conversion of the connector footprint such as to a hardened connector footprint such as shown in **FIGS. 62-69**. However, the concepts of the rear inserted connector constructions may be used with any suitable housing disclosed herein.

[0036] As depicted, connector 10 of **FIG. 3** comprises housing 20, ferrule sub-assembly 60 and cable adapter 59. In this embodiment, ferrule 30 is a portion of ferrule sub-assembly 60. An opening 21A at the rear end 21 of housing 20 is sized for receiving a portion of ferrule sub-assembly 60. Ferrule sub-assembly 60 is configured to cooperate with the housing 20 for inhibiting the rotation of the ferrule sub-assembly 60 with respect to housing 20 when assembled. However, ferrule sub-assembly 60 may be configured to allow rotation of ferrule 30 for tuning as represented by arrows and angle θ as desired before the ferrule sub-assembly 60 is fully-seated within housing 20 as discussed herein.

[0037] Ferrule sub-assembly 60 also comprises a ferrule carrier 40. Ferrule carrier 40 may have different configurations as disclosed herein. Ferrule 30 is tunable relative to housing 20 if desired and may have step-tuning in defined increments based on the ferrule geometry. However, other features or designs disclosed herein for the connectors may allow infinite tuning of the ferrule to any desired rotation position. Tuning ferrule 30 allows improved optical performance by turning the ferrule so that any eccentricity in the optical fiber, ferrule or connector is rotated to a known rotational position or quadrant in a uniform manner. Consequently, connectors or other mating devices can be tuned to similar relative rotational positions for improving optical performance such as reducing optical insertion loss of due to optical fiber core misalignment or the like as understood in the art. Embodiments disclosed herein may also have a plurality of interfaces between components for tuning of the connector as desired.

[0038] The design of connector 10 of **FIG. 3** may also advantageously allow multi-stage tuning if desired. Ferrule 30 or other components/assemblies may be tunable in step increments such as by quadrants or be infinitely tuned as desired. By way of example, ferrule sub-assembly 60 may be configured to allow rotation of the sub-assembly with respect to cable adapter 59 (or other components) as desired for tuning ferrule 30 as represented by the arrows and angle Φ as depicted. Moreover, multi-stage tuning may result in infinite tuning, which means that any desired rotational position desired for any eccentricity of the fiber core within the ferrule 30 is possible. The step or degree of tuning at different component interfaces may depend on the particular construction of the ferrule, ferrule carrier, cable adapter or housing with respect to the permitted of rotation and the possible increments of rotation for the components.

[0039] By way of example, a first-stage of tuning may

be step-tuning by quadrant and a second-stage of tuning may be infinite tuning to allow infinite rotation as desired. More specifically, the first-stage step-tuning may be used for gross tuning of the eccentricity of the fiber core such as to the desired quadrant of the and then the second-stage provides infinite tuning by allowing the fine tuning of the eccentricity of the fiber core within the quadrant for precise rotational positioning. By way of explanation, infinite tuning may accomplished by having one or more components rotate through an angle of ± 180 degrees without step increments, thereby allowing any rotational position for ferrule 30. Of course, other tuning schemes are possible using the concepts disclosed herein. Likewise, variations of ferrule carrier 40 or ferrule subassembly 60 are possible and disclosed herein for use with any suitable housing 20.

[0040] Connector 10 of **FIG. 3** allows ferrule 30 to be rotated or tuned within the ferrule subassembly 60 as depicted. Ferrule 30 may be configured to rotate as a step rotation or infinite rotation depending on the particular design. For instance, ferrule 30 could have a selectively tunable surface 36 that is round for providing infinite rotational positioning or selectively tunable surface of ferrule 30 could comprise a plurality of planar surfaces 36 for step tuning by only allowing certain rotation positions. Moreover, infinite tuning of ferrule 30 may be accomplished by tuning or rotating through an angle θ of ± 180 relative to the ferrule carrier 40 if desired. Being able to rotate one or more components in either direction allows for flexibility in tuning and inhibits excessive twisting of the optical fiber, which is generally undesirable.

[0041] Connector 10 of **FIG. 3** also allows ferrule carrier 40 to be rotated for tuning the ferrule relative to housing 20 as depicted. In this embodiment, ferrule carrier 40 is tunable relative to the housing 20 by way of the rotational position of ferrule carrier 40 relative to cable adapter 59 or rotational position of the cable adapter 59 with respect to the housing. Specifically, ferrule carrier 40 may be tunable through an angle Φ of ± 180 relative to the housing 40 or in step-increments such as using ferrule carrier rotational key 41K (**FIG. 5**) or the like as desired. For instance, a ferrule carrier rear end 41 may have one or more keys for cooperating with cable adapter 59 and only allowing certain positions for tuning, or the ferrule carrier rear end 41 may simply cooperate with the cable adapter 59 for providing infinite rotational positions for tuning. The details of tuning will be discussed in more detail below.

[0042] Likewise, it is possible for connector 10 of **FIG. 3** to have to a third interface for tuning. Specifically, the cable adapter 59 may be tunable relative to the rear end 21 of housing 20. Like the ferrule carrier rear end 41, a flange portion (not numbered) of cable adapter 59 may have one or more keys for cooperating with the rear end 21 of housing 20 and only allowing certain positions for tuning, or the flange portion of cable adapter 59 may simply cooperate with the rear end 21 of housing 20 for providing infinite rotational positions for tuning. Thus, con-

connector 10 of **FIG. 3** provides several different tuning options for manufacturing depending on the desired requirements for the connector.

[0043] **FIGS. 4-4E** depict an explanatory housing 20 for connectors and will be described in further detail to explain concepts and geometry of housings 20 suitable for use with connector concepts disclosed herein. Although the housing of **FIG. 4** is a close-up perspective view of connector 10 having a different construction than the housing 20 depicted in **FIGS. 2 and 3**, the housing 20 of **FIG. 4** is similar to housing 20 of the connector of **FIGS. 2 and 3**. Generally speaking, the footprint of housing 20 of **FIG. 4** may be used with connector constructions that insert the ferrule 30 from the rear end 21 of housing 20 or connector constructions that insert the ferrule 30 from the front end 23 of housing with appropriate modification(s) for the connector construction. By way of explanation, the longitudinal passageway 22 of the housing 20 may need to be modified for the different connector constructions as appropriate.

[0044] Connectors 10 disclosed herein may use any suitable housing 20 with the desired footprint or construction. The disclosure describes several different housings that may be used with connector constructions as appropriate and other variations are also possible. **FIG. 4** depicts housing 20 and connectors 10 may use a variety of different variations of the housing shown in **FIG. 4** or other housings such as the housing 20 shown in **FIG. 5A** which has the locking feature on a separate component. Likewise, housing 20 may comprise one or more features for alignment during mating and may also comprise other features for securing or locking the connector in a suitable complimentary port or device. Housing 20 has a relatively compact form-factor such as having a length L of about 40 millimeters (mm) or less and a cross-section dimension of about 15 mm or less such as 12 mm or less, but other suitable dimensions are possible for the housing.

[0045] **FIGS. 4A-4D** are respective cross-sectional views of the housing of **FIG. 4** taken along respective planes defined by line 4A-4A, line 4B-4B, line 4C-4C and line 4D-4D. Lines 4B-4B and 4C-4C are taken at the same cross-section. **FIG. 4E** is a side view of housing 20 that is similar to housing 20 shown in **FIG. 4**, but further includes threads 28 like housing 20 depicted in **FIGS. 3 and 4**. Threads 28 are disposed on the front portion FR of housing 20 and are discontinuous.

[0046] Housing 20 comprises the rear end 21 and the front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end as shown in **FIG. 4E**. Housing 20 of **FIGS. 4A-4E** comprises a part of the rear portion RP having a round cross-section RCS and a part of the front portion having a non-round cross-section NRCS. Transition region TR is disposed between the rear portion RP and the front portion FP of housing 20. Transition region TR comprises a first transition portion TP1 disposed on a first side of the housing and a second transition portion TP2 disposed on a second side of the housing. In this version, the first transition portion

TP1 and the second transition portion TP2 are spaced apart by an offset distance OD in the longitudinal direction of the housing 20 as best shown in FIG. 4E. The offset distance OD for the transition portion TP is useful since it allows connector only to fully-seat into complimentary devices or ports having the matching geometry. However, other housings 20 for connectors disclosed herein may omit the offset distance if desired.

[0047] Housings 20 may also have suitable features or structures for sealing connectors 10. The sealing plane should be located at a suitable location along the housing 20 for providing suitable environmental protection as necessary for the desired environment. Illustratively, housing 20 may include one or more grooves 20G for receiving an appropriately sized O-ring 65. Housings 20 may include other feature or structures for aiding in sealing. For instance, the housing 20 may have a suitable surface for receiving a portion of a heat shrink 99 or the like for sealing between a portion of the cable 90 and the connector 10. Any suitable heat shrink 99 may be used such as a glue-lined heat shrink. Moreover, other structures or features are possible for aiding in providing a robustly sealed cable assembly 100.

[0048] As used herein, the transition region TR is disposed between the rear end 21 and the front end 23 where the housing 20 makes a transformational shift in the primitive cross-sectional shapes from a part of a rear portion RP to a part of the front portion FP. As used herein, a primitive cross-section means the outer perimeter of the cross-section without regard for the internal features of the cross-section. Further, portions of the cross-sections may include other features that modify the shape of the primitive cross-sections as desired such as a keying feature, retention feature or a locking feature, while still practicing the concepts of the transition region TR or front/rear portions as disclosed herein. For instance, a front portion FP may have rounded corners or chamfered corners while still being a rectangular cross-section.

[0049] In this embodiment of housing 20, the front portion FP of housing 20 has a rectangular cross-section that provides a first orientation feature for the connectors for alignment during mating and inhibit insertion into a non-compliant device or port. The non-round cross-section NRCS has the rectangular cross-section with a width W1 and a height H1 as shown in FIG. 4B. The rectangular cross-section provides the first orientation feature since the rectangular portion may only be inserted into a complimentary device or port in certain orientations due to its rectangular shape, thereby inhibiting incorrect insertion or insertion into non-compliant devices or ports.

[0050] As best shown in FIG. 4C, housing 20 of FIGS. 4A-4E has the first transition portion TP1 that comprises a first riser dimension FRD from the non-round cross-section NRCS to the round cross-section RCS, and the second transition portion TP2 comprises a second riser dimension SRD from the non-round cross-section NRCS to the round cross-section RCS, where the first riser di-

mension FRD is different that the second riser dimension SRD. The riser dimensions are measured perpendicular from the mid-point of the cord defined by the surface of non-round cross-section NRCS as shown in FIG. 4C to the outer surface of the round cross-section RCS.

[0051] The geometry of housing 20 of FIGS. 4A-4E also comprises the non-round cross-section NRCS comprising a rectangular cross-section having rounded corners RC, and the rounded corners RC are sized so they have a similar outer dimension OD as a dimension D for the round cross-section RCS. The rounded corners (RC) may provide stability and snug fit for the mated connector 10 within a port or device when side-pull forces are experienced to inhibit undue optical attenuation by having the round corners transition between the front portion FP to the rear portion RP.

[0052] The front portion FP of housing 20 depicted has more than one primitive cross-sectional shape over its length. Specifically, the front portion FP of housing 20 of FIGS. 4-4E also comprises another cross-section portion ACSP. By way of explanation, the another cross-sectional portion (ACSP) may comprise a SC footprint. The SC footprint can, in part, be similar to the inner housing of a conventional SC connector. This particular housing footprint is useful for allowing the connectors disclosed to be backwards compatible into existing devices or ports using well-established connector footprints as desired. Other embodiments may have connectors configured for LC connector or other known connector footprints as desired.

[0053] As best shown in FIGS. 4 and 4D, the front portion FP of housing 20 may comprise another cross-section portion ACSP with a primitive cross-section that is different than the non-round cross-section NRCS depicted in FIG. 4D. More specifically, the non-round cross-section NRCS changes to another cross-section portion ACSP as shown. As depicted in FIG. 4D, the another cross-section portion comprises a rectangular cross-section with a width W2 that is less than W1 and a height H2 is similar to height H1. By way of example, height H2 may be equal to height H1. In one embodiment, the another cross-section portion ACSP has a primitive cross-section that is similar to a cross-section near a front end of a SC connector.

[0054] Likewise, the rear portion RP may have more than one primitive cross-section shape over its length as desired. Moreover, rear portion RP may include one or more retention features or locking features that alter or modify the cross-section. For instance, housing 20 may also include locking feature 20L so that the connector may be secured in an adapter, port or other suitable device. For instance, locking feature 20L may comprise features integrated into the housing such as one or more of a groove, a shoulder such as shown in FIG. 4E and FIG. 45, a scallop such as shown in the housing 20 of FIG. 3, a reverse bayonet such as depicted in FIG. 44, or a ramp with a ledge such as shown in FIG. 71. In these examples, the locking features 20L advantageously are integrated

into the housing 20 and do not require extra components and may be used with any of the disclosed concepts. In some embodiments, the locking features 20L are subtractive portions from the primitive geometry of the rear portion RP such as a notch in the round rear portion RP. Consequently, having the locking features integrated into the housing 20 (e.g., monolithically formed as part of the housing) may allow denser arrays of connectors in complimentary devices. Moreover, these locking features integrated into the housing 20 are rearward of the sealing location of connectors 10. For example, the integrated locking features of housing 20 are disposed rearward of at least one groove 20G that seats O-ring 65. Locking feature 20L may cooperate with features of a complimentary mating device for securing the mating of the connector 10 with the complimentary mating device.

[0055] Housing 20 may also have features that aid in the proper alignment or orientation of the connector with the complimentary device such as markings, keys, keyways, etc. without changing the primitive form-factors of the housings that are disclosed and claimed herein. Additionally, housing may have other features for mating with a complimentary device or threads for securing a dust cap. **FIG. 2** is a perspective view of connector 10 with a housing 20 similar to the housing 20 depicted in **FIG. 4**, but it further includes threads 28 and keying feature 20K. **FIGS. 25 and 26** depict a fiber optic connector similar to **FIG. 20** having an alternative housing 20A that may be used with any suitable fiber optic connector disclosed herein. Housing 20 further comprises a keying feature 20K. Keying feature 20K has a predetermined location with respect to an orientation of housing 20 for aligning the form-factor of the housing with a respective mating device. For instance, the housing 20 or keying feature 20L provides a proper orientation for connection in one orientation, which may be desired for connectors having angled ferrules. In this embodiment, keying feature 20K ensures correct rotational orientation of the connector 10 during insertion and mating with another device.

[0056] In this particular embodiment, housing 20 is monolithically formed; however, other embodiments could have designs where the housing was formed from one or more components as desired. Housing 20 having a plurality of components could be assembled by snap-fitting, adhesive, welding or the like. Illustratively, **FIGS. 39 and 40** depict a housing 20 having a plurality of components.

[0057] Returning to the description of connector 10 of **FIG. 3** and its components, **FIG. 5** is an exploded view of ferrule subassembly 60 shown in connector 10 of **FIG. 3**. Ferrule subassembly 60 may have several different constructions as depicted herein and still practice the concepts disclosed. For instance, ferrule subassemblies 60 may use different ferrule carrier 40 constructions such as disclosed or desired while still practicing the concepts disclosed.

[0058] Ferrule 30 is a portion of ferrule subassembly

60. In these embodiments, an opening 21A at the rear end 21 of the housing 20 is sized for receiving a portion of the ferrule subassembly 60. When assembled, the ferrule subassembly 60 is configured to cooperate with the housing 20 for inhibiting the rotation of the ferrule subassembly 60 with respect to the housing 20. For instance, the ferrule subassembly may have a friction fit or interlocking structure that cooperates with the passageway 22 of the housing 20 that inhibits rotation of the ferrule subassembly 60 with respect to housing 20. However, in other embodiments the ferrule subassembly 60 may be free to rotate for tuning or the like until the ferrule subassembly 60 is fixed in position relative to housing 20 such as with an adhesive or the like.

[0059] As depicted in **FIG. 5**, ferrule subassembly 60 comprises a ferrule carrier and a resilient member 50. Some embodiments of the ferrule subassembly 60 may omit the resilient member 50 and not bias the ferrule 30 forward. If a resilient member 50 is used, ferrule carrier 40 may further comprise a resilient member pocket 46 as shown. As depicted, the resilient member pocket 46 may be configured for receiving the resilient member 50 in a direction transverse to a longitudinal direction of the ferrule carrier 40 (e.g., transverse to the optical fiber passageway) as represented by the arrow.

[0060] As shown in **FIG. 5**, ferrule carrier 40 comprises a ferrule carrier rear end 41, a ferrule carrier front end 43 and a ferrule carrier passageway 42 extending from the ferrule carrier rear end 41 to the ferrule carrier front end 43, where the ferrule carrier passageway 42 comprises a fiber buckling zone 47. The fiber buckling zone allows the optical fiber 92 to have room to move rearward during mating without causing undue optical attenuation. In other words, during mating the ferrule 30 may be pushed rearward slightly cause the optical fiber 92 of the cable 90 to deflect and in order to inhibit optical attenuation the fiber buckling zone 47 provided for allowing fiber movement.

[0061] Ferrule carrier 40 may have several different designs. In one embodiment, the ferrule carrier comprises a ferrule carrier front end 43 with the ferrule carrier front end 43 comprising at least one cantilevered portion such as shown in **FIG. 10**. Generally speaking, the at least one cantilevered portion extends from a medial portion of the ferrule carrier and allows the assembly of the ferrule 30 into the ferrule carrier 40. The at least one of the first cantilevered portion 43A may also be configured to cooperate with the housing 20 for inhibiting the rotation of the ferrule 39 with respect to the housing 20 when the ferrule subassembly 60 is fully-seated in the housing 20, and allow rotation of the ferrule 30 for tuning when the ferrule subassembly 60 is not seated in the housing 20.

[0062] By way of explanation and example, the front portion of the longitudinal passageway 22 of housing 20 may be sized for snugly fitting to shoulders 43S disposed on the ferrule carrier front end 43 so that one or more of the cantilevered portions either squeeze the ferrule 30 and inhibit rotation or inhibit the deflection of the

at least one cantilevered portion so that the ferrule 30 is inhibited from rotating beyond its desired location. However, the ferrule carrier 40 still allows the ferrule 30 to "float" to the desired degree so it can translate such as in the rearward direction (i.e., z-direction) or X-Y directions for allowing the ferrule to move slightly to the desired location for precise alignment during mating. For instance, the ferrule 30 is biased and may "float" on the resilient member.

[0063] The use of the ferrule carrier described herein should not be confused with a ferrule holder that fixes a conventional ferrule directly to the ferrule holder so there is no appreciable movement between the ferrule and the ferrule holder. Conventional connectors allow the entire assembly of the ferrule holder/ferrule to be biased by a spring. On the other hand, embodiments such as depicted in **FIG. 3**, **FIG. 17** and **FIG. 21** allow the ferrule to float without using a ferrule holder. Moreover, the use of the ferrule holder/ferrule assembly is another component interface where stack-up of tolerances may exist and impact geometry. Consequently, connectors disclosed herein may eliminate the conventional ferrule holder along with the expense and manufacturing time required by using a conventional ferrule holder.

[0064] **FIG. 5** depicts the ferrule carrier front end 43 comprising a first cantilevered portion 43A and a second cantilevered portion 43B. **FIGS. 6 and 7** are longitudinal sectional views of ferrule subassembly 60 of **FIG. 3** showing details of the design and assembly. **FIGS. 8 and 9** respectively are a perspective view and close-up perspective view of ferrule carrier 40 of **FIGS. 5-7** depicting details of the ferrule carrier.

[0065] In this embodiment, at least one of the first cantilevered portion 43A or the second cantilevered portion 43B are configured to cooperate with the housing 20 for inhibiting the rotation of the ferrule 30 with respect to the housing 20 when the ferrule subassembly 60 is fully-seated in the housing 20, and allow rotation of the ferrule 30 for tuning when the ferrule subassembly is not seated in the housing 20. By way of explanation, ferrule carrier front end 43 of **FIG. 5** may be sized to cooperate with the housing 20 by fitting into a passageway 22 that inhibits the cantilevered portions 43A, 43B from deflecting outwards, thereby inhibiting the rotation of the ferrule 30 with respect to the ferrule carrier 40 when the ferrule carrier front end 43 is fully-seated in the housing 20 since some of the selectively tunable surfaces 36 (in this case the planar surfaces 36S) of ferrule 30 cooperate with ferrule retention structure 43C of the ferrule carrier 40.

[0066] Ferrule subassembly 60 is assembled by placing the resilient member 50 into the resilient member pocket 46 by inserting the spring in the transverse direction to the ferrule carrier passageway as best shown in **FIG. 5**. Ferrule carrier 40 of **FIG. 5** allows ferrule 30 to be inserted from the ferrule carrier front end 43 as represented by the arrow. As ferrule 30 is inserted into the ferrule carrier front end 43 the first cantilevered portion 43A and the second cantilevered portion 43B deflect out-

ward as represented by the arrows shown in **FIG. 6**. As the ferrule 30 is seated in the ferrule carrier front end 43 the first cantilevered portion 43A and the second cantilevered portion 43B spring back toward their original positions to capture the ferrule 30. As best shown in **FIGS. 7 and 9**, one of the first cantilevered portions 43A or the second cantilevered portions 43B comprise a ferrule retention structure 43C. Consequently, when the first and second cantilevered portions 43A, 43B are inhibited from deflecting, then ferrule 30 is inhibited from rotating such as when the ferrule subassembly 60 is fully-seated within housing 20. However, when the first and second cantilevered portions 43A, 43B are allow to deflect outwards such as shown in **FIG. 6**, then the ferrule 30 may be rotated thru any desired angle θ for tuning.

[0067] Further, the rear end of ferrule carrier 40 may have other features that allow tuning if desired. For instance, ferrule carrier rear end 41 may have a ferrule carrier groove 41G or shoulder for cooperating with the cable adapter 59, thereby allowing rotation between the two components in either step increments or infinite increments as desired and discussed herein. By way of example, ferrule carrier 40 may comprise one or more ferrule carrier rotational keys 41K to allow rotational step increments or the ferrule carrier 40 may omit ferrule carrier rotational keys 41K and allow infinite rotational positions relative to the cable adapter 59, which may be keyed to the rear end 21 of housing 20. Ferrule carrier 40 may be attached to cable adapter in any suitable manner such as adhesive, welding, mechanical fitment, etc.

[0068] Other embodiments may integrate the ferrule carrier 40 and cable adapter 59 into a monolithic component. However, using separate cable adapter 59 allows the connectors 10 to be adapted to different cables such as round, flat, different sizes by merely selecting the appropriate sized cable adapter 59 for the desired cable type. Additionally, cable adapter may include one or more flexures 59F at the rear portion for providing cable bending strain-relief if desired instead of using a conventional boot. The flexures as depicted are suitable for flat cables that have a preferential bend-characteristic.

[0069] Again, the connectors disclosed herein may allow the ferrule 30 to have a small amount of "float" within ferrule carrier or housing without using a ferrule holder like conventional fiber optic connectors. Conventional connectors mount the ferrule within a ferrule holder in a fixed position and then typically the ferrule holder is biased by a spring. On the other hand, some of the connector designs disclosed by the present application have the resilient member 50 directly bias the ferrule, which eliminates parts and also allows more flexibility for ferrule selection or tuning. Moreover, the ferrule may be tuned relative to the ferrule carrier or the housing depending on the connector design. Further, the high precision geometry ferrule holder is eliminated along with the tolerance stack-up using a conventional connector with a ferrule holder. However, the housings concepts disclosed herein may be used with connectors having ferrule hold-

ers such as disclosed in **FIGS. 70-78**.

[0070] Ferrule retention structure 43C is configured to cooperate with geometry on ferrule 30. Specifically, ferrule 30 depicted in **FIG. 5** has at least one selectively tunable surface 36 that cooperates with the ferrule retention structure 43C. Ferrule retention structure 43C is sized for snugly-fitting to one or more selectively tunable surfaces 36 of ferrule 30 as shown in **FIG. 7**. However, when the ferrule carrier 40 is not seated in housing 20, the ferrule 30 may be rotated within ferrule carrier 40 about an angle θ for optically tuning the assembly. Ferrule 30 may have a round selectively tunable surface 36 for infinite tuning, but that requires a tight fit between the ferrule carrier front end 43 and the appropriate portion of the passageway 22 of the housing 20. If the ferrule 30 uses selectively tunable surfaces 36 comprising a plurality of planar surfaces 36S, then the appropriate portion of the passageway 22 merely has to inhibit deflection of the at least one cantilever arm so that the ferrule 30 is inhibited from rotation when fully assembled. **FIGS. 8 and 9** depict detailed views of the ferrule carrier 40 of **FIG. 5**. As depicted, the first and second cantilevered portions 43A, 43B of ferrule carrier 40 may have stepped down portions forward of shoulder 43S, thereby allowing robust seating and inhibiting of deflection of the cantilevered arms 43A, 43B.

[0071] Ferrule 30 may have any suitable number of plurality of planar surfaces 36S as desired. By way of explanation, four planar surface 36S allows quadrant tuning and further planar surfaces allows finer tuning in a first-stage. However, ferrules 30 may have any number of planar surfaces as desired such as six or eight planar surfaces to increase the number of steps for tuning the ferrule. Generally speaking, quadrant tuning is sufficient and if coupled with an infinite second-stage tuning interface, then the connector advantageously may be tuned to any desirable rotational position in a quick and easy manner during manufacturing.

[0072] **FIG. 10** is a perspective view of an alternative ferrule carrier 40' that may be used in the ferrule subassembly 60 and **FIGS. 11 and 12** respectively are a partially exploded view and an assembled view of the alternative ferrule carrier 40' in ferrule subassembly 60. This ferrule carrier 40' is similar to ferrule carrier 40, but only has first cantilevered arm, and requires loading of the ferrule 30 from the transverse direction like the resilient member 50. Ferrule 30 may still be rotated with respect to ferrule carrier 40', but it may require a slightly larger rotational force to deflect the U-shaped portion or a slightly upward translation of the ferrule 30 to help reduce the rotational force required for the rotation.

[0073] **FIGS. 13 and 14** respectively are a partial sectional view and a cross-sectional view of the alternative ferrule carrier 40' of **FIGS. 10-12** depicted assembled into ferrule subassembly 60 and disposed in housing 20 of fiber optic connector. As depicted, the passageway 22 of housing 20 may include different geometry for seating the ferrule subassembly 60 within the housing and inhib-

iting the rotation of ferrule 30 relative to the housing 20 using the alternative ferrule carrier 40'. As depicted, housing 20 comprises a passageway 22 with an internal key 20KI that cooperates with the U-shaped portion of the alternative ferrule carrier 40'. Consequently, the alternative ferrule carrier is inhibited from further rotation with respect to the housing 20.

[0074] **FIG. 17** is an exploded view of another cable assembly 100 that is similar to the cable assembly 100 of **FIG. 2** with a fiber optic connector having a different ferrule subassembly 60 and **FIG. 18** is a partially exploded view of the cable assembly 100 of **FIG. 17** with the fiber optic cable attached to the ferrule subassembly 60. This cable assembly 100 comprises a connector 10 that has a ferrule carrier 40 that is monolithically formed with the cable adapter as depicted. Otherwise, the cable assembly 100 is similar to the cable assembly 100 of **FIG. 2**.

[0075] The concepts disclosed herein may be used with other types and designs of connectors. For instance, **FIGS. 19-43** and **FIGS. 46-53** disclose connectors where ferrule 30 is inserted from a front end 23 of the connector 10. These connectors designs are depicted without a ferrule holder as generally discussed herein, but may be used with a ferrule holder if desired. These connector designs are different from the earlier connector designs since they do not use a ferrule carrier; however, these designs can still be optically tuned if desired. Specifically, these connector designs comprise a ferrule 30 that "floats" relative to the housing 20 and uses a different structure for securing the ferrule while allowing the ferrule float. Any suitable housings 20 as described herein may be used for these connectors so long as they are suitably modified for securing the ferrule 30 as disclosed in more detail below.

[0076] Illustratively, **FIGS. 19 and 20** are perspective views of cable assembly 100 having a different fiber optic connector 10 with housing 20 that is similar to the housing shown with the fiber optic connector of **FIG. 2**, but having ferrule 30 that loads from the front end 23 of housing 20 and secured a transverse ferrule retention member 140.

FIG. 21 is an exploded view of another cable assembly 100, that is similar to that of **FIG. 19** with the connector having a housing having threads on the housing that are discontinuous. **FIG. 22** is an perspective assembled view of the cable assembly 100 of **FIG. 21** and **FIG. 23** is a perspective view of the cable assembly 100 of **FIG. 22** with a dust cap 70 installed. **FIG. 24** is a longitudinal sectional view of the cable assembly 100 of **FIG. 22** in a vertical direction and **FIG. 29** is a longitudinal sectional view of a front portion of the fiber optic connector 100 in a horizontal direction.

[0077] With reference to **FIG. 21**, connector 10 comprises housing 20, ferrule 30 and transverse ferrule retention member 140. Housing 20 is similar to the other housings disclosed herein, but further comprises an opening 129 in an outer surface that is transverse to the longitudinal passageway 22 of housing 20. The opening 129 is sized for receiving the transverse ferrule retention

member 140 and securing the ferrule 30 in a manner that allows suitable movement so it may float as appropriate as depicted in **FIG. 24**. Connector 10 may also comprise a band 69 for securing a cable 90 to the connector if desired.

[0078] **FIG. 25** is a detailed exploded view of the front end of the cable assembly 100 of **FIG. 22** and **FIG. 26** is a cross-sectional view taken at the opening 129 of the housing 20 of **FIG. 19** showing transverse ferrule retention member 140 securing the ferrule 30. As depicted in **FIG. 25**, ferrule 30 is loaded into the passageway 22 of housing 20 from the front end 23 and secured by the cooperation of the ferrule 30 with the transverse ferrule retention member 140 that is inserted into opening 129 for cooperating with at least one surface of the ferrule 30. Specifically, ferrule 30 is inserted into the passageway 22 until the cooperating surface such as a ferrule retention feature aligns with the opening 129 so that the transverse ferrule retention member 140 may engage the surface and securing the ferrule. Additionally, the at least one surface of the ferrule 30 that serves as the ferrule retention feature cooperates with the transverse ferrule retention member 140 is sized relative to the transverse ferrule retention member so that the ferrule 30 may float. The ferrule retention feature may also be the same feature as the at least one selectively tunable surface 36.

[0079] In this embodiment, ferrule has at least one selectively tunable surface 36 so that ferrule 30 may have at least two rotational orientations with respect to the housing 20 (and which acts as the ferrule retention feature). However, ferrules 30 may have any suitable numbers of selectively tunable surfaces 36 so the ferrule 30 may have the desired number of rotational positions for tuning the ferrule. By way of example, ferrule may have four, six, eight or any suitable number of selectively tunable surfaces 36 as desired. More specifically, the longitudinal passageway 22 of housing 20 extending from the rear end 21 to the front end 23 also comprises a tuning pocket 24 in cooperation with the longitudinal passageway 22. The tuning pocket 24 allow the rotation or manipulation of the ferrule 30 within the housing as needed. In this embodiment, the transverse ferrule retention member 140 is secured to the housing 20 using a pair of catches 140C disposed on the arms of the transverse ferrule retention member 140. Catches 140C may snap-fit to portions of the housing 20 disposed in opening 129 such ledges. However, other variations for securing the ferrule 30 are possible. By way of example, **FIGS. 27 and 28** respectively depict a detailed view of an alternative transverse ferrule retention member 140 having catches 140C and cross-sectional view showing the alternative transverse ferrule retention member 140 for securing ferrule 130. As best depicted in **FIG. 27**, the catches 140C are disposed on a medial portion of the arms of this alternative transverse ferrule retention member 140. Consequently, the catches 140C cooperate with a portion of ferrule 30 as depicted in **FIG. 28**, instead of the housing 20 as depicted in **FIG. 26**. **FIG. 29** is a sectional view of

a portion of the housing 20 having a width of opening 129 being larger than the width of the transverse ferrule retention member 140 so that the ferrule 30 may float. **FIG. 30** is a sectional view depicting tuning pocket 24 of housing 20 that allows rotational tuning of the ferrule 30 during manufacture for improving optical performance. Specifically, when transverse ferrule retention member 140 is disengaged, then the ferrule 30 may be rotated relative to the ferrule. As depicted, tuning pocket 24 allows ferrule 30 to be rotated by a suitable angle θ for optical tuning to a preferred rotational position as represented by the arrow. By way of example, ferrule 30 may be rotated by an angle θ of ± 180 degrees, but other suitable angles are possible.

[0080] **FIGS. 31 and 32** depict explanatory ferrules 30 having at least one selectively tunable surface 36. **FIG. 31** shows a ferrule that may be tuned to quadrants with four selectively tunable surfaces 36. Generally speaking, the selectively tunable surfaces 36 are configured as planar surfaces as shown. More specifically, the selectively tunable surfaces 36 are formed by a plurality of planar surfaces that are recessed on the ferrule 30. Finer tuning is possible with the concepts disclosed by having more selectively tunable surfaces such as six, eight, ten or twelve, thereby providing more rotational positions for securing the ferrule 30. **FIG. 32** depicts a ferrule 30 where the selectively tunable surfaces 36 are disposed adjacent to a free rotation portion 36A of the ferrule 30, thereby allowing rotation of the ferrule for tuning during assembly without removing the transverse ferrule retention member 140. By way of explanation, the ferrule 30 in **FIG. 32** may be secured by transverse retention member 140 and when rotational tuning is required, then the ferrule 30 may be displaced rearward until free rotation portion 36A is aligned with the transverse retention member 140 allowing rotation of the ferrule in either direction and when the desired rotational position is reached the ferrule 30 is allowed to translate to the forward position where the selectively tunable portions 36 engage and cooperate with the transverse ferrule retention member 140 to inhibit rotation of the ferrule 30. Consequently, the transverse ferrule retention member 140 does not need to be removed from housing 20 for tuning.

[0081] **FIGS. 33-36** are various views of depicting the housing 20 of the connector 10 of **FIG. 23** comprising opening 129 and tuning pocket 24. As depicted, housing 20 is similar to the other housings and may be modified for the desired housing configuration as desired. For instance, although the housing 20 depicts threads 28 that are discontinuous for attaching dust cap 70 such as shown in **FIG. 23**, variations are possible that eliminate the threads 28 and use a push-on dust cap. Likewise, other variations to the housing 20 are possible such as changing the mating geometry and using the concepts disclosed with the mating geometry of the housing 20 depicted in **FIG. 54**. Further, housings 20 may have different retention features or different locking features 20L. By way of comparison, housing 20 of **FIG. 3** comprises

a locking feature 20L disposed between rear end 21 and a front end 23 configured as a scallop and the locking feature 20L of the housing of **FIG. 4** is configured by a shoulder. The shoulder comprises an enlarged annular portion 126 with a flat surface on the rear side.

[0082] By way of example, **FIG. 37** is a perspective view of another cable assembly 100 with still another alternative connector 10 that is similar to connector 10 of **FIG. 19**, but further comprises multi-piece housing 20 comprising a nosepiece 160. **FIG. 38** is a perspective view of the cable assembly 100 with dust cap 70 and **FIG. 39** is an exploded view of the cable assembly 100.

[0083] As best depicted in **FIG. 39**, the connector 10 comprises a housing 20 having nosepiece that fits about a front end 23. In this configuration, using the separate nosepiece 160 provides more access to the passageway 22 of the housing and allows more room and vision for assembly. Moreover, the opening 129 is disposed in a location that is covered by nosepiece 160 so that once the connector is tuned and the nosepiece 160 is secured the transverse ferrule retention member is not visible or accessible. Housing 20 of this embodiment also has a different locking feature 20L compared with the housing depicted in **FIG. 33-36** and an aperture 29. Locking feature 20L is configured as a groove for receiving a clip or other suitable locking feature from a complimentary device for retaining the connector in a mated state when secured. This embodiment of the connector also use cable adapter 59 so that the connector may accommodate different cable types by using the appropriately sized cable adapter for the given cable 90.

[0084] **FIG. 40** is a front end sectional view of the connector 10 of **FIG. 37** showing the nosepiece 160 attached to the front end of housing 20 and **FIG. 41** is a front end view of the housing showing an attachment interface (not numbered) such as a weld interface disposed on a front portion of the housing 20. As depicted in **FIG. 40**, once the nosepiece 160 is installed it inhibits the removal of the transverse ferrule retention member 140. In other words, the transverse ferrule retention member 140 is not visible, nor is it accessible once the nosepiece is installed. Consequently, once the connector is tuned and the nosepiece is suitable installed, the transverse ferrule retention member 140 is tamper-resistant. The attachment interface of the housing provides a surface for attaching nosepiece 160. Nosepiece 160 may be attached in any suitable manner such as adhesive, friction-fit, snap-fit, welding or the like as desired. In one embodiment, the nosepiece 160 is formed from a translucent material. Using a translucent material for nosepiece 160 allows the use of a UV curable epoxy for securing the nosepiece 160.

[0085] Still other variations of connectors are possible using modified housings or other modified components. **FIGS. 42 and 43** are perspective and side views of a connector 10 similar to **FIG. 37** having an alternative housing 20. Housing 20 in this embodiment does not have an offset distance among transition portions TP1-

TP4. In other words, all of the transition portions TP1-TP4 are aligned. Additionally, this housing 20 comprises keying feature 20K for orienting the connector for mating. Keying feature 20K is a key, but other embodiments may use other suitable structure such as a keyway or the like.

[0086] Other variations of housings disclosed herein are also possible such as having other shapes for the rear portion RP such as a polygon cross-section PCS, instead of the round cross-section RCS. Polygon cross-sections may have any suitable number of side such as four, five, six, seven or eight, but other suitable number of sides are also possible. Still other variations are possible with the housing concepts disclosed. For instance, the housing 20 of the connectors may be configured to work with other devices so that a retention feature or locking feature of the connector is intended to cooperate with different devices for maintaining the optical connection at the mating interface. By way of example, **FIGS. 44 and 45** are perspective views of portions of alternative housings 20 depicting other locking feature designs. The housings 20 depicted in **FIGS. 44 and 45** may be used with any suitable connectors disclosed herein. Likewise, locking or retention features may be selected with other features such as keying features 20K. Keying feature 20K has a predetermined location with respect to an orientation of housing 20 for aligning the connector form-factor with a respective mating device. Specifically, the housing 20 provides a proper orientation for connection in one orientation, which may be desired for angled ferrules. In this embodiment, keying feature 20K is disposed on a center line of fiber optic connector 10 and ensures correct rotational orientation during insertion and mating with another device.

[0087] Components or features of connectors may be selected as desired to form other variations of connectors. Illustratively, **FIG. 46** is a perspective view of still another cable assembly 100 using a connector similar to the connector of **FIG. 37**, but having a different cable adapter 59. The connector also has a different type of locking feature 20L than the housing 20 of the connector of **FIG. 37**. Like the cable adapter 59 of **FIG. 37**, the cable adapter 59 of this embodiment that fits into a rear opening 21A of the housing 20. As discussed, using connectors with a separate cable adapter 59 allows the connector to be used with different types cables by merely changing out and selecting the cable adapter that is suitable for the desired cable 90. **FIGS. 47 and 48** respectively are a perspective view and a cross-sectional view the cable adapter 59 of **FIG. 46**. **FIG. 49** is a vertical sectional view and **FIG. 50** is a horizontal sectional view of the rear portion of cable assembly 100 showing the cable 90 disposed within the cable adapter 59.

[0088] **FIGS. 47A and 48A** are a perspective view and a cross-sectional view of another cable adapter 59, that is similar to the cable adapter of **FIG. 47**. As depicted, cable adapters 59 may comprise an aperture 59A, a recessed surface 59R, a shoulder 59S, a passageway 59P, and a cable saddle 59C or a cable adapter key 59K as

desired for any particular embodiment of cable adapter 59. Generally speaking, cable adapter 59 comprises passageway 59P from a cable adapter front end 59F to a cable adapter rear end 59R. Passageway 59P allows the optical fiber 92 of cable 90 to pass therethrough. Shoulder 59S allows cable adapter 59 to have a snug-fit within the passageway 22 of housing 20 and inhibits adhesive from wicking or flowing forward of the shoulder 59S. Any adhesive or epoxy used for securing cable adapter 59 may wick around the recessed surface 59R for creating a sufficient bonding area and any excessive adhesive or epoxy may flow into the aperture 59A. Housings 20 may include one or more aperture 29 for injecting epoxy or adhesive or the adhesive or epoxy may be placed on the cable adapter before insertion into the housing. For instance, housing may include two apertures 29 such as show in **FIG. 49** so that air may escape as adhesive or epoxy is injected. Additionally, the one or more apertures 29 may be aligned with the apertures 59A of the cable adapter so that the adhesive or epoxy also secures the strength members 94 of cable 90 to the cable adapter 59 that is secured to the housing 20, thereby forming a robust cable/connector attachment and also providing sealing at the rear end. Cable saddle 59C is sized and shaped for the particular cable 90 that is intended to be secured using the cable adapter along with the appropriate components as appropriate such as depicted in **FIG. 50**. The rear portion of the cable adapter 59 may have a cable bend relief area such as a reverse funnel at entrance to the passageway, flexures or other suitable structure for inhibiting sharp bending of the cable near the rear of the cable adapter 59. Further, cable adapters 59 may or may not include keys 59K as desired for cooperating with features of the housing. The rear portion 59R of the cable adapter 59 of **FIG. 47A** comprises one or more ribs 59RB suitable for receiving a boot or overmold on the rear portion 59R. The ribs 59RB aid in the retention of the boot or overmold.

[0089] **FIG. 51** is perspective view of another cable assembly 100 according to the concepts disclosed and **FIG. 52** is an exploded view of the cable assembly 100. Housing 20 of this embodiment is similar to the housing disclosed herein, but further comprises a keying portion 20KP that extends into the transition region TR as shown, but embodiments without the keying portion 20KP are possible. The transition region TR of this housing is asymmetric. Specifically, the asymmetric transition region is a threaded portion TP, but other asymmetric geometries are possible as disclosed herein. In this embodiment, the keying portion 20KP is configured as a female key or a subtractive portion on housing 20 such as a female keyway or a slice on the side of the connector leaving a D-shape. The keying portion 20KP extends into the transition region as shown. The keying portion 20KP cooperates with a suitable keying portion in a connection port of a device such as an additive or male portion for inhibiting non-compliant connectors from being inserted into the connection port. Although, the keying portion 20KP

is disposed about 180 degrees from the at least one locking feature 20L, other arrangements are possible where the keying portion 20KP is disposed less than 180 degrees from the at least one locking feature 20L. In other embodiments, keying portion 20KP may be arranged as a subtractive portion that removes a side or slice of the housing 20 for creating a D-shaped cross-section over the length of the keying portion 20KP; instead of the female keyway shown.

[0090] The internal construction of connector 10 of **FIG. 52** is similar to that of **FIGS. 70-78** where ferrule 30 disposed within a ferrule holder 49 and inserted from a front end 23 of the connector 10 and is discussed in more detail in relation to those **FIGS.** This embodiment also comprises a boot or overmold 259 disposed on the rear portion 59R of cable adapter 59 as best shown in **FIG. 53**. Further, when assembled a sealing element such as heat shrink 99 is disposed over the boot or overmold 259 as best shown in **FIG. 54**. The sealing element may also be disposed over a portion of the housing 20 as shown. Placing the sealing element over boot or overmold and a portion of the housing 20 allows for sealing of the cable jacket to the rear of the connector. This may also improve the bending strain-relief for the cable assembly.

[0091] **FIG. 51A** is a rear perspective view of another cable assembly having cable adapter 59 with flexures 59F for bend-strain relief. **FIGS. 52A and 53A** are a side and sectional views of the cable assembly of **FIG. 51A** showing heat-shrink 99 before and after being installed. As depicted, if the cable adapter 59 uses flexures 59F they are generally aligned with the flat portions of cable 90 for cable bend relief. Also the cable adapter 59 may or may be able to have more than one rotational position with respect to the housing 20 depending on how the ends of the components cooperate or not. As depicted in **FIG. 53A**, housing 20 may have a stepped down portion at the rear end 21 for receiving a portion of heat shrink 99 and may cover the flexures 59F while also providing further cable bending strain-relief.

[0092] Still other variations of housings 20 are possible using the connector concepts disclosed herein. The other connector embodiments disclosed included locking features 20L that were integrated into the housing 20; however, other connectors may use locking features that are separate and distinct components from the housing 20. Although this may require a bigger connector footprint or more access space between connectors the concepts of separate and distinct components for the locking features are possible. **FIG. 54A** is a front perspective view of another housing 20 that may be used with the fiber optic connector concepts disclosed herein. In this embodiment, the securing feature is formed on a separate and distinct component from the housing 20. Specifically, securing feature is disposed on a coupling nut 120 having threads and that rotates about an outer shaft of housing 20 for securing the connector to a complimentary device. Additionally, the housing 20 may not have offset distance between transition portions of the housing 20 such as

depicted in this embodiment.

[0093] Connectors disclosed herein may be portions of other cable assemblies as desired. For instance, **FIG. 55** depicts a distribution cable 100' having one or more connectors 10 on tether cables 90' that extend from a mid-span access 93 of a distribution cable. Of course, other suitable assemblies may use the connectors according to the concepts disclosed herein.

[0094] By way of example, connectors disclosed herein may be converted from a first connector footprint to a second connector footprint. **FIG. 56** is a perspective view of an explanatory connector 10' that further comprises a conversion housing 80 attached about the housing 20 for changing the connector 10' from a first connector footprint to a second connector footprint and **FIG. 57** is a sectional view of the connector 10'. By way of example, the connector 10' may have a first connector footprint such as shown in **FIG. 19** and be changed to a second connector footprint such as a SC connector by adding conversion housing 80. However, any of the suitable connectors disclosed herein may be converted as described herein. Conversion housing 80 cooperates with housing 20 for changing from the first connector footprint to the second connector footprint. In this embodiment, the changing of the first connector footprint to the second connector footprint comprises the use of a single component.

[0095] In other embodiments, the changing of the first connector footprint to the second connector footprint may comprise the use of a plurality of components. Illustratively, **FIG. 58** is a partially exploded view of another connector 100' that may be changed from a cable assembly 100 having first connector footprint 10 to a second connector footprint 10' as shown assembled in **FIG. 59**. Further, this embodiment of the second connector footprint 10' comprises a hardened connector footprint. Hardened connector footprint means that the connector is suitable for outdoor environments without be protected within a closure. Any suitable connector 10 disclosed herein may be used for such a conversion from the first footprint to the second footprint. **FIG. 58** depicts cable assembly 100 with connector 10 with the plurality of components for the conversion to the second footprint exploded for depicting the assembly of the components. In this particular embodiment, the plurality of components are suitable for converting connector 10 to a hardened OptiTap® compatible connector; however, the plurality of components may be configured for converting connector 10 into other hardened connectors as desired. In this embodiment, the plurality of components for the conversion to the hardened connector comprise an inner boot 83, an outer boot 87, a conversion housing 82 configured as a shroud, a retaining member 84 configured as a retaining nut and a coupling nut 85. To make the conversion to the hardened connector, the inner boot 83 is slid over up over part of connector 10 and the conversion housing or shroud 82 is slid rearward into position and then the retaining nut 84 is secured to the threads of connector 10. The coupling

nut 85 is slid onto shroud 82 and then outer boot 87 can be slid-up into position from the rear. Shroud 82 may include an O-ring 86 for sealing during mating. **FIG. 60** is an assembled view of the fiber optic connector of **FIG. 58** showing the hardened second connector footprint with the dust cap 88 installed thereon. **FIG. 61** is a sectional view of the hardened connector of **FIG. 60**.

[0096] Still other embodiments for the conversion of connectors 10 are possible according to the concepts disclosed herein. By way of example, connectors 10 similar to the connector 10 of **FIG. 2A** with the transition region TR having a threaded portion TP may be converted to other connectors. **FIG. 62** depicts cable assembly 100 having connector 10 with a connector housing 20 comprising a transition region TR having a threaded portion TP similar to connector 10 of **FIG. 2A**. **FIG. 63** shows the connector 10 of **FIG. 62** with a conversion housing 82 attached about the housing 20 for changing connector 10 with a first connector footprint to a connector 10" with second connector footprint. Second connector footprint for connector 10" comprises a hardened connector footprint, thereby converting cable assembly 100 to cable assembly 100".

[0097] **FIG. 64** is a partially exploded view of connector 10" of **FIG. 63**. This particular conversion uses a plurality of components for converting connector 10 to a hardened OptiTap® compatible connector 10"; however, the plurality of components may be configured for converting connector 10 into other hardened connectors as desired. The plurality of components for the conversion to connector 10" comprise the conversion housing 82 configured as shroud, a retaining member 84 configured as a retaining clip, and a coupling nut 85. Shroud 82 may include one or more O-rings 86 for sealing during mating with a complimentary device.

[0098] To make the conversion to the connector 10", the shroud 82 is slid into a passageway of coupling nut 85 as shown and then slid over connector 10 from the front end. Next, the shroud 82 is rotated so that the internal threads 82T of shroud 82 as best shown in **FIG. 65** engage with the threaded portion TP of connector 10 until the shroud 82 is secured to connector 10. Thereafter, retaining member 84 is aligned with the front end of the shroud 82 and then pushed onto the connector 10 until it is seated and retained on housing 20, thereby inhibiting the shroud 82 from backing off the threaded portion TP of connector 10 as depicted in **FIG. 66**.

[0099] **FIG. 67** is a detailed sectional view of the front end of connector 10" showing the retaining member 84 secured to connector 10 and **FIGS. 68 and 69** are perspective views of the retaining member 84. As depicted, retaining member 84 comprises an opening 84O at the front for receiving a portion of housing 20 therethrough when installed. Additionally, retaining member 84 also has a front flange 84F shaped to the passageway of shroud 82 so it may be inserted and engage connector 10. Retaining member 84 may also include one or more keyways 84K for allowing the retaining member to slide

past keying feature 20K of connector 10. Windows 84W disposed on opposite sides of retaining member 84 engage with ears 27 of housing 20 for securing the retaining member 84 to connector 10. Once installed, retainer member 84 inhibits the shroud 82 from rotating and coming off connector 10. Connector 100" may also include a dust cap 88 like connector 10' of FIG. 60.

[0100] The connector concepts disclosed herein may be used with still other connector designs such as connectors using a ferrule disposed in a ferrule holder. FIGS. 70-78 disclose a cable assembly 100 comprising connector 10. Connector 10 of FIGS. 70-78 is similar to other connectors 10 disclosed herein, but it has ferrule 30 disposed within a ferrule holder 49 and inserted from a front end 23 of the connector 10 as depicted in FIG. 75. Housing 20 of the connector 10 of FIGS. 70-78 is similar to other housings 20 discussed herein and differences with be described while other details will not be repeated for the sake of brevity.

[0101] FIGS. 70 and 71 respectively are perspective and sectional views showing cable assembly 100 comprising connector 10 having a ferrule 30 disposed within a ferrule holder 49, thereby forming a ferrule sub-assembly (not numbered) that is biased to a forward position by resilient member 50. When assembled, ferrule sub-assembly (60) is configured to cooperate with the housing (20) for inhibiting the rotation of the ferrule subassembly (60) with respect to the housing (20) as best shown in FIG. 78.

[0102] As depicted in FIG. 70, connector 10 is configured so that conversion housing 80 may be attached to housing 20 for converting to an SC connector. Likewise, connector 10 has housing 20 with a transition region TR with a threaded portion TP similar to the housing 20 depicted in FIG. 2A so it may be converted to a hardened connector as depicted in FIGS. 62-69.

[0103] FIGS. 72-74 are various views of the housing 20 of the connector 10 depicted in FIGS. 70 and 71. FIG. 72A is bottom perspective view showing the locking feature 20L of housing 20 configured as a ramp (not numbered) with a ledge (not numbered) as the retaining feature for cooperating with a suitable securing feature of a device. Housing 20 is similar to the housings 20 disclosed herein, but further comprises one or more latch arms 20LA disposed in a front portion FP of housing 20 as depicted. Moreover, the front opening of passageway 22 is sized for allowing the insertion of ferrule holder 49 from the front end 23 of housing 20 such as shown in the cross-section of FIG. 73. Latch arms 20LA are connected at the front end and cantilevered at the rear end so they can be deflected when ferrule holder 49 is inserted and then spring back to retain the ferrule holder 49 once it is fully-inserted.

[0104] FIG. 75 is a partially exploded view of the front end of connector 10 prior to the ferrule holder 49 and ferrule 30 being inserted into housing 20. FIG. 76 is a cross-sectional view of the front end of the connector 10 after the ferrule holder 49 and ferrule 30 are inserted into

housing 20 and retained by latch arms 20LA. As depicted, latch arms 20LA have ramp portions for aiding portions of ferrule holder 49 to deflect the latch arms 20LA outward as the ferrule holder 49 is inserted into housing 20 and then spring back over ferrule holder 49 for retaining the same.

[0105] Referring to FIG. 75, optical fiber 92 of cable 90 is assembled to extend past the front end 23 and resilient member 50 is threaded about optical fiber 92 and then the ferrule holder 49 and ferrule 30 are threaded over optical fiber 92. Optical fiber 92 may be clamped in a suitable manner through bores 20C disposed on opposite side of housing 20 as represented by the arrows in FIG. 76 when ferrule holder 49 is being inserted into housing 20. Clamping optical fiber 92 inhibits the optical fiber 92 from pushing rearward or buckling as ferrule holder 49 inserted. Ferrule holder 49 is aligned to a suitable rotational position and pushed rearward into housing 20 until retained by latch arms 20LA as depicted in FIG. 76. Optical fiber 92 is secured to ferrule 30 in a suitable fashion and the end face of ferrule 30 is polished.

[0106] Additionally, ferrule holder 49 may be configured for tuning ferrule 30 relative to housing 20. FIG. 77 is a perspective detailed view of the ferrule 30 disposed in ferrule holder 49. As shown, ferrule holder 49 comprises a plurality of recesses 49R formed in flange 49F for tuning of the connector. In this embodiment, flange 49F has four recesses 49R allowing four different rotational positions for ferrule holder 49/ferrule 30, thereby allowing quadrant tuning. FIG. 78 is a detailed front end view of the connector 10 showing that the front opening of housing 20 is sized for allowing the insertion of the ferrule holders. Additionally, a portion of the passageway 22 is sized to cooperate with the flange 49F and allow different rotational positions. Consequently, after measurement of the end face profile of the ferrule 30 or measurement of the insertion loss, the ferrule 30 may be tuned if desired for improving performance such as to a Grade B standard. By way of explanation, the latch arms 20LA may be deflected outward to release the ferrule holder 49 and then the ferrule holder 49 is rotated to the desired position and inserted back into the housing 20 until it is retained by latch arms 20LA. Other embodiments of ferrule holder 49 may have other suitable numbers of rotational positions as desired.

[0107] The concepts of the housings for connectors disclosed herein may also be used with multifiber connectors. By way of example, FIG. 79 is an assembled perspective view of a cable assembly 300 comprising a multifiber optic connector 200 having a housing 220. Housing 220 is similar to other housings 20 disclosed herein comprising a rear end (221) and a front end (223) with a longitudinal passageway (222) extending from the rear end (221) to the front end (223). Housing 220 comprises a part of the rear portion (RP) having a round cross-section (RCS) and a part of the front portion (FP) having a non-round cross-section (NRCS). By way of explanation, the front portion (FP) may have a rectangular cross-

section with rounded sides (RS) that provides a first orientation feature for the connector for alignment during mating and inhibit insertion into a non-compliant device or port as best shown in **FIG. 93**.

[0108] Housing 220 also comprises a transition region (TR) disposed between the rear portion (RP) and the front portion (FP) as best shown in **FIGS. 92 and 93**. Transition region (TR) of housing 220 comprises a threaded portion TP like other housings 20 disclosed herein. Housing 220 also comprises a locking feature 20L integrally-formed in housing 220 as best shown in **FIG. 92**. **FIG. 80** depicts multifiber optic connector 200 may use a dust cap 280 attached for protecting a ferrule 230 from dust, debris and the like when not connected. Like other embodiments disclosed herein, dust cap 280 may be configured for attaching to the housing 220 using the threaded portion (TP).

[0109] **FIG. 81** depicts an exploded view of cable assembly 300 having multifiber connector 200. As depicted, connector 200 comprises housing 220, multifiber ferrule 230, a ferrule holder 249, a ferrule holder retainer 245, a resilient member 250, a cable adapter 259, and a nose-piece 260. Connector may include other components such as one or more O-rings 65 that fit on housing 220. Connector 200 may have other components, arrangements or configurations depending various factors such as the cable or other considerations. Cable 90 is similar to the other cables disclosed herein, but it has a plurality of optical fibers. Cable assemblies 300 may use any suitable cable design.

[0110] **FIGS. 82-93** show the details and construction of cable assembly 300. **FIGS. 82 and 83** respectively are a detailed exploded and assembled view showing a pre-assembly of components of multifiber connector 200 before cable 90 is threaded through the pre-assembly. The pre-assembly comprises ferrule holder 249, ferrule holder retainer 245, resilient member 250, and cable adapter 259. Ferrule holder retainer 245 comprises an aperture 245A sized for receiving a portion of ferrule holder 249 therethrough when attached to cable adapter 259 as shown in **FIG. 83**. Ferrule holder retainer 245 also comprises one or more attachment features 245W for securing ferrule holder retainer 245 to a front portion of cable adapter 259. Cable adapter 259 comprises a passageway 259P from the rear end to the front end for receiving the optical fibers 92 therethrough. The opening at the front end of cable adapter 259 is sized for receiving resilient member 250 and has a backstop for seating the resilient member 250. When ferrule holder retainer 245 is attached to cable adapter 259 the resilient member 250 biases ferrule holder 249 to a forward position. Attachment features 245W of ferrule holder retainer 245 cooperate with attachment features 259F such as protrusions of cable adapter 259 for securing the ferrule holder retainer 245. As depicted in **FIG. 83**, forward portions of cable adapter 259 are exposed between arms of ferrule holder retainer 245 and the forward portion of ferrule holder 249 having recessed portion 249R is exposed. Cable

adapter 259 may also include a strain-relieve portion 259S for inhibiting sharp cable bends near connector 200.

[0111] **FIG. 84** is a perspective view showing cable 90 prepared for insertion into the pre-assembly of **FIG. 83** with suitable lengths of strength components 94 and optical fibers 92 exposed. **FIGS. 85 and 86** respectively depict a perspective view and a sectional view of cable 90 threaded through the pre-assembly of **FIG. 83** so that optical fibers 92 extend well beyond the ferrule holder 249. As depicted, cable adapter 259 has bores on opposite side so that strength components 94 extend through the bores and into grooves 259G of cable adapter 259. Adhesive or other fastener may be applied to the strength components 94 to fix them to the cable adapter 259. **FIG. 87** depicts a detailed perspective view of the assembly of **FIG. 83** after a portion of the coating of optical fibers 92 is removed in preparation for inserting the ends of optical fibers 92 into the multifiber ferrule 230. Waiting to strip the coating from optical fibers 92 until this point in the assembly provides protection to the optical fibers 92 until they are ready to be inserted into the multifiber ferrule 230.

[0112] **FIGS. 88 and 89** shows the multifiber ferrule 230 attached to optical fibers 92 and the rear end of the multifiber ferrule 230 seated into the recess 249R of ferrule holder 249. Multifiber ferrule 230 may be a MPO ferrule, but other types of ferrules are possible such as a MT ferrule. Optical fibers 92 are attached to comprising a plurality of fiber bores (232) of multifiber 230 in a suitable manner known in the art such as adhesive or the like. **FIG. 90** shows the housing 220 aligned with the cable adapter 259 before being attached. Housing 220 may include any suitable locking feature 20L disclosed herein.

[0113] **FIGS. 91 and 92** respectively show a perspective view and a sectional view of the multifiber connector after being attached to the cable adapter 259. Optical fibers 92 extend beyond the front face of the multifiber ferrule 230 so they may be cleaved and polished after the multifiber ferrule is stabilized by the housing 220 as shown in **FIG. 92**. As depicted, opening 229 aligns over a groove of cable adapter 259 so that an adhesive may be injected into the opening 229 and wick about the cavity between the components and also contact the strength components 94. A second opening 229 is also provided in housing 220 so that air may escape when injecting the adhesive. **FIG. 93** depicts a perspective view of the assembled multifiber connector after the nosepiece 260 is attached housing 220. Like the other nosepieces disclosed herein, nosepiece 260 may be attached in a similar fashion. Such as adhesive, welding and/or a mechanical means such as cooperating window and protrusions.

[0114] Other variations of housings 220 according to the concepts disclosed are possible. As an example of another housing for use with the multifiber connector, the housing may be defined as comprising a part of the rear portion (RP) having a polygonal cross-section (PCS) and

a part of the front portion having a non-round cross-section (NRCS). The front portion (FP) or the rear portion (RP) of this explanatory housing may be further defined in various configurations as disclosed herein while retaining a part of the rear portion (RP) with the polygonal cross-section (PCS) and a part of the front portion (FP) having a non-round cross-section (NRCS). By way of example, the polygonal cross-section (PCS) may be a hexagon, a rectangle, a square or other suitable polygon as desired. Likewise, the complimentary device or port would be configured to mate in a suitable manner with the housing.

[0115] Other variations of the housing 20 for connectors 10 are possible. **FIGS. 94 and 94A** depict perspective view and cross-sectional views of another connector housing that may be used with any of the suitable concepts disclosed. In this embodiment, the rear portion RP is non-round, and has a polygonal cross-section PCS as shown by the cross-section in **FIG. 94A**. **FIG. 94A** shows that this housing 20 may have a keying feature 20K which may take any suitable form or may have a keying portion 20KP as desired. Likewise, this housing 20 may use any suitable locking feature 20L as desired.

[0116] According to a first aspect of the disclosure, the fiber optic connector 10 comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23, the housing 20 comprising a front portion FP and a rear portion RP, wherein the rear portion RP of the housing 20 comprises a keying portion 20KP and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20; and a ferrule 30 comprising at least one fiber bore 32.

[0117] According to a further development of the first aspect of the disclosure, the keying portion KP comprises a female key.

[0118] According to a second aspect of the disclosure, the fiber optic connector 10 comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23, the housing 20 comprising a front portion FP and a rear portion RP, wherein the rear portion RP of the housing 20 comprises a female key and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20; and a ferrule 30 comprising at least one fiber bore 32.

[0119] According to a further development of the first and second aspect of the disclosure, the at least one locking feature 20L is disposed about 180 degrees from the keying portion 20KP or the female key.

[0120] According to a further development of the first and second aspect of the disclosure, the at least one locking feature 20L is disposed less than 180 degrees from the keying portion 20KP or the female key.

[0121] According to a third aspect of the disclosure, the fiber optic connector comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the

front end 23, the housing 20 comprising a front portion FP and a rear portion RP, wherein the rear portion RP of the housing 20 comprises a female key and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20, and the at least one locking feature 20L is disposed about 180 degrees from the female key; and a ferrule 30 comprising at least one fiber bore 32.

[0122] According to a further development of the first, second and third aspect of the disclosure, the housing 20 further comprises a transition region TR disposed between the front portion FP and the rear portion RP of the housing 20.

[0123] According to a further development of the first, second and third aspect of the disclosure, the keying portion 20KP or the female key extends into the transition region TR.

[0124] According to a fourth aspect of the disclosure, the fiber optic connector comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23, the housing comprising a front portion FP, a rear portion RP and a transition region TR disposed between the front portion FP and the rear portion RP of the housing 20, wherein the rear portion RP of the housing 20 comprises a keying portion 20KP that extends into a portion of the transition region TR, and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20, and the at least one locking feature 20L is disposed about 180 degrees from the keying portion 20KP; and a ferrule 30 comprising at least one fiber bore 32.

[0125] According to a further development of the first, second, third and fourth aspect of the disclosure, the transition region TR comprises a threaded portion TP. Alternatively, the transition region TR comprises a first transition portion TP1 disposed on a first side of the housing 20 and a second transition portion TP2 disposed on a second side of the housing 20, wherein the first transition portion TP1 and the second transition portion TP2 are spaced apart by an offset distance OD in the longitudinal direction. The first transition portion TP1 may comprise a first riser dimension FRD from a non-round cross-section NRCS to the round cross-section RCS, and the second transition portion TP2 may comprise a second riser dimension SRD from the non-round cross-section NRCS to the round cross-section RCS, wherein the first riser dimension FRD is different than the second riser dimension SRD.

[0126] According to a fifth aspect of the disclosure, the fiber optic connector comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23, the housing 20 comprising a front portion FP, a rear portion RP and transition region TR disposed between the front portion FP and the rear portion RP of the housing 20, wherein the rear portion RP of the housing comprises a female key that extends into a portion of the

transition region TR, and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20, the transition region TR comprising a threaded portion TP and the at least one locking feature 20L is disposed about 180 degrees from the female key; and a ferrule 30 comprising at least one fiber bore 32.

[0127] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the at least one locking feature 20L comprises a first locking feature and a second locking feature.

[0128] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector further comprises a ferrule holder 49, wherein the ferrule 30 is disposed within a portion of the ferrule holder 49 to form a ferrule subassembly 60. An opening at the front end 23 of the housing 20 may be sized for receiving a portion of the ferrule subassembly 60. The ferrule subassembly 60 may be configured to cooperate with the housing 20 for inhibiting the rotation of the ferrule subassembly 60 with respect to the housing 20. The longitudinal passageway 22 may comprises an angular stop geometry 20AS for inhibiting the rotation of the ferrule holder 49 with respect to the housing 20. The housing 20 may further comprise one or more latch arms 20LA for securing the ferrule holder 49. The fiber optic connector may further comprise a resilient member 50 for biasing the ferrule holder 49 to a forward position.

[0129] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the ferrule 30 is a portion of a ferrule subassembly 60, and an opening 21a at the rear end 21 of the housing 20 is sized for receiving a portion of the ferrule subassembly 60. The ferrule subassembly 60 may comprise a ferrule carrier 40. The fiber optic connector may comprise a resilient member 50, wherein the ferrule carrier 40 may further comprise a resilient member pocket 46. The ferrule carrier 40 may comprises a ferrule carrier front end 43, the ferrule carrier front end 43 comprising a first cantilevered portion 43a. The ferrule carrier 40 may comprise a ferrule carrier front end 43, the ferrule carrier front end 43 comprising a first cantilevered portion 43a and a second cantilevered portion 43b. The first cantilevered portion 43a may be configured for cooperating with the housing 20 for inhibiting the rotation of the ferrule 30 with respect to the housing 20 when the ferrule subassembly 60 is fully-seated in the housing 20. The ferrule subassembly 60 may comprise a ferrule retention structure 43C.

[0130] According to another further development of the first, second, third, fourth and fifth aspect of the disclosure, the ferrule 30 has at least one selectively tunable surface 36 that cooperates with the tuning pocket 24 of the housing allowing rotation of the ferrule for optical tuning. The selectively tunable surface 36 of ferrule 30 is disposed adjacent to a free rotation portion of the ferrule 30, thereby allowing rotation of the ferrule 30 for tuning during assembly. The fiber optic connector may further comprise a transverse ferrule retention member 140 for

limiting the movement of the ferrule 30 relative to the housing 20. The housing 20 may comprise an opening 129 in an outer surface that is transverse to the longitudinal passageway 22. The transverse ferrule retention member 140 may comprise a clip. The fiber optic connector may further comprise a nosepiece 260. The fiber optic connector may further comprise a resilient member 50.

[0131] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the at least one locking feature 20L is a notch comprising a retention surface 20LRS formed in the housing 20. Alternatively, the at least one locking feature 20L is a notch, a groove, a shoulder or a scallop formed in the housing 20. The at least one locking feature 20L may provide a predetermined retention force of 50 pounds or more.

[0132] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, a part of the rear portion RP of the housing 220 comprises a round cross-section RCS and a part of the front portion FP of the housing 220 comprises a non-round cross-section NRCS.

[0133] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, a part of the rear portion RP of the housing 220 comprises a round cross-section RCS and a part of the front portion FP of the housing 220 comprises a non-round cross-section NRCS, and wherein the threaded portion TP extends from the non-round cross-section NRCS to the round cross-section RCS.

[0134] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector further comprises a male key 20K. The male key 20K may be aligned with the female key.

[0135] The ferrule 30 may be tunable relative to the housing 20. The ferrule 20 may comprise a multifiber ferrule.

[0136] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the front portion FP of the housing 20 comprises another cross-section portion ACSP. The another cross-section portion ACSP may comprise a SC footprint or a SC compatible footprint.

[0137] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector comprises a cable adapter 59 or a boot attached to a cable adapter 59 or a boot overmolded on a cable adapter 59. The fiber optic connector may comprise a sealing element disposed about a portion of the boot and a part of the rear portion RP. The cable adapter 59 may receive a portion of a resilient member 250 and a portion of a ferrule holder 249, and a ferrule holder retainer 245 may be attached to the cable adapter 59. The cable adapter 259 may comprise a strain-relief portion 259S.

[0138] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure,

the fiber optic connector comprises an O-ring 65. The O-ring 65 may be disposed rearward of the at least one locking feature 20L.

[0139] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector comprises a dust cap 280.

[0140] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector further comprises a conversion housing 80, 82, wherein the conversion housing 80, 82 cooperates with the housing 20 for changing the fiber optic connector 10 from the first connector footprint to a second connector footprint. The second footprint may comprise a hardened connector footprint. The changing from the first connector footprint to the second connector footprint may comprise a single component. Alternatively, the changing from the first connector footprint to the second connector footprint may comprise a plurality of components. The second connector footprint may be a SC connector footprint or a SC compatible connector footprint. The changing from the first connector footprint to the second connector footprint may comprise an inner boot, an outer boot, a shroud, a retaining member, and a coupling nut. The second connector footprint may be an OptiTap® compatible footprint.

[0141] According to a further development of the first, second, third, fourth and fifth aspect of the disclosure, the fiber optic connector is a portion of a cable assembly 100 or a portion of a distribution cable 100'. The fiber optic connector may comprise a fiber optic cable 90 comprising at least one strength element, the at least one strength element of the fiber optic cable being attached to a portion of the fiber optic connector.

[0142] According to a sixth aspect of the disclosure, the fiber optic connector comprises a housing 20 comprising a rear end 21 and a front end 23 with a longitudinal passageway 22 extending from the rear end 21 to the front end 23, and the rear end 21 comprising a rear opening 21A; a ferrule 30 comprising at least one fiber bore 32; a cable adapter 59 sized for fitting into the rear opening 21A of the housing 20; a boot attached to the cable adapter; and a sealing element disposed about a portion of the boot and a part of a rear portion RP of the housing.

[0143] According to a further development of the sixth aspect of the disclosure, the rear portion RP of the housing 20 comprises a keying portion 20KP, and at least one locking feature 20L integrally formed in the rear portion RP of the housing 20. The keying portion KP may comprise a female key. The at least one locking feature 20L may be disposed about 180 degrees or less than 180 degrees from the keying portion 20KP or the female key. The housing 20 may further comprise a transition region TR disposed between the front portion FP and the rear portion RP of the housing 20. The keying portion 20KP or the female key may extend into the transition region TR. The transition region TR may comprise a threaded portion TP.

[0144] Although the disclosure has been illustrated

and described herein with reference to explanatory embodiments and specific examples thereof, it will be readily apparent to those of ordinary skill in the art that other embodiments and examples can perform similar functions and/or achieve like results. All such embodiments and examples are within the scope of the disclosure and are intended to be covered by the appended claims. It will also be apparent to those skilled in the art that various modifications and variations can be made to the concepts disclosed without departing from the scope of the same. Thus, it is intended that the present application cover the modifications and variations provided they come within the scope of the claims.

Claims

1. A fiber optic connector, comprising:
a housing (20) comprising a rear end (21) and a front end (23) with a longitudinal passageway (22) extending from the rear end (21) to the front end (23), the housing (20) comprising a front portion (FP) and a rear portion (RP), wherein the rear portion (RP) of the housing (20) comprises a female key and at least one locking feature (20L) integrally formed in the rear portion (RP) of the housing (20), and the at least one locking feature (20L) is disposed about 180 degrees from the female key; and
a ferrule (30) comprising at least one fiber bore (32).
2. The fiber optic connector of claim 1, wherein the housing (20) further comprises a transition region (TR) disposed between the front portion (FP) and the rear portion (RP) of the housing (20).
3. The fiber optic connector of claim 1 or 2, wherein the keying portion (20KP) or the female key extends into the transition region (TR).
4. The fiber optic connector of claims 2 or 3, wherein the transition region (TR) comprises a threaded portion (TP).
5. The fiber optic connector of any one of claims 1-4, wherein a part of the rear portion (RP) of the housing (20) comprises a round cross-section (RCS) and a part of the front portion (FP) of the housing (20) comprise a non-round cross-section (NCRS).
6. The fiber optic connector of claim 4, wherein a part of the rear portion (RP) of the housing (20) comprises a round cross-section (RCS) and a part of the front portion (FP) of the housing (20) comprise a non-round cross-section (NCRS), and wherein the threaded portion (TP) extends from the non-round cross-section to the round cross-section (RCS).
7. The fiber optic connector of any one of claims 1-6,

wherein the front portion (FR) of housing (20) comprises another cross-section portion (ACSP).

8. The fiber optic connector of any one of claims 1-7, wherein the at least one locking feature (20L) is a notch comprising a retention surface (20LRS) formed in the housing (20). 5
9. The fiber optic connector of any one of claims 1-8, wherein the at least one locking feature (20L) is a notch, a groove, a shoulder or a scallop formed in the housing (20). 10
10. The fiber optic connector of claims 8 or 9, wherein the at least one locking feature (20L) provides a pre-determined retention force of 50 pounds or more. 15
11. The fiber optic connector of any one of claims 1-7, wherein the at least one locking feature (20L) is integrally-formed in the housing (20) and comprises a ramp with a ledge. 20
12. The fiber optic connector of any one of claims 1-11, further comprising a cable adapter (59). 25
13. The fiber optic connector of any one of claims 1-12, further comprising an O-ring (65). 30
14. The fiber optic connector of claim 13, wherein the O-ring (65) is disposed rearward of the at least one locking feature (20L). 35
15. The fiber optic connector of any one of claims 1-14 being a portion of a cable assembly (100). 40




45

50

55

60

65

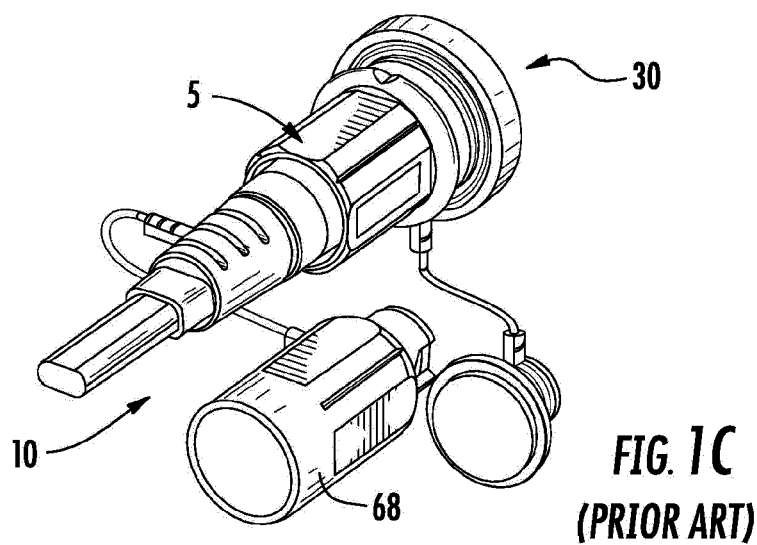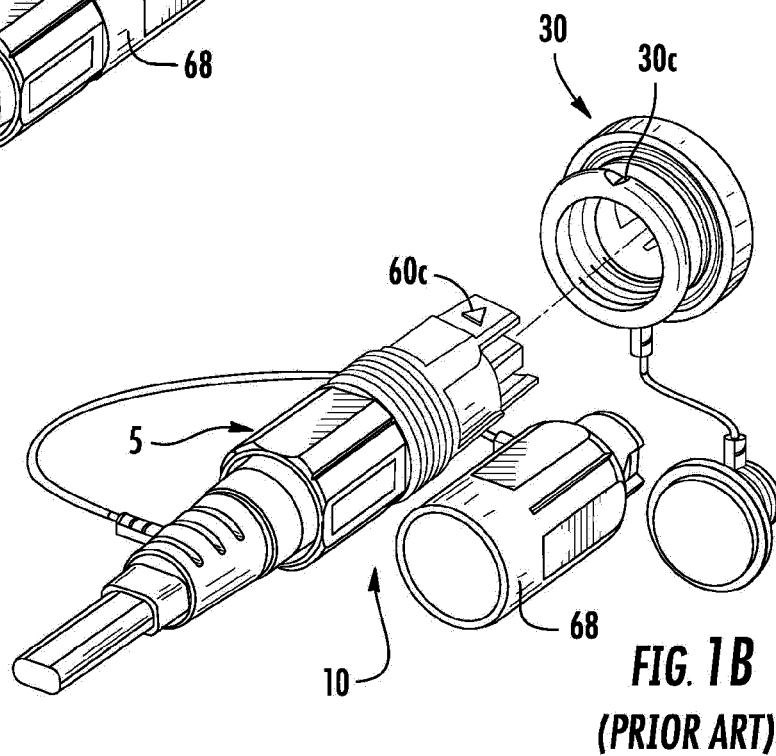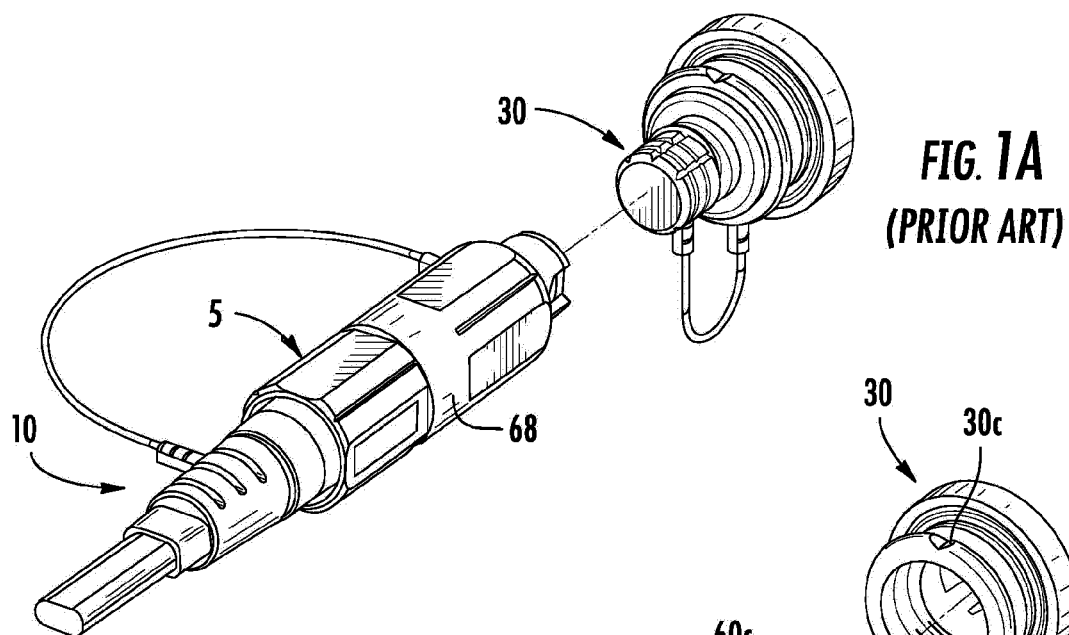

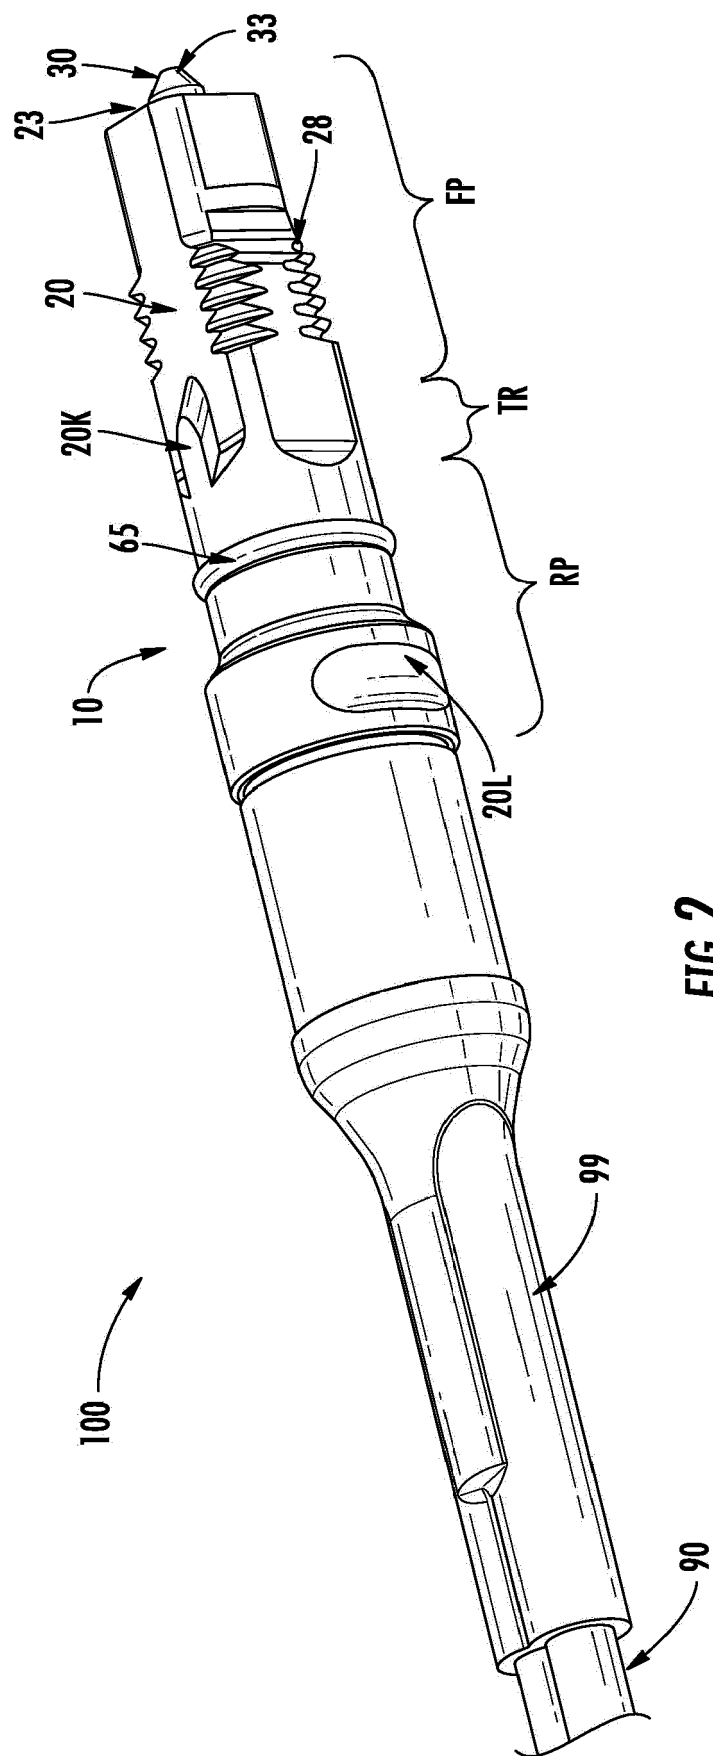


FIG. 2

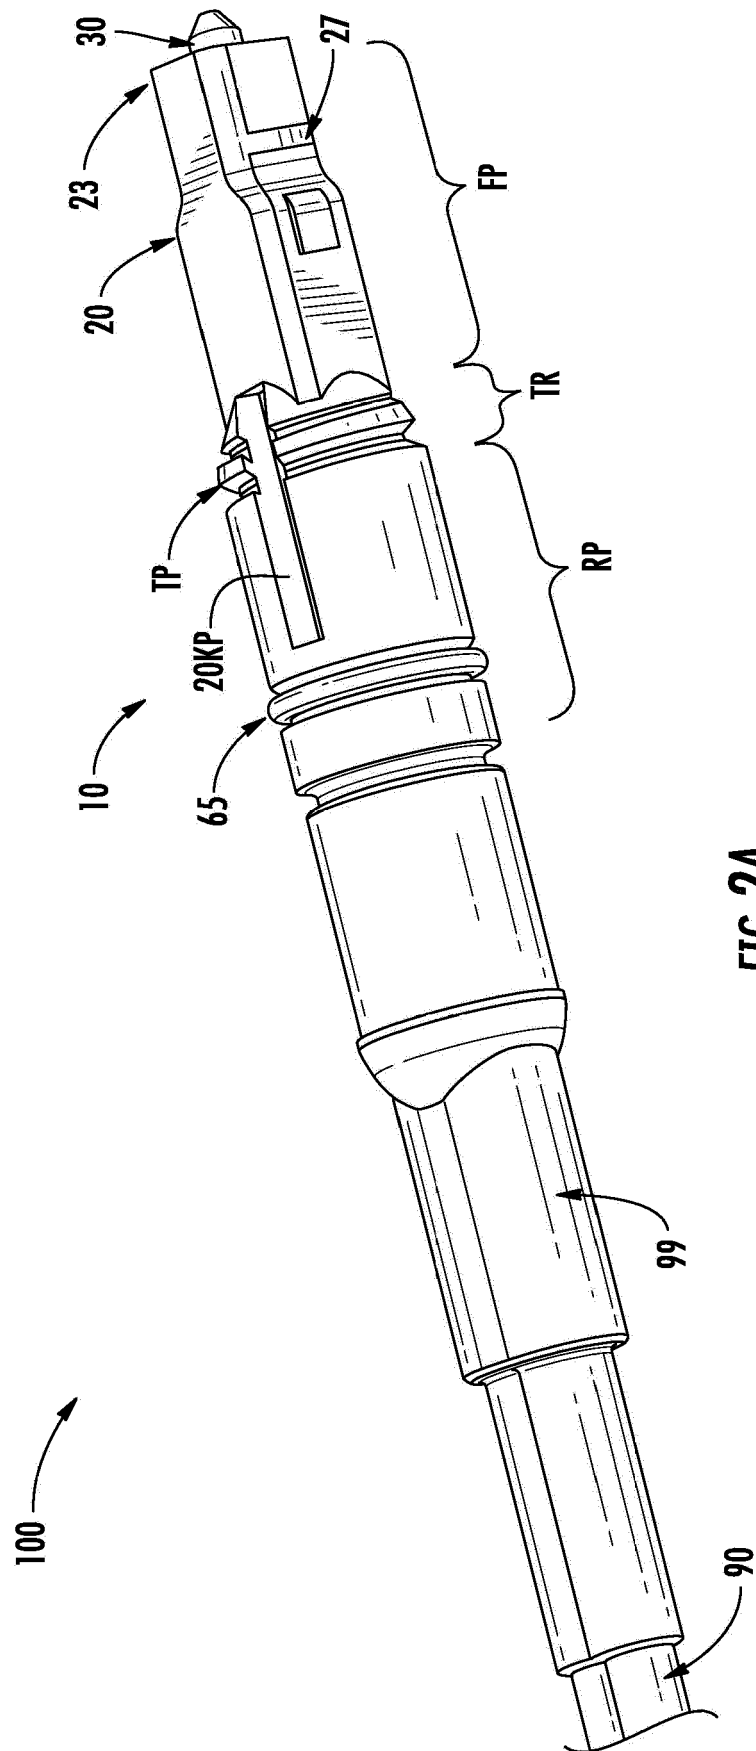


FIG. 2A

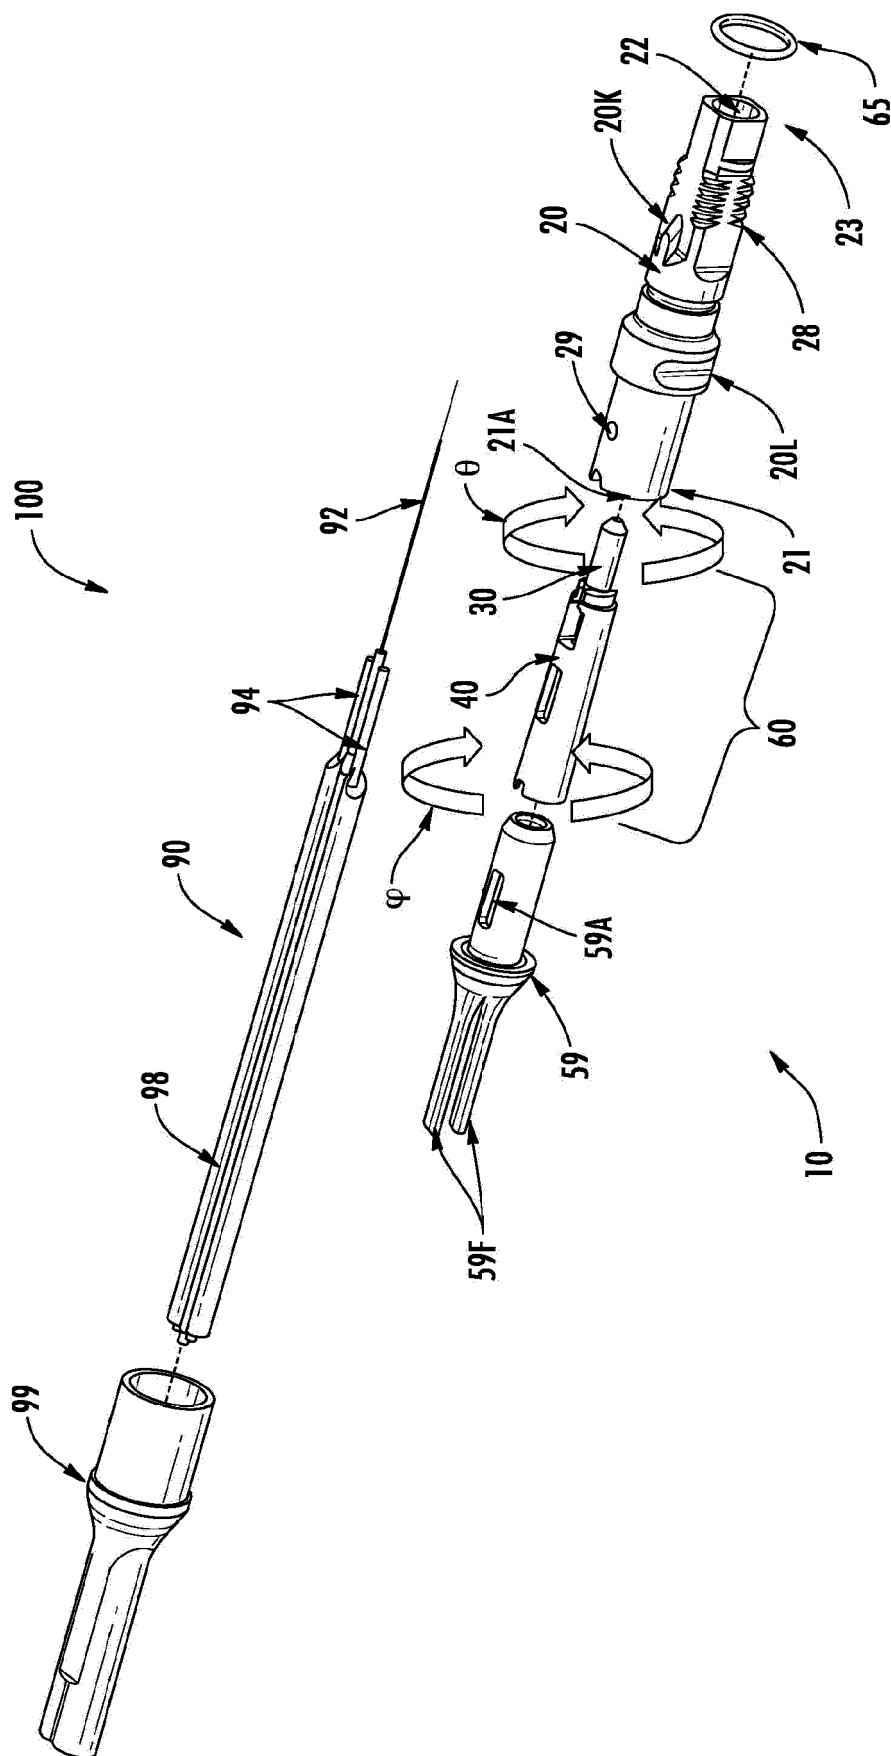
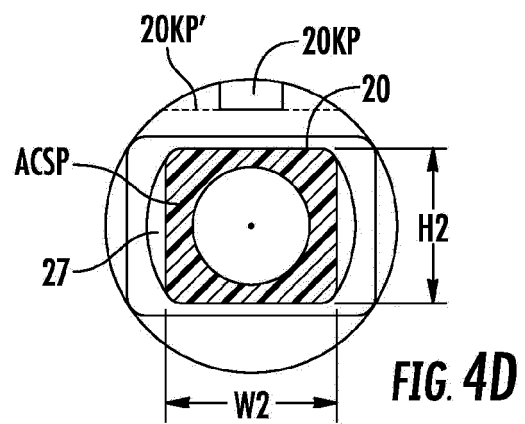
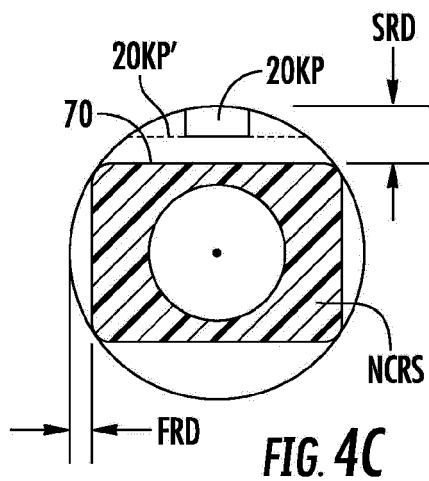
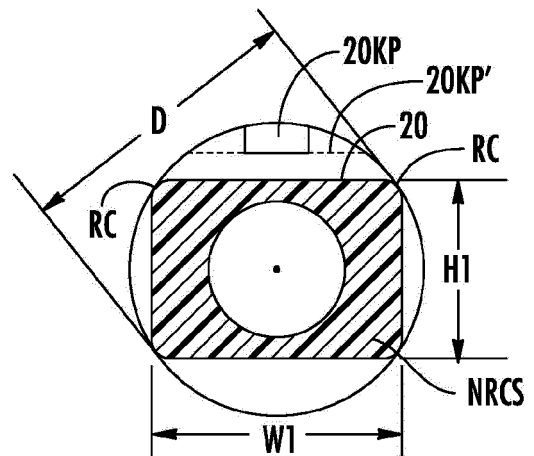
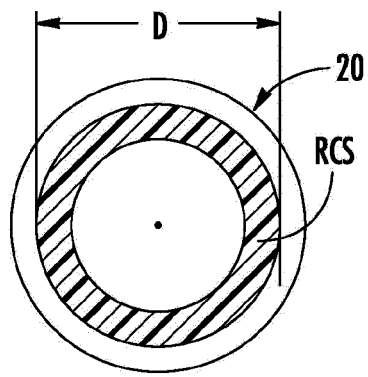
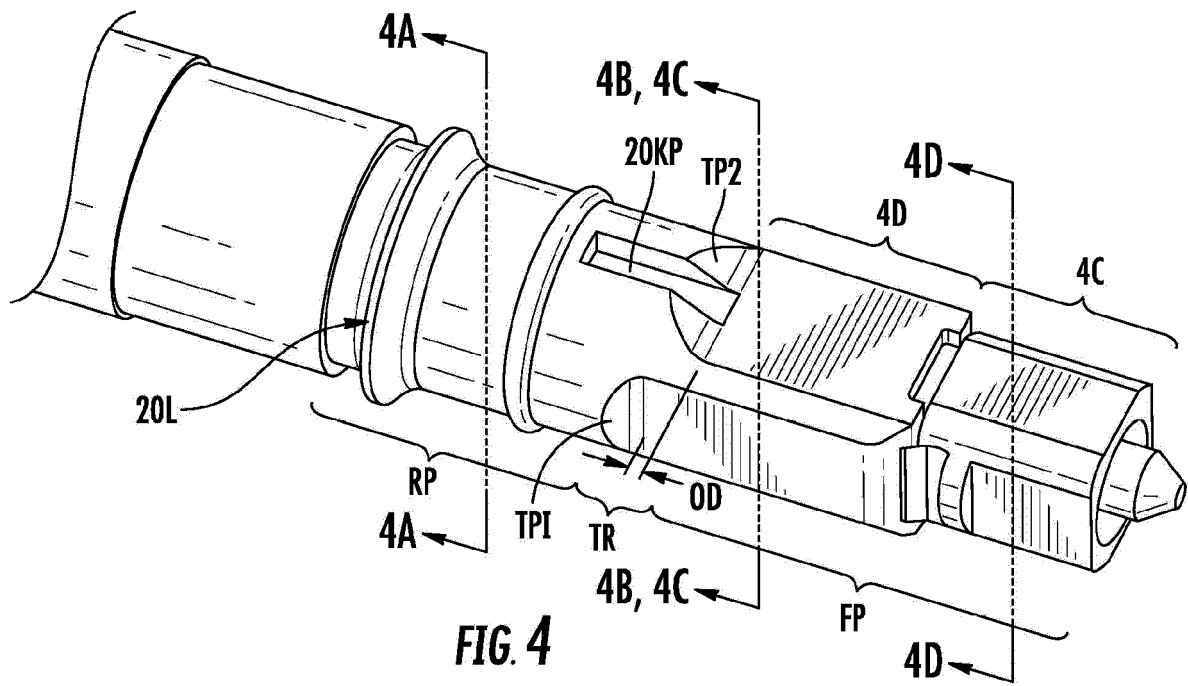


FIG. 3



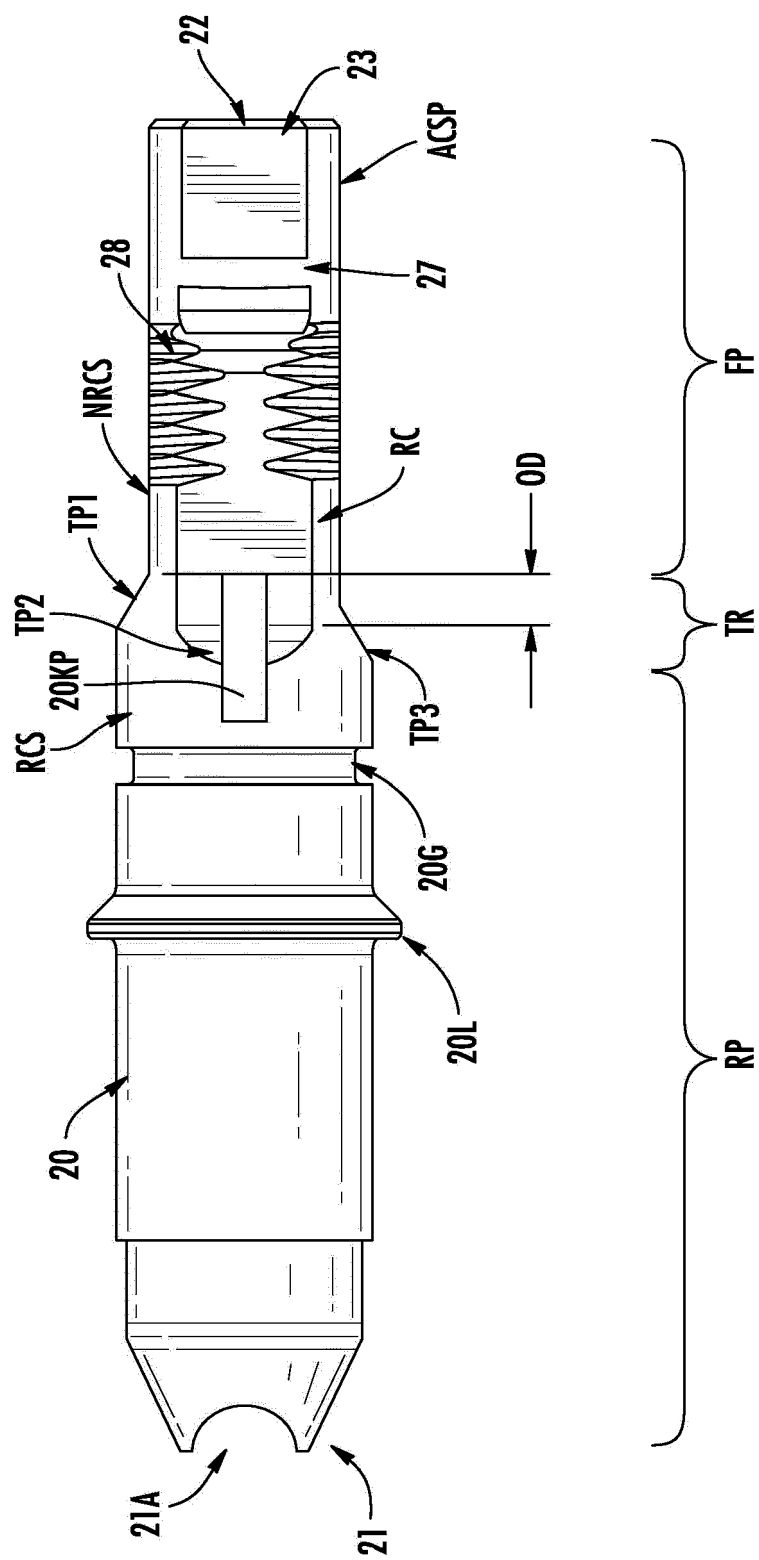


FIG. 4E

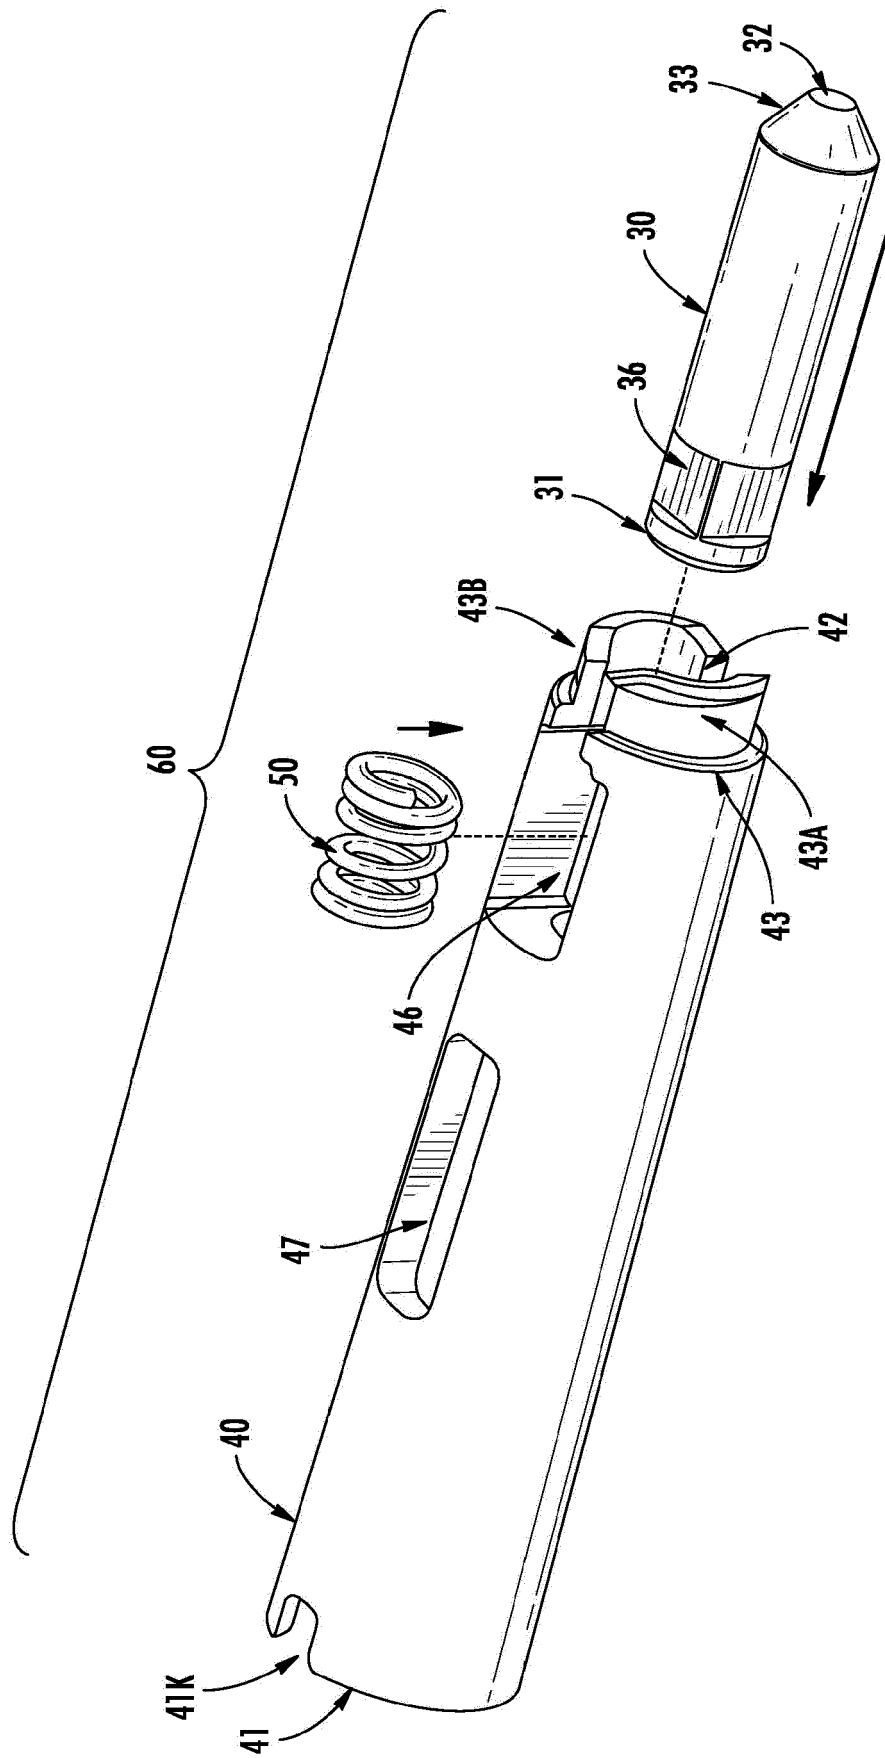
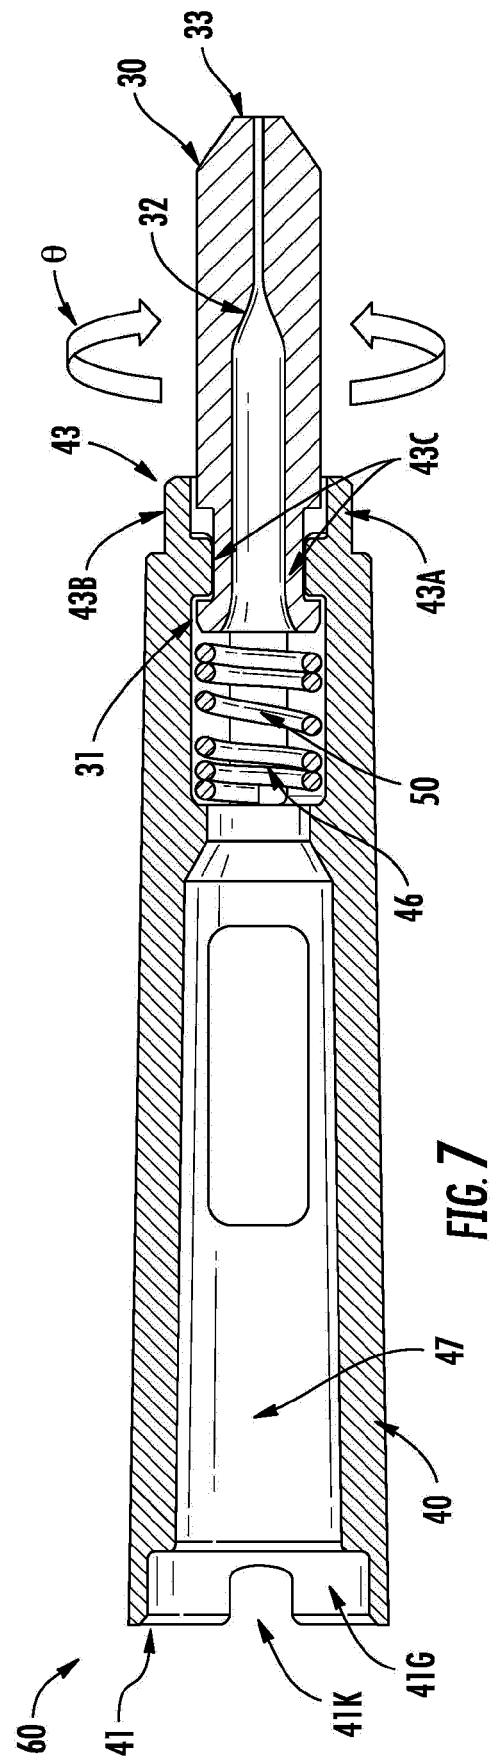
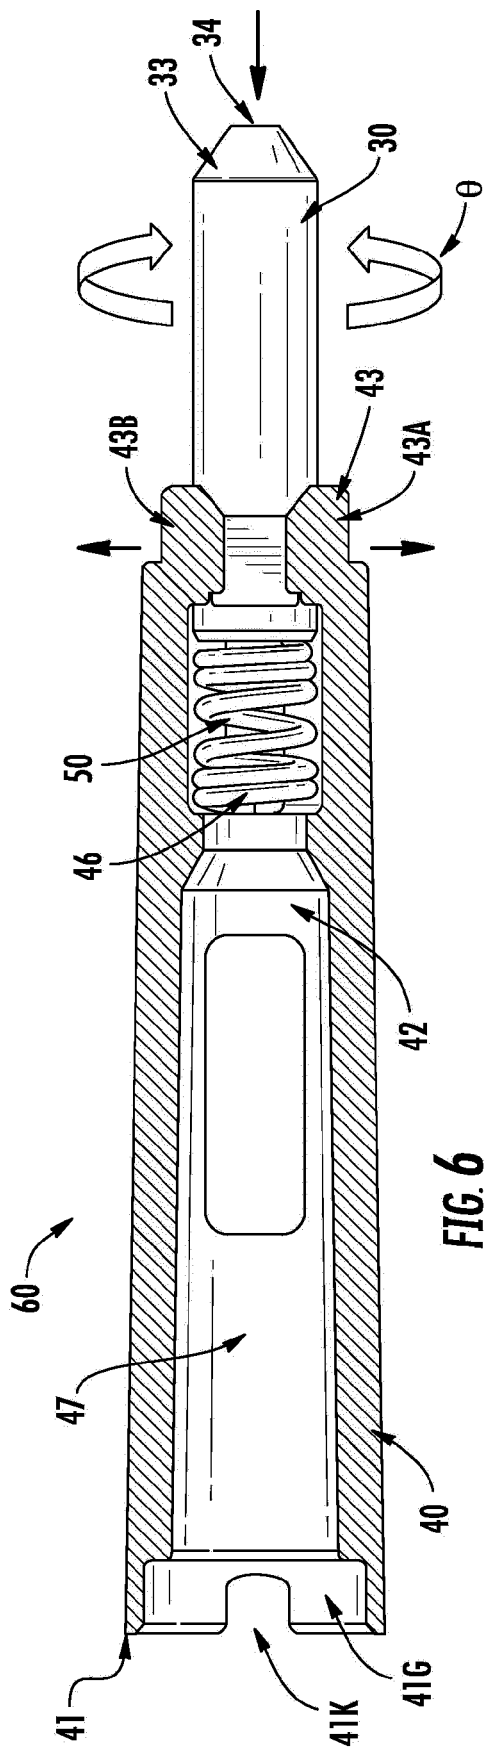
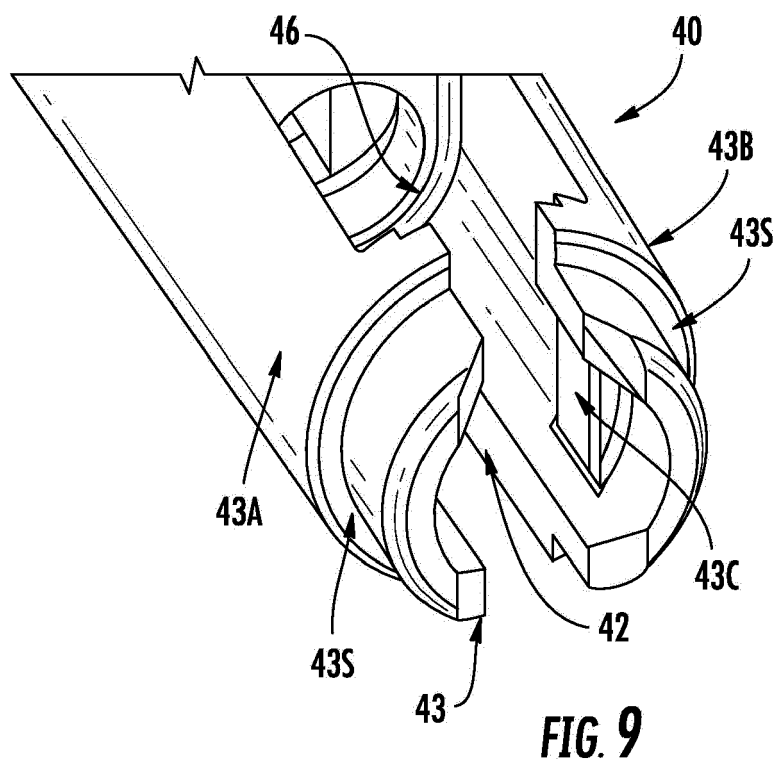
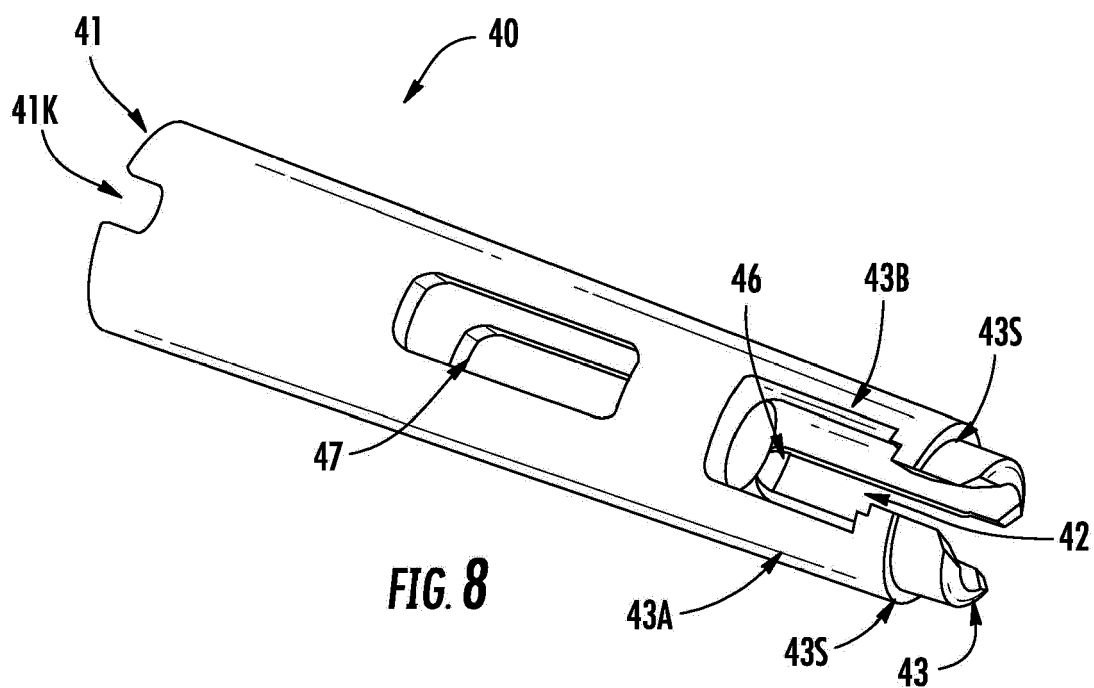
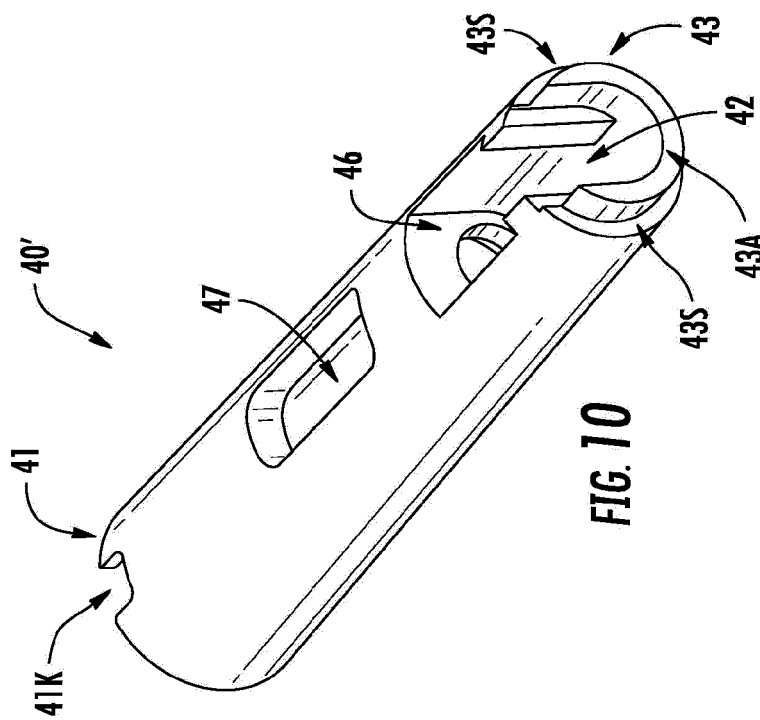
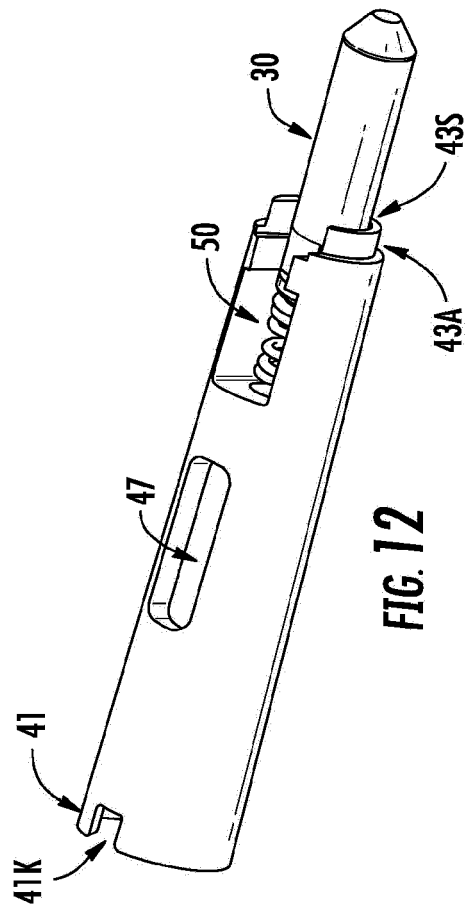
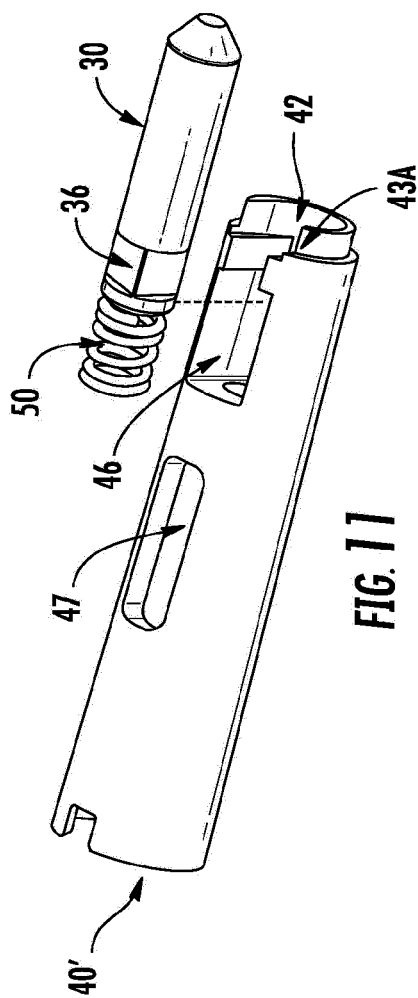


FIG. 5







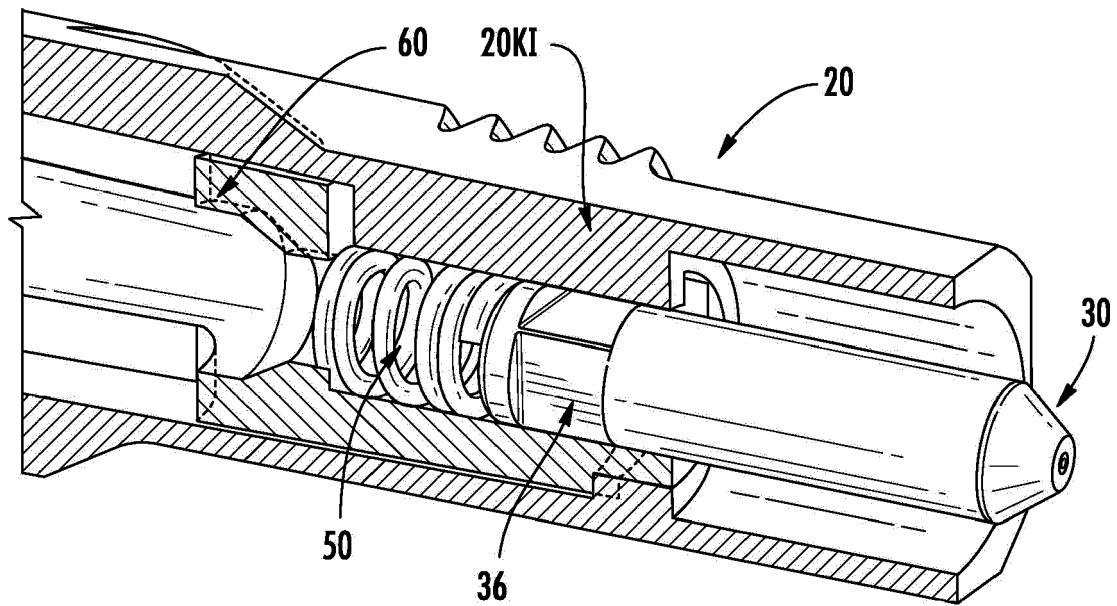


FIG. 13

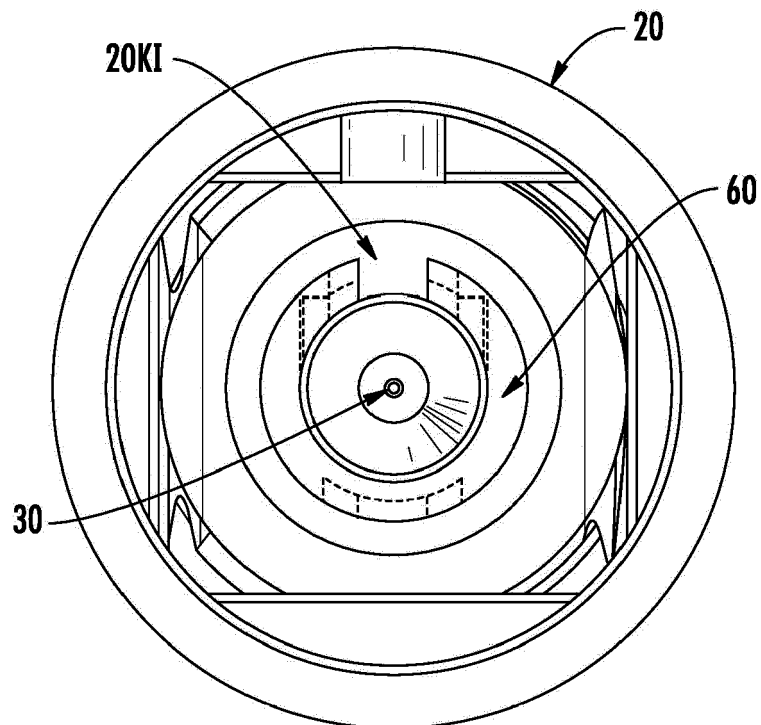
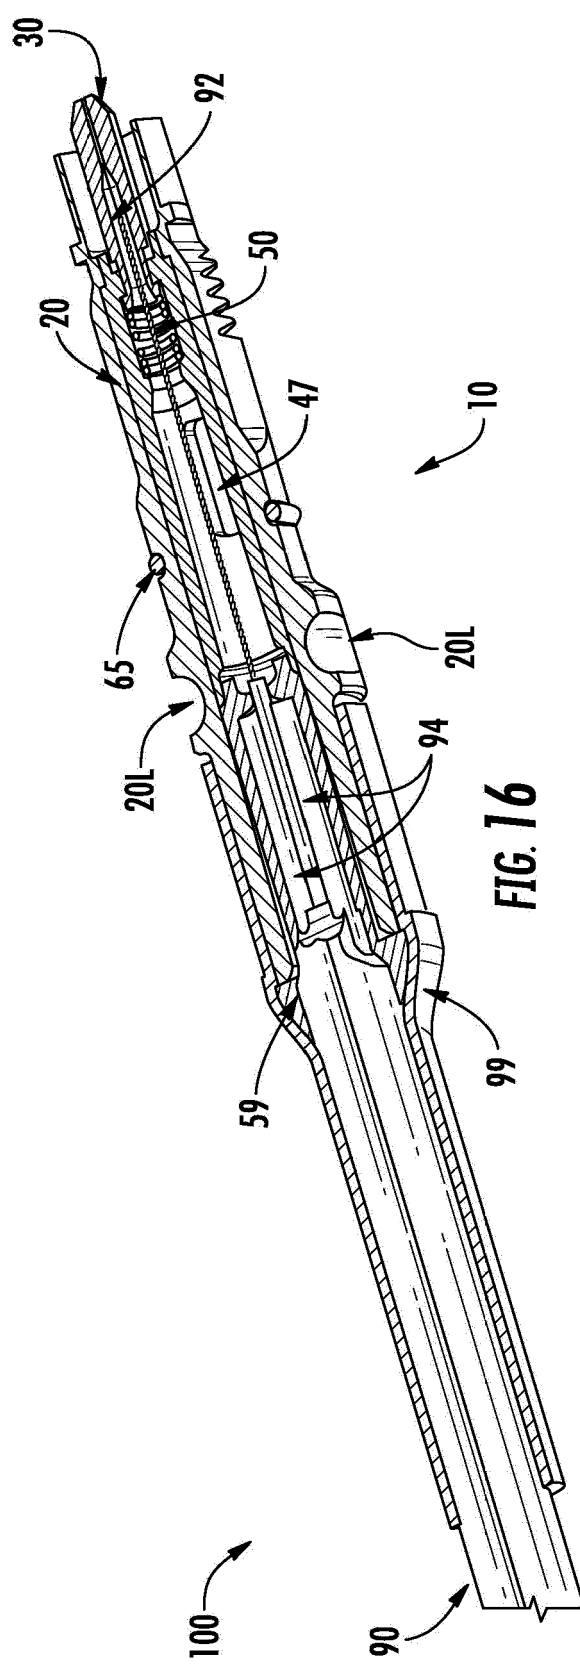
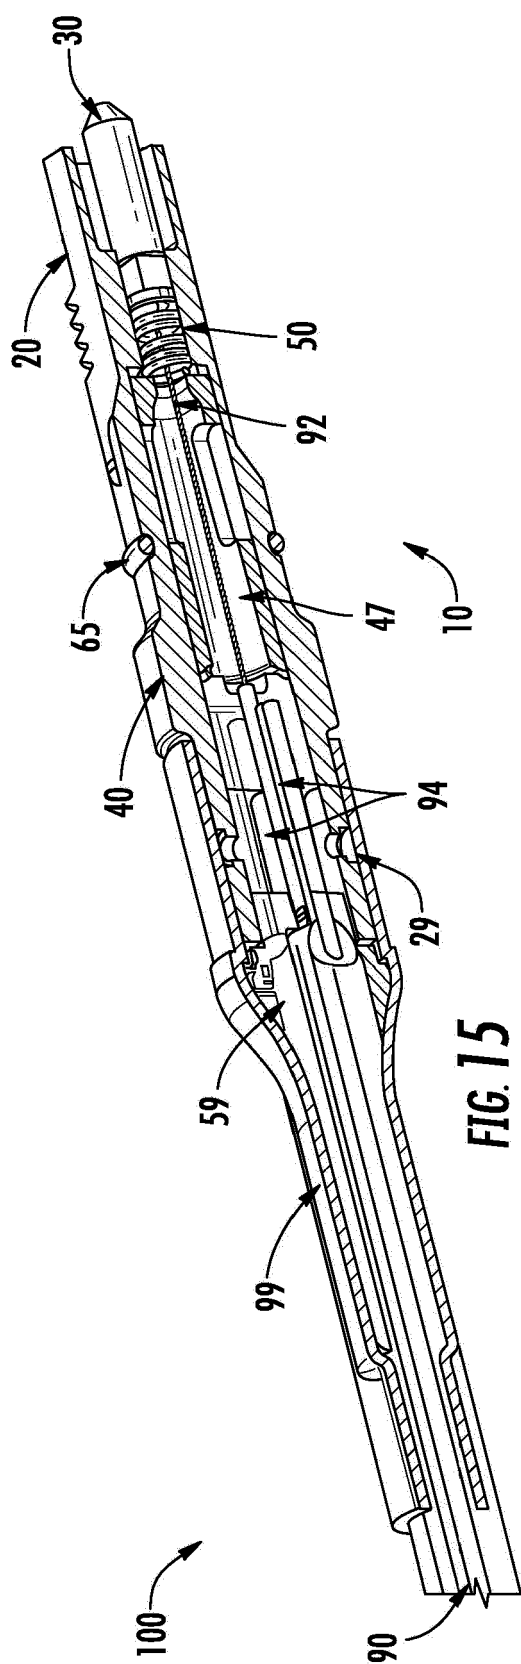


FIG. 14



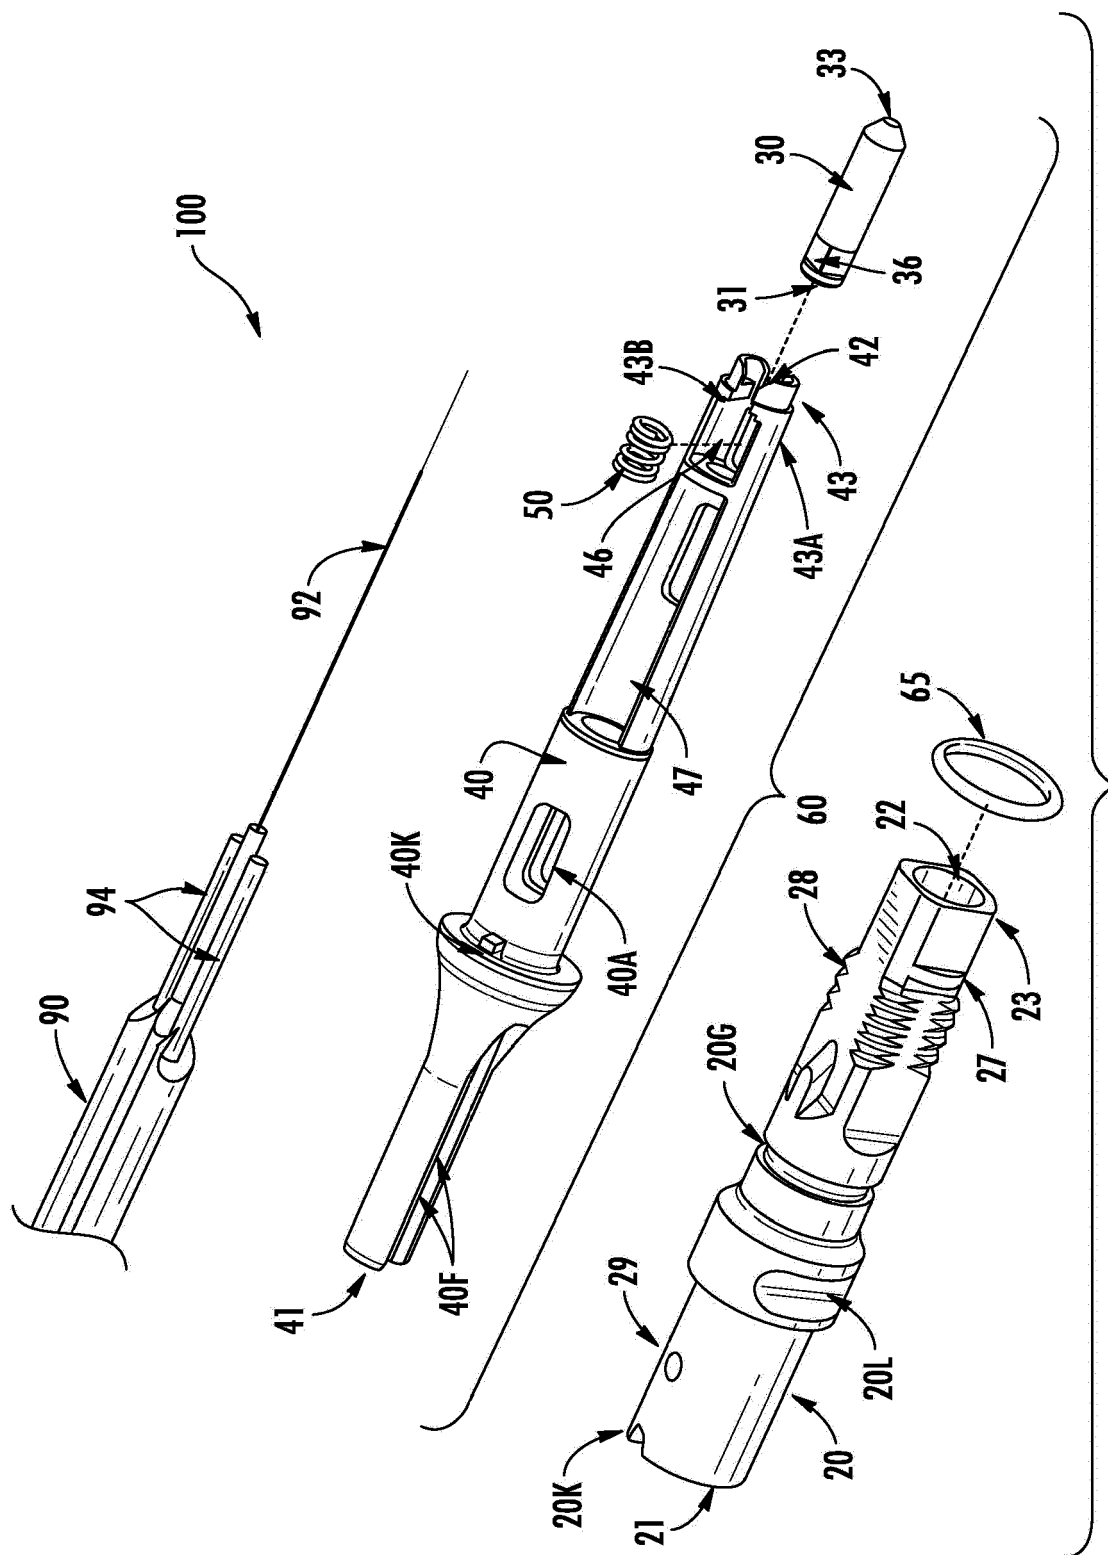


FIG. 17

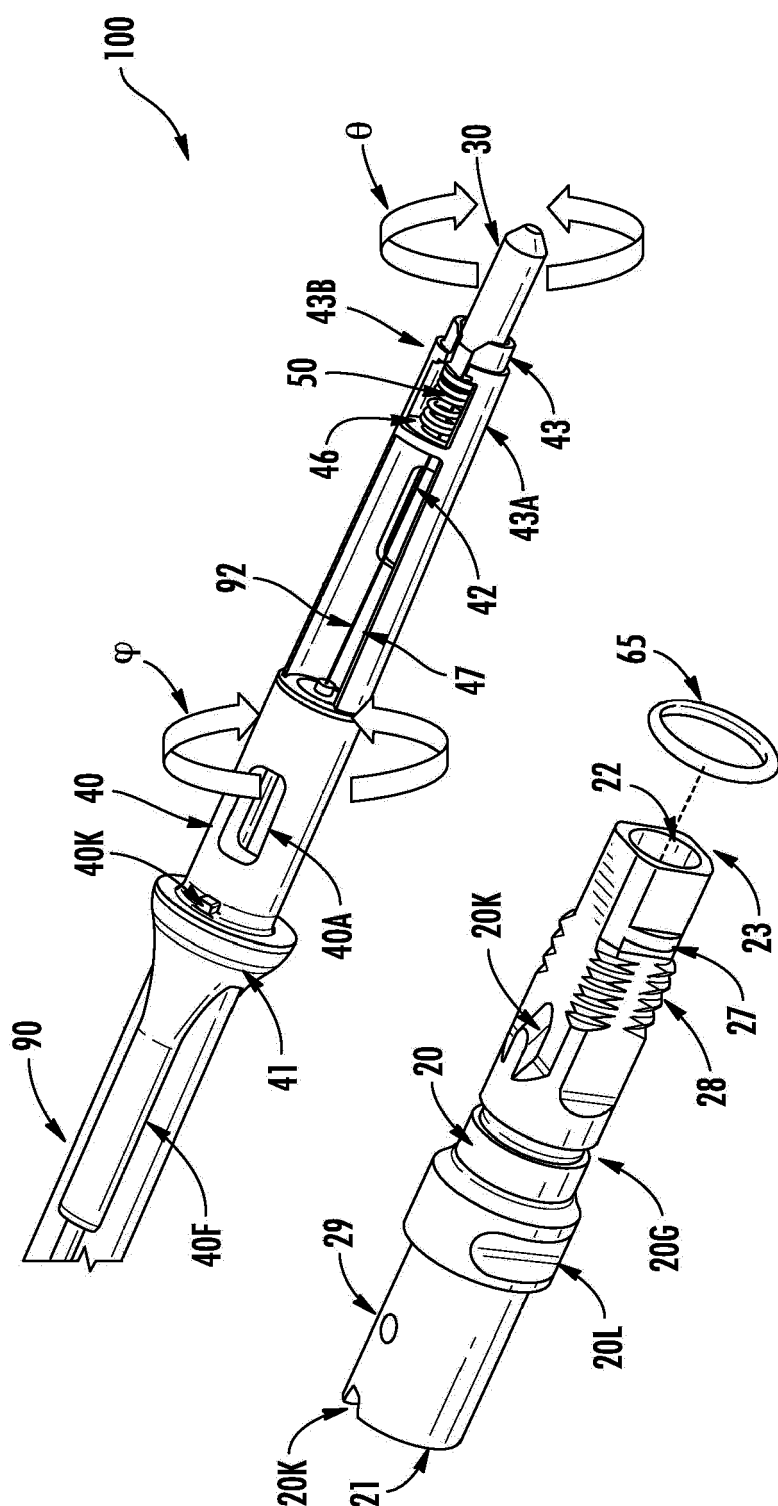
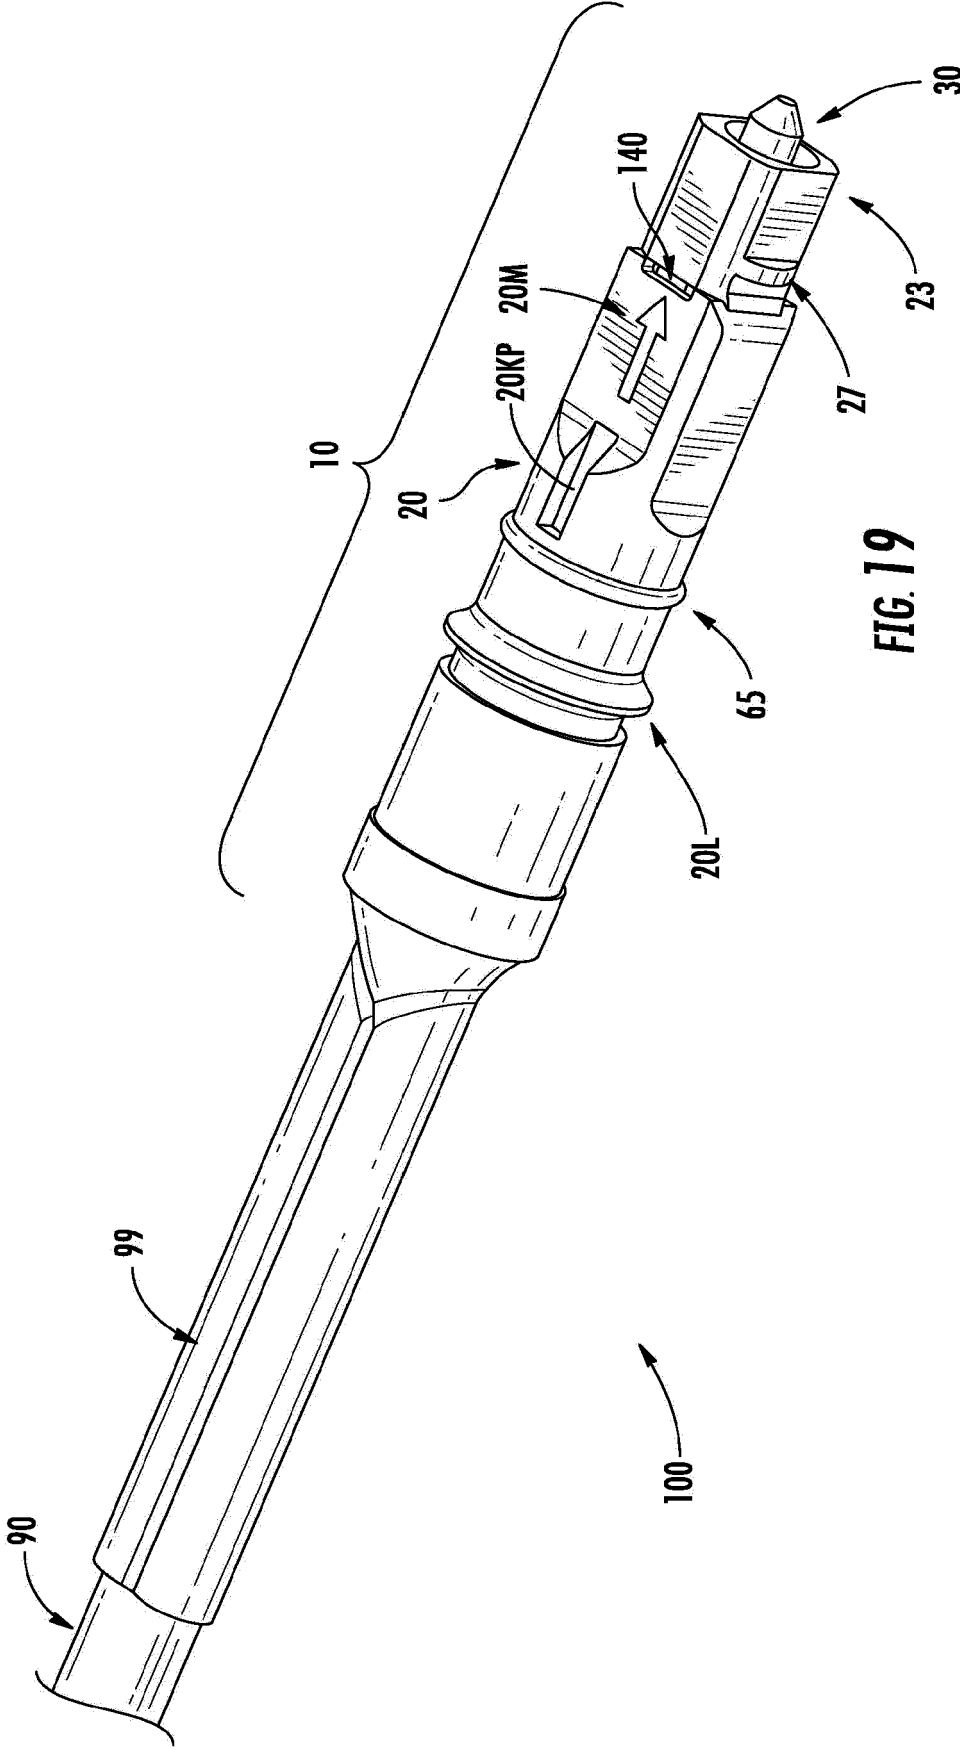


FIG. 18



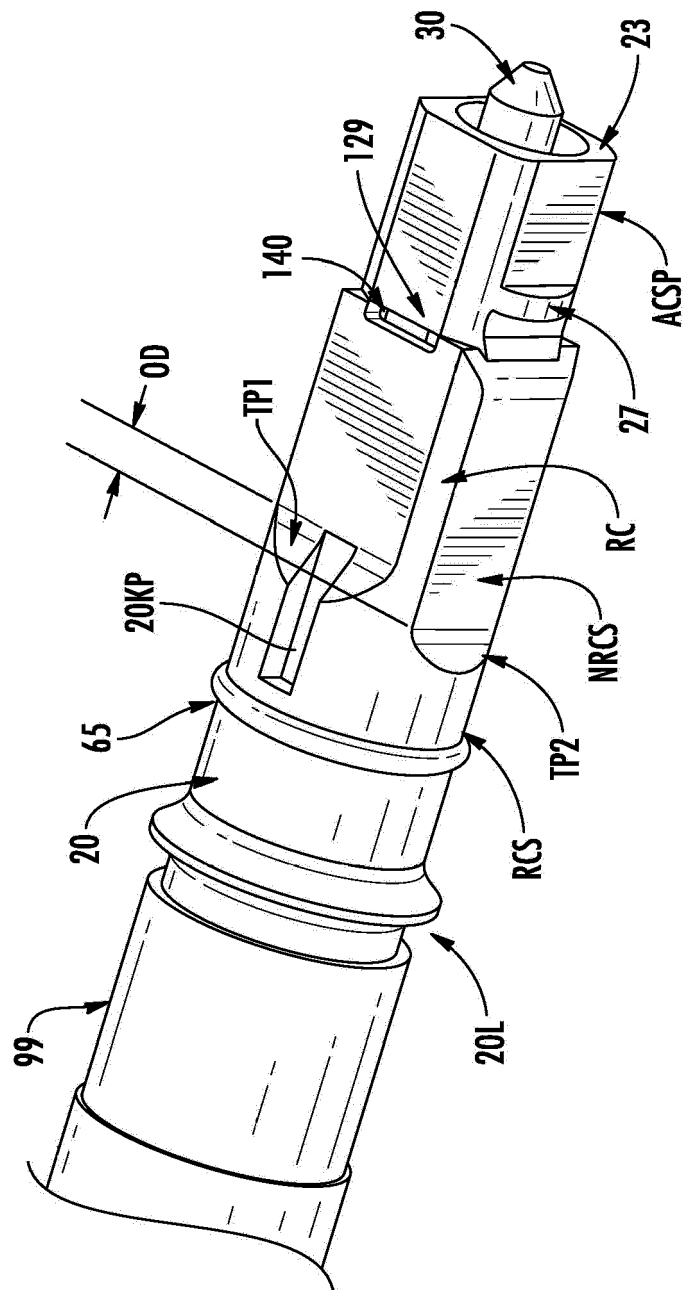
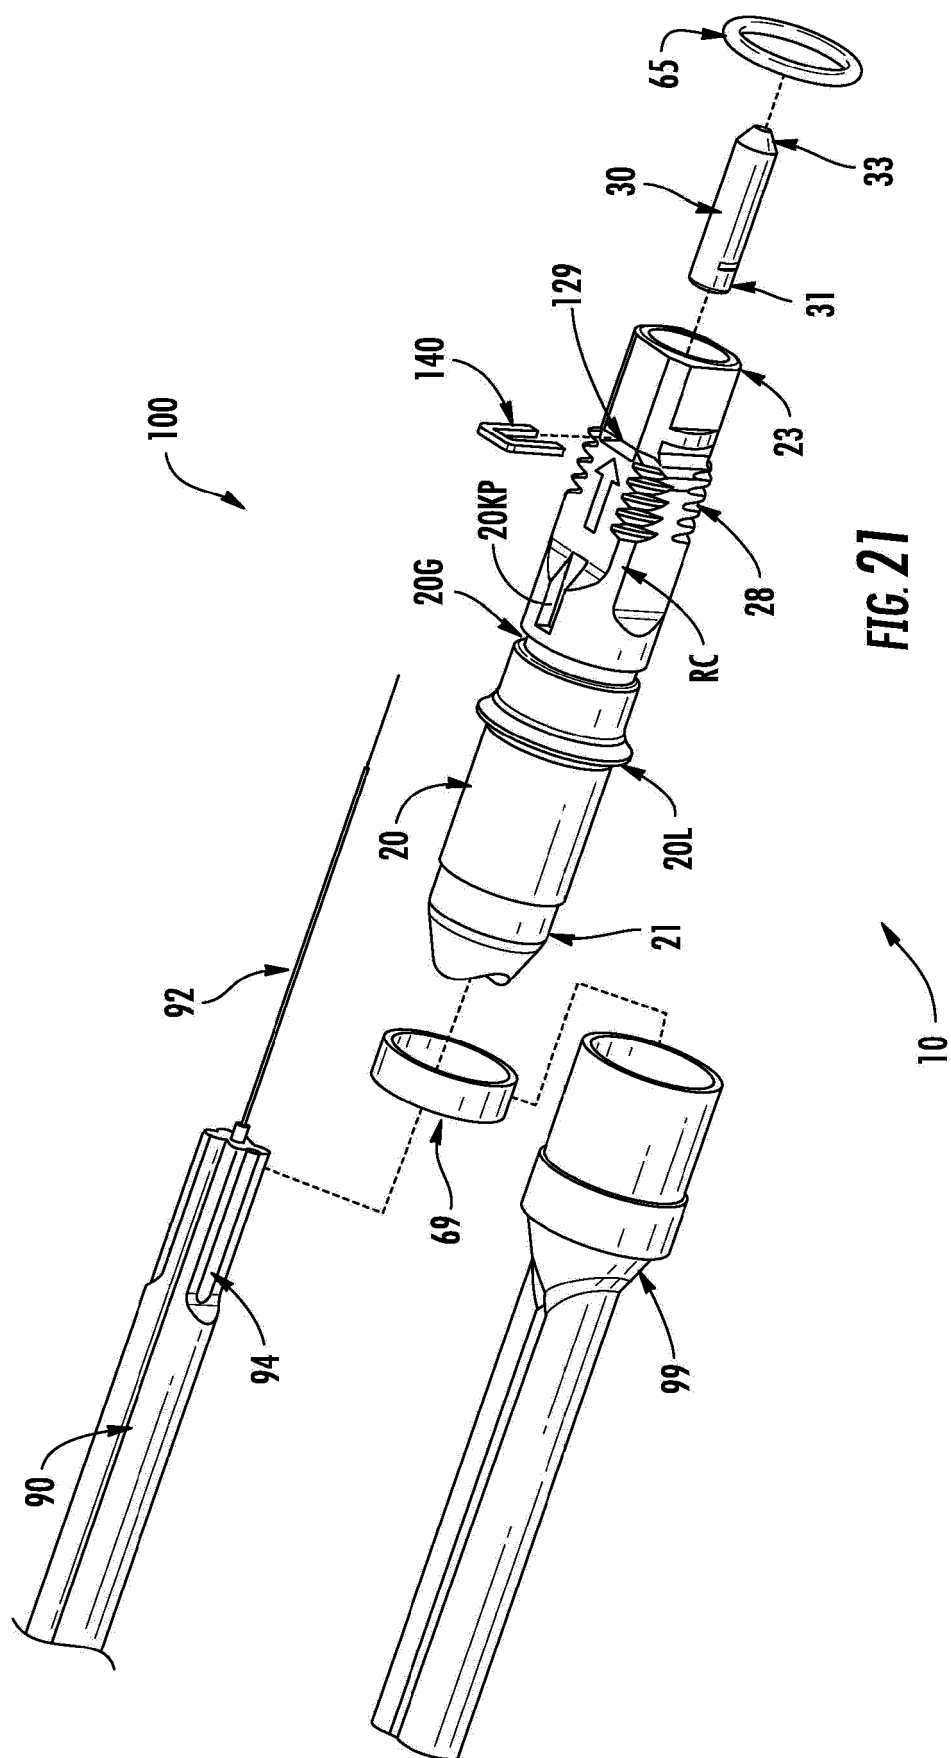
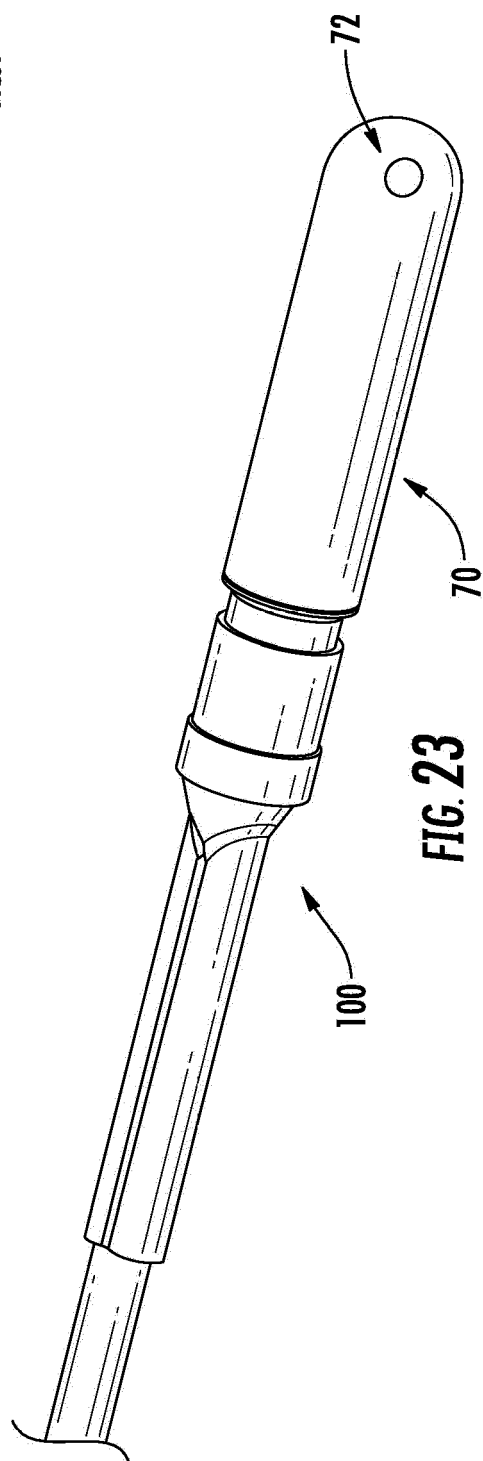
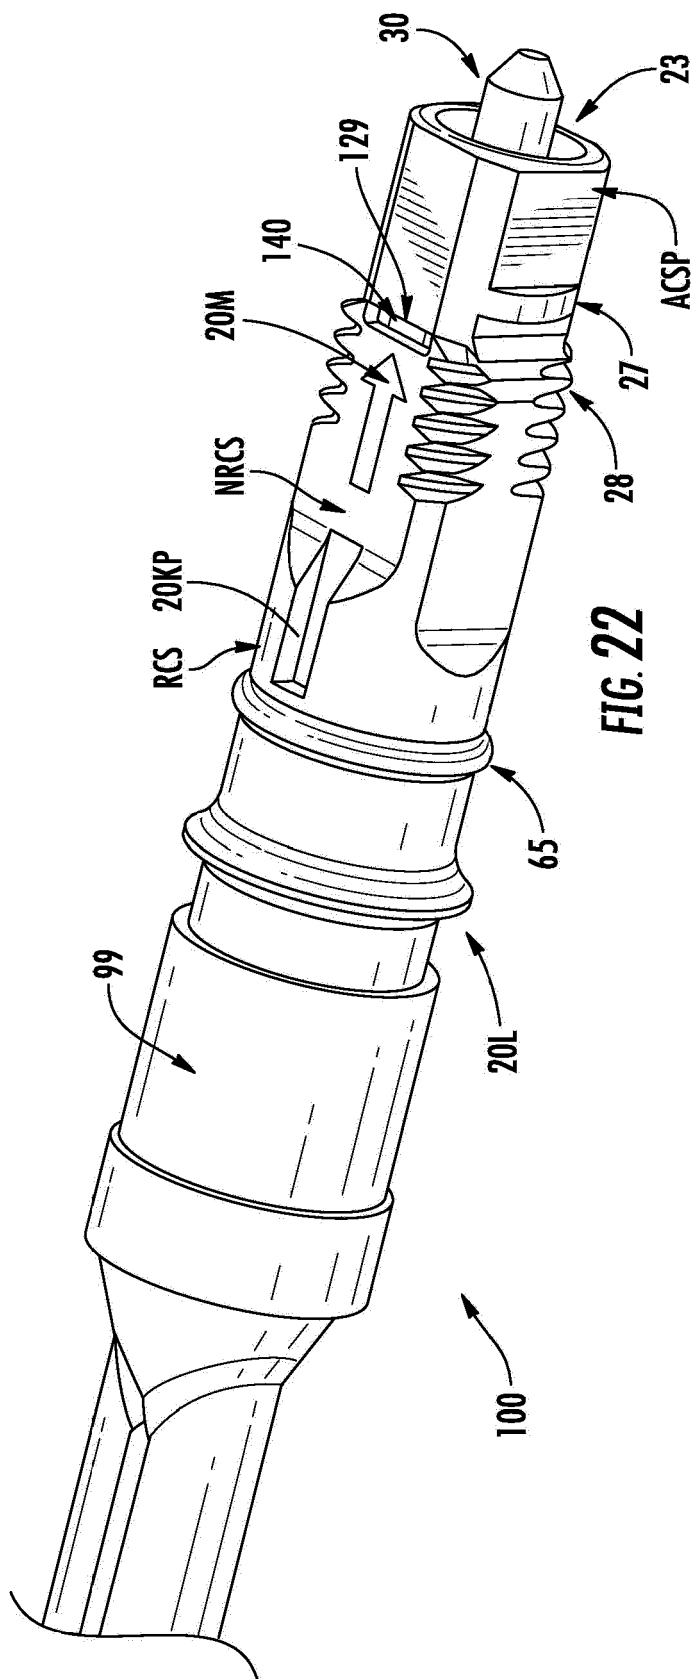
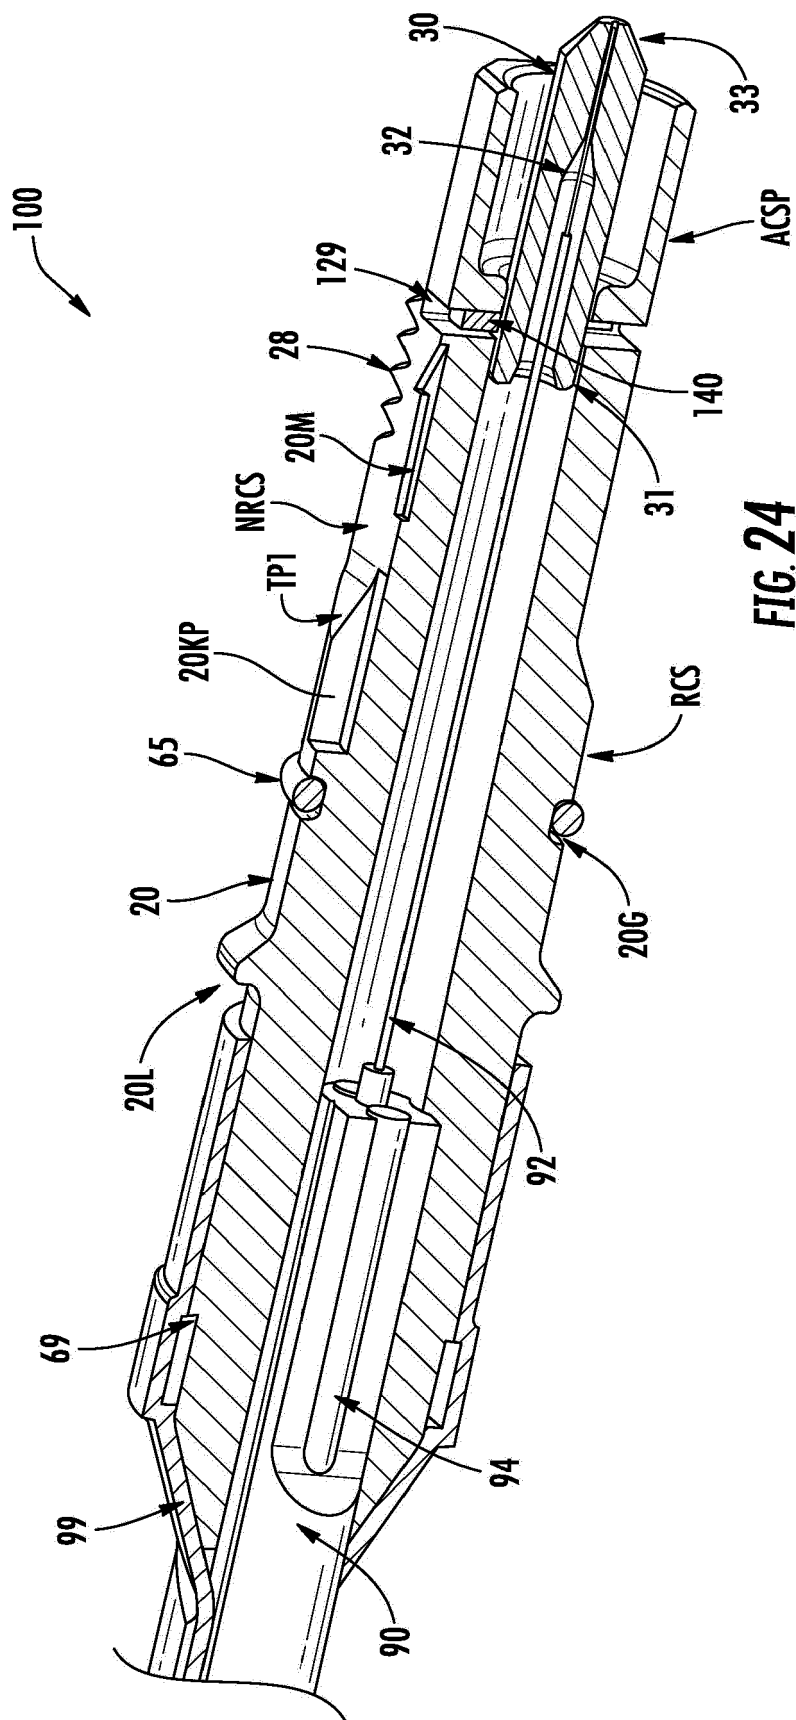
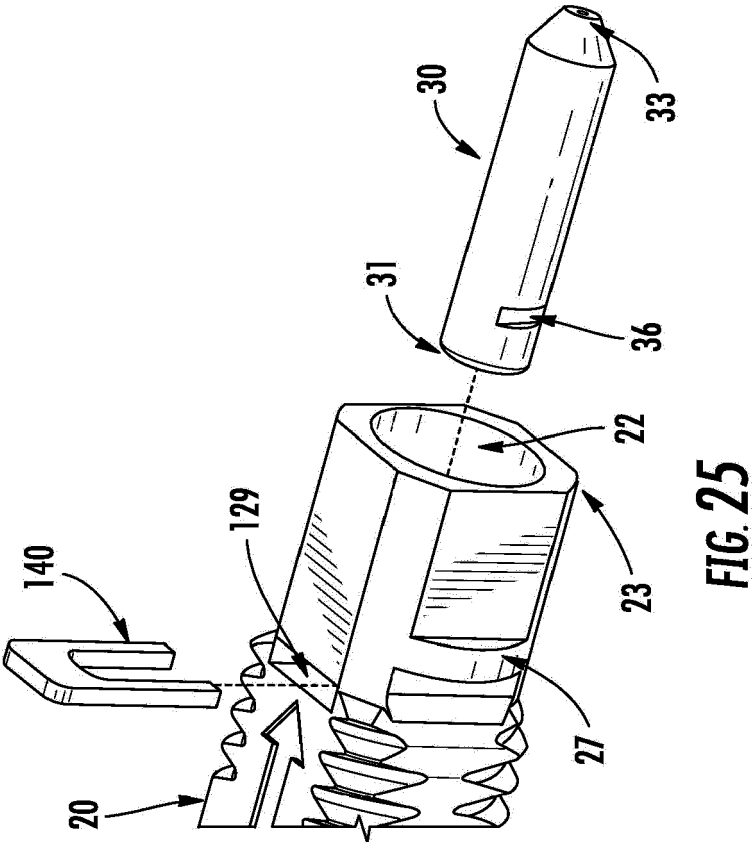
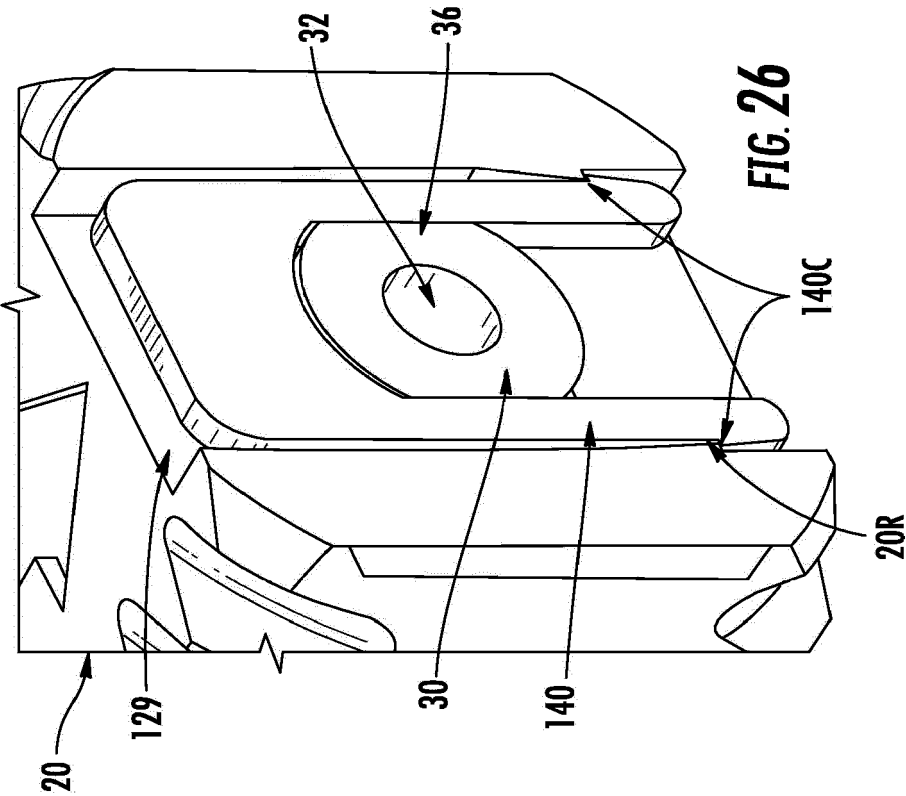


FIG. 20









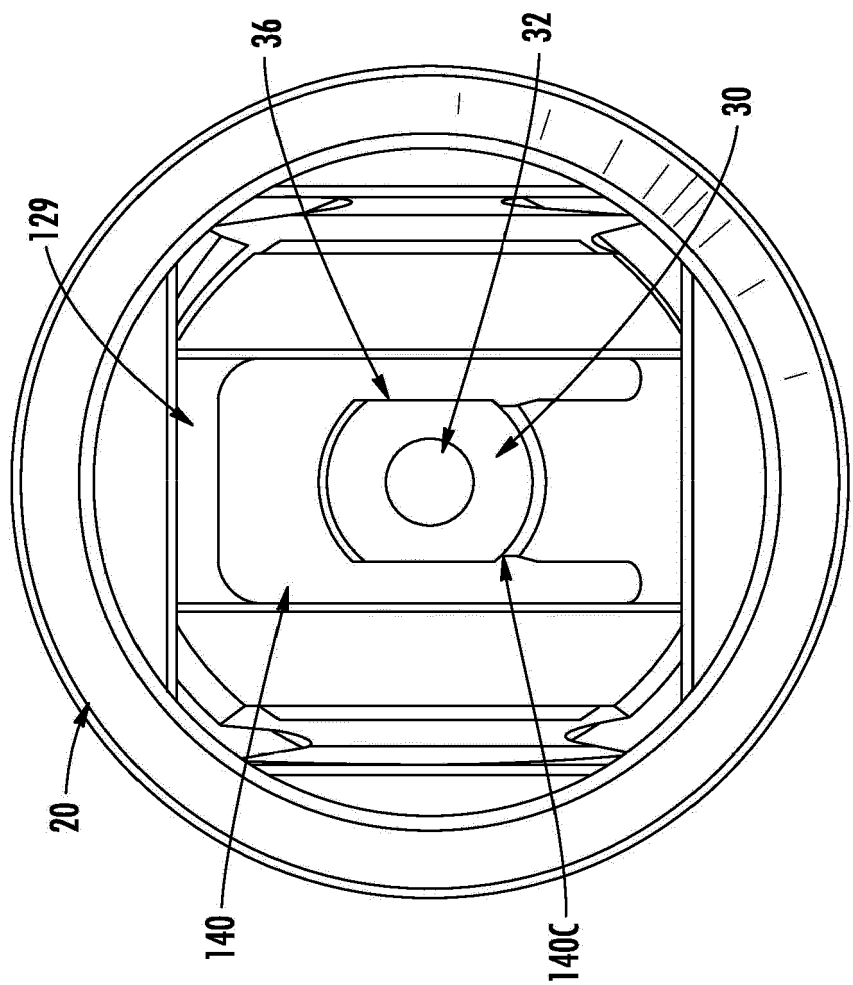


FIG. 28

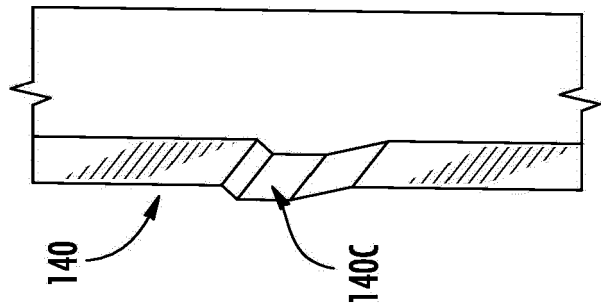


FIG. 27

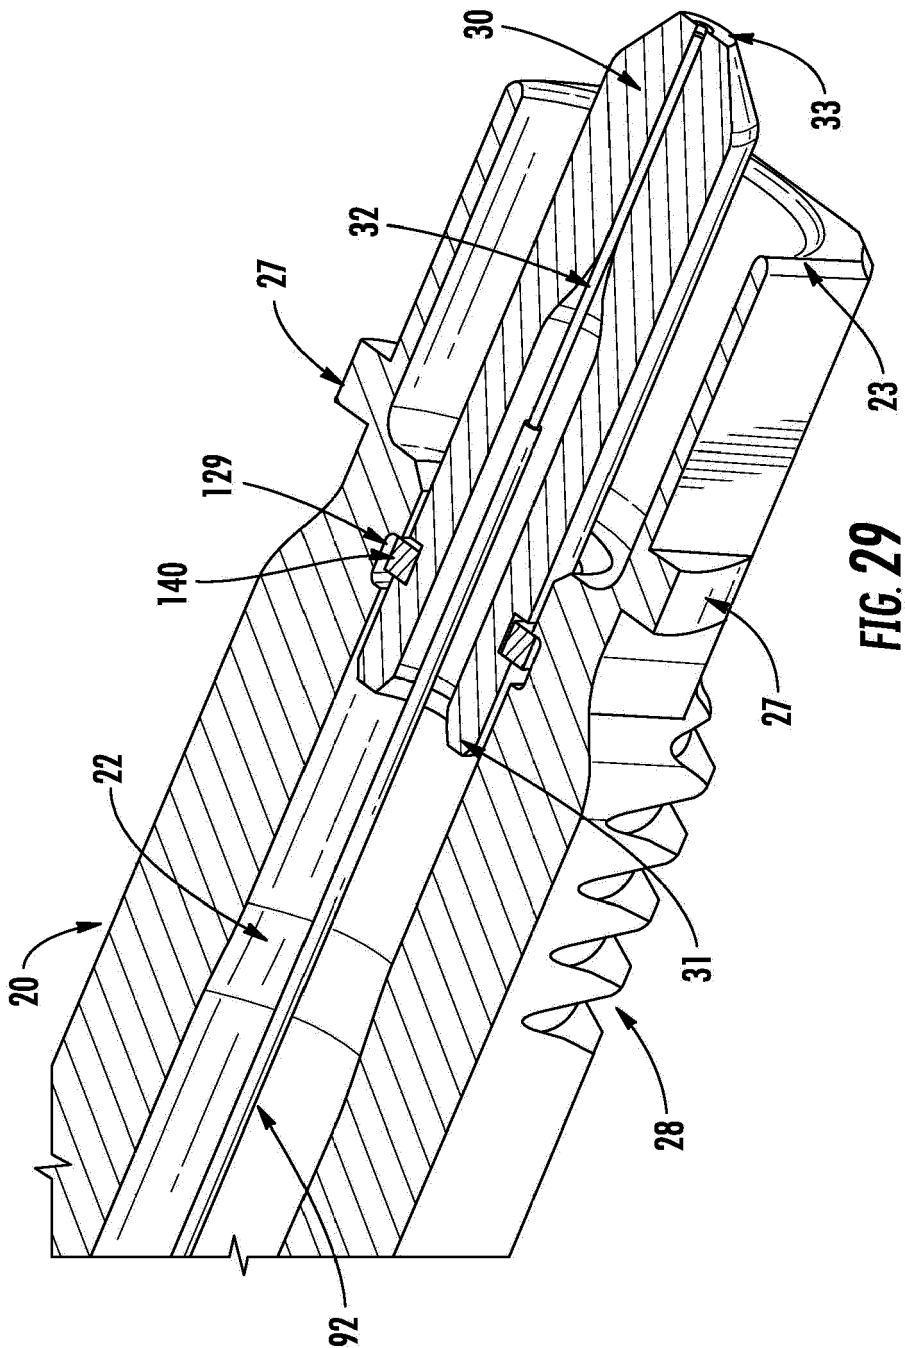


FIG. 29

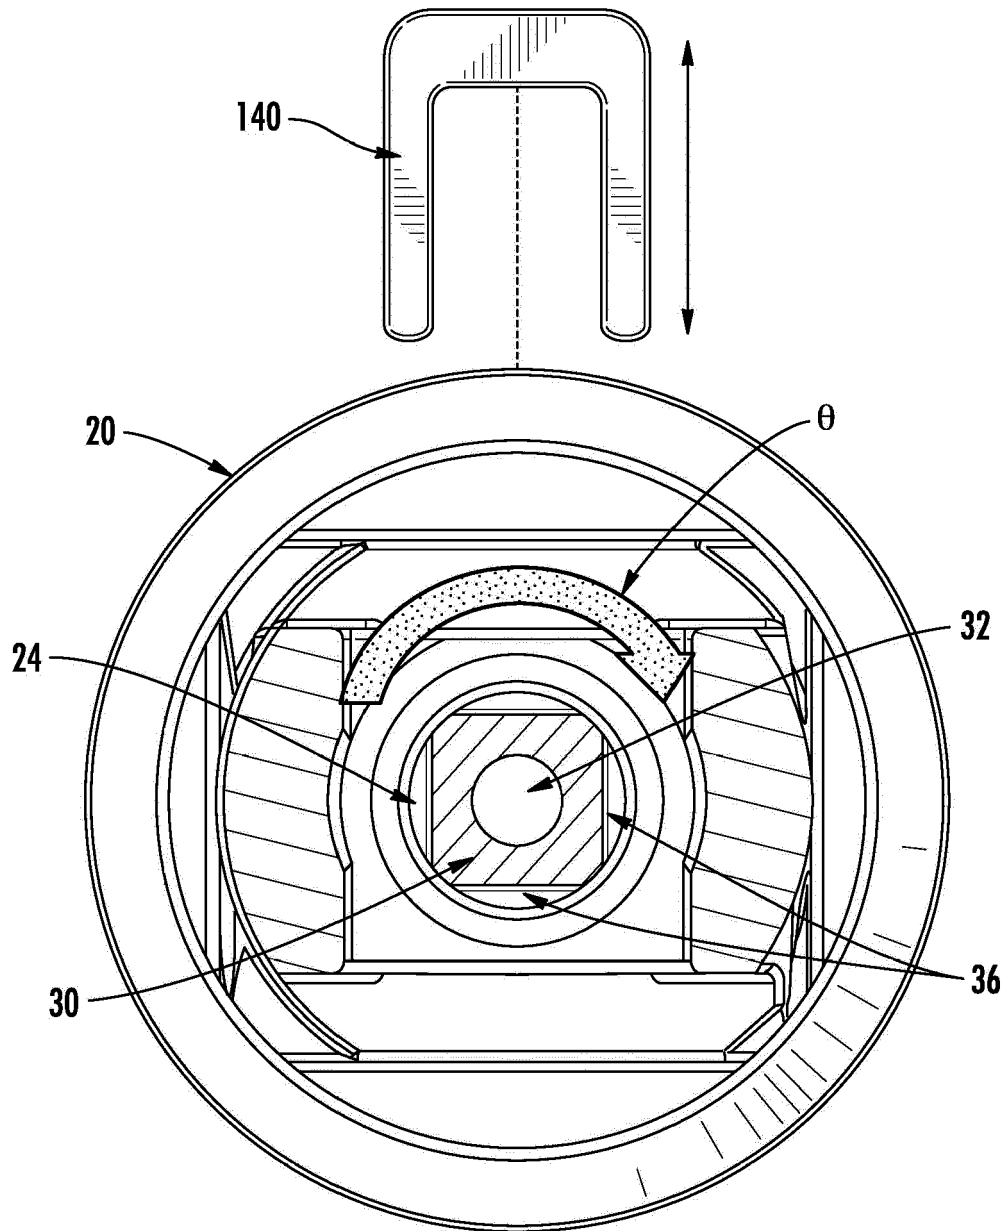
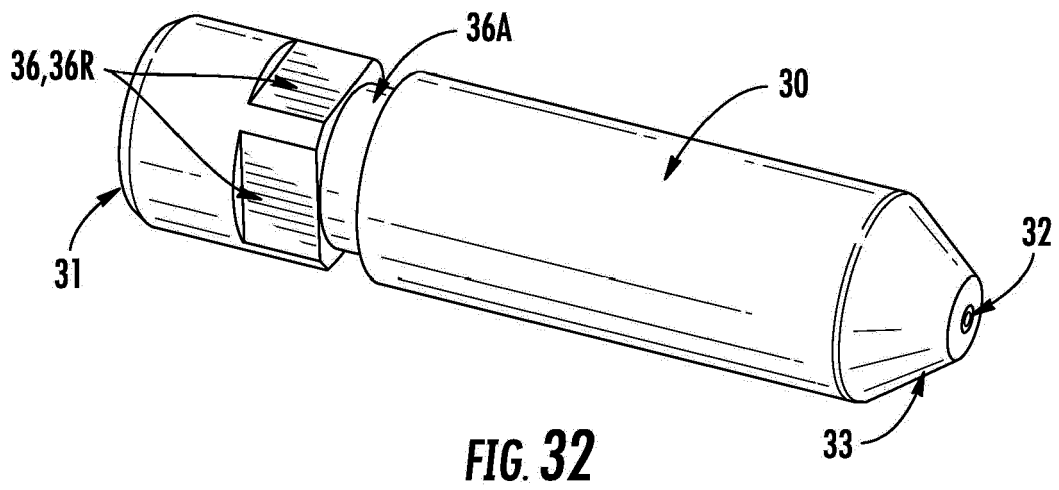
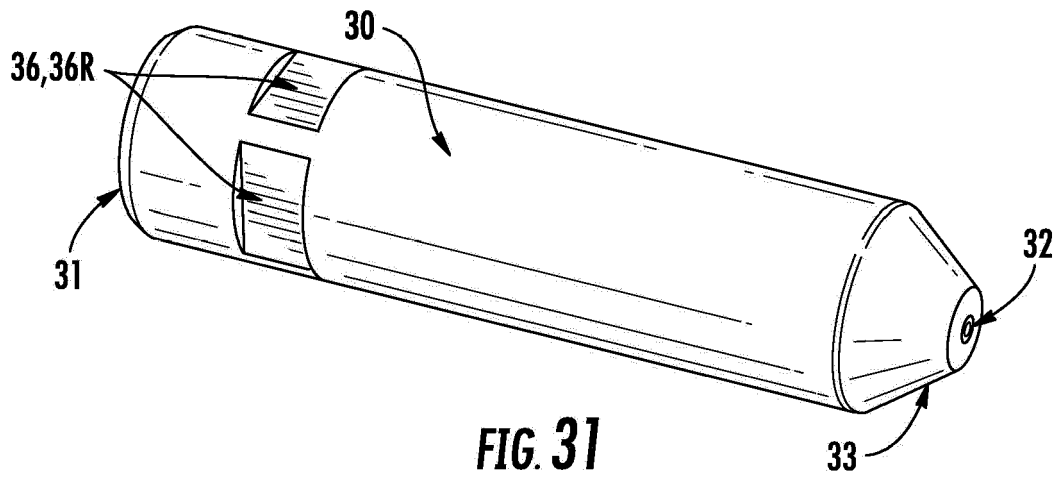


FIG. 30



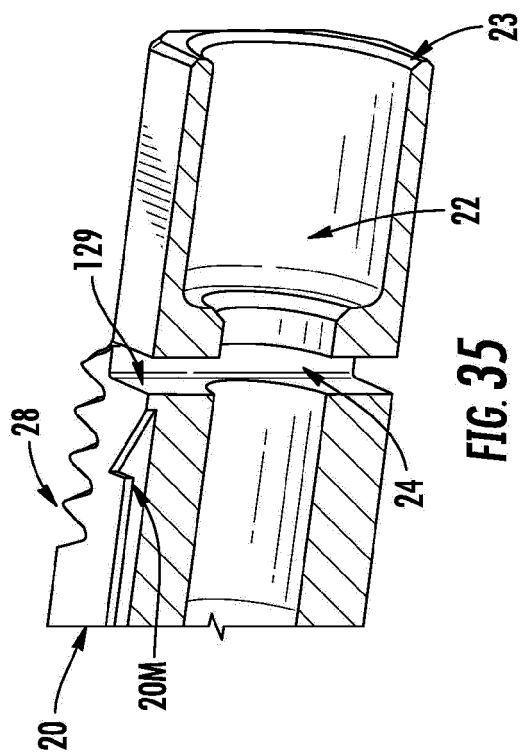


FIG. 35

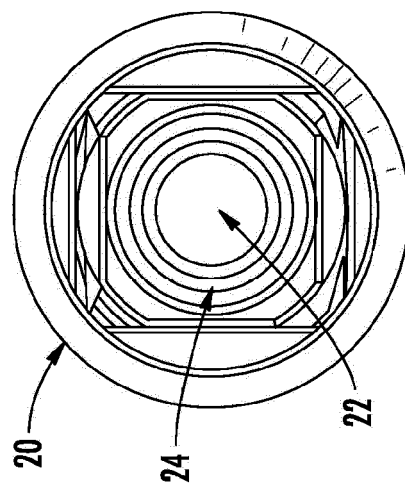


FIG. 36

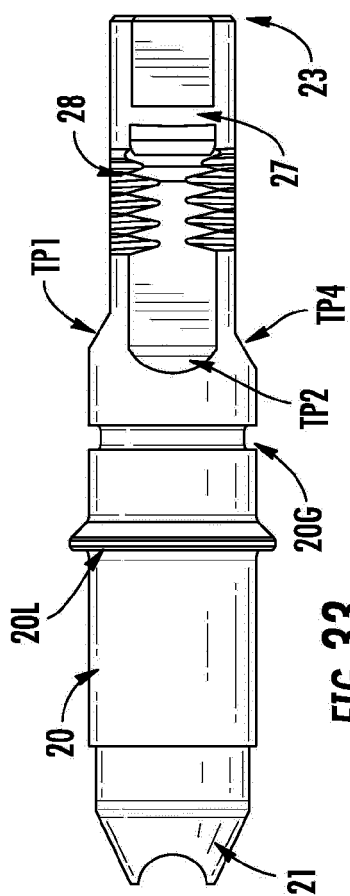


FIG. 33

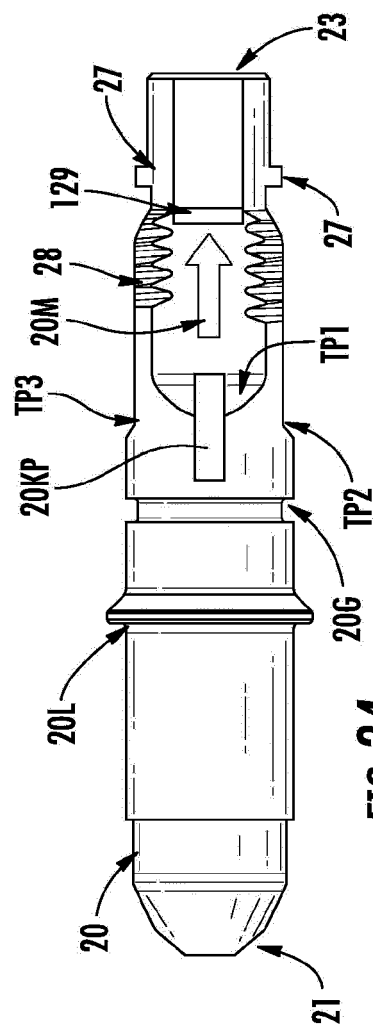


FIG. 34

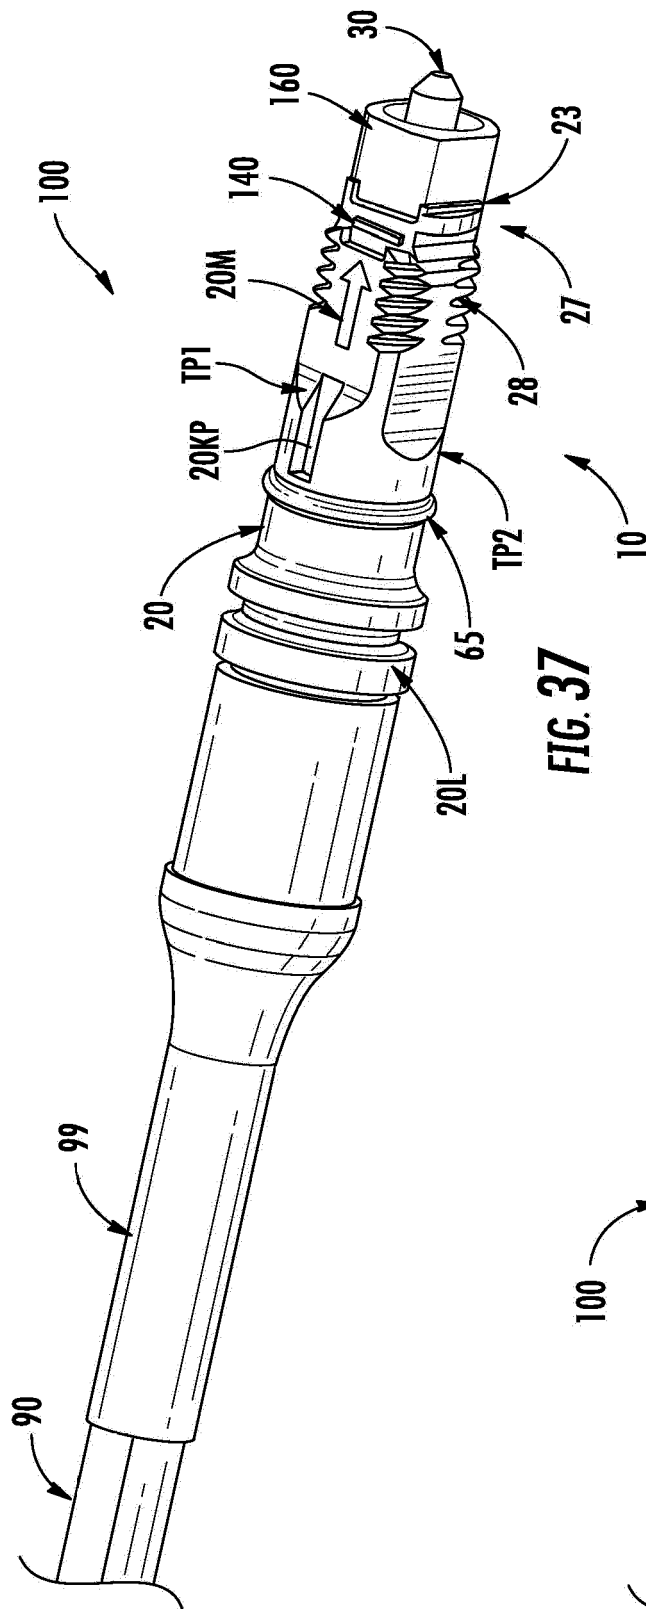


FIG. 37

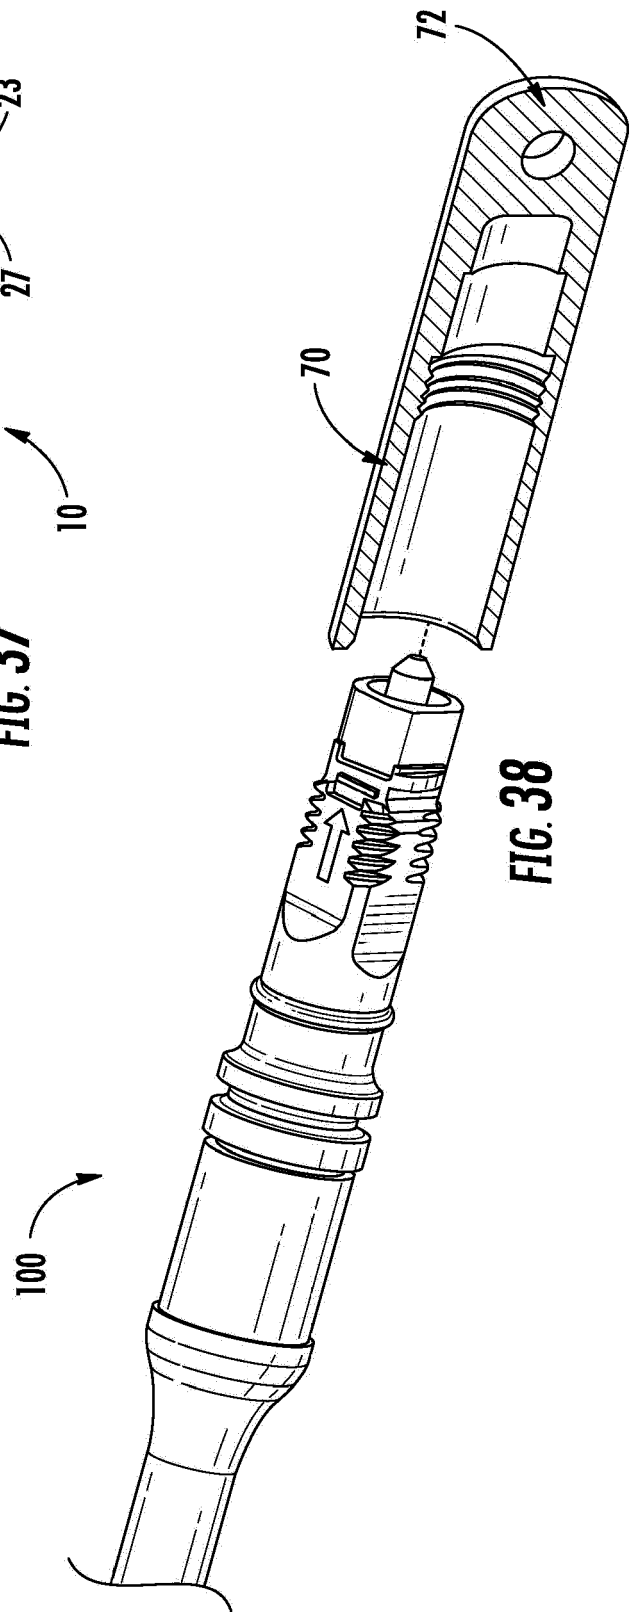


FIG. 38

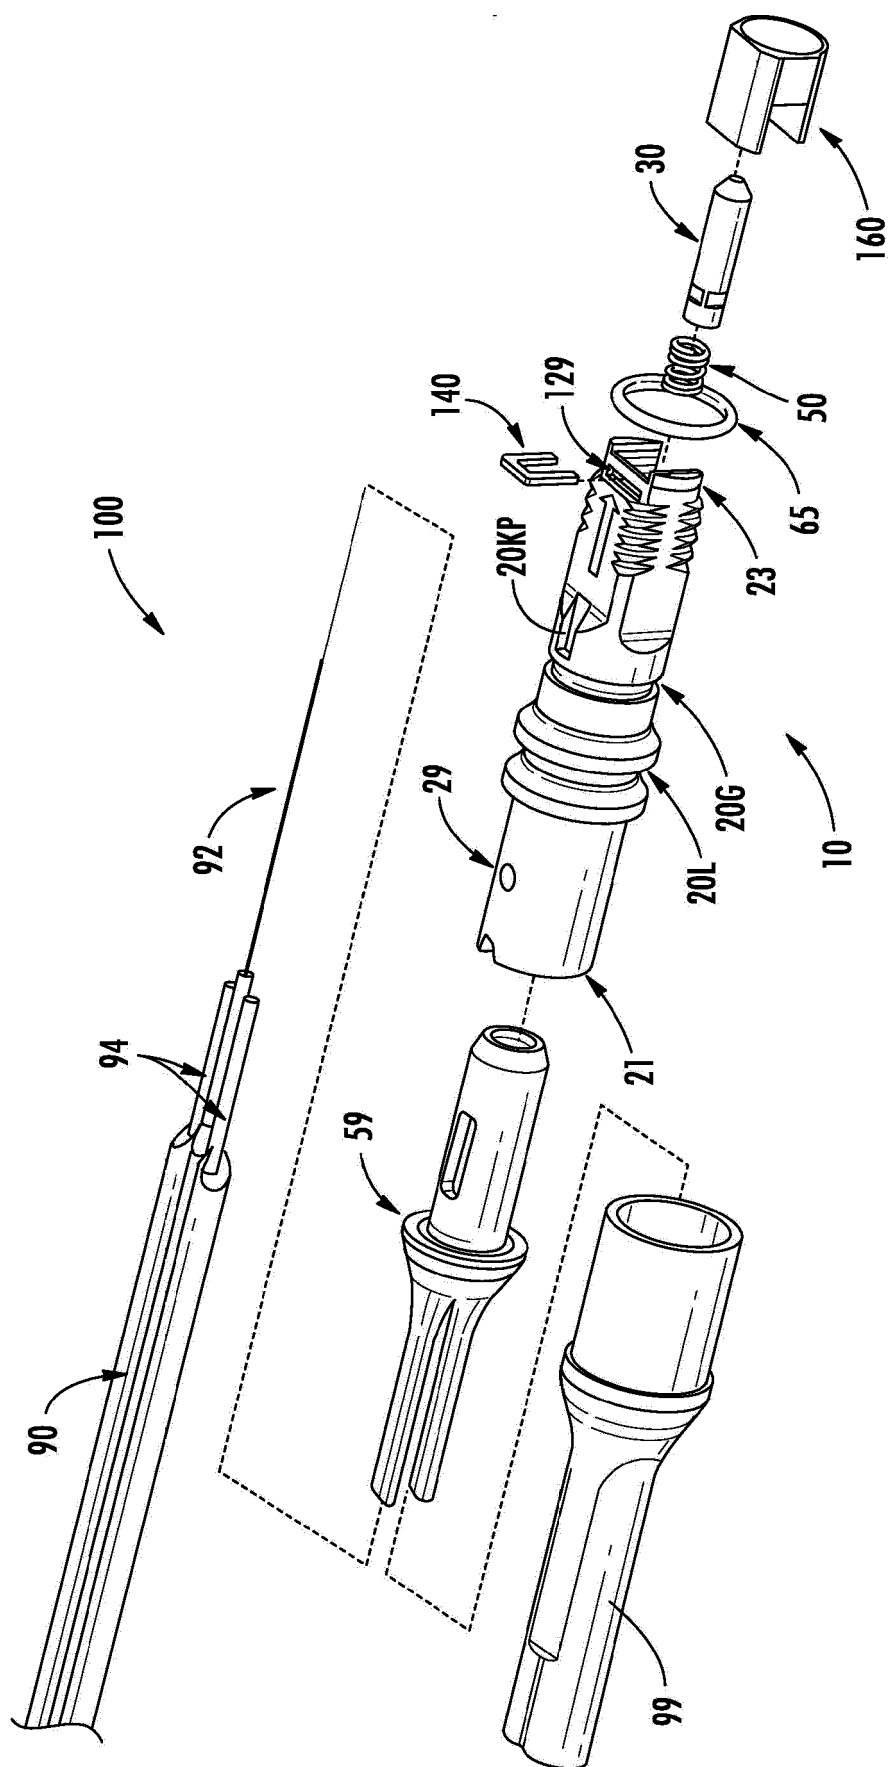


FIG. 39

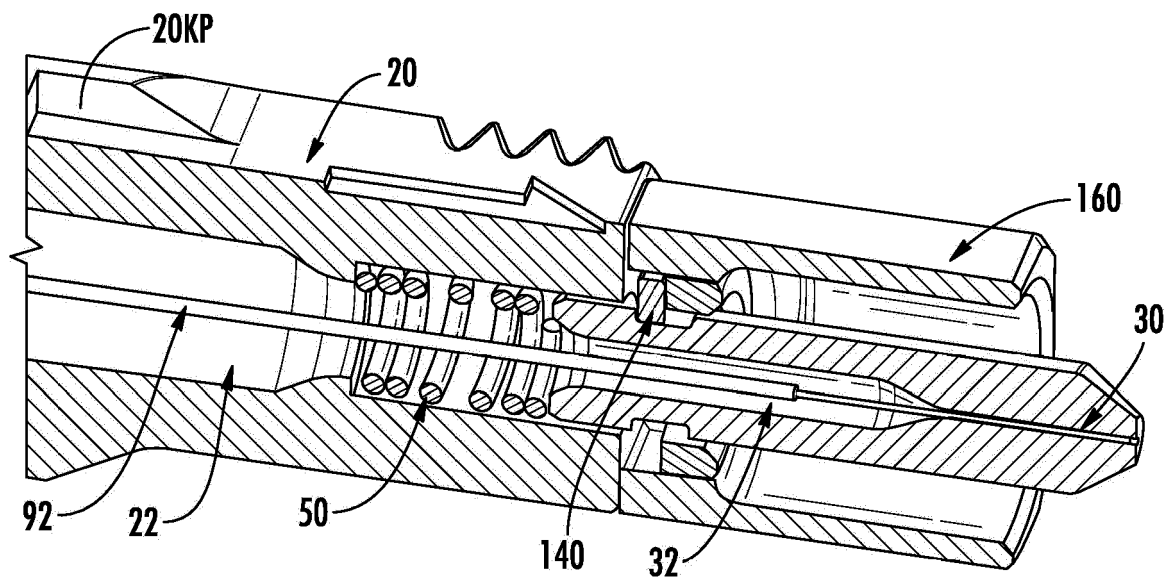


FIG. 40

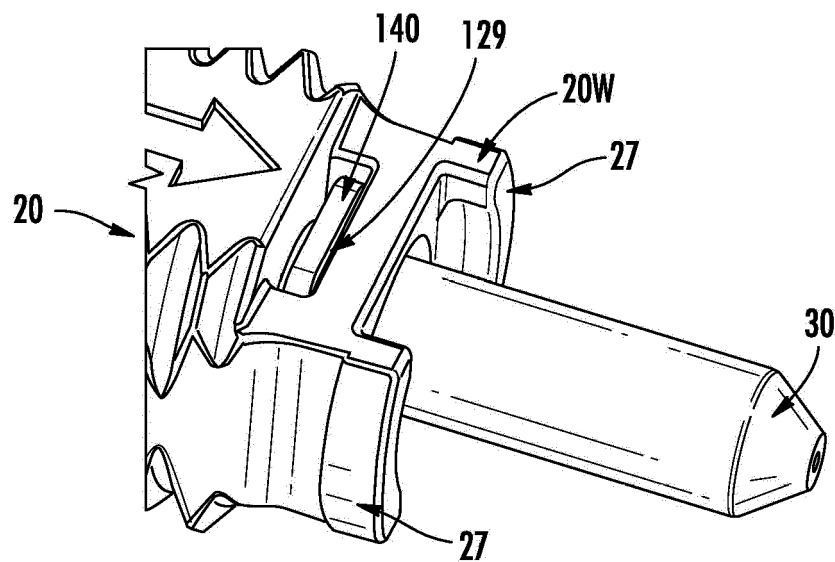
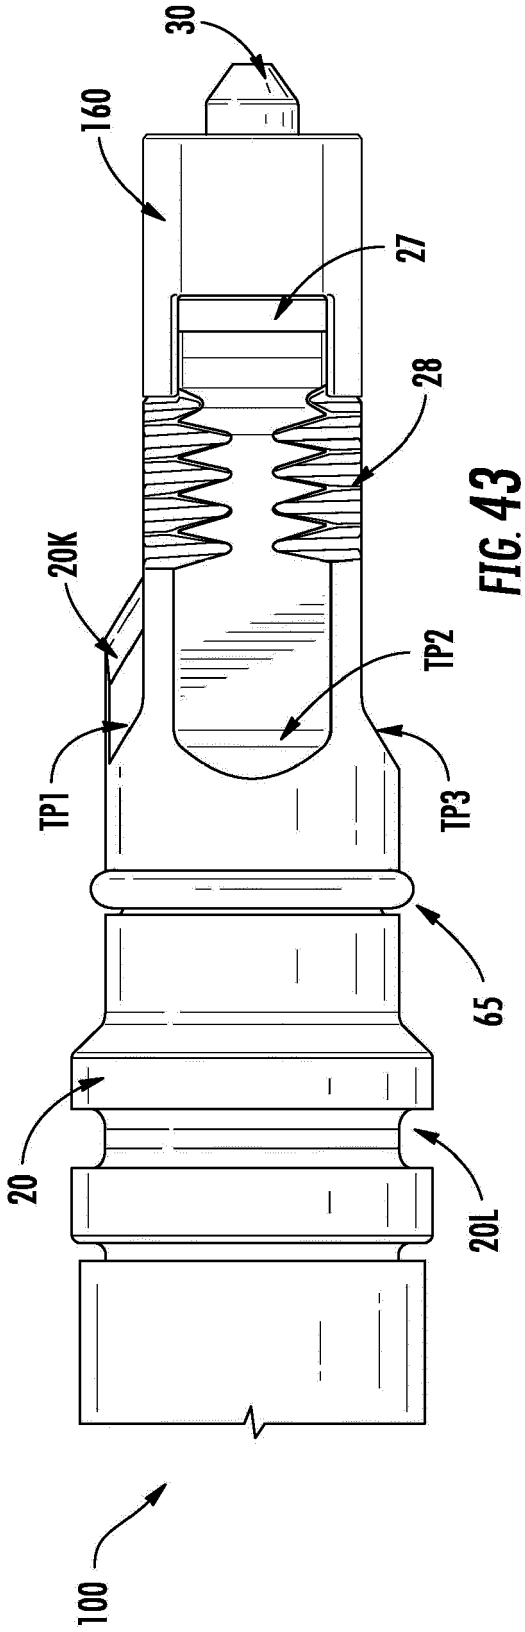
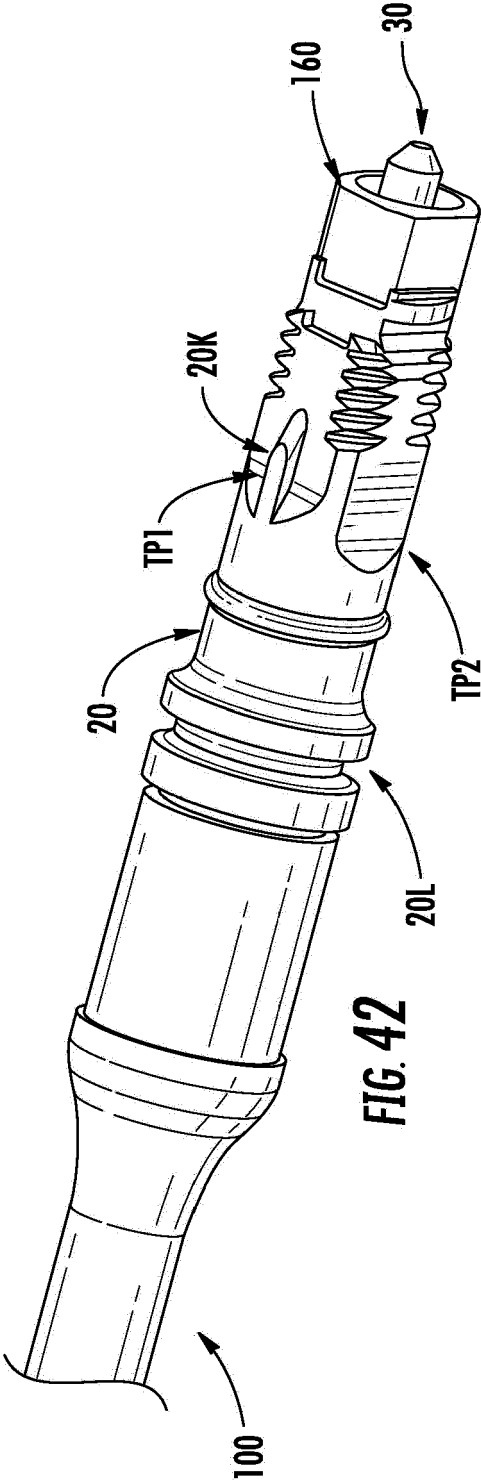
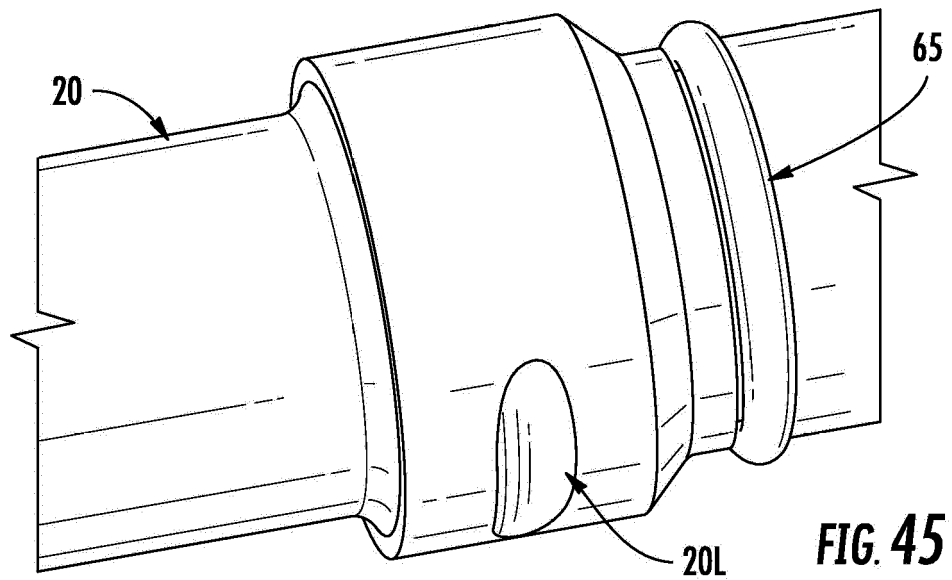
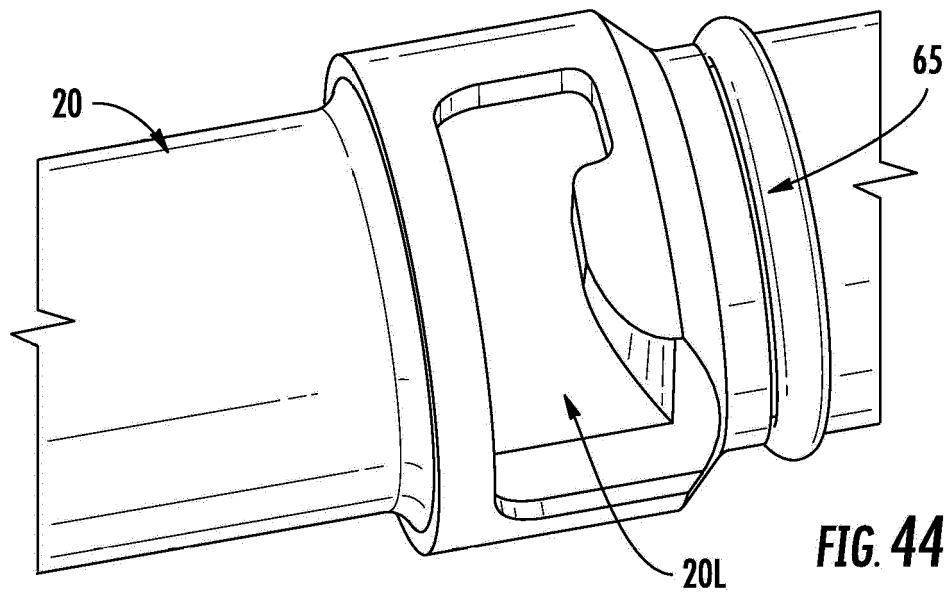
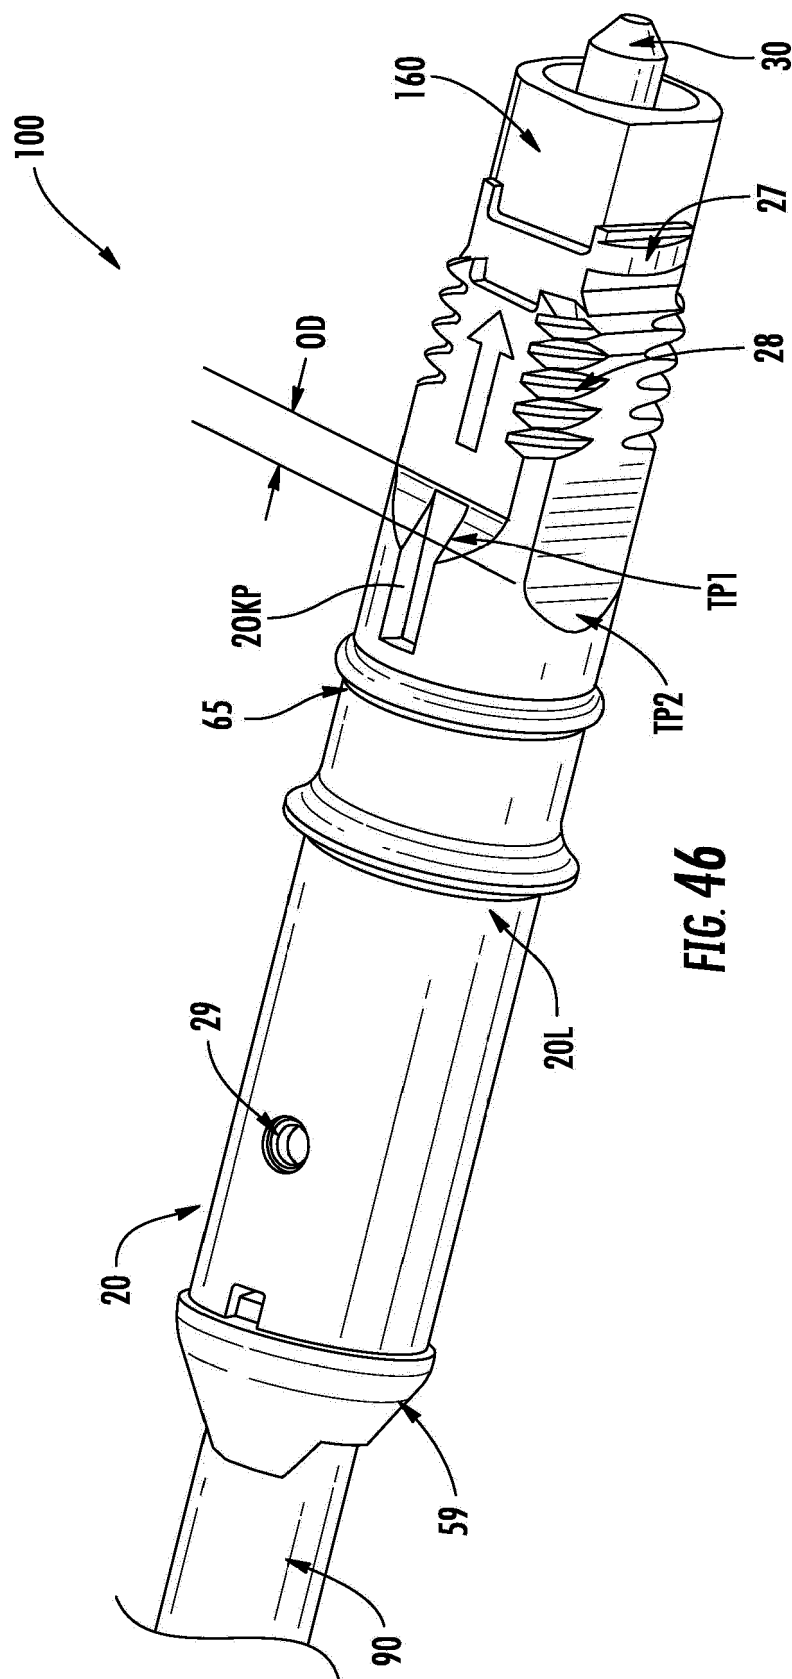
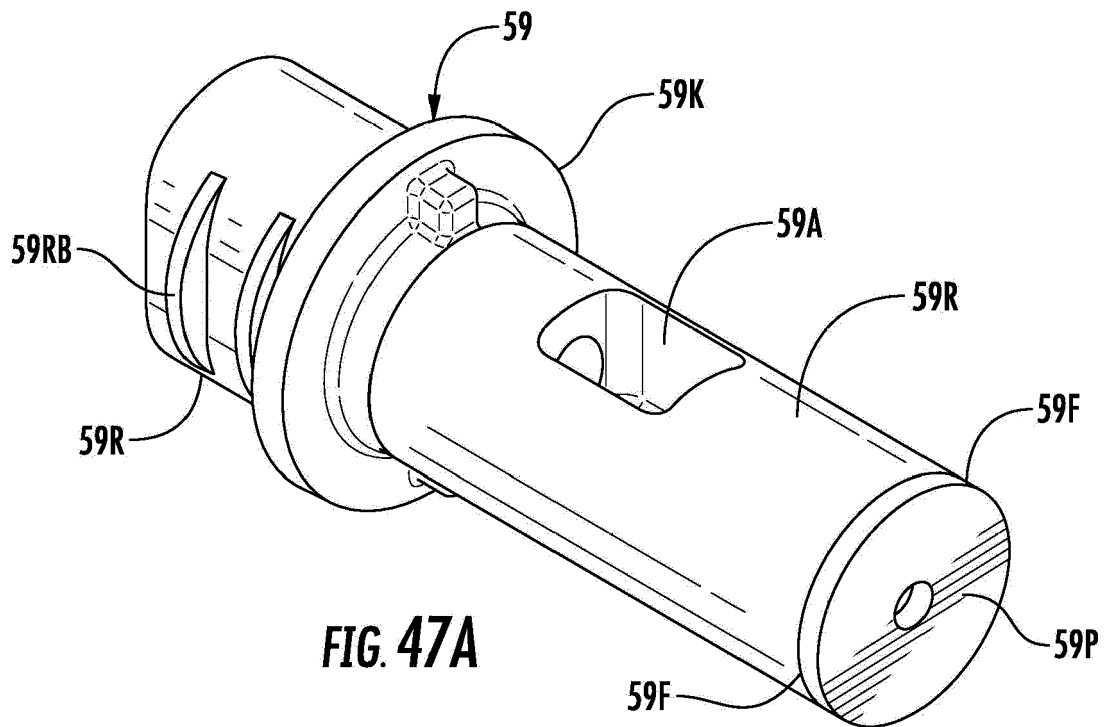
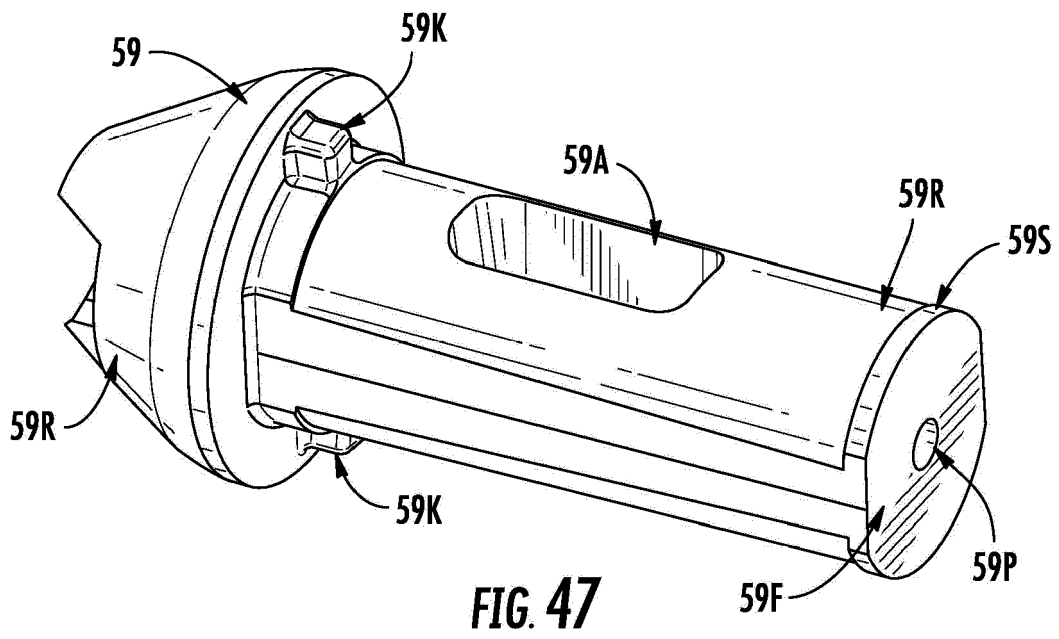




FIG. 41









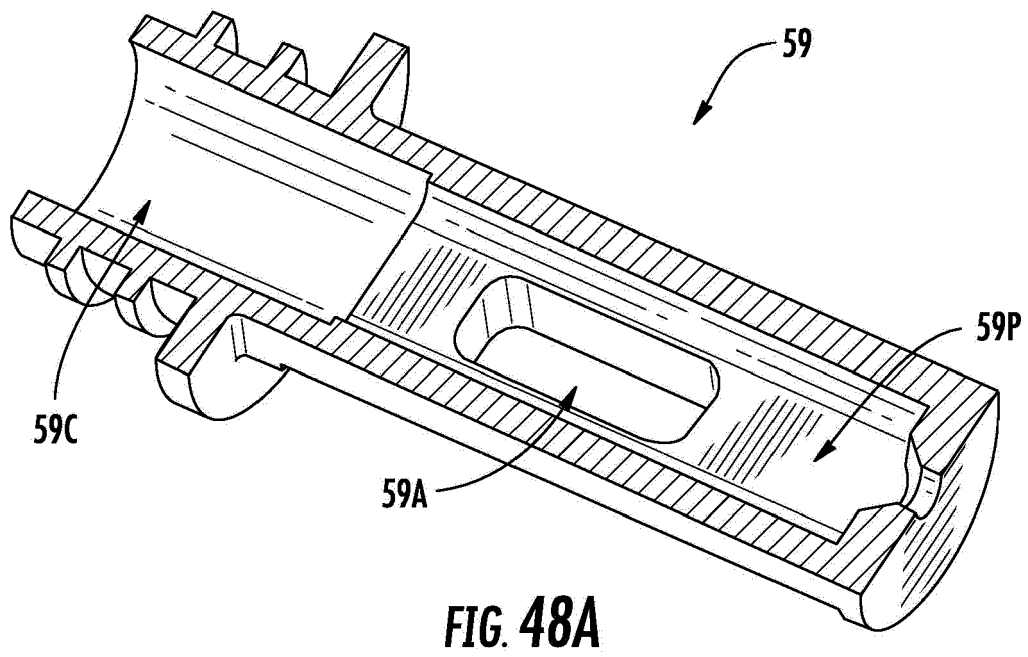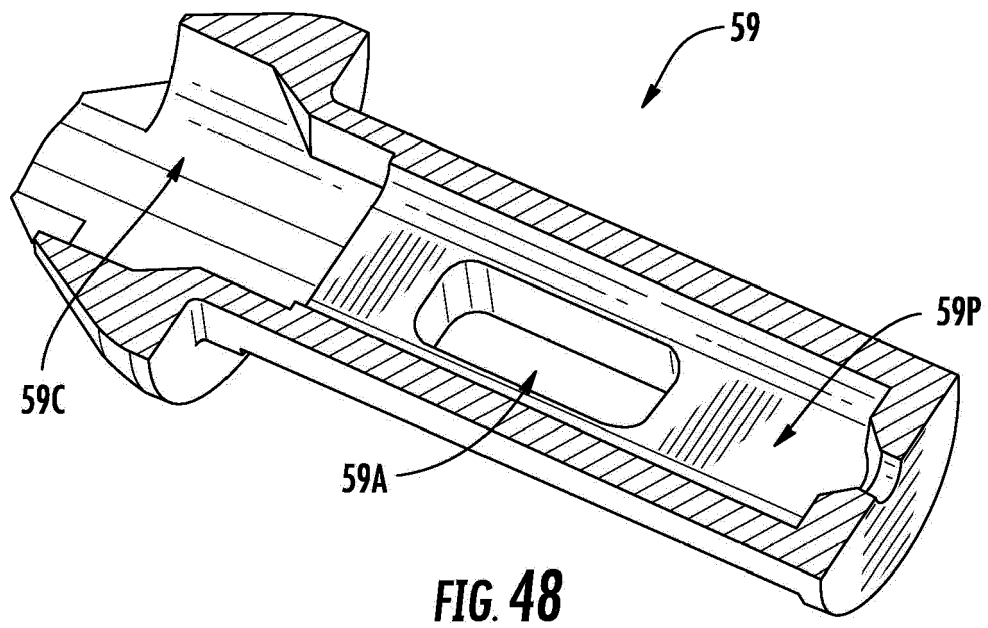

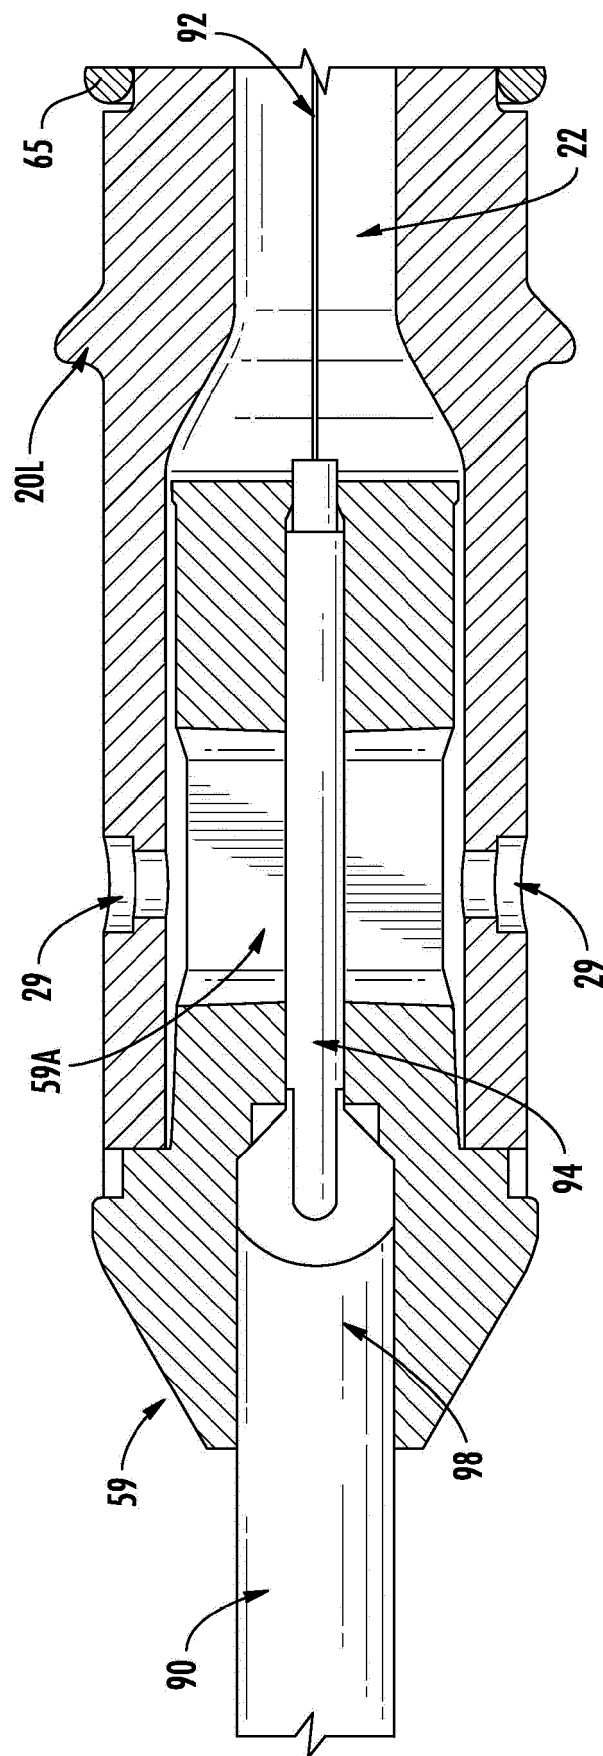
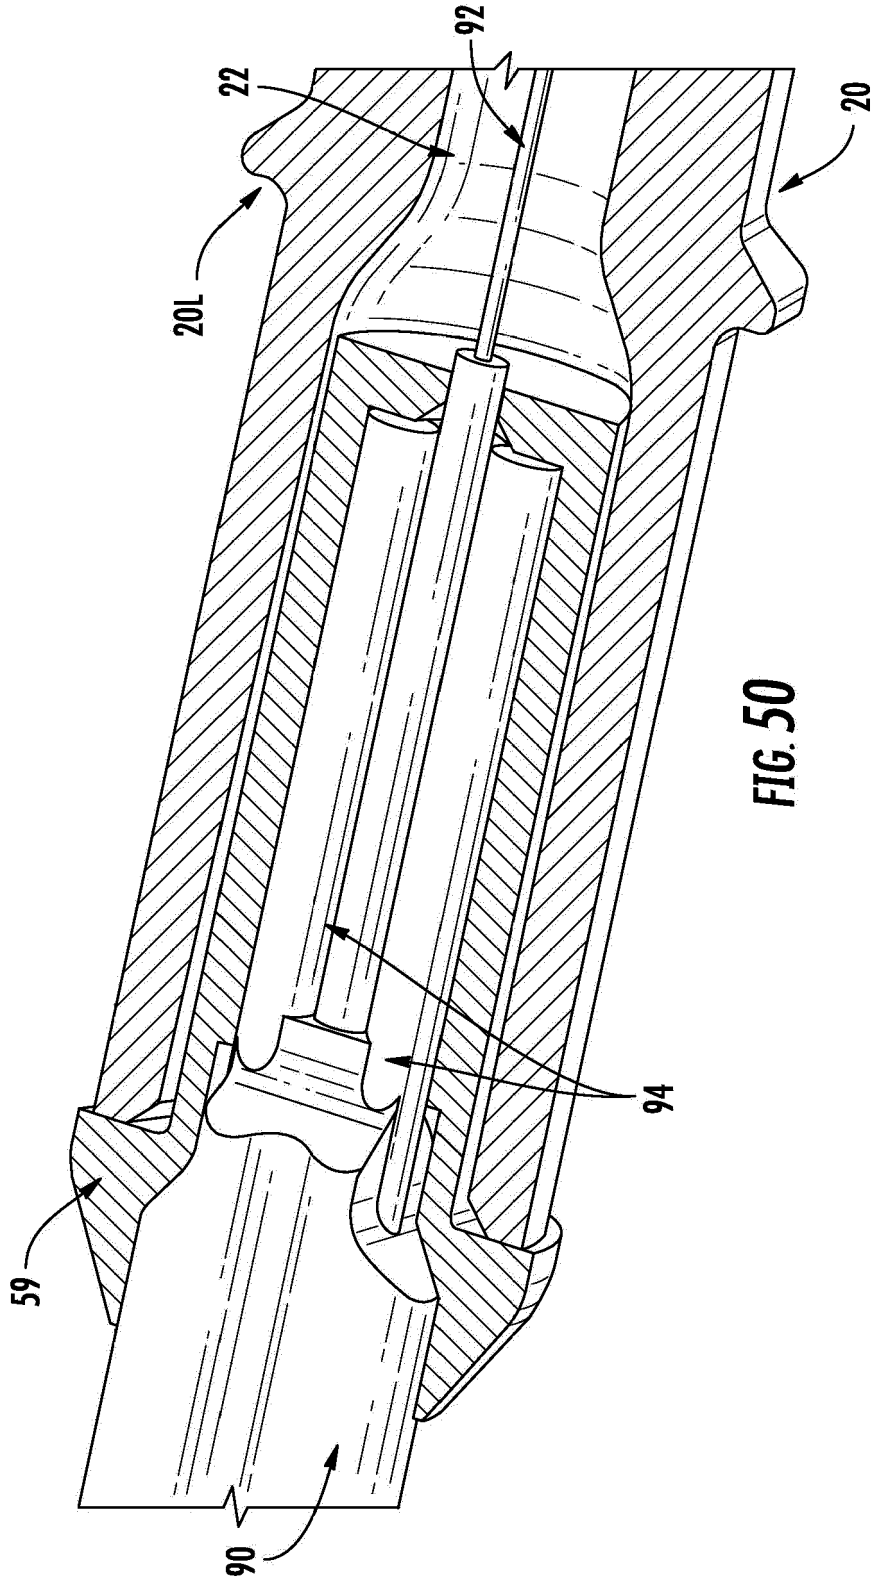
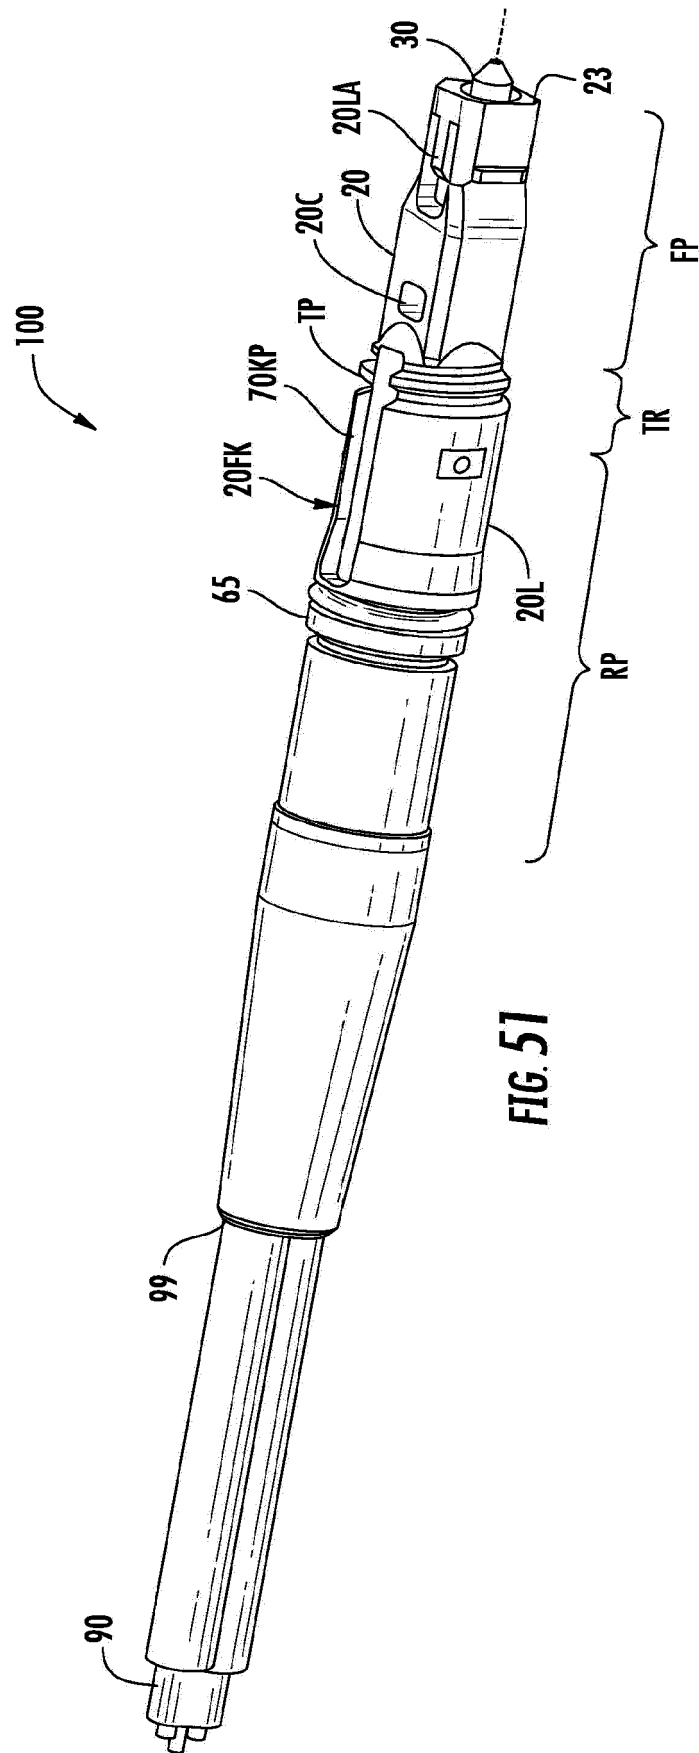
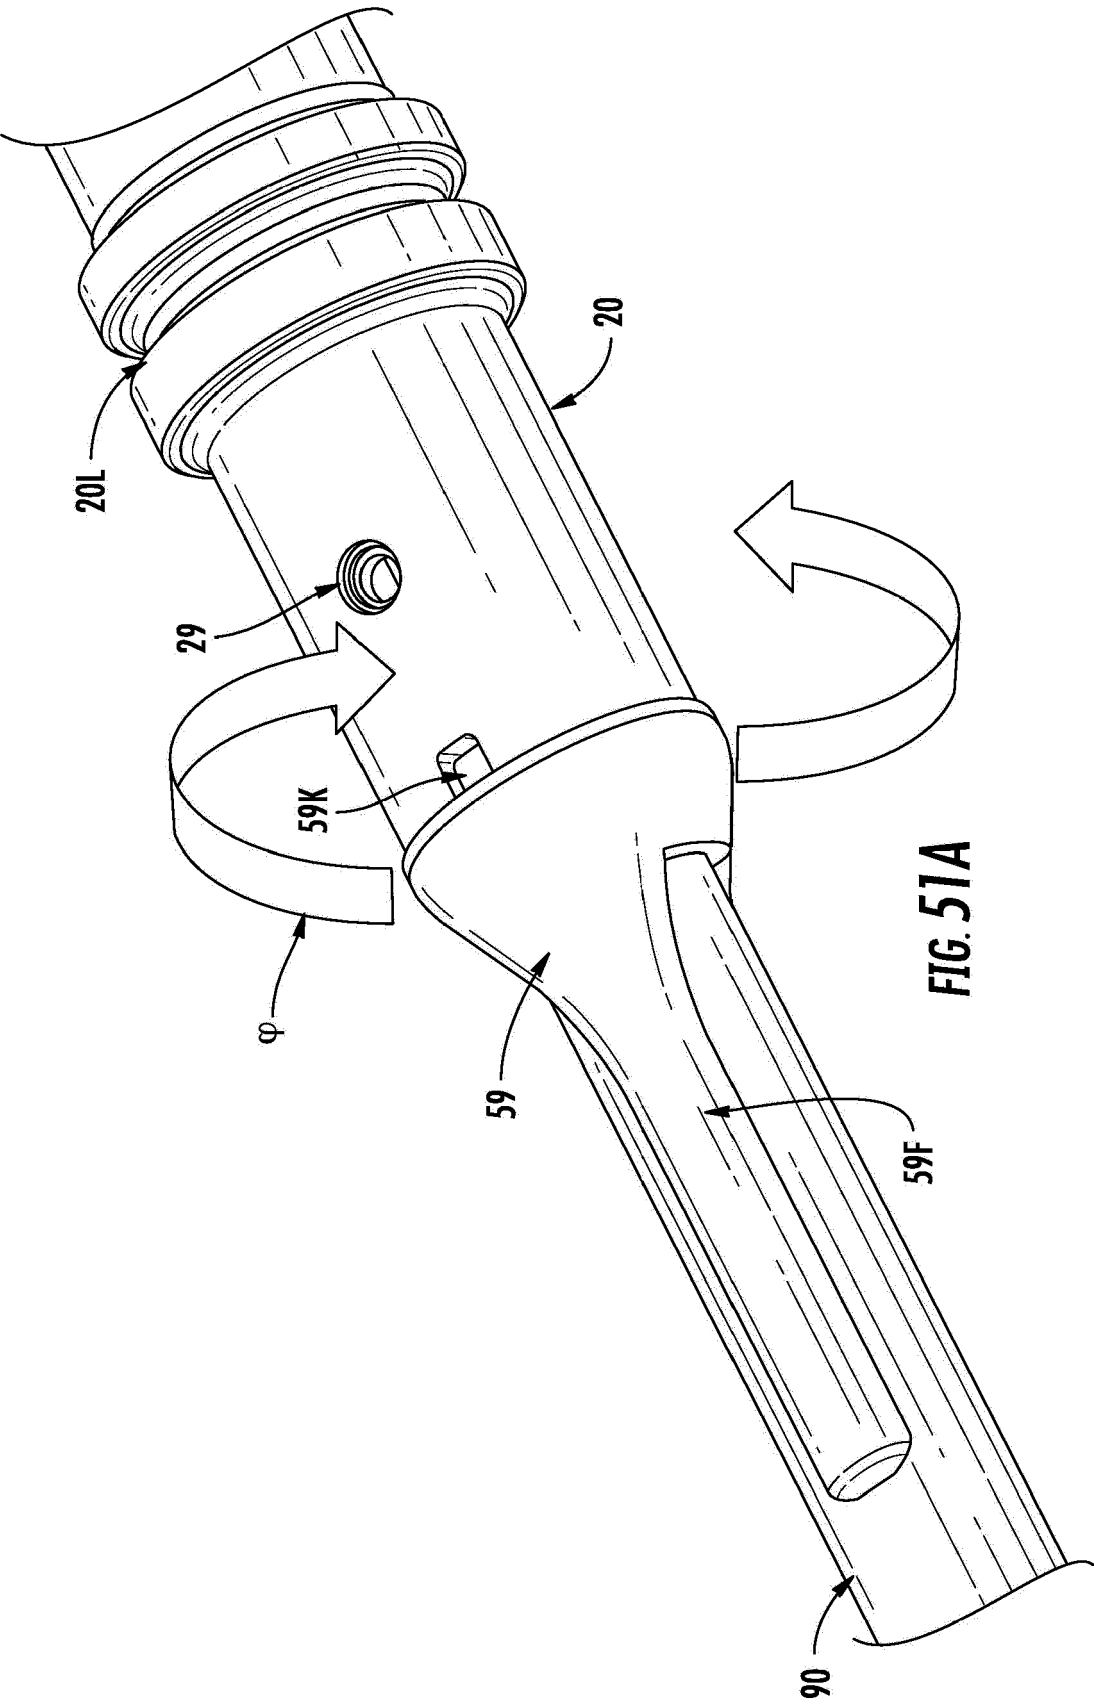
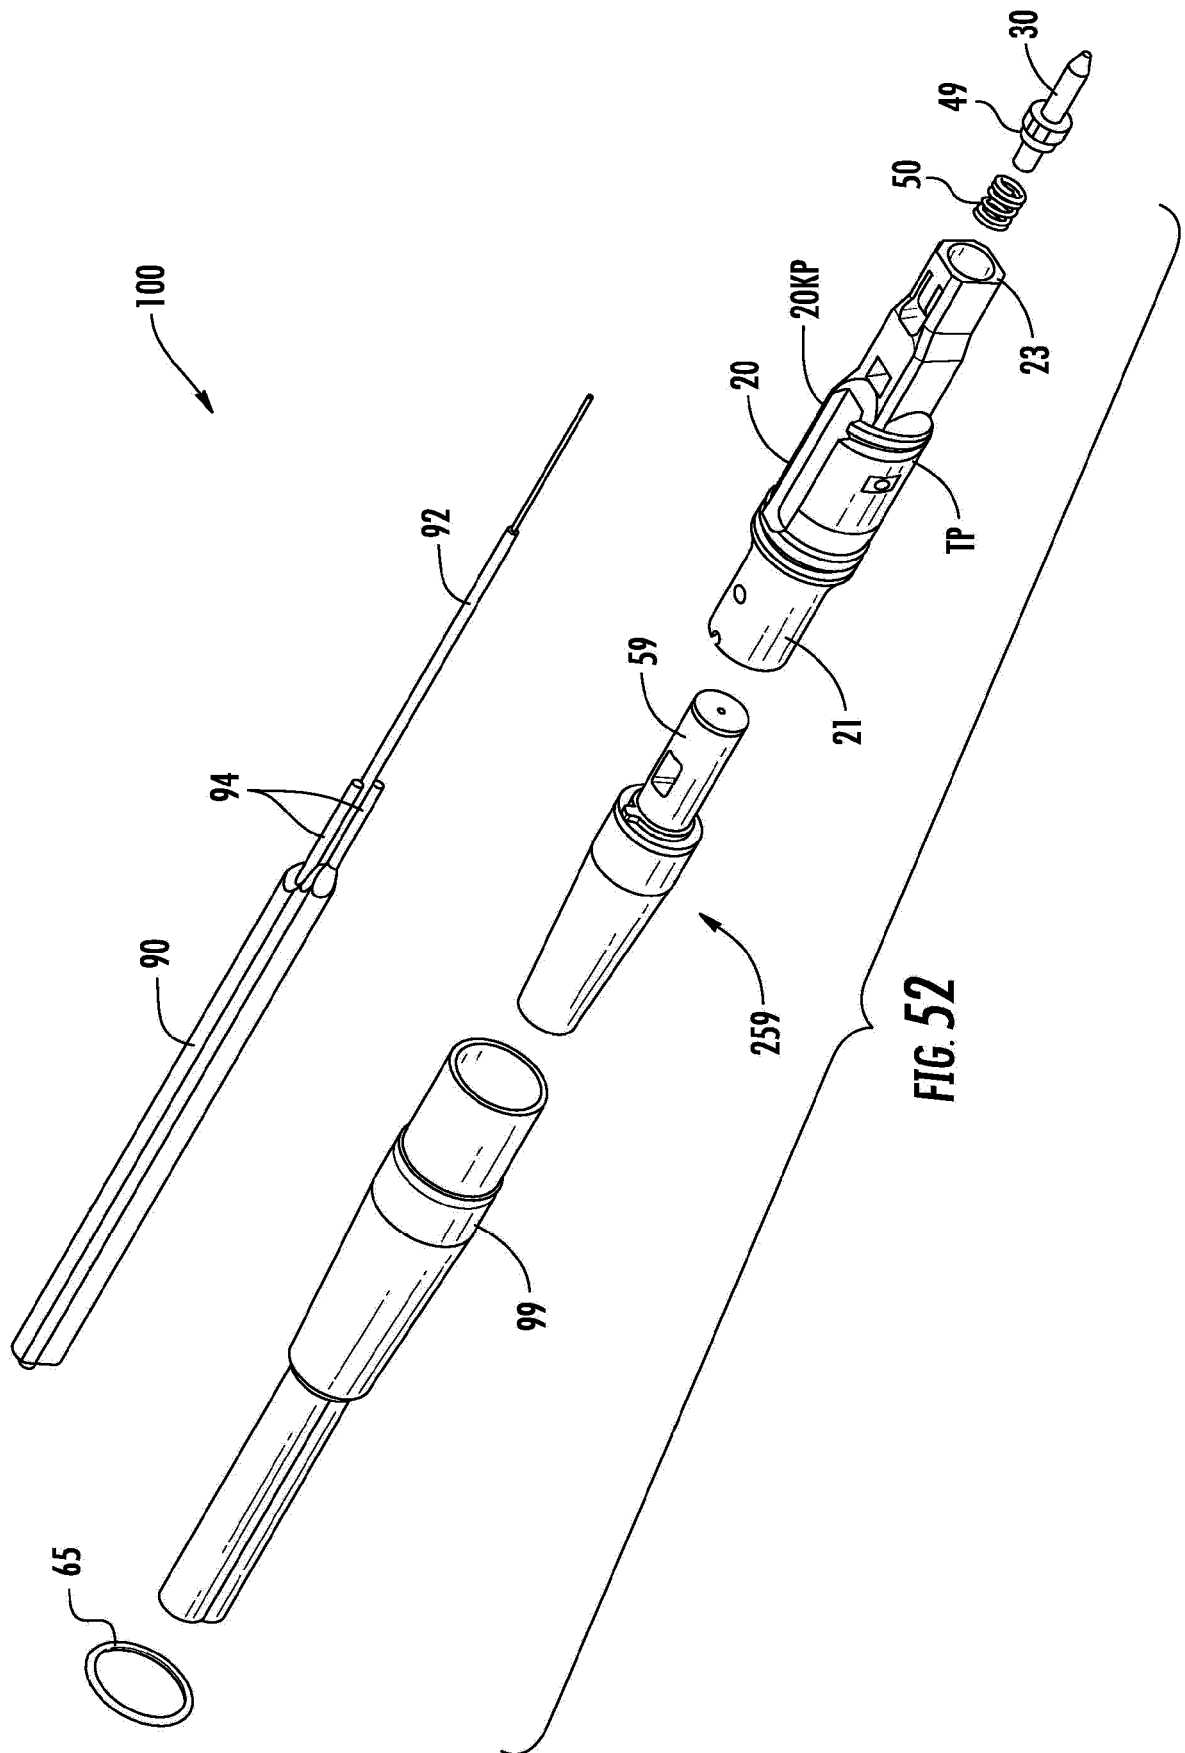




FIG. 49









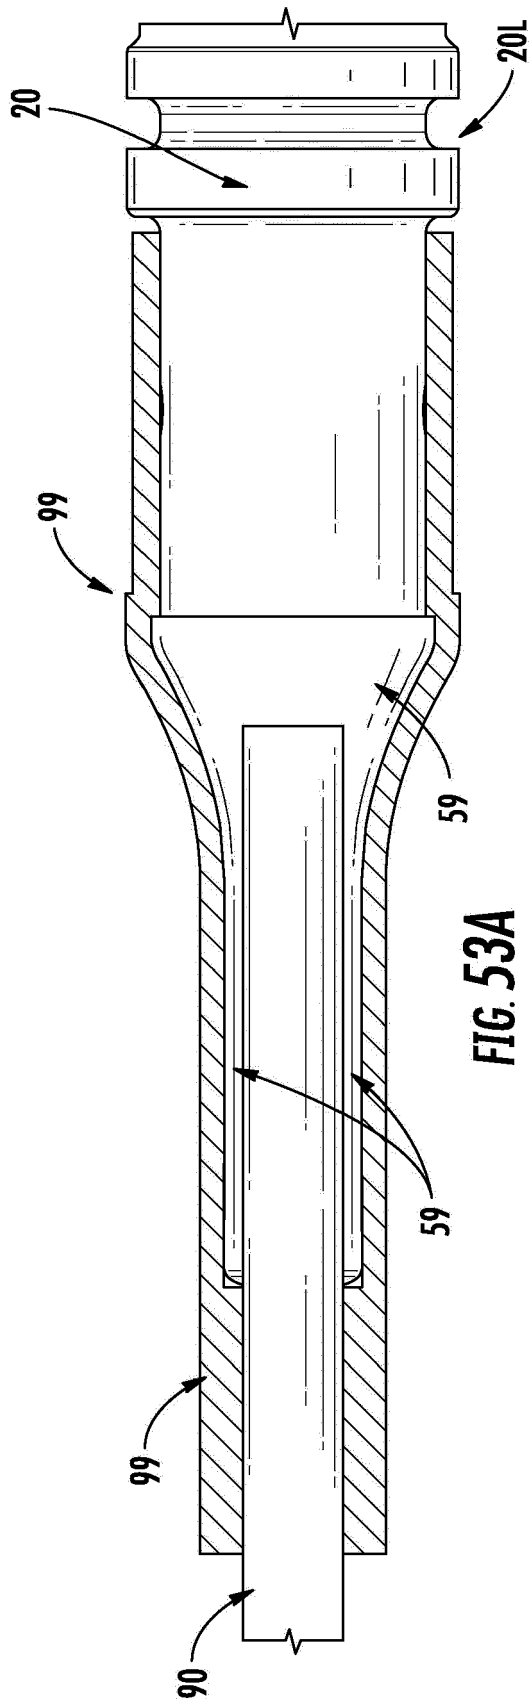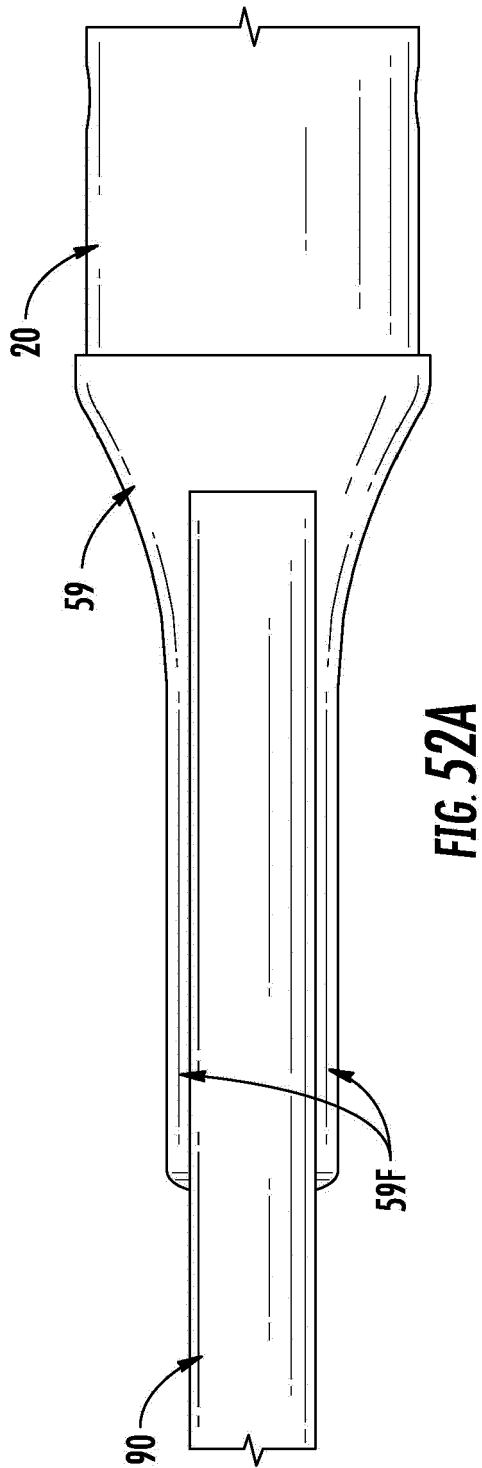

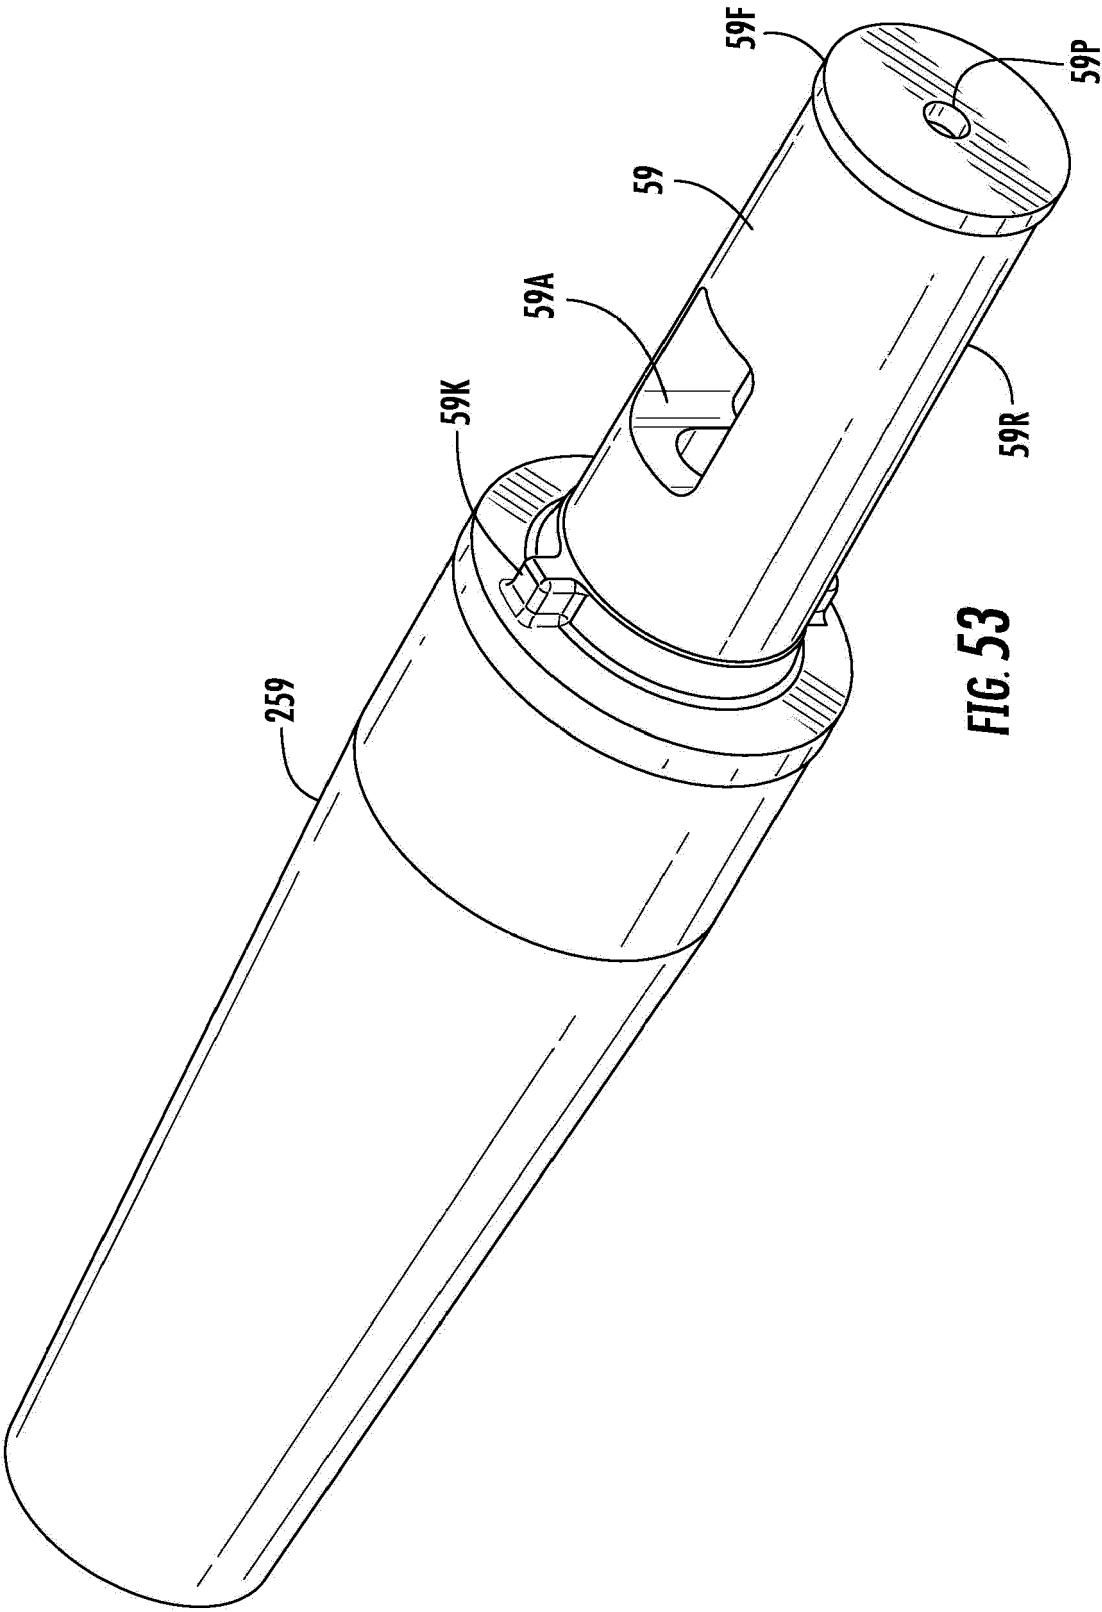
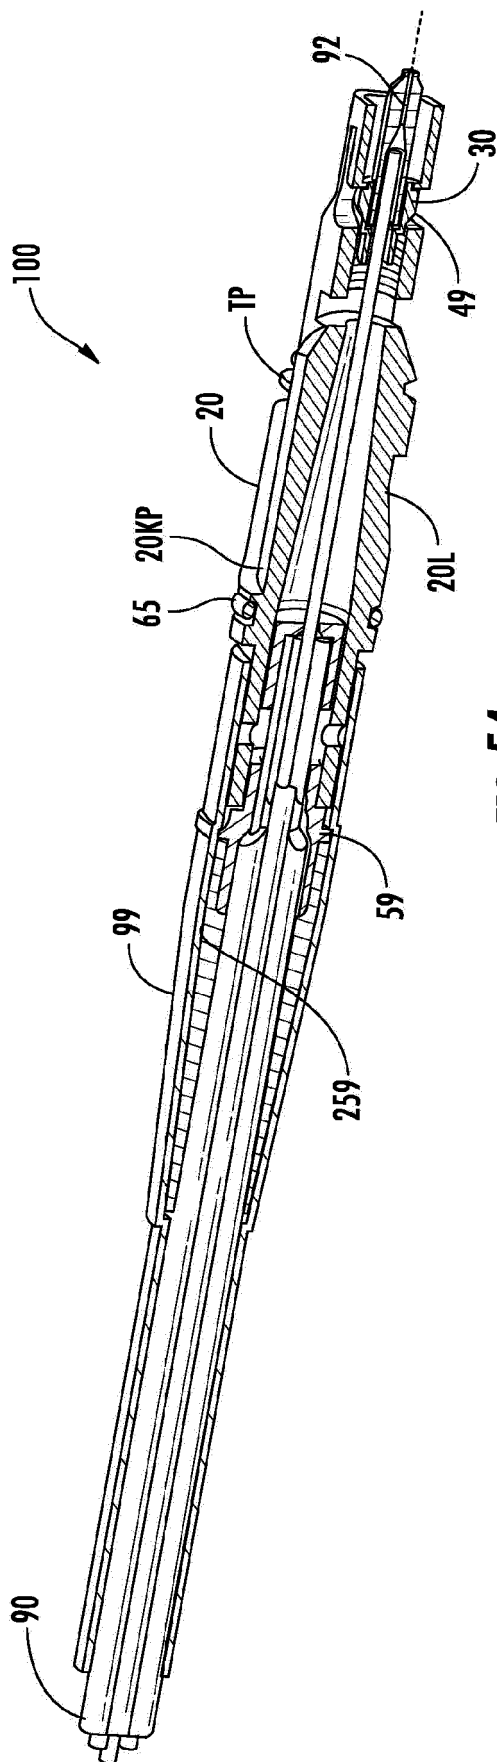
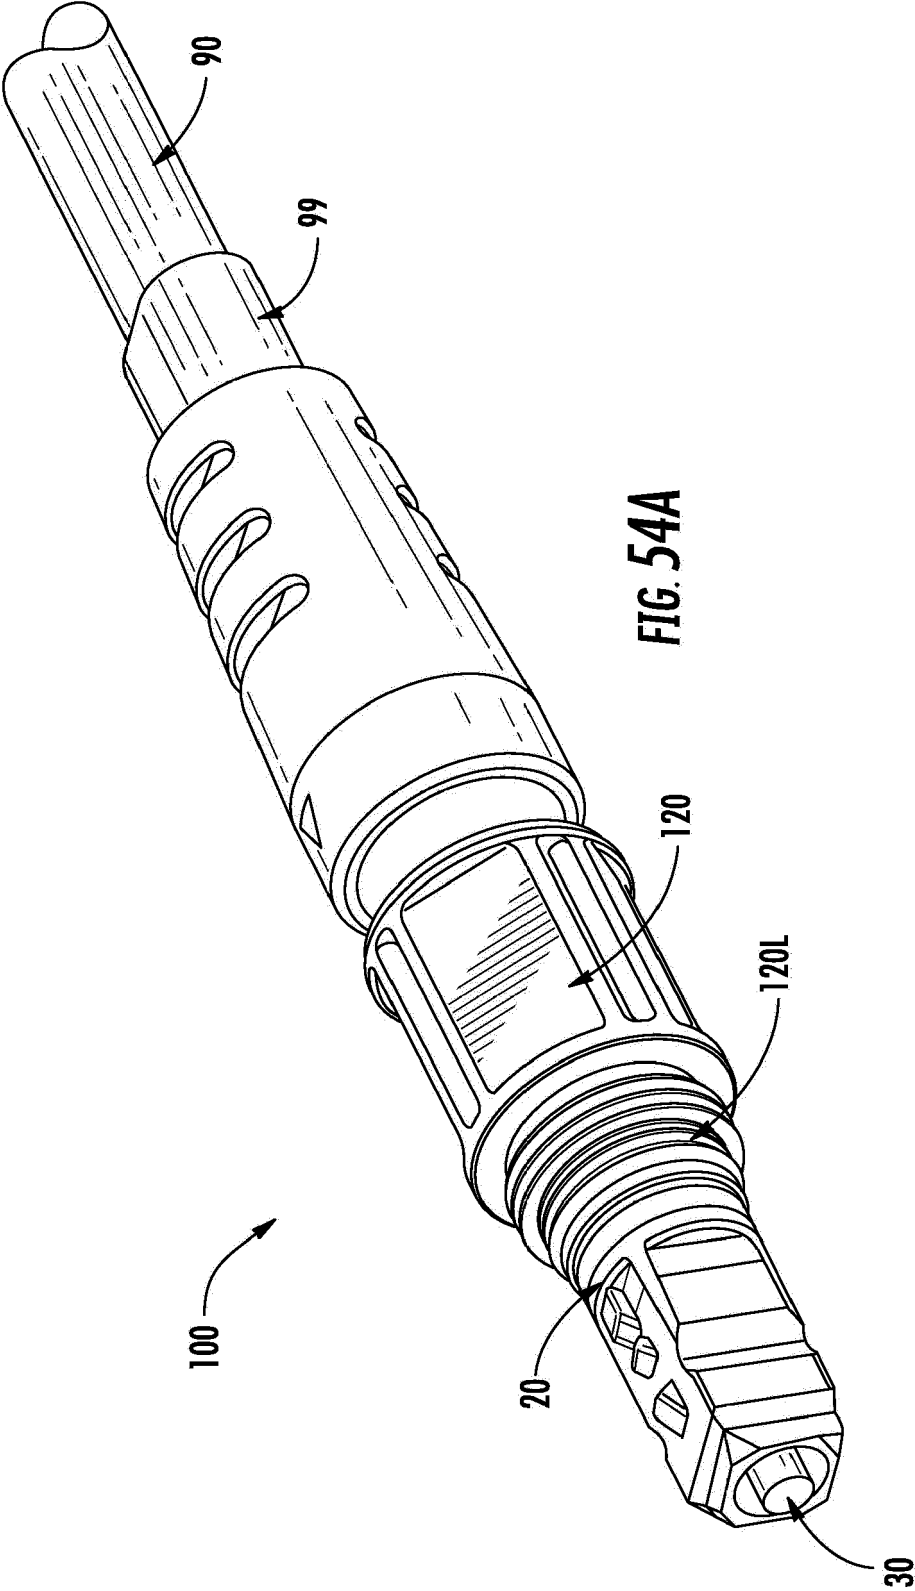


FIG. 53





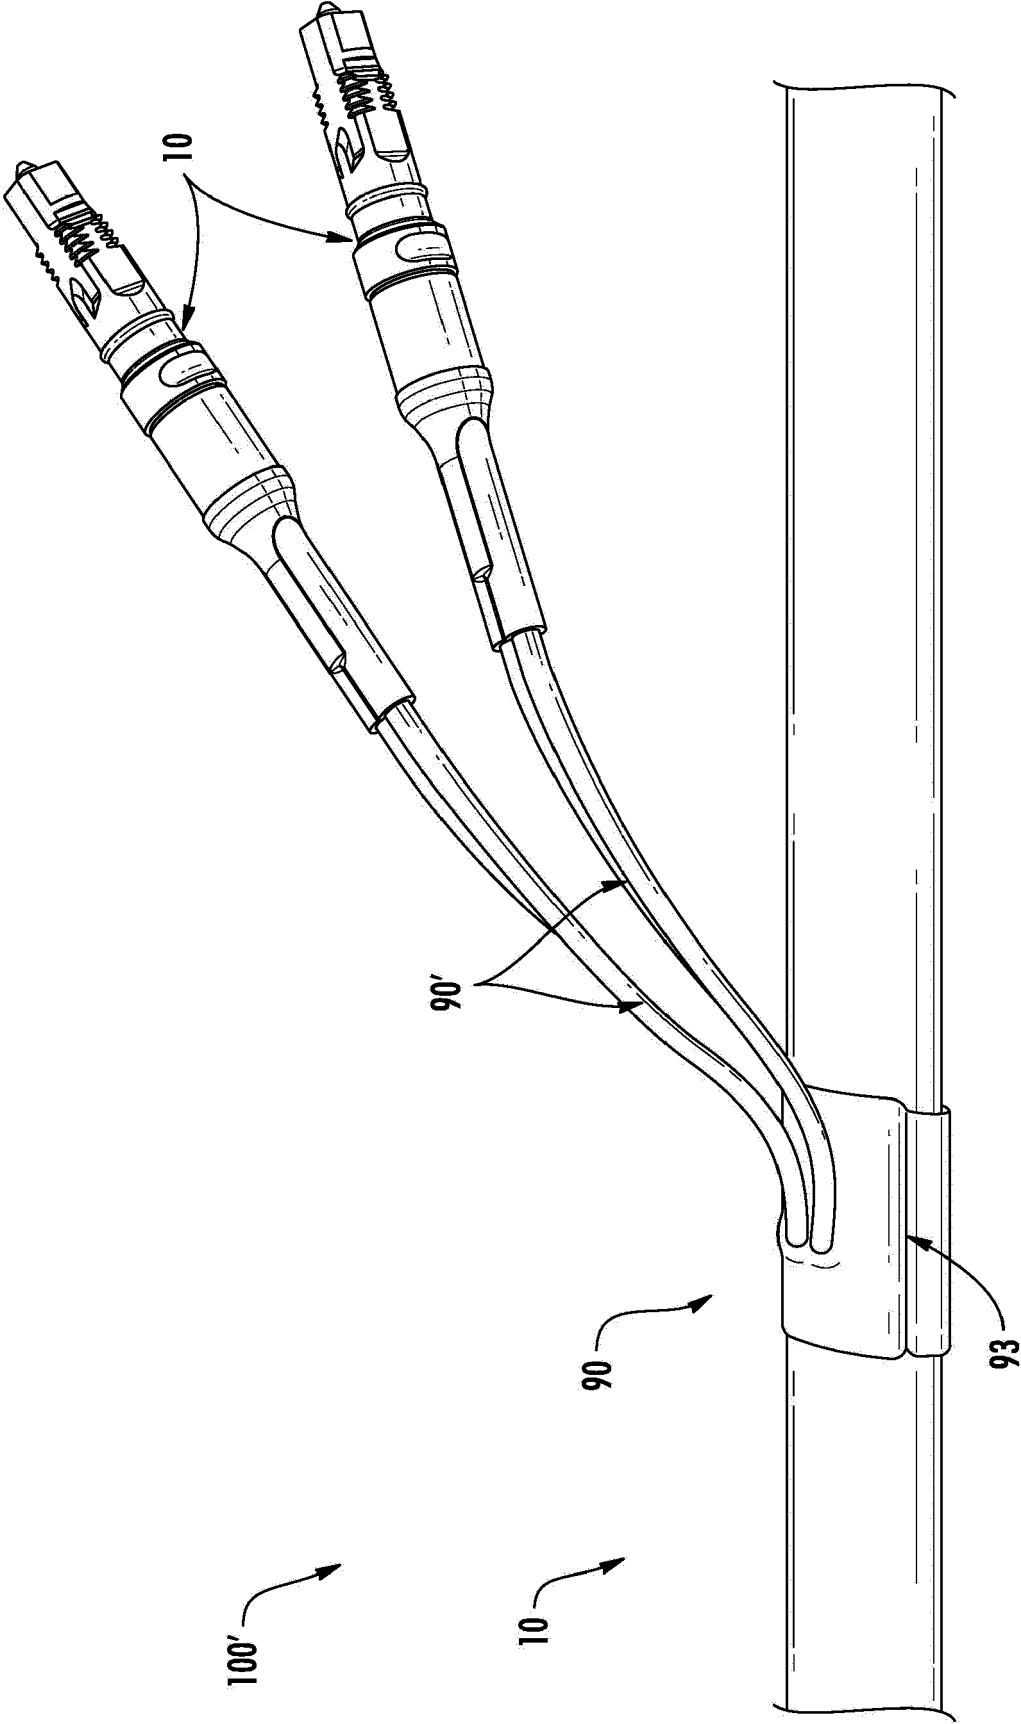


FIG. 55

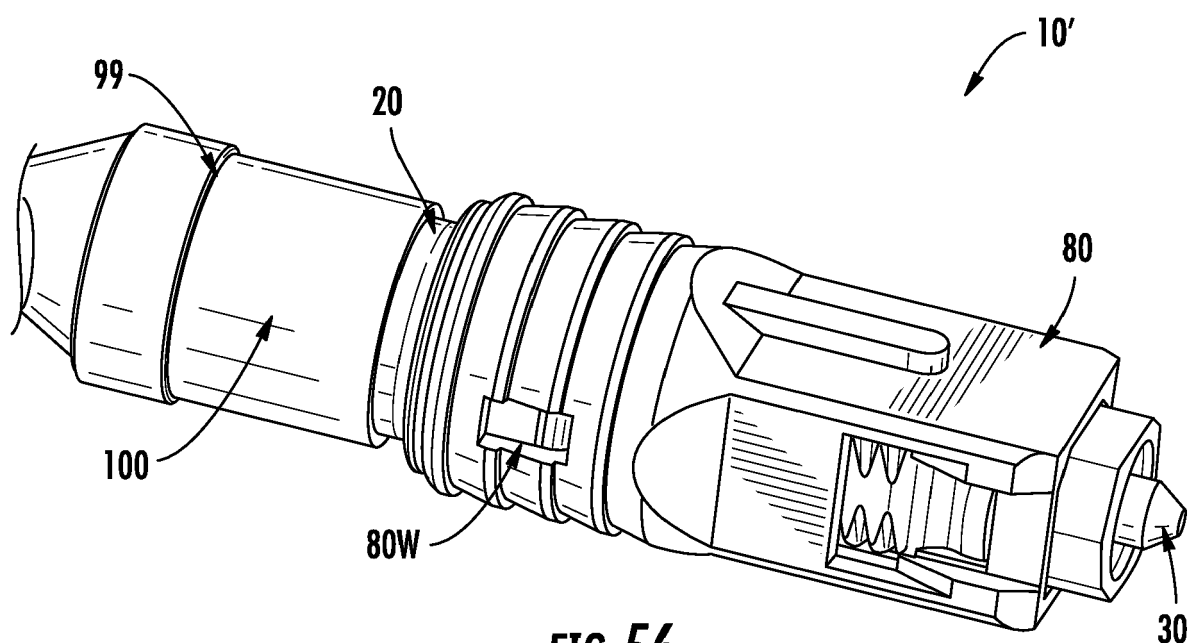


FIG. 56

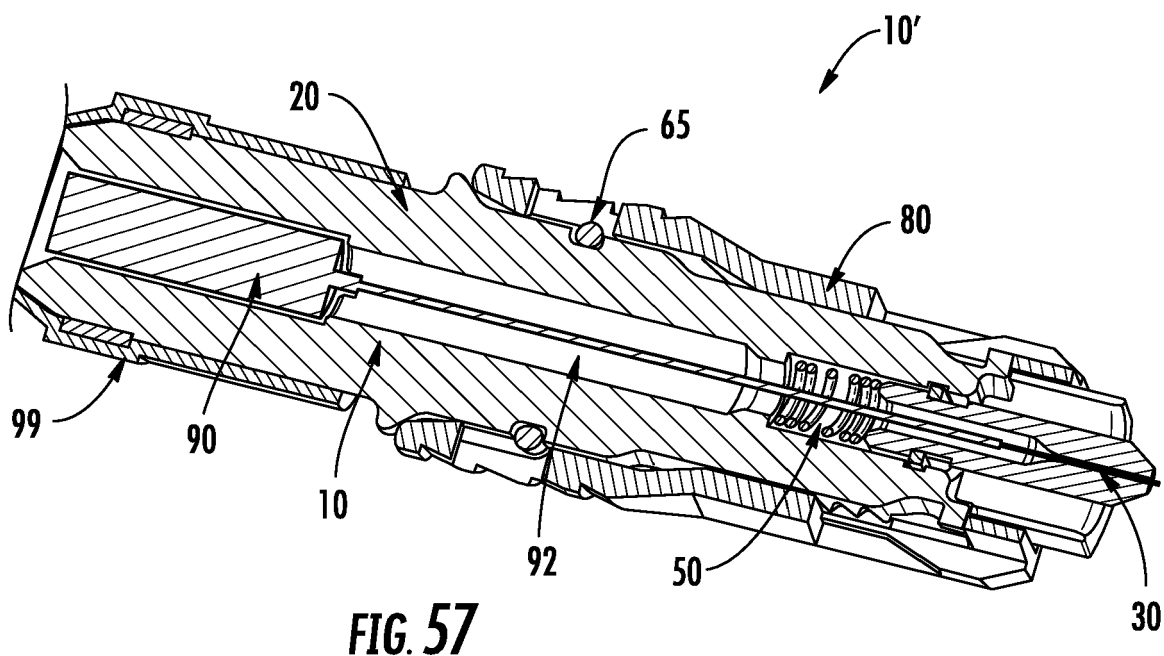
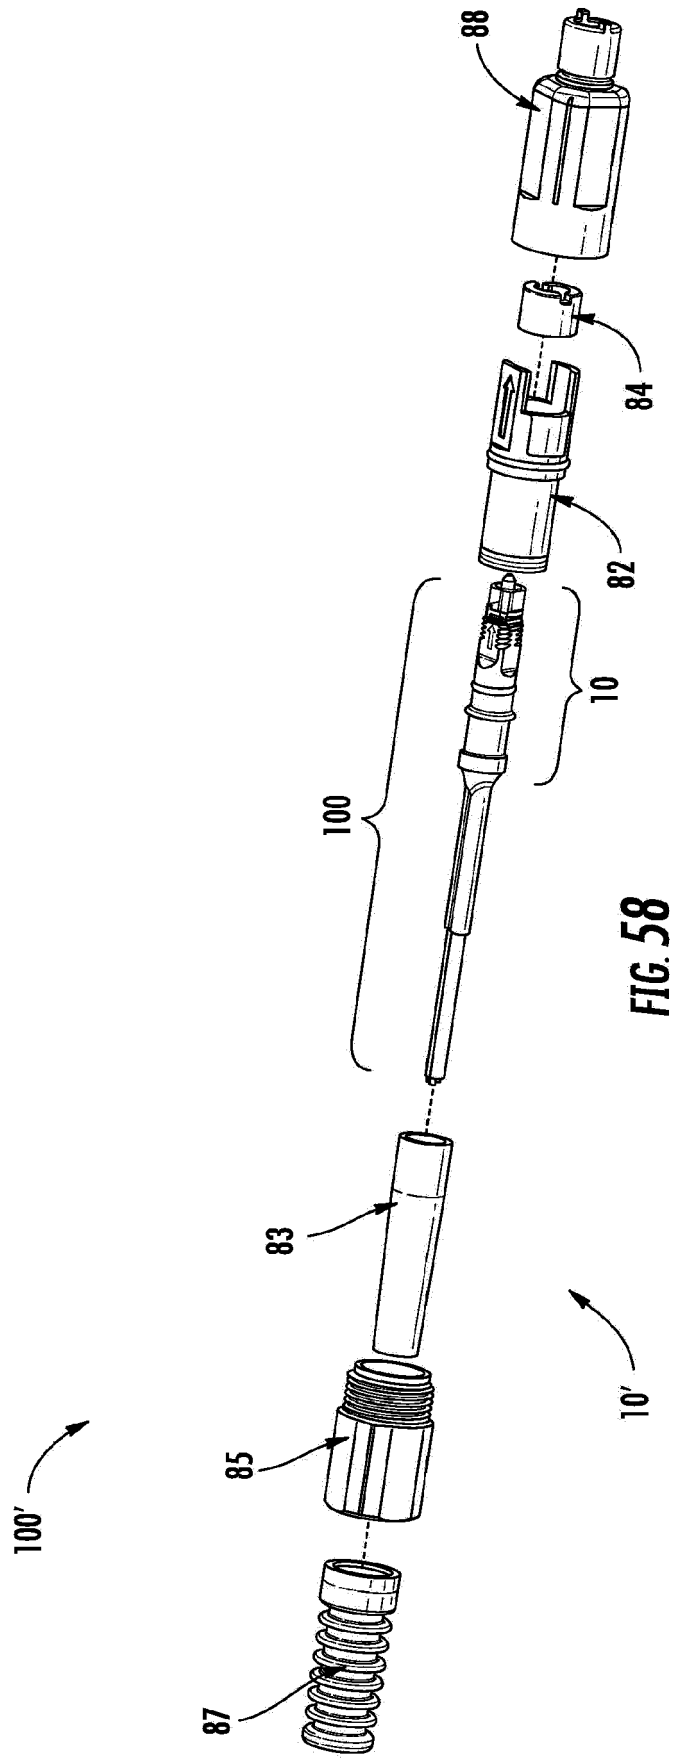
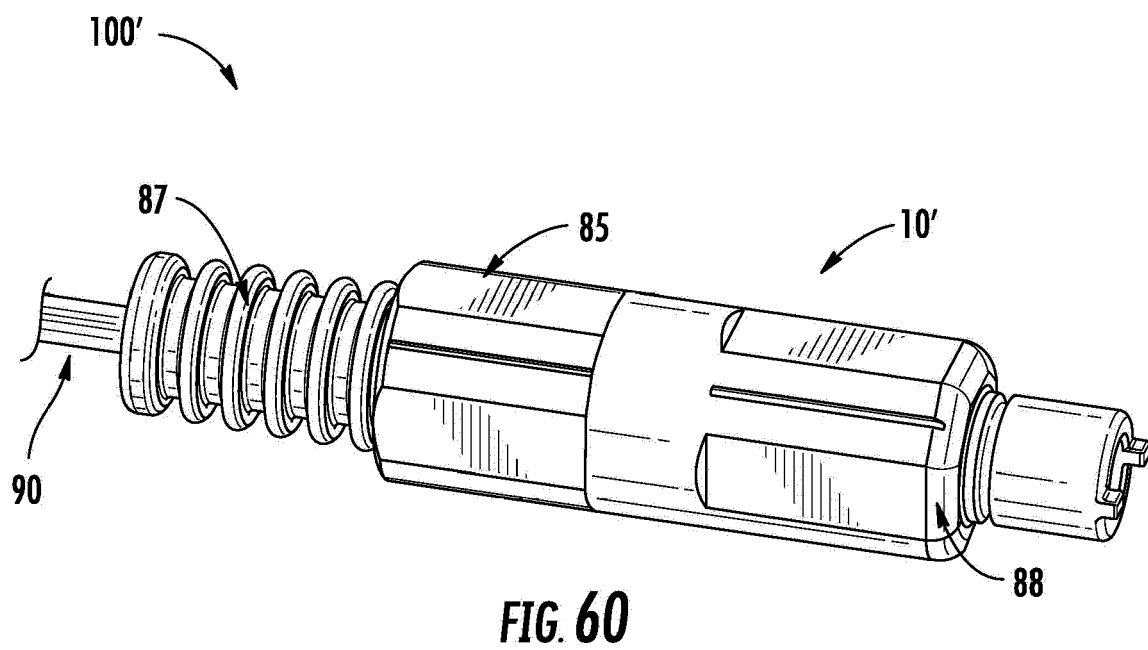
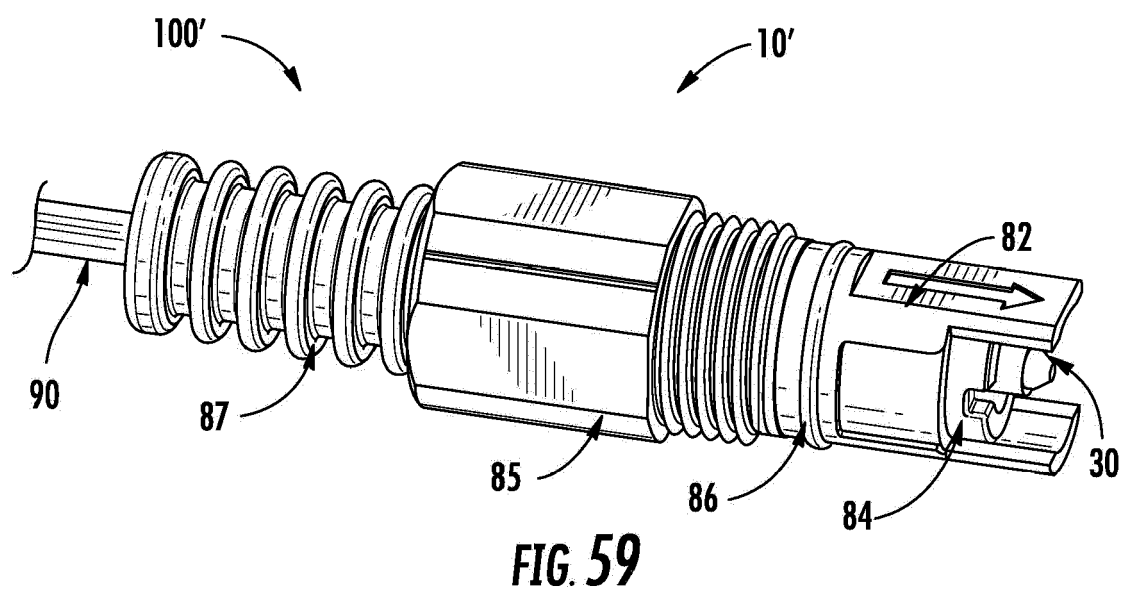


FIG. 57





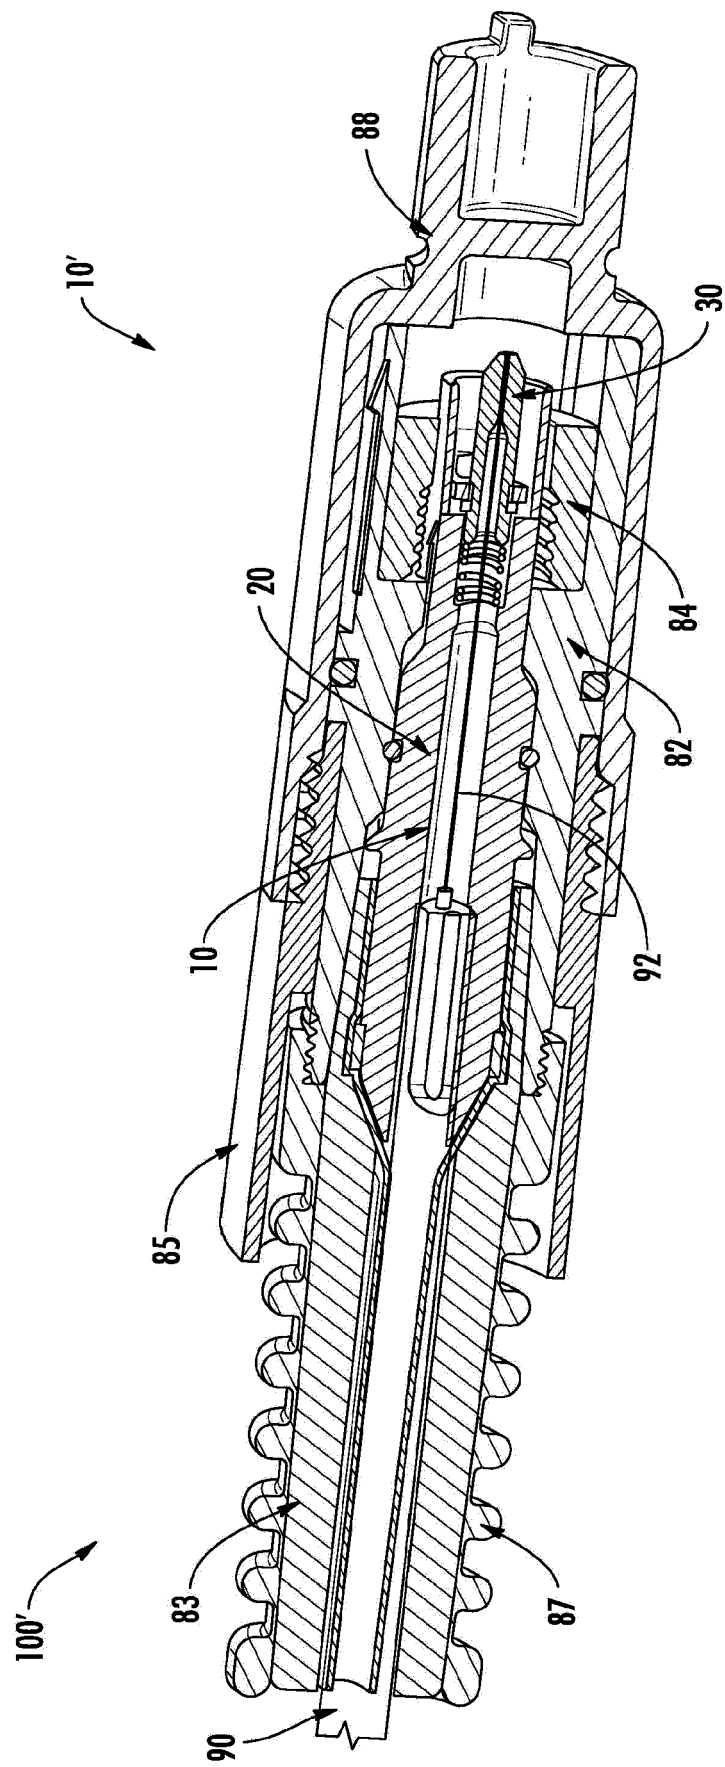
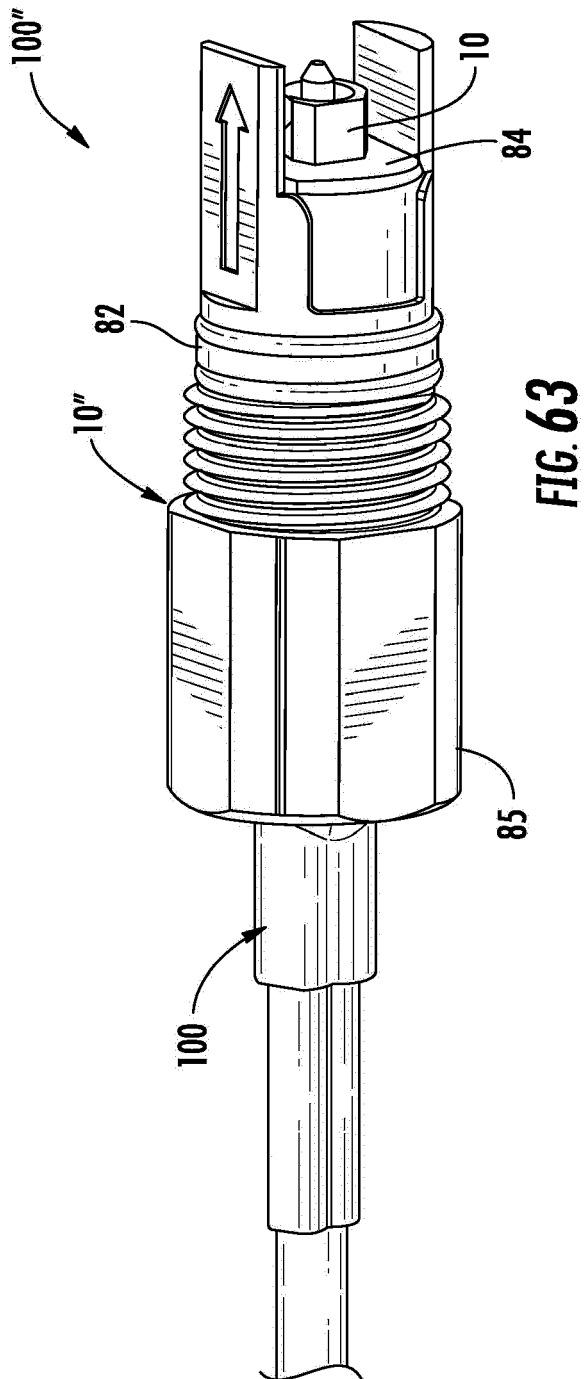
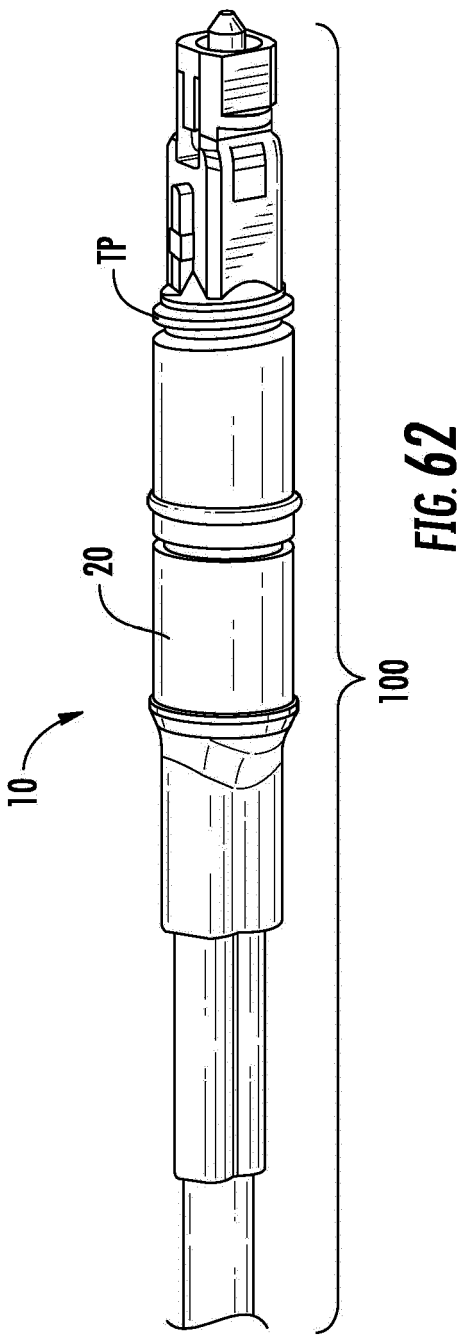
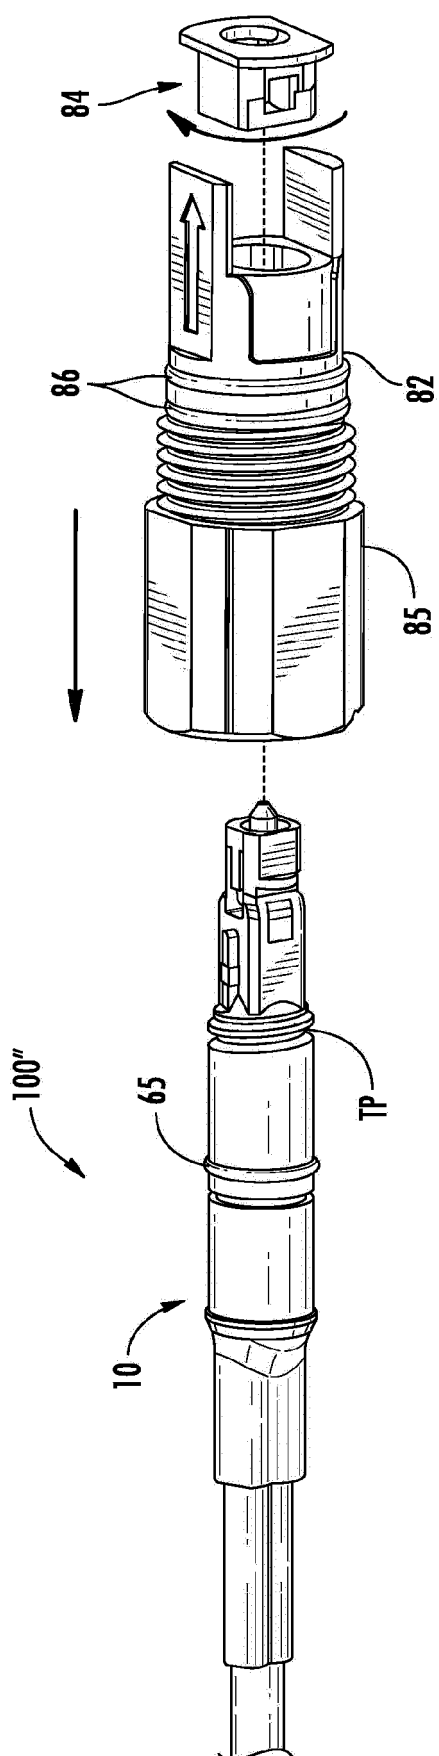


FIG. 61





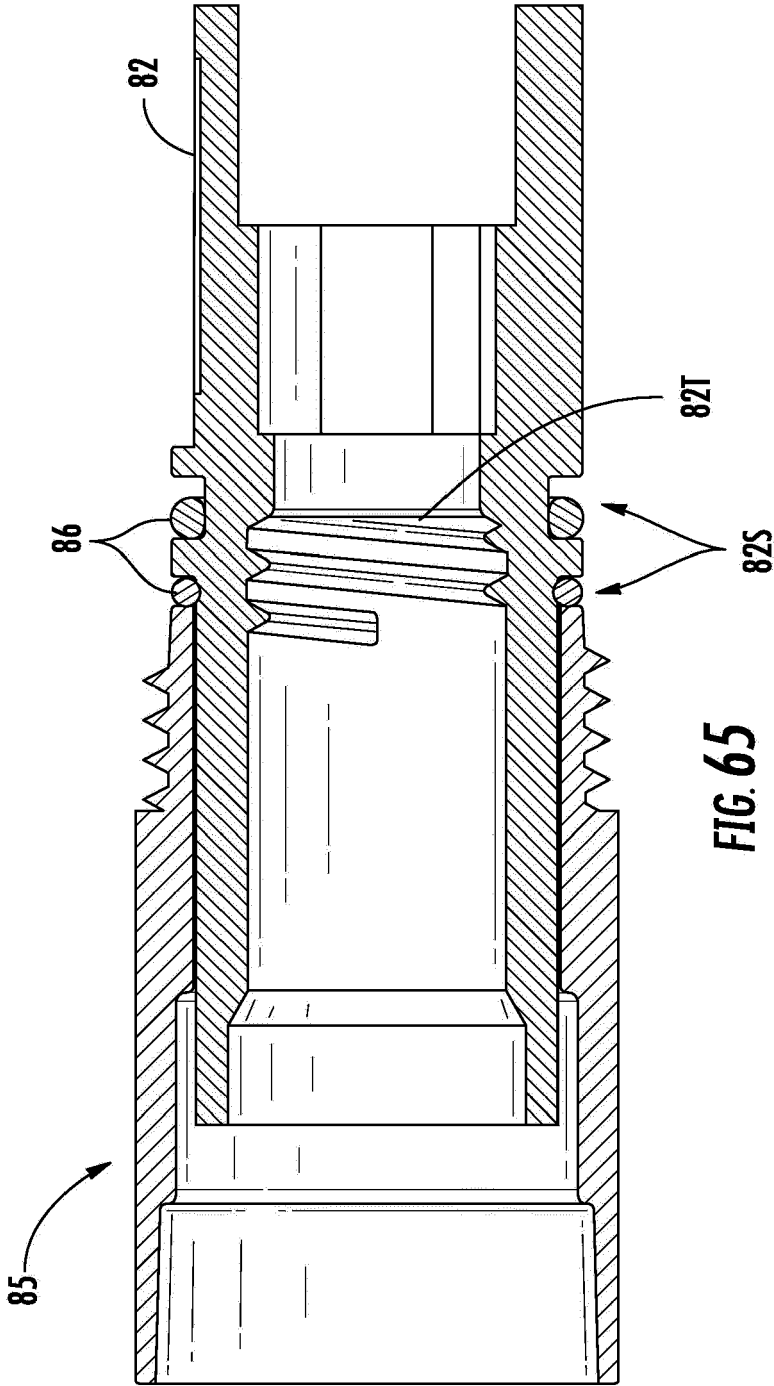


FIG. 65

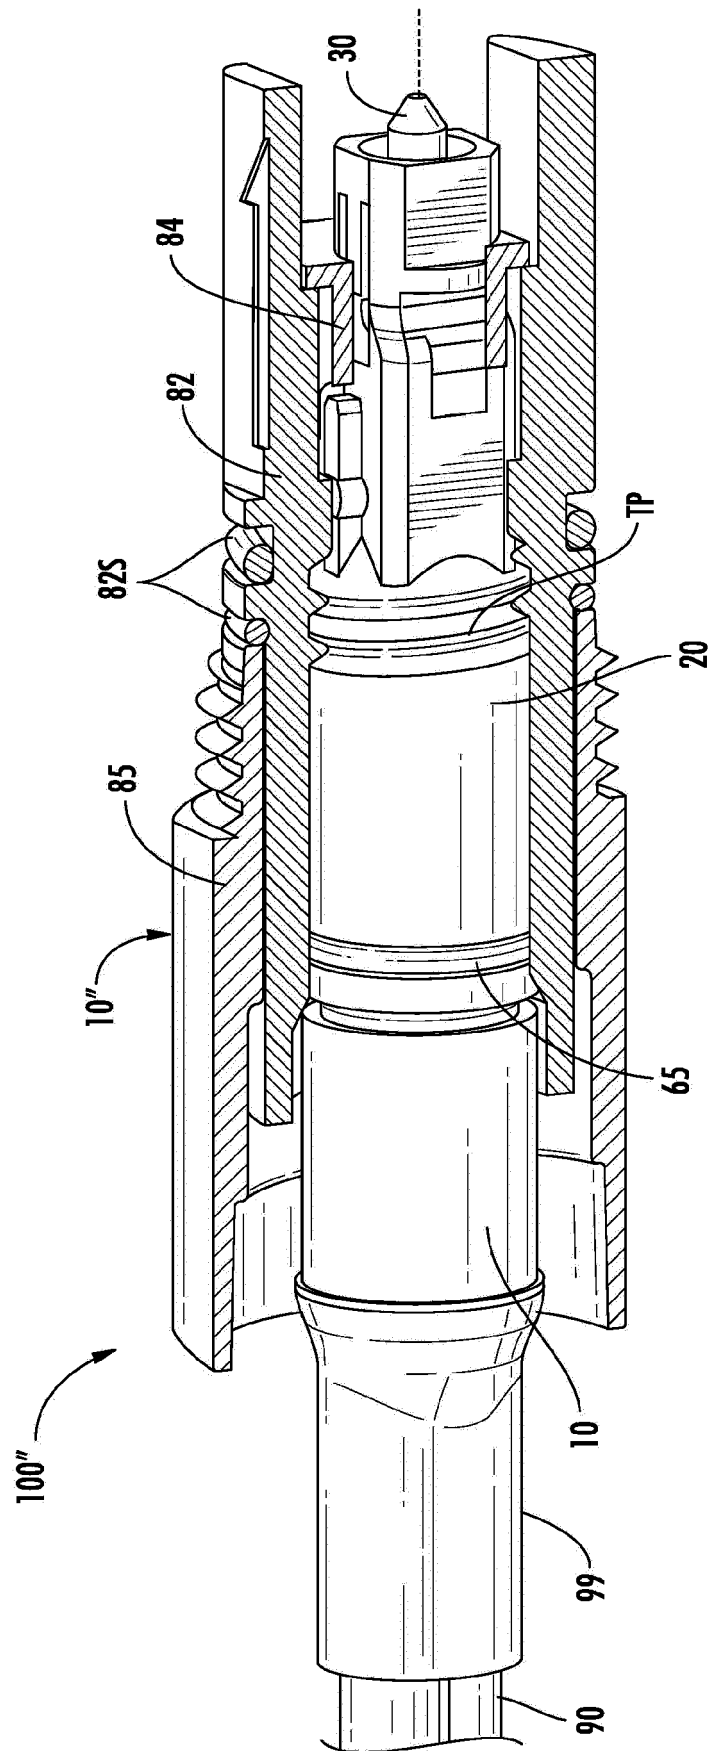
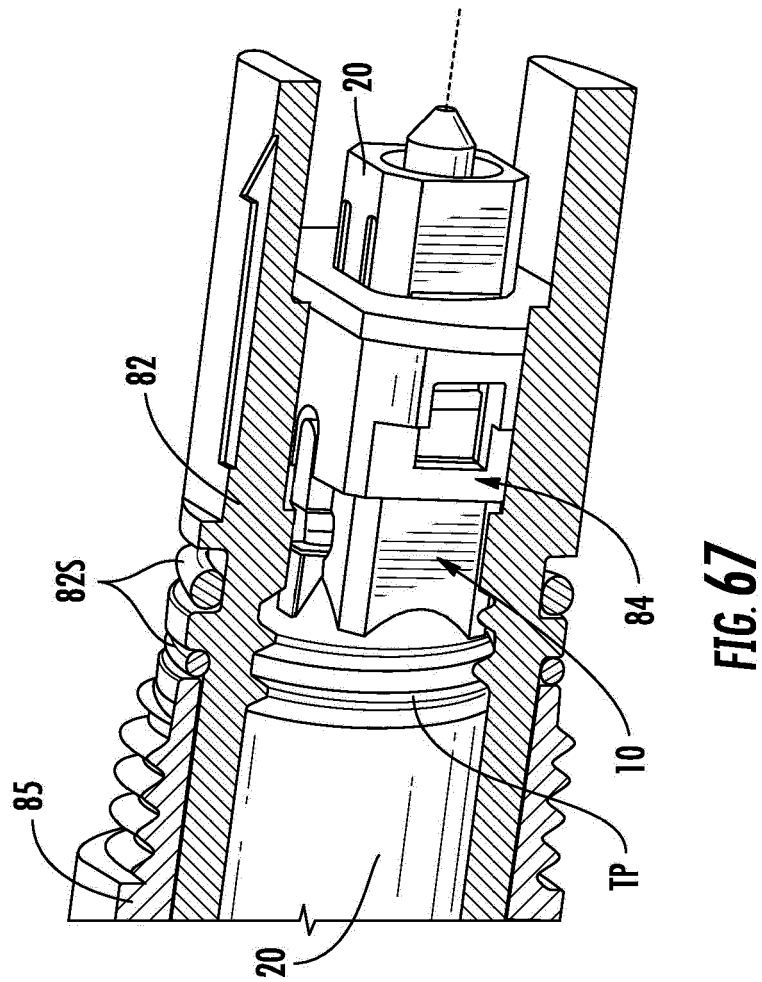
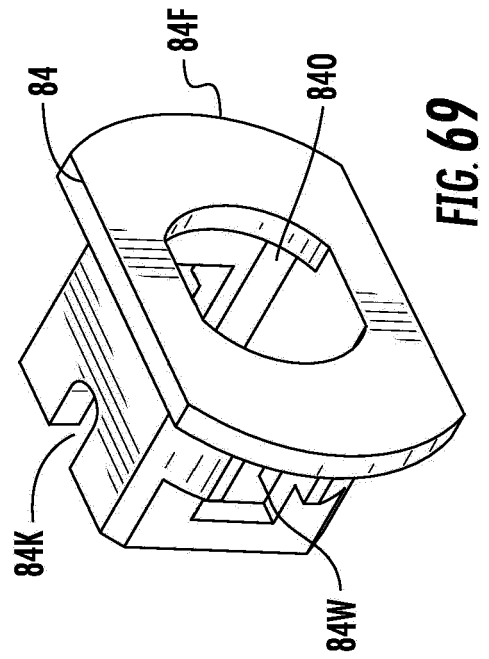
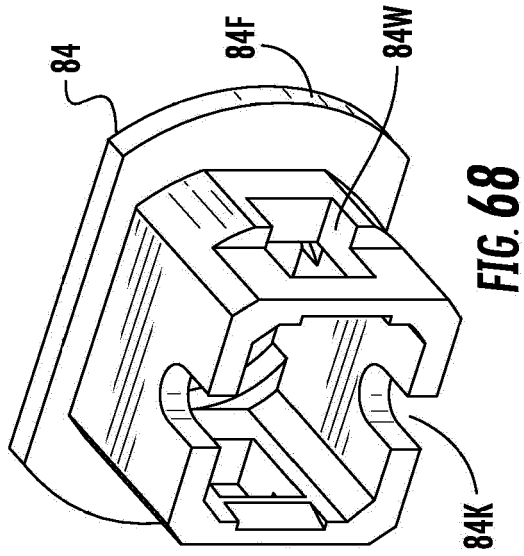
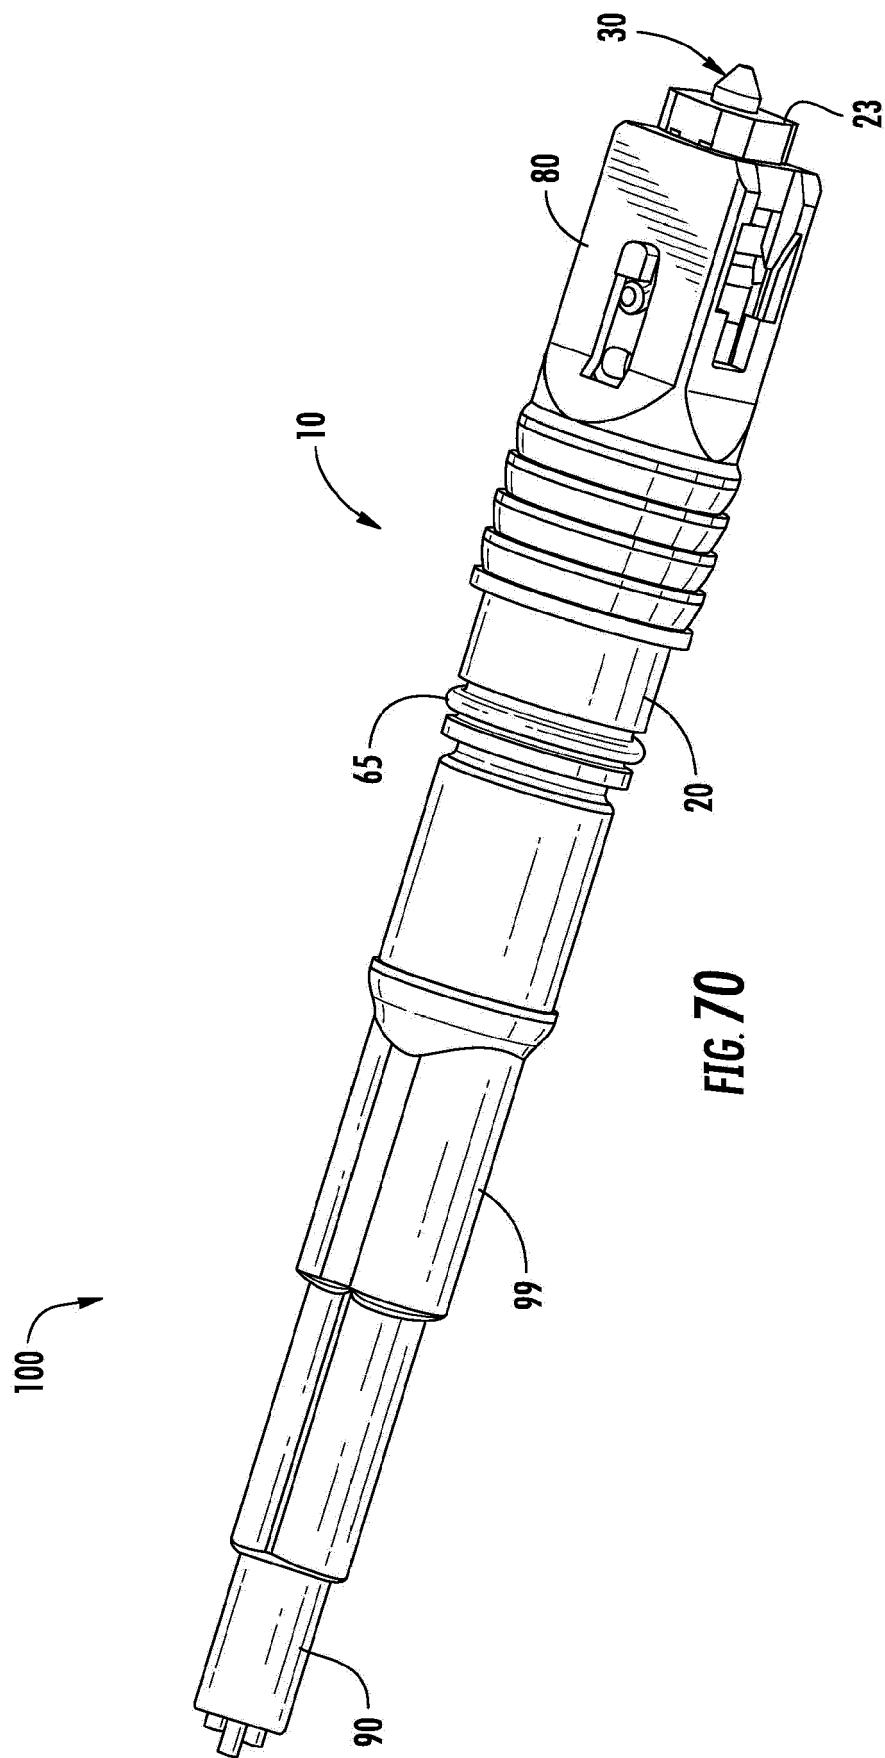
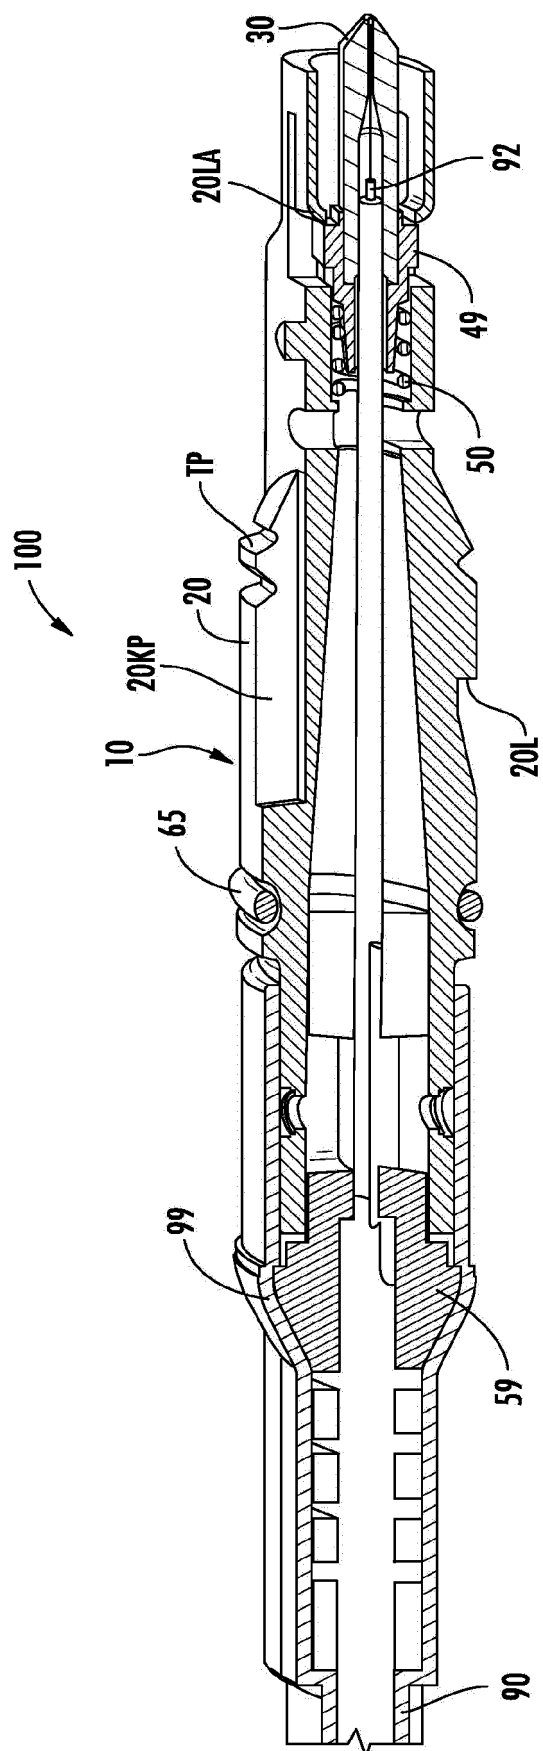


FIG. 66







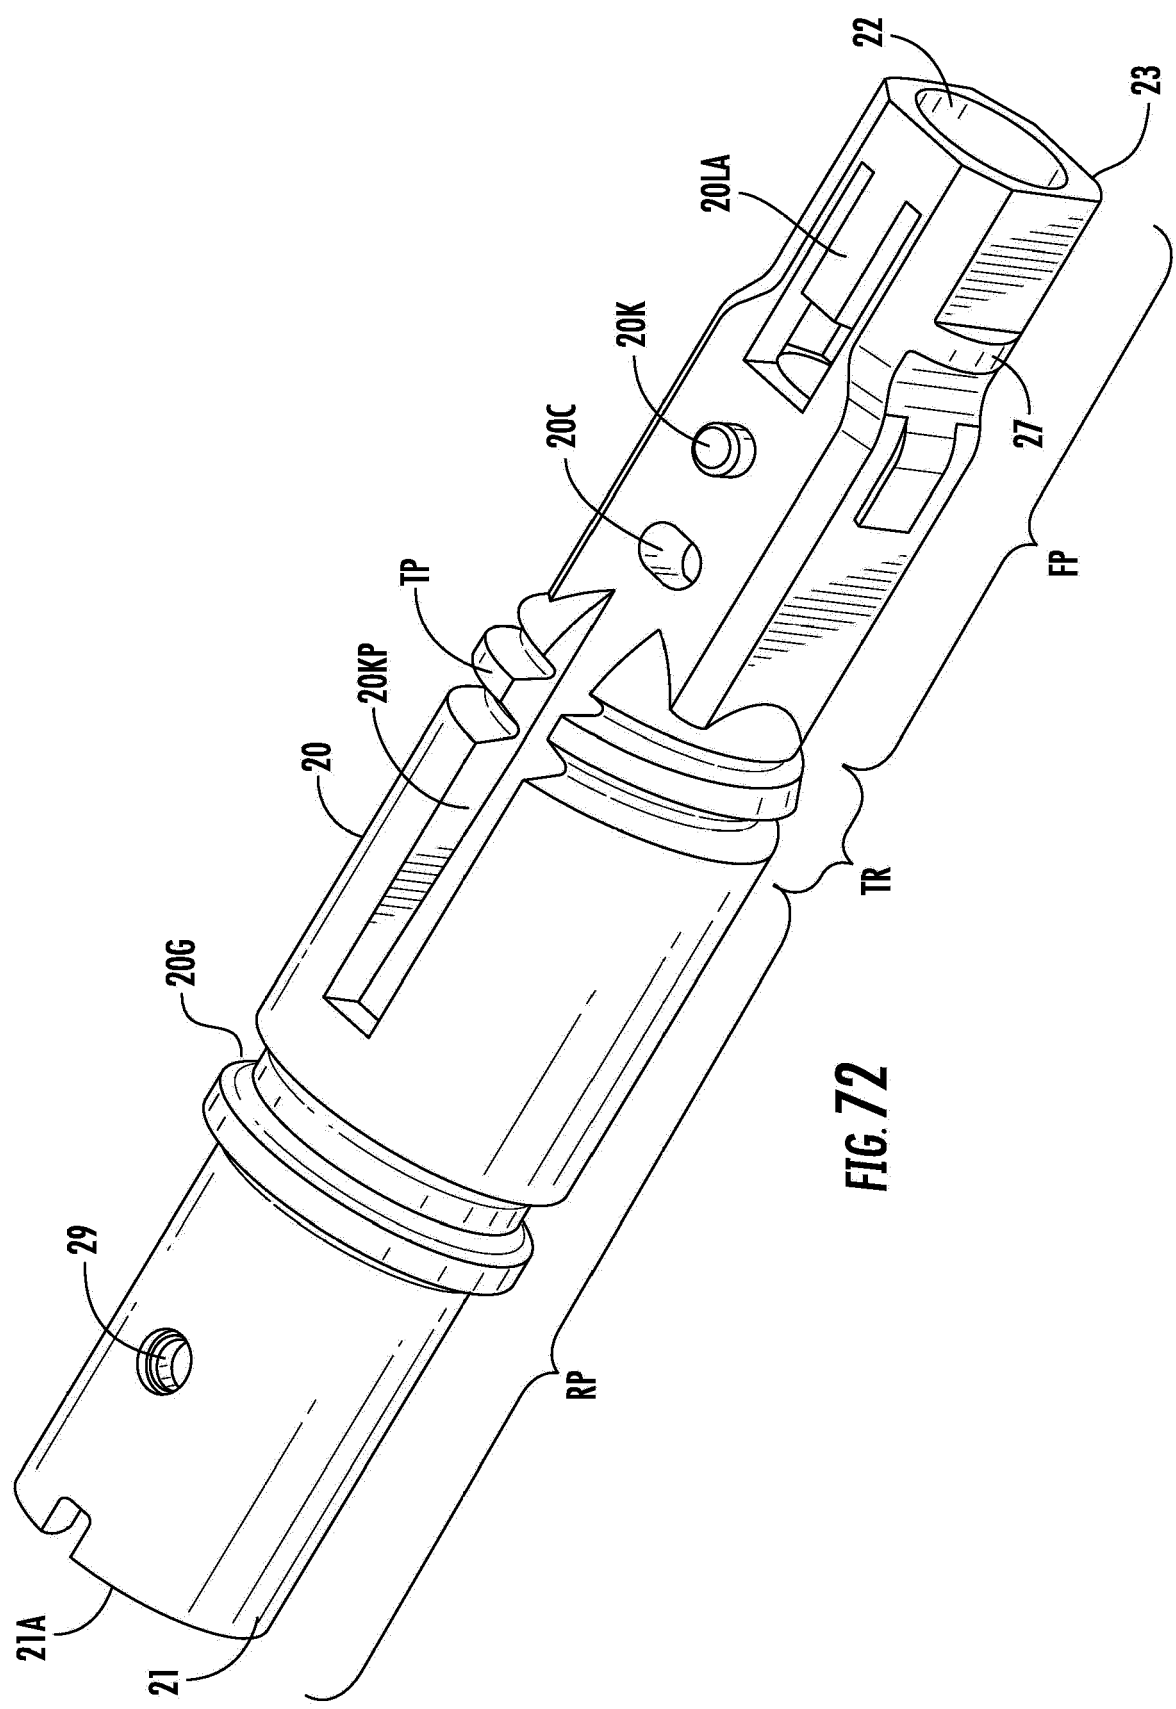


FIG. 72

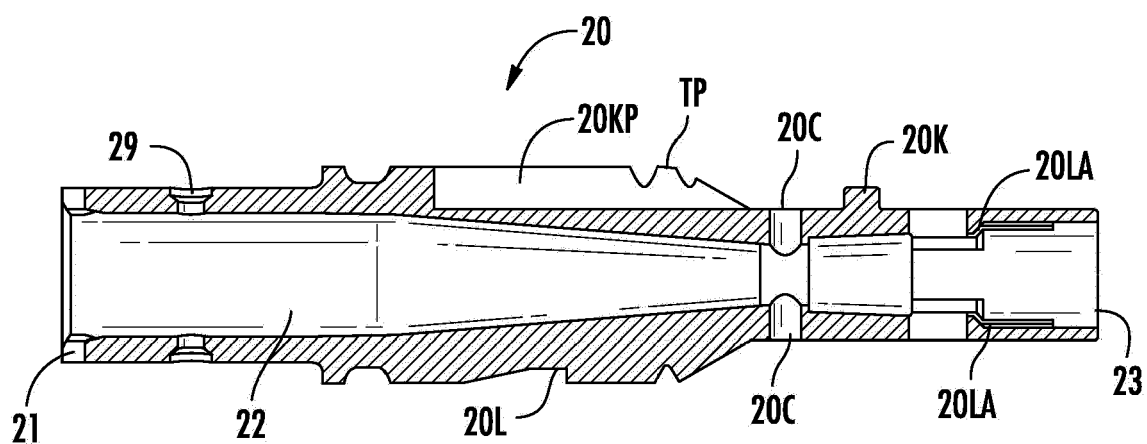


FIG. 73

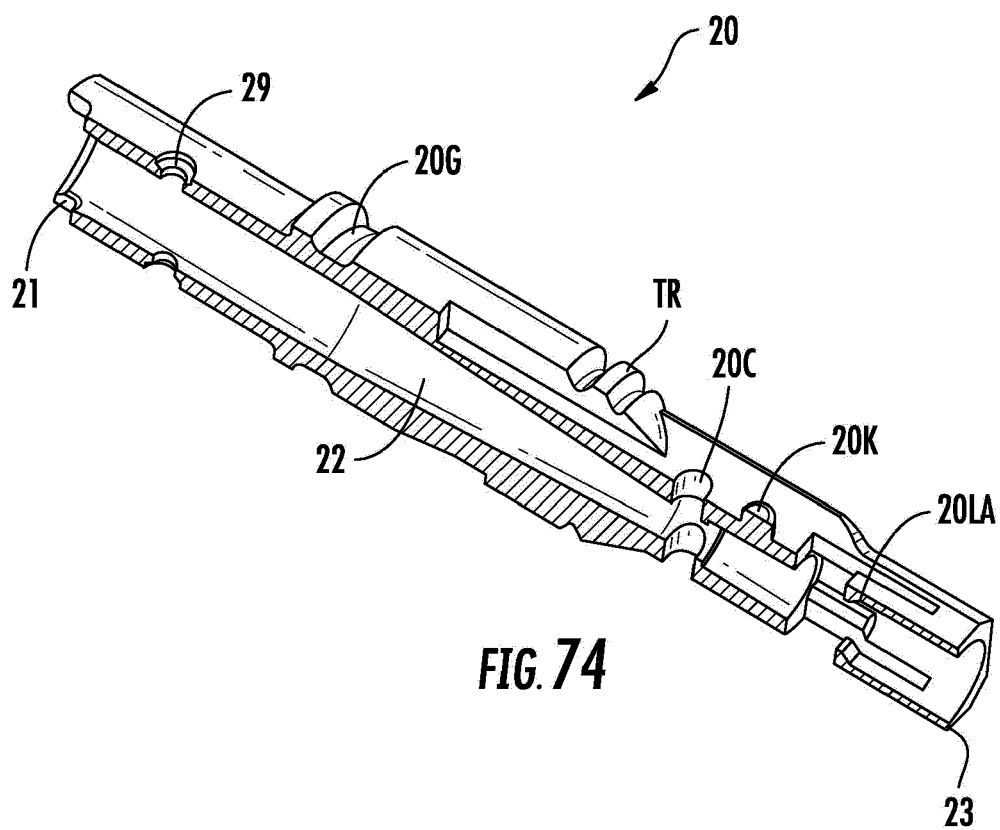
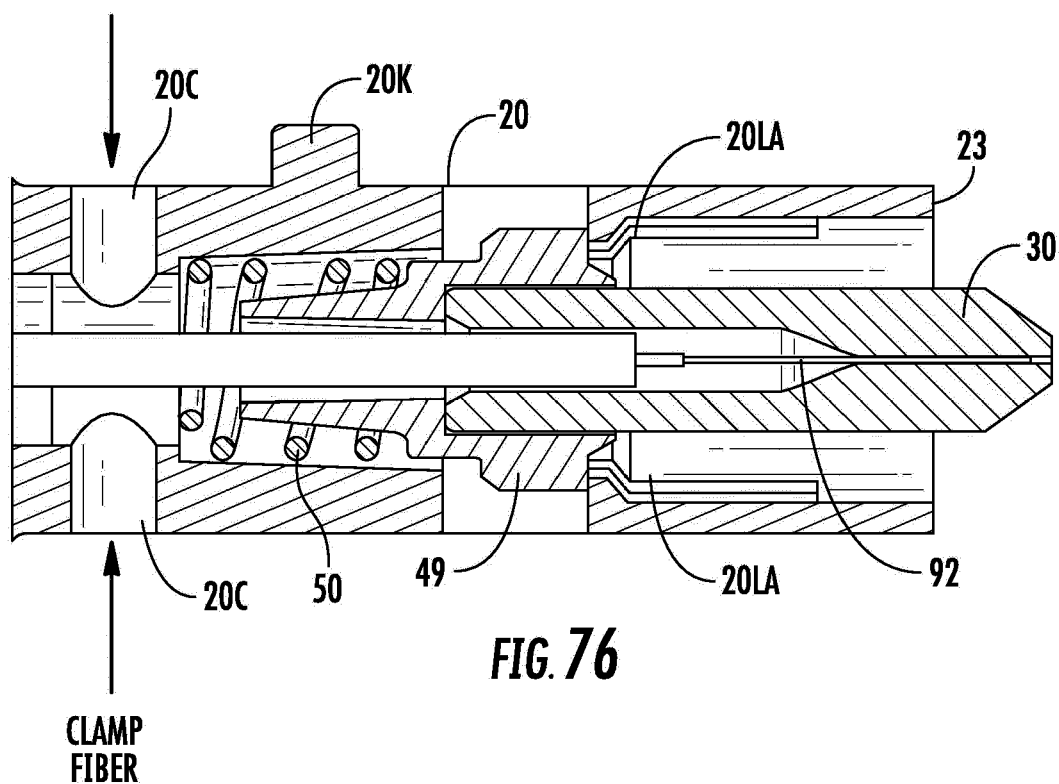
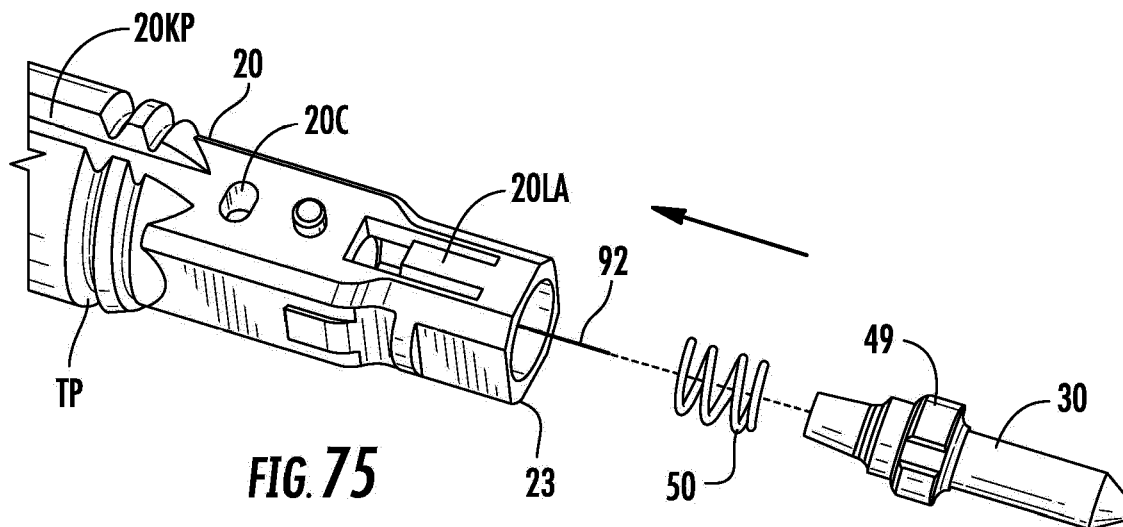
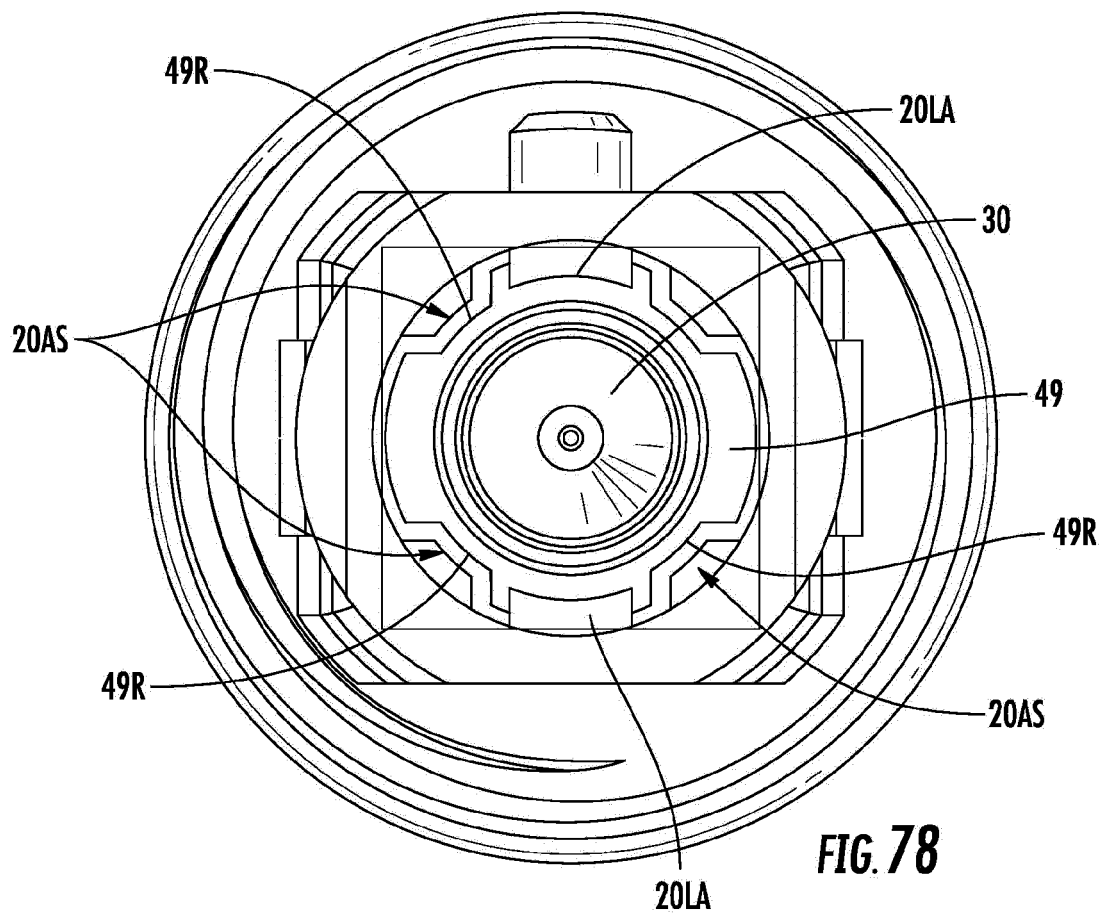
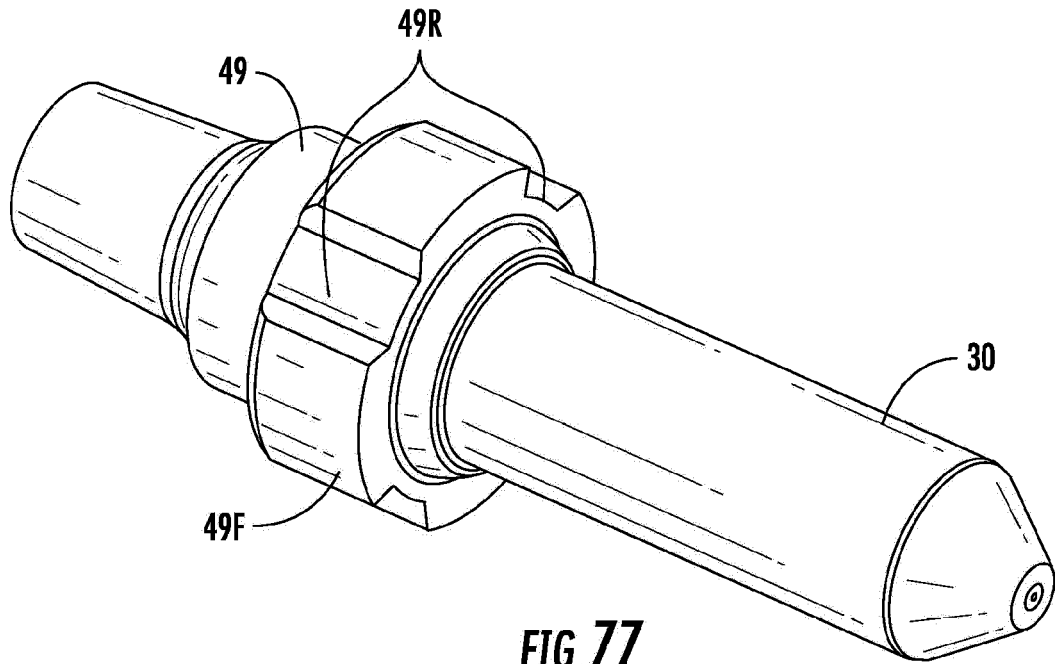
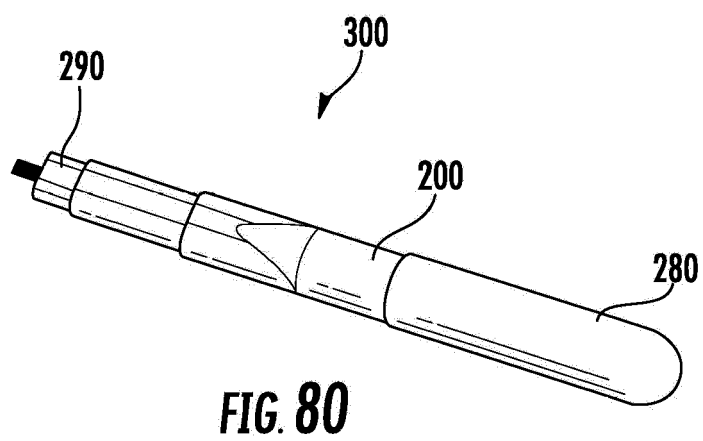
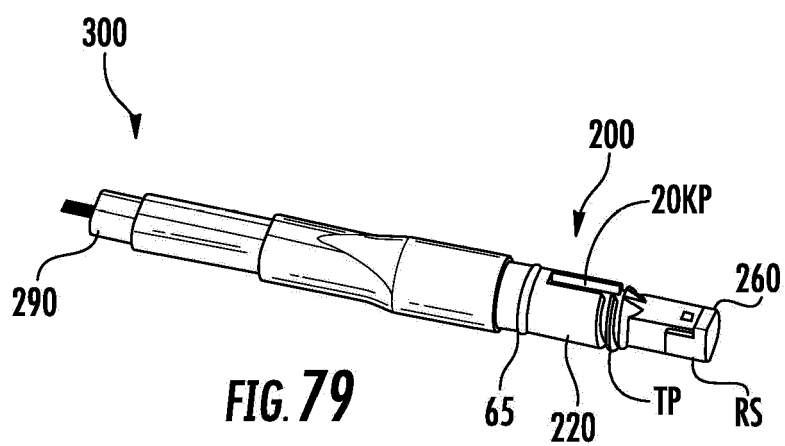


FIG. 74







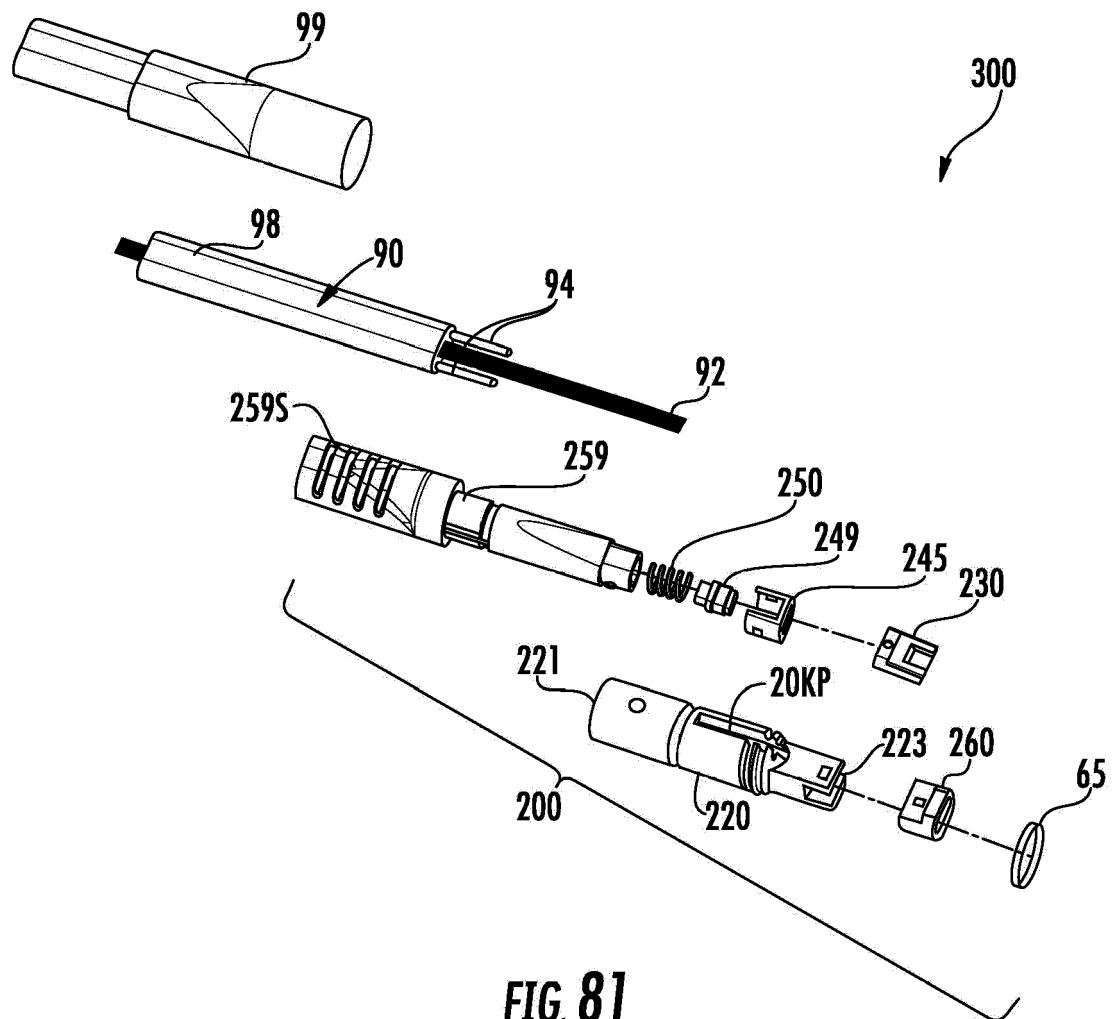
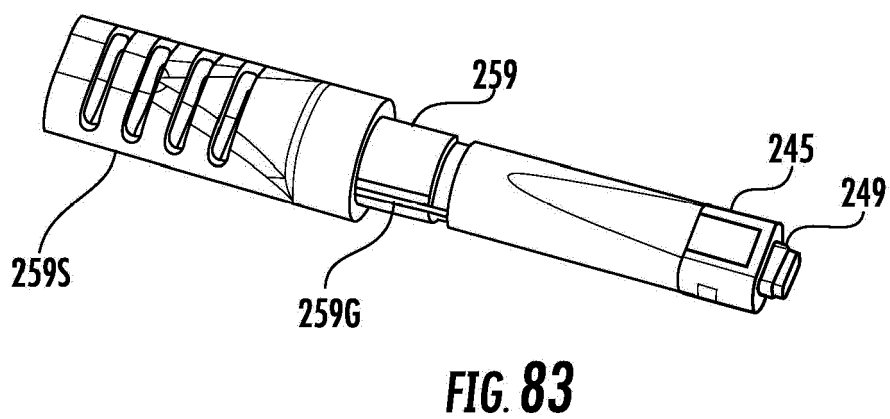
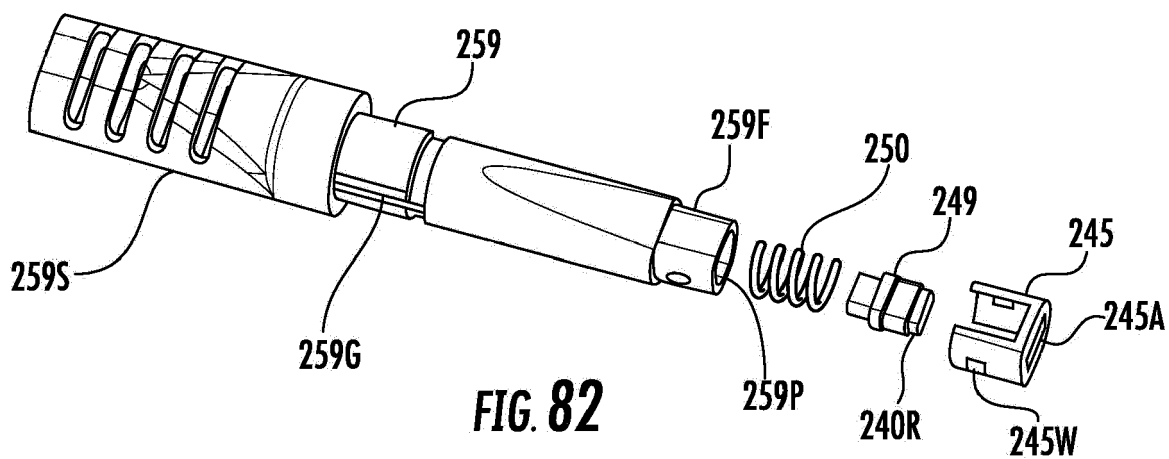


FIG. 81



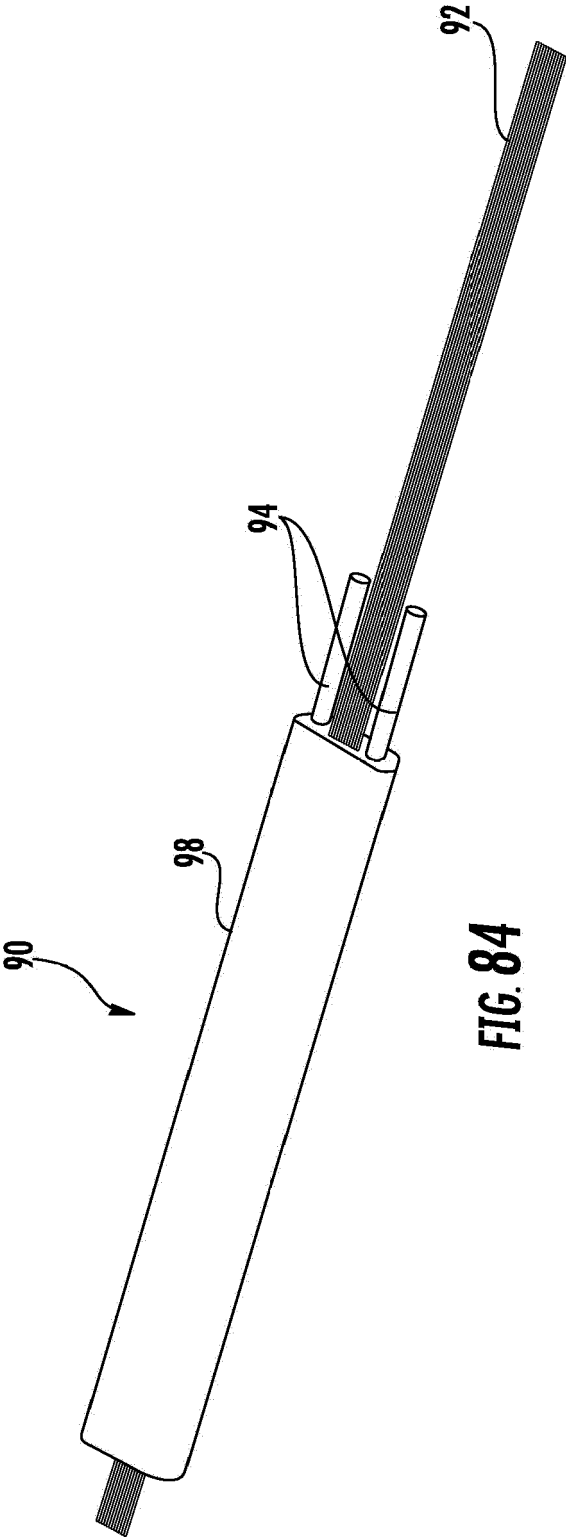


FIG. 84

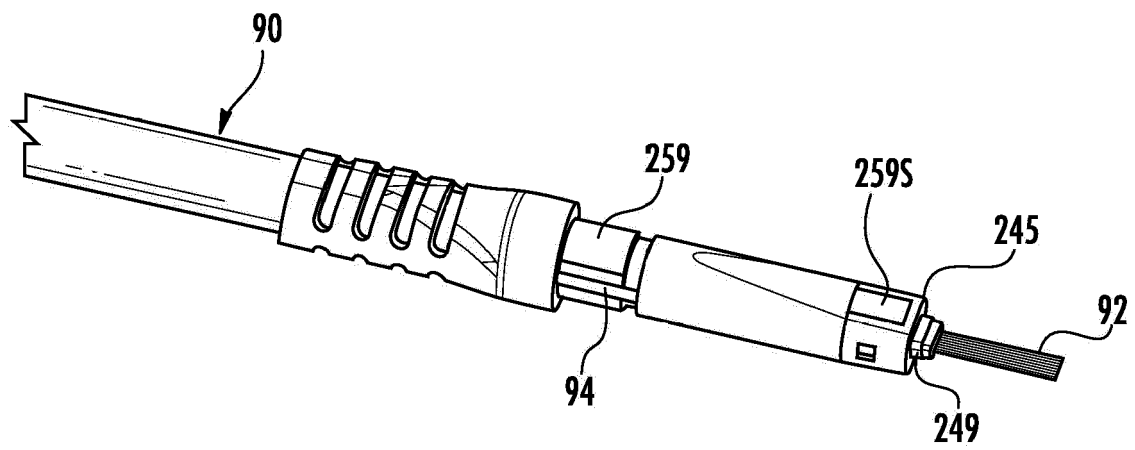


FIG. 85

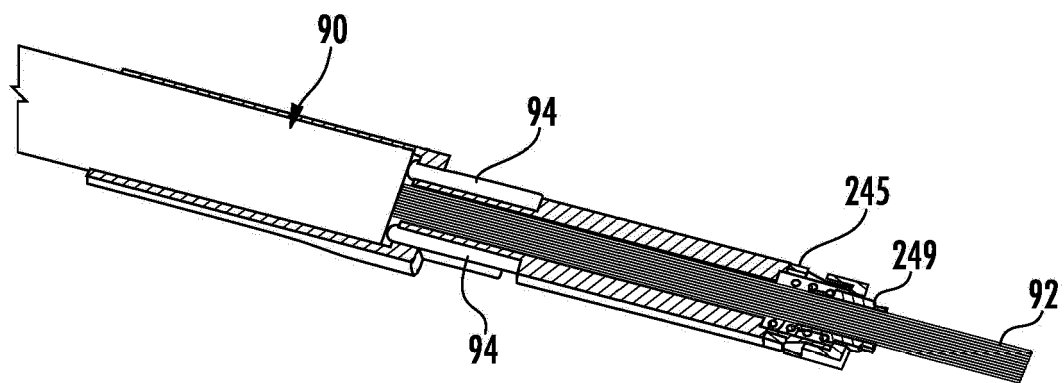


FIG. 86

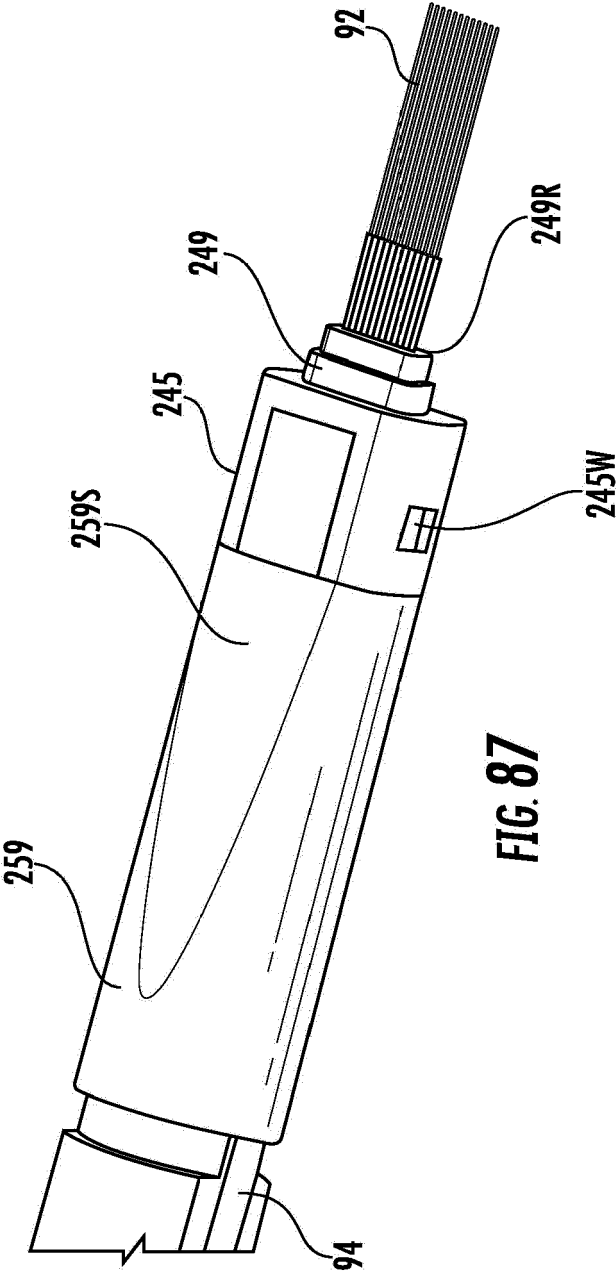
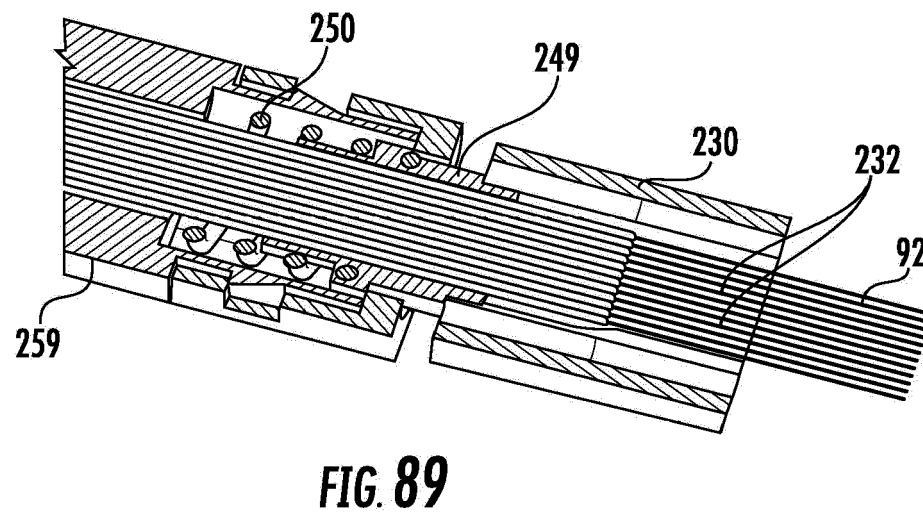
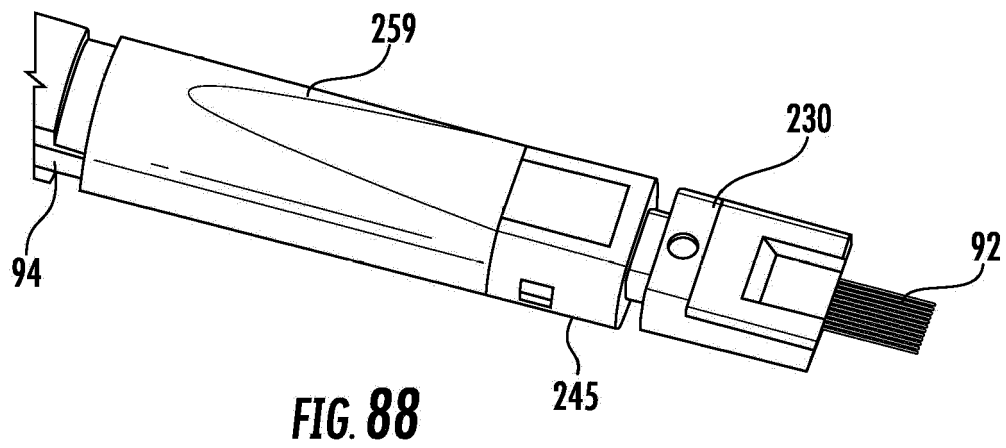


FIG. 87



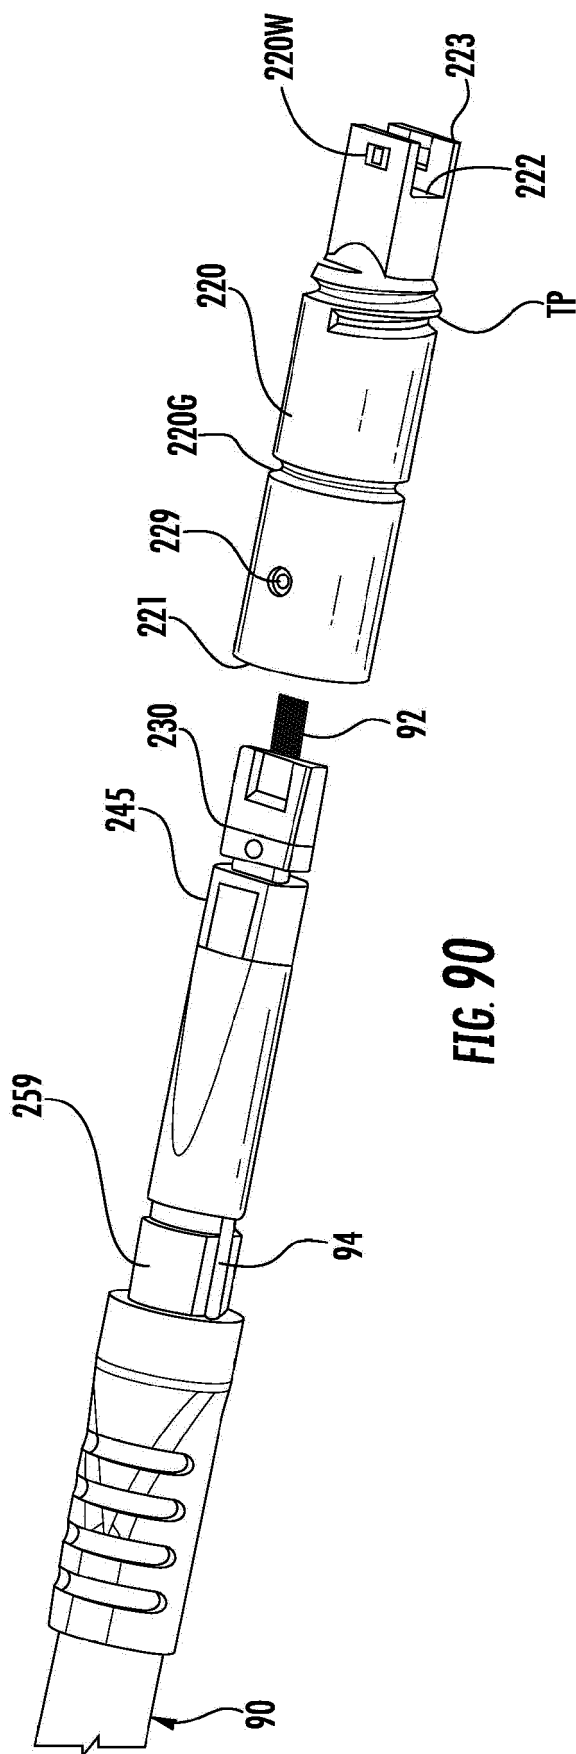


FIG. 90

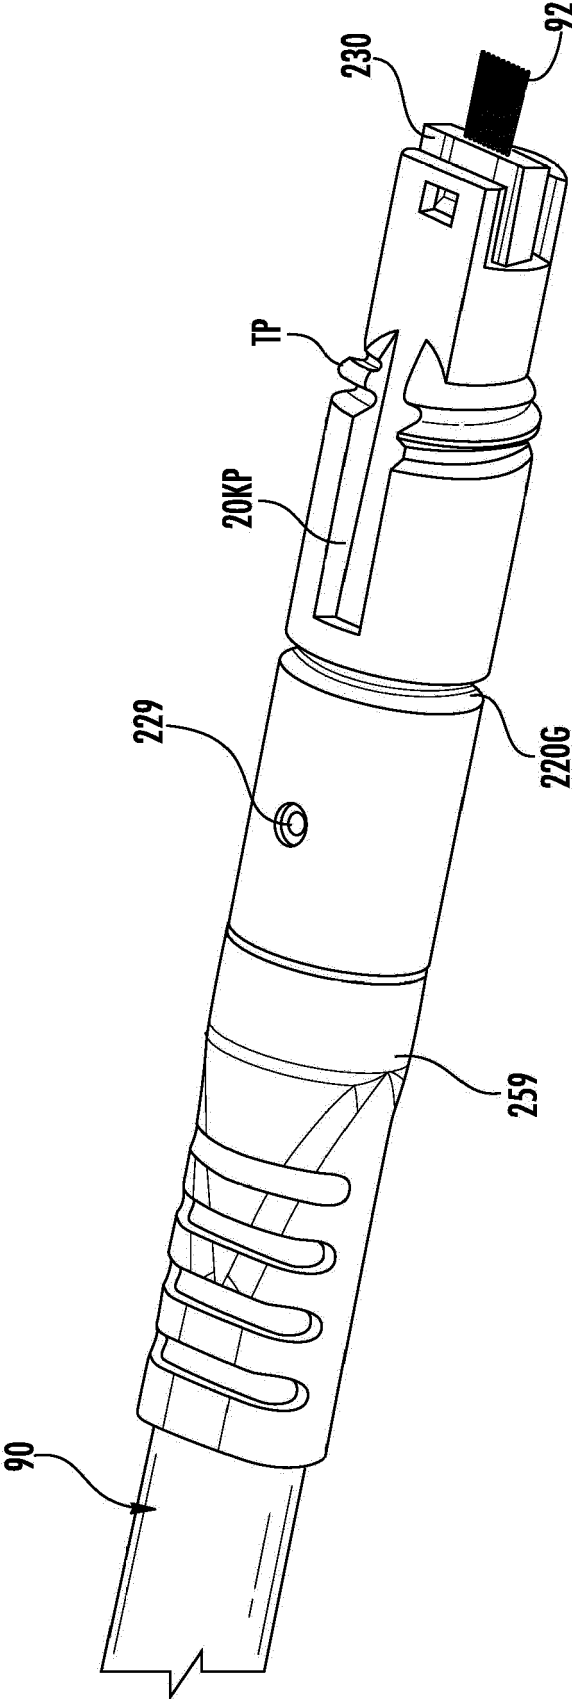


FIG. 91

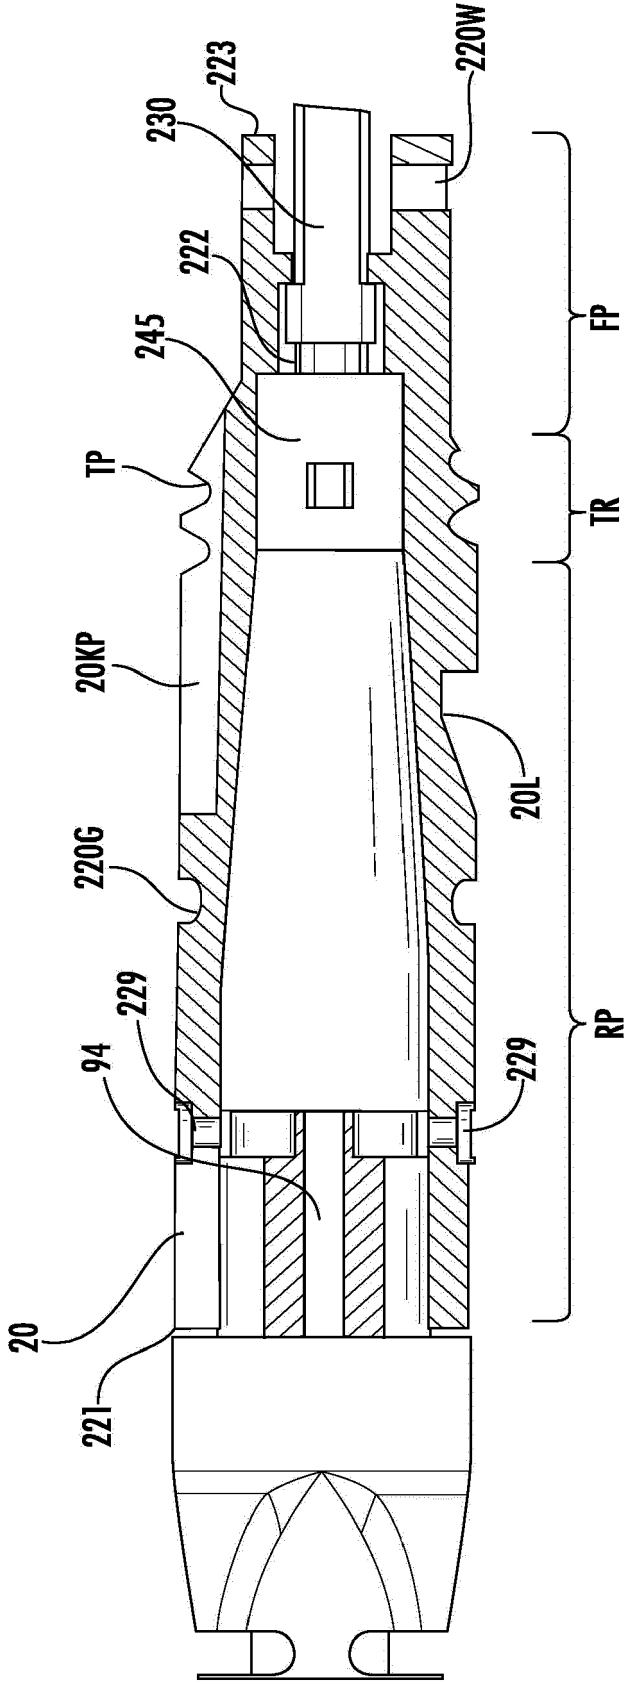


FIG. 92


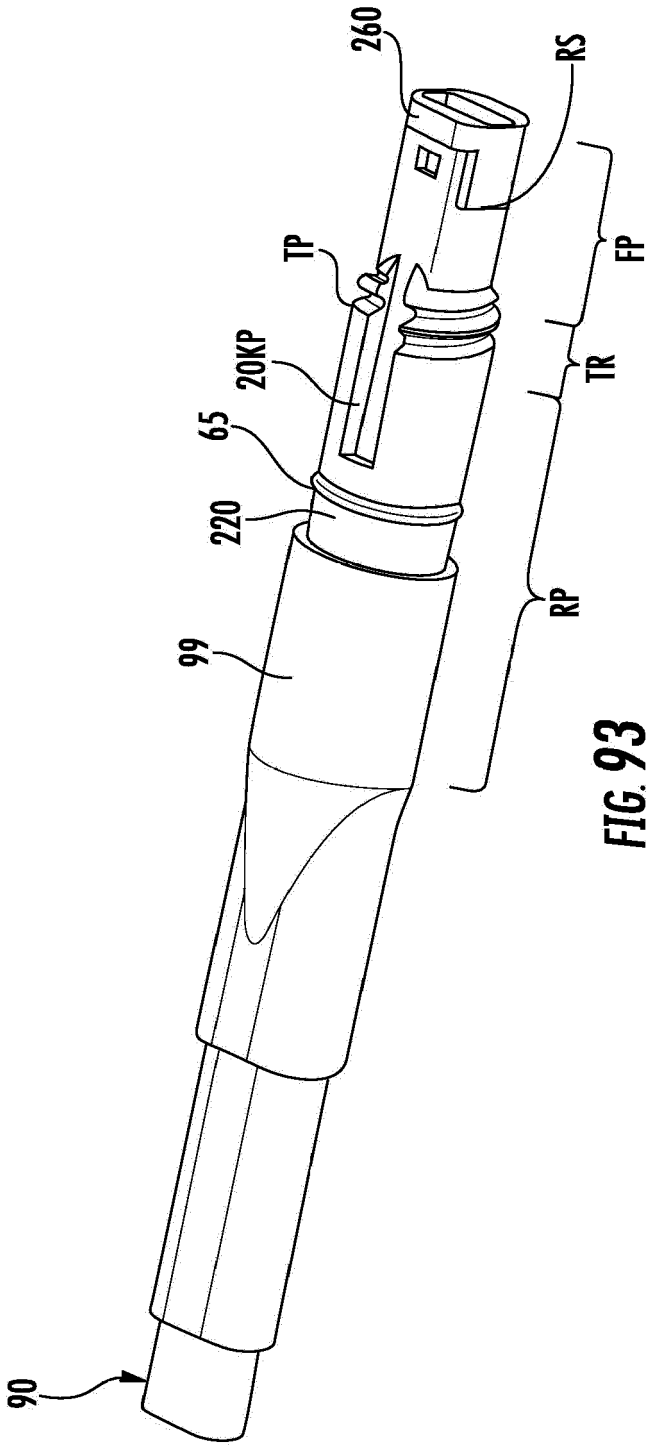


FIG. 93



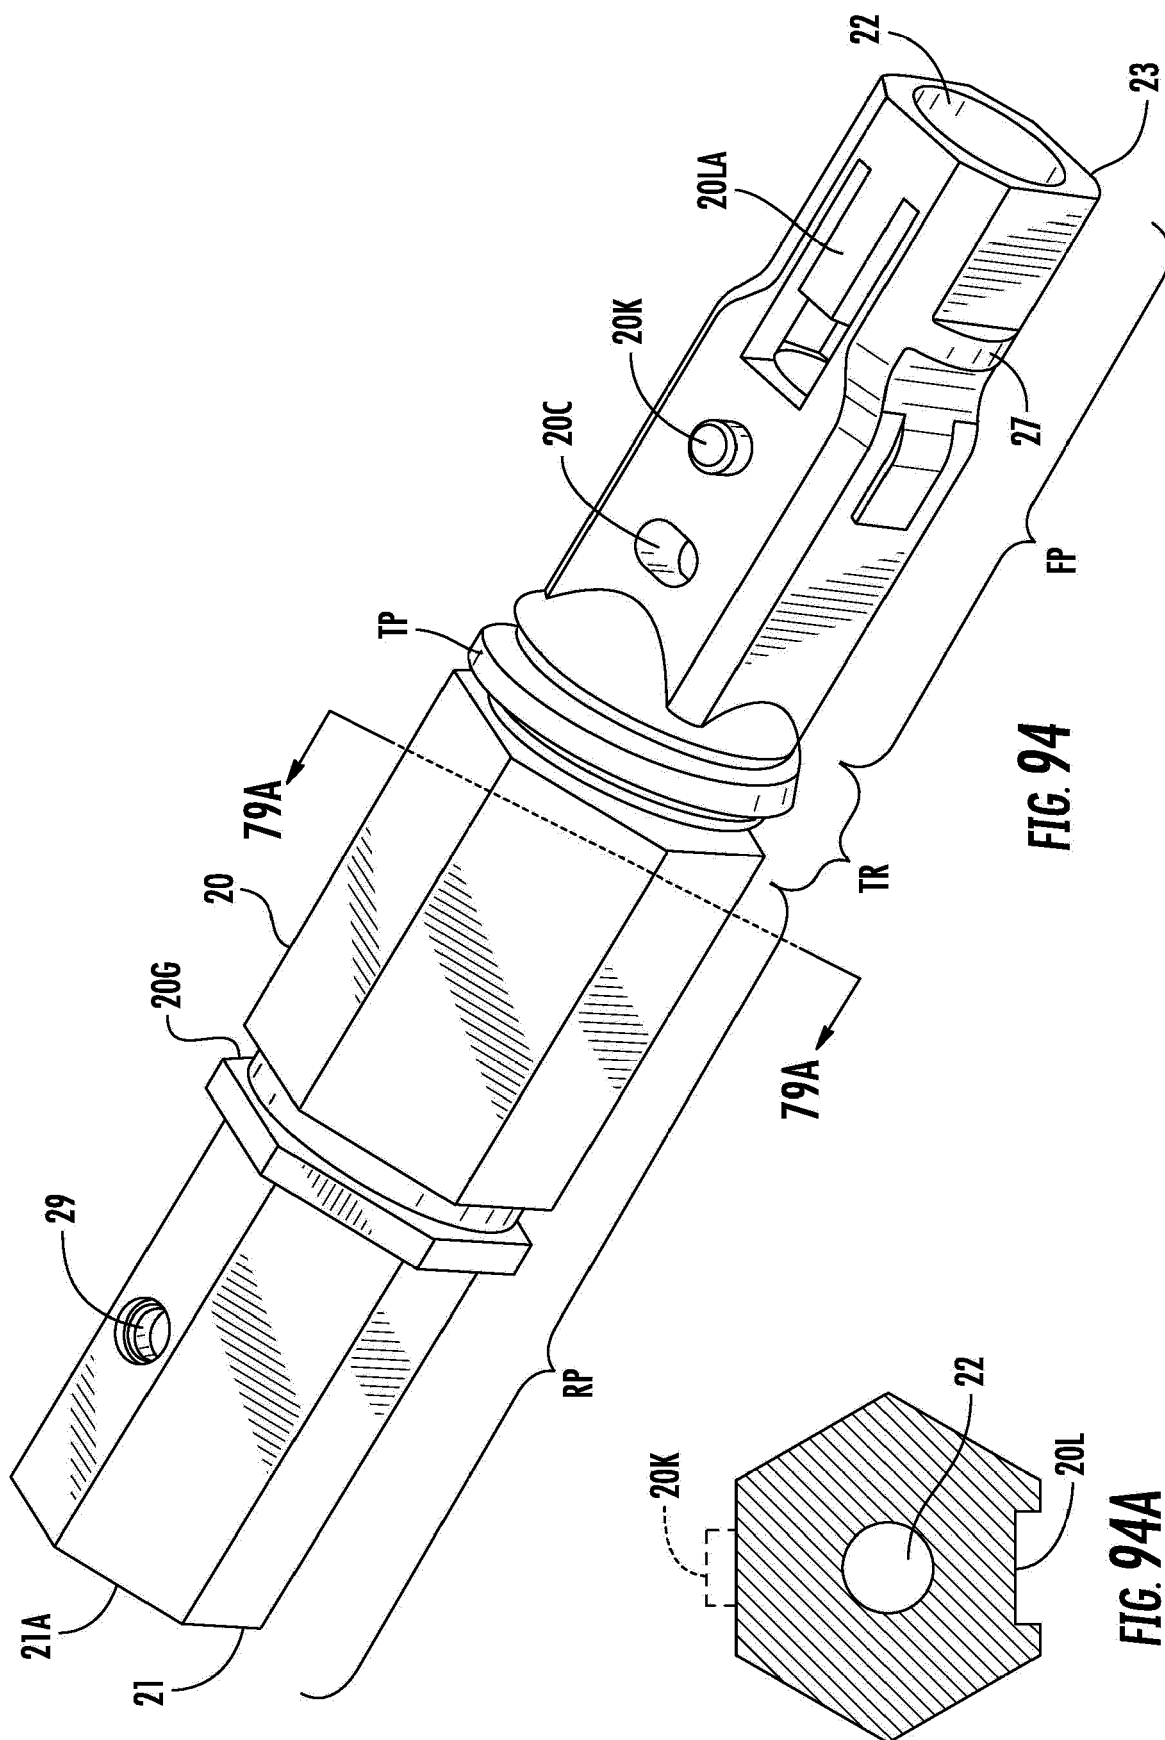

EUROPEAN SEARCH REPORT

Application Number
EP 21 16 9195

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2016/209599 A1 (VAN BAELEN DAVID JAN IRMA [BE] ET AL) 21 July 2016 (2016-07-21) * paragraph [0040] - paragraph [0048] * * figures 1-6 *	1-15	INV. G02B6/38 G02B6/44
A	US 5 067 783 A (LAMPERT NORMAN R [US]) 26 November 1991 (1991-11-26) * column 4, line 24 - column 10, line 30 * * figures 1-16 *	1-15	
A	US 2004/157499 A1 (NANIA FRANCESCO A [US] ET AL) 12 August 2004 (2004-08-12) * the whole document *	1-15	
A	US 2010/310213 A1 (LEWALLEN CHRISTOPHER PAUL [US] ET AL) 9 December 2010 (2010-12-09) * the whole document *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			G02B H01R
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 July 2021	Examiner Szachowicz, Marta
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 16 9195

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-07-2021

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016209599 A1	21-07-2016	CN 105683795 A	15-06-2016
		CN 110244411 A	17-09-2019
		EP 3036573 A1	29-06-2016
		EP 3761092 A2	06-01-2021
		ES 1232137 U	08-07-2019
		ES 2831401 T3	08-06-2021
		PL 3036573 T3	08-02-2021
		US 2016209599 A1	21-07-2016
		US 2018031774 A1	01-02-2018
		US 2019369336 A1	05-12-2019
US 5067783 A	26-11-1991	US 2020225422 A1	16-07-2020
		WO 2015028433 A1	05-03-2015
		AU 631076 B2	12-11-1992
		CA 2050355 C	21-02-1995
		CN 1060911 A	06-05-1992
		DE 69128450 T2	16-04-1998
		DK 0481642 T3	24-08-1998
		EP 0481642 A2	22-04-1992
		ES 2110432 T3	16-02-1998
		JP H0750229 B2	31-05-1995
US 2004157499 A1	12-08-2004	JP H04289805 A	14-10-1992
		KR 920008512 A	28-05-1992
		MX 174463 B	17-05-1994
		TW 231339 B	01-10-1994
		US 5067783 A	26-11-1991
		CA 2454438 A1	07-08-2004
		CN 1599149 A	23-03-2005
		EP 1450449 A1	25-08-2004
		IL 203100 A	31-03-2014
		US 2004157499 A1	12-08-2004
US 2010310213 A1	09-12-2010	US 2008166906 A1	10-07-2008
		US 2010144183 A1	10-06-2010
		AU 2007342442 A1	17-07-2008
		CA 2674155 A1	17-07-2008
		EP 2102692 A1	23-09-2009
		US 2007160327 A1	12-07-2007
		US 2010310213 A1	09-12-2010
		WO 2008085407 A1	17-07-2008

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 62428212 [0001]
- US 62428219 [0001]
- US 62428224 [0001]
- US 62428230 [0001]
- US 62428234 [0001]
- US 62428244 [0001]
- US 62428252 [0001]
- US 62451221 [0001]
- US 62451234 [0001]
- US 62526011 [0001]
- US 62526018 [0001]
- US 62526195 [0001]
- US 7090406 B [0003]
- US 7113679 B [0003]
- US 6579014 B [0005]