



(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(43) Date of publication:  
**29.09.2021 Bulletin 2021/39**

(51) Int Cl.:  
**F25D 29/00 (2006.01) F25D 11/02 (2006.01)**

(21) Application number: **19908593.7**

(86) International application number:  
**PCT/CN2019/070992**

(22) Date of filing: **09.01.2019**

(87) International publication number:  
**WO 2020/142931 (16.07.2020 Gazette 2020/29)**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

• **Midea Group Co., Ltd.**  
**Foshan, Guangdong 528311 (CN)**

(72) Inventors:  
• **FANG, Ruiming**  
**Hefei, Anhui 230601 (CN)**  
• **LI, Yu**  
**Hefei, Anhui 230601 (CN)**

(71) Applicants:  
• **Hefei Midea Refrigerator Co., Ltd.**  
**Hefei, Anhui 230601 (CN)**  
• **Hefei Hualing Co., Ltd.**  
**Hefei, Anhui 230601 (CN)**

(74) Representative: **RGTH**  
**Patentanwälte PartGmbB**  
**Neuer Wall 10**  
**20354 Hamburg (DE)**

(54) **REFRIGERATOR AND METHOD AND DEVICE FOR CONTROLLING REFRIGERATION THEREOF**

(57) Disclosed are a refrigerator and a method and device for controlling refrigeration of a refrigerator, a refrigeration system of the refrigerator comprises: a refrigerating evaporator for refrigerating a refrigerating compartment, an ice-making evaporator for making ice in an ice machine, a refrigerating capillary tube adjacent to the refrigerating evaporator and an ice-making capillary tube adjacent to the ice-making evaporator, and a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube. The method comprises: recognizing a current ice-making stage of the ice machine; acquiring a current temperature of an ice-making compartment in the refrigerator; and controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature. Through controlling the refrigeration period of the refrigerating compartment and delaying the starting refrigeration time of the refrigerating compartment, the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thus improving the ice-making efficiency of the ice machine and the ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

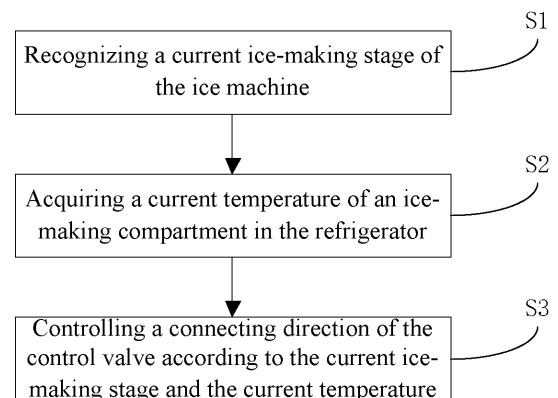


Fig. 3

**Description****CROSS-REFERENCE TO RELATED APPLICATIONS**

**[0001]** This application claims a priority to Chinese Patent Application in application name of refrigerator and method and device for controlling refrigeration thereof filed on January 09, 2019 of HEFEI HUALING CO., LTD., HEFEI MIDEA REFRIGERATOR CO., LTD. and MIDEA GROUP CO., LTD.

**FIELD**

**[0002]** This application belongs to the technical field of household appliances, in particular to a refrigerator and a method and device for controlling refrigeration of a refrigerator.

**BACKGROUND**

**[0003]** In the related art, a refrigerator with an ice machine has no requirement for a refrigeration period of a refrigerating compartment and an ice-making period of the ice machine. That is, when the ice machine is in an ice-making state, the refrigerating compartment can request and perform refrigeration at any time, thus often leading to low ice-making efficiency of the ice machine, and high energy consumption of the refrigerator.

**SUMMARY**

**[0004]** This application aims to solve one of the technical problems in the related technology at least to a certain extent.

**[0005]** For this, the present disclosure in embodiments proposes a method for controlling refrigeration of a refrigerator. The method for controlling refrigeration of a refrigerator is capable of controlling the refrigeration period of the refrigerating compartment, so that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice machine, thus improving the ice-making efficiency of the ice machine and reducing the energy consumption of the refrigerator.

**[0006]** This present disclosure in embodiments also proposes a device for controlling refrigeration of a refrigerator and a refrigerator.

**[0007]** To solve the above problem, a first aspect of the present disclosure in embodiments proposes a method for controlling refrigeration of a refrigerator, wherein a refrigeration system of the refrigerator comprises:

a refrigerating evaporator for refrigerating a refrigerating compartment,  
an ice-making evaporator for making ice in an ice machine,  
a refrigerating capillary tube and an ice-making capillary tube adjacent to the refrigerating evaporator and the ice-making evaporator, and

a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube;  
the method comprises:

recognizing a current ice-making stage of the ice machine;  
acquiring a current temperature of an ice-making compartment in the refrigerator; and  
controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature.

**[0008]** According to the method for controlling refrigeration of a refrigerator in embodiments of the present disclosure, the connecting direction of the control valve is controlled to determine the time of performing refrigeration and the time of ending refrigeration for corresponding compartments, thereby controlling the refrigeration period of the refrigerating compartment and delaying the starting refrigeration time of the refrigerating compartment to be within a heating-deicing stage of ice-making mode of the ice-making compartment, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thus improving the ice-making efficiency of the ice machine and reducing the energy consumption of the refrigerator.

**[0009]** In embodiments of the present disclosure, controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature comprises:

detecting and determining that the current ice-making stage is a heating-deicing stage;  
detecting and determining that the current temperature is greater than a first preset temperature threshold; and  
controlling the control valve to switch on the connecting direction to the refrigerating capillary tube.

**[0010]** In embodiments of the present disclosure, the method further comprises:

detecting and determining that the current temperature is less than or equal to the first preset temperature threshold; and  
controlling the control valve to switch off.

**[0011]** In embodiments of the present disclosure, detecting and determining that the current ice-making stage is a heating-deicing stage comprises:

acquiring a current operating power of the refrigerator;  
detecting and determining that the current operating power is within a preset range; and  
determining that the current ice-making stage is the heating-deicing stage.

**[0012]** In embodiments of the present disclosure, the method further comprises:

detecting and determining that the current ice-making stage is a first ice-making stage;  
 detecting and determining that the current temperature is greater than a second preset temperature threshold; and  
 controlling the control valve to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.

**[0013]** In embodiments of the present disclosure, the method further comprises:

detecting and determining that the current temperature is less than or equal to the second preset temperature threshold; and  
 controlling the control valve to switch off the connecting direction to the refrigerating capillary tube.

**[0014]** In embodiments of the present disclosure, the method further comprises:

acquiring a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment,  
 before controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature.

**[0015]** In embodiments of the present disclosure, the method further comprises:

detecting and determining that the ice machine is currently operating in an ice-making mode,  
 before recognizing a current ice-making stage of the ice machine.

**[0016]** In embodiments of the present disclosure, the method further comprises:

detecting and determining that the ice machine is currently operating in a non-ice making mode;  
 detecting a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment; and  
 controlling the connecting direction of the control valve according to the detected refrigeration request instruction and a source of the refrigeration request instruction.

**[0017]** The present disclosure in embodiments further proposes an electronic device, comprising:

at least one memory;  
 a processor;  
 at least one program,

wherein the at least one program is stored in the memory that when executed by the at least one processor, to implement a method for controlling refrigeration of a refrigerator as described in the embodiments of the first aspect of the present disclosure.

**[0018]** The present disclosure in embodiments still further proposes a non-transitory computer-readable storage medium having stored therein a computer program that, when executed by a processor, causes the processor to perform a method for controlling refrigeration of a refrigerator as described in the embodiments of the first aspect of the present disclosure.

**[0019]** To solve the above problem, a second aspect of the present disclosure in embodiments proposes a device for controlling refrigeration of a refrigerator, wherein a refrigeration system of the refrigerator comprises:

a refrigerating evaporator for refrigerating a refrigerating compartment,  
 an ice-making evaporator for making ice in an ice machine,  
 a refrigerating capillary tube and an ice-making capillary tube adjacent to the refrigerating evaporator and the ice-making evaporator, and  
 a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube;  
 the device comprises:

a recognizing module, configured to recognize a current ice-making stage of the ice machine;  
 an acquiring module, configured to acquire a current temperature of the ice-making compartment in the refrigerator; and  
 a controlling module, configured to control a connecting direction of the control valve according to the current ice-making stage and the current temperature.

**[0020]** According to the device for controlling refrigeration of a refrigerator in embodiments of the present disclosure, the connecting direction of the control valve is controlled to determine the time of performing refrigeration and the time of ending refrigeration for corresponding compartments, thereby controlling the refrigeration period of the refrigerating compartment and delaying the starting refrigeration time of the refrigerating compartment to be within a heating-deicing stage of ice-making mode of the ice-making compartment, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thus improving the ice-making efficiency of the ice machine and reducing the energy consumption of the refrigerator.

**[0021]** In embodiments of the present disclosure, the controlling module is further configured to:

detect and determine that the current ice-making

stage is a heating-deicing stage;  
 detect and determine that the current temperature  
 is greater than a first preset temperature threshold;  
 and  
 control the control valve to switch on the connecting  
 direction to the refrigerating capillary tube.

**[0022]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

detect and determine that the current temperature  
 is less than or equal to the first preset temperature  
 threshold; and  
 control the control valve to switch off.

**[0023]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

acquire a current operating power of the refrigerator;  
 detect and determine that the current operating pow-  
 er is within a preset range; and determine that the  
 current ice-making stage is the heating-deicing  
 stage.

**[0024]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

detect and determine that the current ice-making  
 stage is a first ice-making stage;  
 detect and determine that the current temperature  
 is greater than a second preset temperature thresh-  
 old; and  
 control the control valve to switch on the connecting  
 direction to both the refrigerating capillary tube and  
 the ice-making capillary tube.

**[0025]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

detect and determine that the current temperature  
 is less than or equal to the second preset tempera-  
 ture threshold; and  
 control the control valve to switch off the connecting  
 direction to the refrigerating capillary tube.

**[0026]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

acquire a refrigeration request instruction issued by ei-  
 ther the refrigerating compartment or the ice-making  
 compartment.

**[0027]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

detect and determine that the ice machine is currently  
 operating in an ice-making mode before recognizing a  
 current ice-making stage of the ice machine.

**[0028]** In embodiments of the present disclosure, the  
 controlling module is further configured to:

detect and determine that the ice machine is current-  
 ly operating in a non-ice making mode;  
 detect a refrigeration request instruction issued by  
 either the refrigerating compartment or the ice-mak-  
 ing compartment; and  
 control the connecting direction of the control valve  
 according to the detected refrigeration request in-  
 struction and a source of the refrigeration request  
 instruction.

**[0029]** A third aspect of the present disclosure in em-  
 bodiments proposes a refrigerator, comprising the device  
 for controlling refrigeration of a refrigerator, based on the  
 device for controlling refrigeration of a refrigerator as de-  
 scribed in embodiments of the above aspect. According  
 to the device for controlling refrigeration of a refrigerator  
 as described in embodiments of the above aspect, it is  
 possible to implement the controlling of refrigeration pe-  
 riod of the refrigerating compartment, such that the re-  
 frigeration cycle of the refrigerating compartment match-  
 es the ice-making cycle of the ice machine, thus improv-  
 ing the ice-making efficiency of the ice machine and re-  
 ducing the energy consumption of the refrigerator.

## DESCRIPTION OF DRAWINGS

**[0030]**

Fig. 1 is a block diagram of a refrigeration system  
 that can be implemented in a method for controlling  
 refrigeration of a refrigerator according to an embod-  
 iment of the present disclosure;

Fig. 2 is a block diagram of a refrigeration system  
 that can be implemented in a method for controlling  
 refrigeration of a refrigerator according to an embod-  
 iment of the present disclosure;

Fig. 3 is a schematic flow chart of a method for con-  
 trolling refrigeration of a refrigerator according to an  
 embodiment of the present disclosure;

Fig. 4 is a schematic diagram showing a refrigeration  
 cycle of a refrigerating compartment and an ice-mak-  
 ing cycle of an ice-making compartment in a method  
 for controlling refrigeration of a refrigerator according  
 to an embodiment of the present disclosure;

Fig. 5 is a schematic diagram of comparison of a  
 refrigeration cycle of a refrigerating compartment  
 and an ice-making cycle of an ice-making compart-  
 ment in a method for controlling refrigeration of a  
 refrigerator according to an embodiment of the  
 present disclosure;

Fig. 6 is a schematic flow chart of a process for con-  
 trolling a starting refrigeration time of a refrigerating  
 compartment in a method for controlling refrigeration  
 of a refrigerator according to an embodiment of the  
 present disclosure;

Fig. 7 is a schematic flow chart of a process for im-  
 proving ice-making efficiency in a method for con-  
 trolling refrigeration of a refrigerator according to an

embodiment of the present disclosure;

Fig. 8 is a schematic flow chart of a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure;

Fig. 9 is a flow chart of a process for controlling a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure;

Fig. 10 is a block diagram showing the structure of a device for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure;

Fig. 11 is a block diagram showing the structure of a refrigerator according to an embodiment of the present disclosure;

Fig. 12 is a block diagram showing the structure of an electronic device according to an embodiment of the present disclosure.

## DETAILED DESCRIPTION

**[0031]** The embodiments of the present disclosure are described in detail below. Examples of the embodiments are shown in the accompanying drawings, in which the same or similar reference numerals indicate the same or similar elements or elements with the same or similar functions. The embodiments described below with reference to the drawings are exemplary and are intended to explain the present disclosure, which should not be understood as a limitation to the present disclosure.

**[0032]** A refrigerator and a method and device for controlling refrigeration of a refrigerator according to embodiments of the present disclosure are described below with reference to the drawings.

**[0033]** Fig. 1 is a block diagram of a refrigeration system that can be implemented in a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 1, the refrigeration system at least includes a compressor, a condenser, a control valve, a refrigerating capillary tube, an ice-making capillary tube, a refrigerating evaporator, an ice-making evaporator and an air return pipe. Among them, the compressor is connected to the condenser, the condenser is connected to the control valve, the control valve is respectively connected to the refrigerating capillary tube and the ice-making capillary tube, the refrigerating capillary tube is connected to the refrigerating evaporator, the ice-making capillary tube is connected to the ice-making evaporator, the ice-making evaporator is connected to the compressor through the air return pipe, and the refrigerating evaporator is connected to the ice-making evaporator. Among them, the refrigerating evaporator is configured to refrigerate the refrigerating compartment in the refrigerator, and the ice-making evaporator is configured to make ice in the ice machine, that is, for making ice in an ice-making compartment. The control valve is configured to control switching on or switching off a connecting direction to the refrigerating

capillary tube and the ice-making capillary tube.

**[0034]** Fig. 2 is a block diagram of a refrigeration system that can be implemented in a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 2, the refrigeration system in Fig. 2 differs from that in Fig. 1 in that the refrigerating evaporator in this refrigeration system is not connected to the ice-making evaporator but is connected to the compressor through the air return pipe.

**[0035]** It should be noted that the ice machine in the embodiments of the present disclosure can be located but not limited to, in a refrigerating compartment or a freezing compartment of the refrigerator, and the specific location can be determined according to actual conditions.

**[0036]** Fig. 3 is a schematic flow chart of a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 3, the method for controlling refrigeration of a refrigerator in this embodiment includes the following steps.

S1. Recognizing a current ice-making stage of the ice machine

**[0037]** It should be noted that, in this embodiment, the ice-making stage of the ice machine includes two stages, i.e., a heating-deicing stage and a first ice-making stage. Among them, during the heating-deicing stage, a heating wire in the ice machine works to melt part of ice cubes, thereby causing the ice cubes to fall off. During the first ice-making stage, the ice-making evaporator works to decrease the temperature of the ice-making compartment, so that the liquid solidifies into a solid. It should be understood that the ice-making stage of the ice machine may be referred to as an ice-making mode, and the non-ice-making stage of the ice machine may be referred to as a non-ice-making mode to facilitate describing and distinguishing the ice-making stage and the non-ice-making stage. Optionally, it is possible to detect and determine that the ice machine is currently operating in an ice-making mode, before recognizing a current ice-making stage of the ice machine. Specifically, when detecting if the ice machine is operating in an ice-making mode, for example, a user's interactive interface or working mode selection button may be provided on the refrigerator, that the ice machine is currently operating in an ice-making mode can be determined by user according to the user's interactive interface or working mode selection button on the refrigerator. If the user selects the ice-making mode through the user's interactive interface, it is determined that the ice machine is currently operating in an ice-making mode. Optionally, the working mode can be selected through voice or remote control. When the ice-making mode is selected through voice or remote control, it can be determined that the ice machine is currently operating in an ice-making mode.

**[0038]** During the heating-deicing stage in the ice-making mode, a heating wire in the ice machine need to work

to increase the temperature, to cause the solidified ice cubes to fall off. Thus, the current operating power of the refrigerator would be greater than the normal operating power of the refrigerator under the action of heating wire working. Thereby, in embodiments of the present disclosure, the current ice-making stage in the ice-making mode can be determined according to the current operating power of the refrigerator.

**[0039]** In the actual working process of the refrigerator, the operating power during the heating-deicing stage (hereinafter referred to as the "first power") is greater than the refrigerating power of the ice-making compartment alone in the refrigerator, but it is less than the refrigerating power of both the ice-making compartment and the refrigerating compartment in the refrigerator (hereinafter referred to as the "third power"). Thus, during the heating-deicing stage, when the refrigerator simultaneously performs the refrigeration of refrigerating compartment, the operating power of the refrigerator (hereinafter referred to as the "third power" for convenience of description) would be greater than the second power due to the large power of heating wire in the ice machine. As shown in Fig. 4, line 1 shows the change of temperature in the refrigerating compartment, line 2 shows the change of temperature in the ice-making compartment, and line 3 shows the change of operating power of the refrigerator. Among them, in the time period from 0 to t<sub>1</sub>, the refrigerating compartment does not perform refrigeration but the ice-making mode is in the heating-deicing stage; in the time period from t<sub>1</sub> to t<sub>2</sub>, the refrigerating compartment performs refrigeration and the ice-making mode is in the heating-deicing stage; in the time period from t<sub>2</sub> to t<sub>3</sub>, the refrigerating compartment continues refrigeration but the ice-making mode turns to an ice-making stage; and in the time period from t<sub>3</sub> to t<sub>4</sub>, the refrigerating compartment stops refrigeration and the ice-making mode keeps in the ice-making stage until the ice-making stage ends. In the entire ice-making mode, the operating power P during the heating-deicing stage is within the range of the first power P<sub>1</sub> to the second power P<sub>2</sub>. Thus, whether the ice-making mode is in the heating-deicing stage can be determined according to the operating power of the refrigerator. If the ice-making mode is not in the heating-deicing stage, it is in a first ice-making stage.

**[0040]** Optionally, after the ice machine is determined to be operated in the ice-making mode, a current temperature of the heating wire in the ice machine can be detected, thereby determining the current temperature of the heating wire. If the current temperature of the heating wire is higher than the preset temperature, it indicates that the ice machine is currently in the heating-deicing stage of the ice-making mode.

S2. Acquiring a current temperature of an ice-making compartment in the refrigerator

**[0041]** Specifically, a temperature sensor may be pro-

vided in the ice-making compartment in the refrigerator, to detect the current temperature of the ice-making compartment.

5 S3. Controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature

**[0042]** According to the current ice-making stage of the ice-making mode and the current temperature in the ice-making compartment acquired, the connecting direction of the control valve can be controlled to determine whether the refrigerating compartment is to be refrigerated. Through controlling the refrigeration period of the refrigerating compartment, the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thus reducing the influence of the refrigeration in the refrigerating compartment on the ice-making in the ice machine, improving the ice-making efficiency and ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

**[0043]** It should be noted that, referring to Fig. 5, in an ideal state, as shown in Fig. 5a, the refrigeration cycle of the refrigerating compartment is same as the refrigeration cycle of the ice-making compartment. At the time, the ice-making efficiency of the ice machine is the highest, the ice-making amount is the highest and the energy consumption of the refrigerator is the lowest. Among them, during the time period from 0 to t<sub>1</sub>, the refrigerating compartment is in a refrigeration stage and the ice-making compartment is in a heating-deicing stage; during the time period from t<sub>1</sub> to t<sub>2</sub>, the refrigerating compartment ends refrigerating, the ice-making compartment starts into the first ice-making stage, and making ice begins. However, in a practical application, since the refrigeration cycle of the refrigerating compartment is often shorter than the ice-making cycle of the ice-making compartment, the situation shown in Fig. 5b often occurs during the operation of the refrigerator, thereby generally resulting in the refrigerating compartment being in a refrigeration stage and the ice-making compartment being in a first ice-making stage. At the time, due to the amount of refrigerant splitting, the temperature of the ice-making evaporator rises, despite still lower than the preset temperature, resulting in slow down of the decrease of temperature of the ice-making compartment, decreasing the ice-making rate, increasing the ice-making cycle, reducing the ice-making amount and increasing the energy consumption. In addition, even when the starting refrigeration time of the refrigerating compartment keeps path with the heating-deicing time of the ice-making compartment, the situation shown in Fig. 5c occurs, resulting in that the ice-making compartment is still in the late stage of the heating-deicing stage when the refrigerating compartment begins in a refrigeration stage again. Meanwhile, due to the amount of refrigerant splitting, the temperature of the ice-making evaporator rises, despite still lower than the

preset temperature, which would slow down the decrease of temperature of the ice-making compartment, decrease the ice-making rate, increase the ice-making cycle, reduce the ice-making amount, and increase the energy consumption. However, in the embodiments of the present disclosure, through controlling the refrigeration period of the refrigerating compartment and delaying the starting refrigeration time of the refrigerating compartment to be within a heating-deicing stage of ice-making mode of the ice-making compartment, the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thereby forming the cycles as shown in Fig. 5d, thus greatly reducing the time period when both the refrigerating compartment and the ice-making compartment perform refrigerating, thereby reducing the influence of refrigeration in the refrigerating compartment on ice-making in the ice-making compartment, improving the ice-making efficiency and ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

**[0044]** Above all, the present disclosure in embodiments proposes a method for controlling refrigeration of a refrigerator. The method controls the connecting direction of the control valve in the refrigeration system of the refrigerator according to the current ice-making stage of the ice machine and the current temperature of the ice-making compartment. Through controlling the connecting direction of the control valve to determine the time of performing refrigeration and the time of ending refrigeration for corresponding compartments, the refrigeration period of the refrigerating compartment is controlled and the starting refrigeration time of the refrigerating compartment is delayed to be within a heating-deicing stage of ice-making mode of the ice-making compartment, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, thus improving the ice-making efficiency of the ice machine and the ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

**[0045]** In some embodiments, the time of performing refrigeration in the refrigerating compartment can be determined according to the temperature in the ice-making compartment. Fig. 6 is a schematic flow chart of a process for controlling a starting refrigeration time of the refrigerating compartment in a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 6, the method includes the following steps.

S61. Detecting and determining that the current ice-making stage is a heating-deicing stage

**[0046]** Specifically, if the refrigerator is in the heating-deicing stage can be determined according to the current operating power of the refrigerator. Referring to the description in step S1, if the current operating power of the

refrigerator is between the first power and the second power, it indicates that the current ice-making stage is a heating-deicing stage.

S62. Detecting and determining that the current temperature is greater than a first preset temperature threshold

**[0047]** It should be noted that a first preset temperature threshold is preset in the refrigerator, and whether the refrigeration in the refrigerating compartment is initiated can be determined according to the temperature in the ice-making compartment and the first preset temperature threshold. In embodiments of the present disclosure, the first preset temperature threshold is set, and only when the temperature in the ice-making compartment is greater than the first preset temperature threshold, the refrigeration in the refrigerating compartment can be initiated, thereby capable of delaying the starting refrigeration time of the refrigerating compartment, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment.

**[0048]** Specifically, the current temperature of the refrigerating compartment of the refrigerator is acquired and it can be compared with the first preset temperature threshold. Further, the magnitude relationship between the current temperature of the refrigerating compartment of the refrigerator and the first preset temperature threshold can be determined. If the current temperature is greater than the first preset temperature threshold, step S63 is executed; otherwise, step S64 is executed.

S63. Controlling the control valve to switch on the connecting direction to the refrigerating capillary tube

**[0049]** Specifically, when the current temperature is greater than the first preset temperature threshold, the refrigeration of the refrigerating compartment is performed, that is, controlling the control valve to switch on the connecting direction to the refrigerating capillary tube. It should be understood that the control valve switches off the connecting direction to the ice-making capillary tube at this time.

S64. Controlling the control valve to switch off

**[0050]** Specifically, if the current temperature is less than or equal to the first preset temperature threshold, the control valve switches off, that is, the refrigeration system stops refrigerating, thereby delaying the starting refrigeration time of the refrigerating compartment.

**[0051]** In some embodiments, considering that the simultaneous refrigeration of the refrigerating compartment and the refrigerating compartment for a long time would reduce the ice-making efficiency and increase the energy consumption, the refrigeration ending period of the refrigerating compartment can also be controlled to avoid occurrence of the above situation. Specifically, referring to Fig. 7, Fig. 7 is a schematic flow chart of a

process for improving ice-making efficiency in a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 7, the method includes the following steps.

S71. Detecting and determining that the current ice-making stage is a first ice-making stage

**[0052]** Specifically, whether the heating-deicing stage ends can be detected. When the heating-deicing stage ends, it indicates that the current ice-making stage is in the first ice-making stage.

S72. Detecting and determining that the current temperature is greater than a second preset temperature threshold

**[0053]** It should be noted that a second preset temperature threshold is preset in the refrigerator. Whether the refrigeration in the refrigerating compartment ends can be determined according to the temperature in the ice-making compartment and the second preset temperature threshold. The setting of the second preset temperature threshold prevents the refrigerating compartment and the ice-making compartment from simultaneously refrigerating for a long time, thus not only reducing energy consumption and improving ice-making efficiency, but also meeting the refrigeration requirements of the refrigerating compartment. For example, if the target temperature set in the refrigerating compartment is lower than the second preset temperature threshold, the refrigeration of the refrigerating compartment is ended in advance to ensure ice-making efficiency; and if the target temperature set in the refrigerating compartment is greater than or equal to the second preset temperature threshold, the refrigeration of the refrigerating compartment can be ended when the target temperature is reached.

**[0054]** Specifically, the current temperature of the refrigerating compartment of the refrigerator is acquired and it can be compared with the second preset temperature threshold. Further, the magnitude relationship between the current temperature of the refrigerating compartment of the refrigerator and the second preset temperature threshold can be determined. If the current temperature is greater than the second preset temperature threshold, step S73 is executed; otherwise, step S74 is executed.

S73. Controlling the control valve to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube

**[0055]** Specifically, if the current temperature is greater than the second preset temperature threshold, the control valve is controlled to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube, thus performing the refrigeration in both the ice-making compartment and the refrigerating

compartment.

S74. Controlling the control valve to switch off the connecting direction to the refrigerating capillary tube

**[0056]** Specifically, if the current temperature is less than or equal to the second preset temperature threshold, the control valve is controlled to switch off the connecting direction to the refrigerating capillary tube, thus ending the refrigeration in the refrigerating compartment.

**[0057]** It should be understood that, in this embodiment, the method needs to acquire a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment before controlling a connecting direction of the control valve, and select the connecting direction to be switched on by the control valve according to the corresponding refrigeration request instruction.

**[0058]** In some embodiments, if the ice machine is currently operating in a non-ice-making mode, the connecting direction of the control valve can be controlled according to the following steps. As shown in Fig. 8, the method includes steps.

S81. Detecting and determining that the ice machine is currently operating in a non-ice-making mode

**[0059]** Specifically, referring to the description in step S 1 as above, if the ice machine is not in the ice-making mode, it is determined that the ice machine is currently operating in a non-ice-making mode.

S82. Detecting a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment

**[0060]** Specifically, during the operation of the refrigerator, when the internal temperature of the refrigerator changes, compartments like the refrigerating compartment, the ice-making compartment and the like are to be refrigerated from time to time. When a corresponding compartment needs to be refrigerated, the corresponding compartment will issue a refrigeration request instruction to request being refrigerated by the refrigerator. Thus, the refrigeration request instruction issued by respective compartment can be detected in real time or at intervals.

S83. Controlling the connecting direction of the control valve according to the detected refrigeration request instruction and a source of the refrigeration request instruction

**[0061]** Specifically, the connecting direction of the control valve is controlled according to the refrigeration request instruction issued by corresponding compartments. For example, if the ice-making compartment and the refrigerating compartment both issue a refrigeration



request instruction, the control valve would switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube. If the ice-making compartment issues a refrigeration request instruction but the refrigerating compartment does not issue a refrigeration request instruction, the control valve would switch on the connecting direction to the ice-making capillary tube but would switch off the connecting direction to the refrigerating capillary tube.

**[0062]** Fig. 9 is a flow chart of a process for controlling a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 9, the process for controlling a method for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure includes the following steps.

S91. Detecting if the ice machine is in an ice-making mode

**[0063]** If yes, a step S92 is executed. If no, a step S93 is executed.

S92. Detecting if the ice-making compartment issues a refrigeration request instruction

**[0064]** If yes, a step S921 is executed. If no, a step S922 is executed.

S921. Detecting if the refrigerating compartment issues a refrigeration request instruction

**[0065]** If yes, a step S8211 is executed. If no, a step S9212 is executed.

S9211. Detecting if the current temperature of the ice-making compartment is greater than a second preset temperature threshold

**[0066]** If yes, a step S9213 is executed. If no, a step S9212 is executed.

**[0067]** S9212. The control valve switches on the connecting direction to the ice-making capillary tube.

**[0068]** S9213. The control valve switches on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.

S922. Detecting if the refrigerating compartment issues a refrigeration request instruction

**[0069]** If yes, a step S9221 is executed. If no, a step S9222 is executed.

S9221. Detecting if the current temperature of the ice-making compartment is greater than a first preset temperature threshold

**[0070]** If yes, a step S9222 is executed. If no, a step

S9223 is executed.

**[0071]** S9222. The control valve switches on the connecting direction to the refrigerating capillary tube.

**[0072]** S9223. The connecting direction of the control valve remains unchanged and the refrigeration system stops refrigerating.

S93. Detecting if the ice-making compartment issues a refrigeration request instruction

**[0073]** If yes, a step S931 is executed. If no, a step S932 is executed.

S931. Detecting if the refrigerating compartment issues a refrigeration request instruction

**[0074]** If yes, a step S9311 is executed. If no, a step S9312 is executed.

**[0075]** S9311. The control valve switches on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.

**[0076]** S9312. The control valve switches on the connecting direction to the ice-making capillary tube.

S932. Detecting if the refrigerating compartment issues a refrigeration request instruction

**[0077]** If yes, a step S9321 is executed. If no, a step S9322 is executed.

**[0078]** S9321. The control valve switches on the connecting direction to the refrigerating capillary tube.

**[0079]** S9322. The connecting direction of the control valve remains unchanged and the refrigeration system stops refrigerating.

**[0080]** It should be noted that, according to the method proposed in this embodiment, the refrigeration system of the refrigerator is controlled, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-making compartment, referring to Fig. 4 showing the schematic diagram of the refrigeration cycle of refrigerating compartment and the ice-making cycle of ice-making compartment. Therefore, the ice-making in the ice machine is less influenced by the refrigeration in the refrigerating compartment, improving the ice-making efficiency and ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

**[0081]** To implement the method in the foregoing embodiments, the present disclosure still further proposes a device for controlling refrigeration of a refrigerator, in which a refrigeration system of the refrigerator includes:

a refrigerating evaporator for refrigerating a refrigerating compartment,  
an ice-making evaporator for making ice in an ice machine,  
a refrigerating capillary tube and an ice-making capillary tube adjacent to the refrigerating evaporator

and the ice-making evaporator, and  
a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube.

**[0082]** Fig. 10 is a block diagram showing the structure of a device for controlling refrigeration of a refrigerator according to an embodiment of the present disclosure. As shown in Figure 10, the device includes:

a recognizing module 1001, configured to recognize a current ice-making stage of the ice machine;  
an acquiring module 1002, configured to acquire a current temperature of the ice-making compartment in the refrigerator; and  
a controlling module 1003, configured to control a connecting direction of the control valve according to the current ice-making stage and the current temperature.

**[0083]** Further, the controlling module 1003 is further configured to:

detect and determine that the current ice-making stage is a heating-deicing stage;  
detect and determine that the current temperature is greater than a first preset temperature threshold; and  
control the control valve to switch on the connecting direction to the refrigerating capillary tube.

**[0084]** Further, the controlling module 1003 is further configured to:

detect and determine that the current temperature is less than or equal to the first preset temperature threshold; and  
control the control valve to switch off.

**[0085]** Further, the controlling module 1003 is further configured to:

acquire a current operating power of the refrigerator;  
detect and determine that the current operating power is within a preset range; and  
determine that the current ice-making stage is the heating-deicing stage.

**[0086]** Further, the controlling module 1003 is further configured to:

detect and determine that the current ice-making stage is a first ice-making stage;  
detect and determine that the current temperature is greater than a second preset temperature threshold; and  
control the control valve to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.

**[0087]** Further, the controlling module 1003 is further configured to:

detect and determine that the current temperature is less than or equal to the second preset temperature threshold; and  
control the control valve to switch off the connecting direction to the refrigerating capillary tube.

**[0088]** Further, the controlling module 1003 is further configured to:

acquire a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment.

**[0089]** Further, the controlling module 1003 is further configured to:

detect and determine that the ice machine is currently operating in an ice-making mode before recognizing a current ice-making stage of the ice machine.

**[0090]** Further, the controlling module 1003 is further configured to:

detect and determine that the ice machine is currently operating in a non-ice making mode;  
detect a refrigeration request instruction issued by either the refrigerating compartment or the ice-making compartment; and  
control the connecting direction of the control valve according to the detected refrigeration request instruction and a source of the refrigeration request instruction.

**[0091]** It should be understood that the foregoing device is configured to execute the method described in the foregoing embodiments. The corresponding program module in the device has implementation principles and technical effects which are similar to those described in the foregoing method. The working process of the device may take reference to the process of the corresponding method as above, which will not be repeated herein.

**[0092]** According to the device for controlling refrigeration of a refrigerator proposed in the embodiments of the present disclosure, the controlling module in the device controls a connecting direction of the control valve in the refrigeration system of the refrigerator according to the current ice-making stage of the ice machine recognized by the recognizing module and the current temperature of the ice-making compartment acquired by the acquiring module. Therefore, the connecting direction of the control valve is controlled to determine the time of performing refrigeration and the time of ending refrigeration for corresponding compartments, thereby controlling the refrigeration period of the refrigerating compartment and delaying the starting refrigeration time of the refrigerating compartment to be within a heating-deicing stage of ice-making mode of the ice-making compartment, such that the refrigeration cycle of the refrigerating compartment matches the ice-making cycle of the ice-

making compartment, thus improving the ice-making efficiency of the ice machine and ice-making amount, shortening the ice-making cycle, and reducing the energy consumption of the refrigerator.

**[0093]** To implement the above embodiments, the present disclosure still further proposes a refrigerator. Fig. 11 is a block diagram showing the structure of a refrigerator according to an embodiment of the present disclosure. As shown in Fig. 11, the refrigerator includes the device for controlling refrigeration of a refrigerator 100.

**[0094]** To implement the above embodiments, the present disclosure still further proposes an electronic device. Fig. 12 is a block diagram showing the structure of an electronic device according to an embodiment of the present disclosure. As shown in Fig. 12, the electronic device includes a memory 1201 and a processor 1202; wherein the processor 1202 runs a program corresponding to an executable program code by reading the executable program code stored in the memory 1201, to be configured to implement each step in the method described above.

**[0095]** To implement the embodiments as mentioned above, the present disclosure still further proposes a non-transitory computer-readable storage medium having stored therein a computer program that, when executed by a processor, causes the processor to implement each step in the method described above.

**[0096]** In the description of the present disclosure, it should be understood that the terms "center", "longitudinal", "transverse", "length", "width", "thickness", "upper", "lower", "front", "back", "left", "right", "vertical", "horizontal", "top", "bottom", "inner", "outer", "clockwise", "counterclockwise", "axial", "radial", "circumferential" and the like indicate the orientation or positional relationship is that shown in the drawings, and is only for the convenience of describing the present disclosure and simplifying the description, rather than indicating or implying the pointed device or element has to have a specific orientation, and be constructed and operated in a specific orientation, and therefore cannot be understood as a limitation of the present disclosure.

**[0097]** In addition, the terms "first" and "second" are only used for descriptive purposes and cannot be understood as indicating or implying relative importance or implicitly indicating the number of indicated technical features. Therefore, the features defined with "first" and "second" may explicitly or implicitly include at least one of the features. In the description of the present disclosure, the "plurality" means two or more than two, unless otherwise specifically defined.

**[0098]** In the present disclosure, the terms "disposed", "arranged", "connected", "fixed" and the like should be understood broadly and may be either a fixed connection or a detachable connection, or an integration; may be a mechanical connection, or an electrical connection; may be directly connected, or connected via an intermediate medium; and may be the internal communication of two

elements or the interaction of two elements, unless otherwise explicitly stated and defined. For those skilled in the art, the specific meanings of the above terms in the present disclosure can be understood according to specific situations.

**[0099]** In the present disclosure, a first feature "on" or "under" a second feature may refer to a direct contact of the first feature with the second feature or an indirect contact of the first feature and the second feature via an intermediate medium, unless otherwise explicitly stated and defined. Moreover, a first feature "above" a second feature may mean the first feature is right above or obliquely above the second feature, or merely that the first feature is located at a level higher than the second feature. A first feature "below" a second feature may mean the first feature is just below or obliquely below the second feature, or merely that the first feature is located at a level lower than the second feature.

**[0100]** Reference throughout this specification to "an embodiment", "one embodiment", "some embodiments", "an example", "a specific example" or "some examples" means that a particular feature, structure, material, or characteristic described in connection with the embodiment or example is included in at least one embodiment or example of the present disclosure. Thus, the appearances of the phrases such as "in some embodiments", "in one embodiment", "in an embodiment", "in an example", "in a specific example" or "in some examples" in various places throughout this specification are not necessarily referring to the same embodiment or example of the present disclosure. Moreover, the described particular feature, structure, material, or characteristic may be combined in any one or more embodiments or examples in a suitable manner. Furthermore, the different embodiments or examples and the features of the different embodiments or examples described in this specification may be combined by those skilled in the art without contradiction.

**[0101]** Although embodiments of the present disclosure have been shown and described in the above, it would be appreciated that the above embodiments are exemplary which cannot be construed to limit the present disclosure, and changes, alternatives, substitution and modifications can be made in the embodiments by those skilled in the art without departing from scope of the present disclosure.

## Claims

1. A method for controlling refrigeration of a refrigerator, wherein a refrigeration system of the refrigerator comprises:
  - a refrigerating evaporator for refrigerating a refrigerating compartment,
  - an ice-making evaporator for making ice for an ice machine, a refrigerating capillary tube and

- an ice-making capillary tube adjacent to the refrigerating evaporator and the ice-making evaporator, and  
a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube;  
the method comprises:
- recognizing a current ice-making stage of the ice machine;  
acquiring a current temperature of an ice-making compartment in the refrigerator; and  
controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature.
2. The method according to claim 1, wherein controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature comprises:
- detecting and determining that the current ice-making stage is a heating-deicing stage;  
detecting and determining that the current temperature is greater than a first preset temperature threshold; and  
controlling the control valve to switch on the connecting direction to the refrigerating capillary tube.
3. The method according to claim 2, further comprising:
- detecting and determining that the current temperature is less than or equal to the first preset temperature threshold; and  
controlling the control valve to switch off.
4. The method according to claim 2, wherein detecting and determining that the current ice-making stage is a heating-deicing stage comprises:
- acquiring a current operating power of the refrigerator;  
detecting and determining that the current operating power is within a preset range; and  
determining that the current ice-making stage is the heating-deicing stage.
5. The method according to any one of claims 1 to 4, further comprising:
- detecting and determining that the current ice-making stage is a first ice-making stage;  
detecting and determining that the current temperature is greater than a second preset temperature threshold; and  
controlling the control valve to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.
6. The method according to claim 5, further comprising:
- detecting and determining that the current temperature is less than or equal to the second preset temperature threshold; and  
controlling the control valve to switch off the connecting direction to the refrigerating capillary tube.
7. The method according to any one of claims 1 to 6, further comprising:
- acquiring a refrigeration request instruction issued by at least either the refrigerating compartment or the ice-making compartment, before controlling a connecting direction of the control valve according to the current ice-making stage and the current temperature.
8. The method according to any one of claims 1 to 7, further comprising:
- detecting and determining that the ice machine is currently operating in an ice-making mode, before recognizing a current ice-making stage of the ice machine.
9. The method according to any one of claims 1 to 8, further comprising:
- detecting and determining that the ice machine is currently operating in a non-ice making mode; detecting a refrigeration request instruction issued by at least either the refrigerating compartment or the ice-making compartment; and controlling the connecting direction of the control valve according to the detected refrigeration request instruction and a source of the refrigeration request instruction.
10. A device for controlling refrigeration of a refrigerator, wherein a refrigeration system of the refrigerator comprises:
- a refrigerating evaporator for refrigerating a refrigerating compartment,  
an ice-making evaporator for making ice for an ice machine,  
a refrigerating capillary tube and an ice-making capillary tube adjacent to the refrigerating evaporator and the ice-making evaporator, and  
a control valve for controlling the refrigerating capillary tube and the ice-making capillary tube;  
the device comprises:
- a recognizing module, configured to recognize a current ice-making stage of the ice machine;

- an acquiring module, configured to acquire a current temperature of the ice-making compartment in the refrigerator; and a controlling module, configured to control a connecting direction of the control valve according to the current ice-making stage and the current temperature.
11. The device according to claim 10, wherein the controlling module is further configured to:
- detect and determine that the current ice-making stage is a heating-deicing stage;  
detect and determine that the current temperature is greater than a first preset temperature threshold; and  
control the control valve to switch on the connecting direction to the refrigerating capillary tube.
12. The device according to claim 11, wherein the controlling module is further configured to:
- detect and determine that the current temperature is less than or equal to the first preset temperature threshold; and  
control the control valve to switch off.
13. The device according to claim 11, wherein the controlling module is further configured to:
- acquire a current operating power of the refrigerator;  
detect and determine that the current operating power is within a preset range; and  
determine that the current ice-making stage is the heating-deicing stage.
14. The device according to any one of claims 10 to 13, wherein the controlling module is further configured to:
- detect and determine that the current ice-making stage is a first ice-making stage;  
detect and determine that the current temperature is greater than a second preset temperature threshold; and  
control the control valve to switch on the connecting direction to both the refrigerating capillary tube and the ice-making capillary tube.
15. The device according to claim 14, wherein the controlling module is further configured to:
- detect and determine that the current temperature is less than or equal to the second preset temperature threshold; and  
control the control valve to switch off the con-
- necting direction to the refrigerating capillary tube.
16. The device according to any one of claims 10 to 15, wherein the controlling module is further configured to:
- acquire a refrigeration request instruction issued by at least either the refrigerating compartment or the ice-making compartment.
17. The device according to any one of claims 10 to 16, wherein the controlling module is further configured to:
- detect and determine that the ice machine is currently operating in an ice-making mode before recognizing a current ice-making stage of the ice machine.
18. The device according to claim 17, wherein the controlling module is further configured to:
- detect and determine that the ice machine is currently operating in a non-ice making mode;  
detect a refrigeration request instruction issued by at least either the refrigerating compartment or the ice-making compartment; and  
control the connecting direction of the control valve according to the detected refrigeration request instruction and a source of the refrigeration request instruction.
19. A refrigerator, comprising the device for controlling refrigeration of a refrigerator of any one of claims 10 to 18.
20. An electronic device, comprising a memory and a processor;  
wherein the processor runs a program corresponding to an executable program code by reading the executable program code stored in the memory, to be configured to implement a method for controlling refrigeration of a refrigerator of any one of claims 1 to 9.
21. A non-transitory computer-readable storage medium having stored therein a computer program that, when executed by a processor, causes the processor to perform a method for controlling refrigeration of a refrigerator of any one of claims 1 to 9.

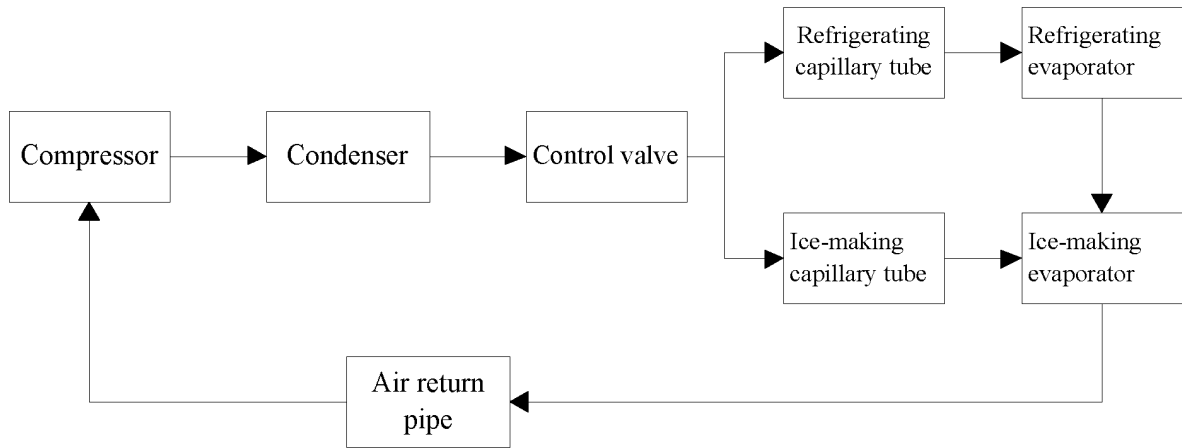


Fig. 1

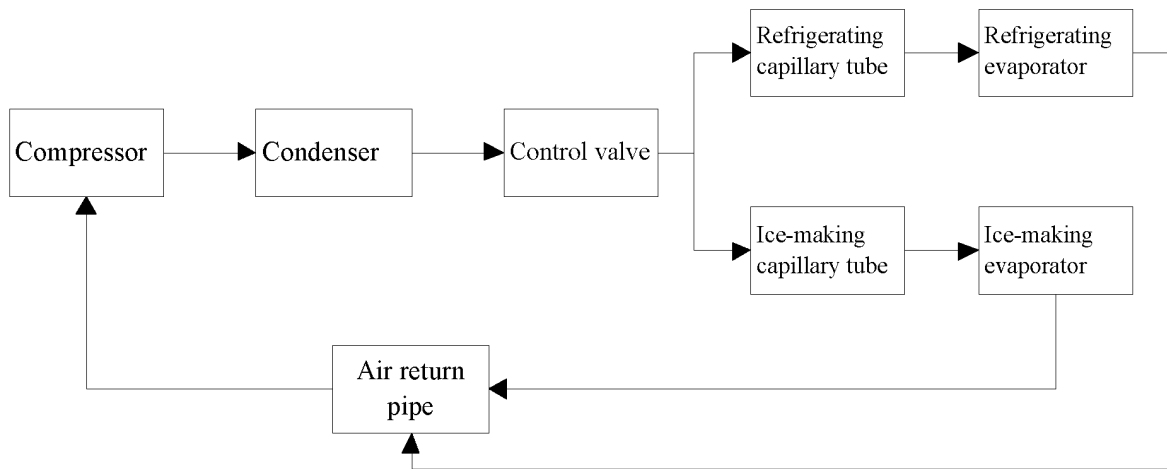


Fig. 2

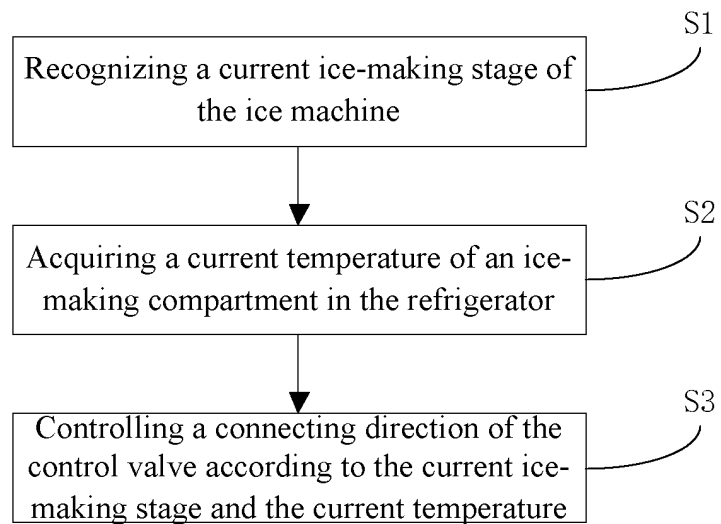


Fig. 3

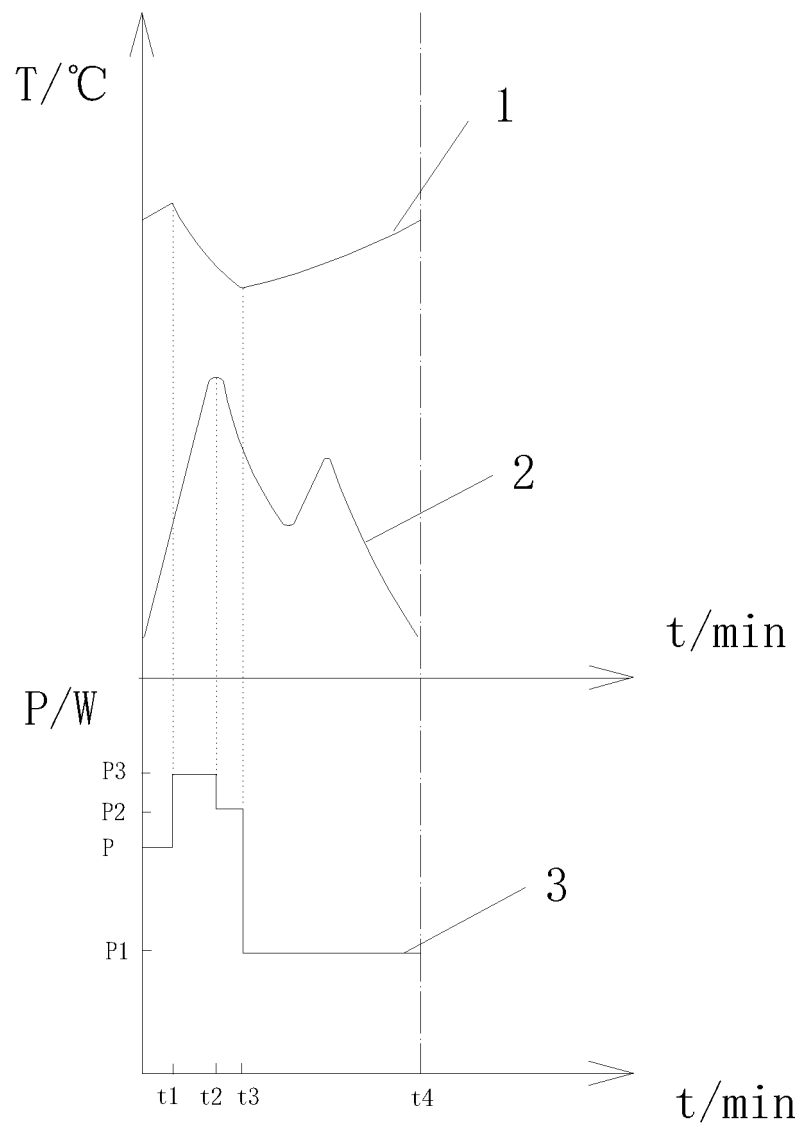


Fig. 4

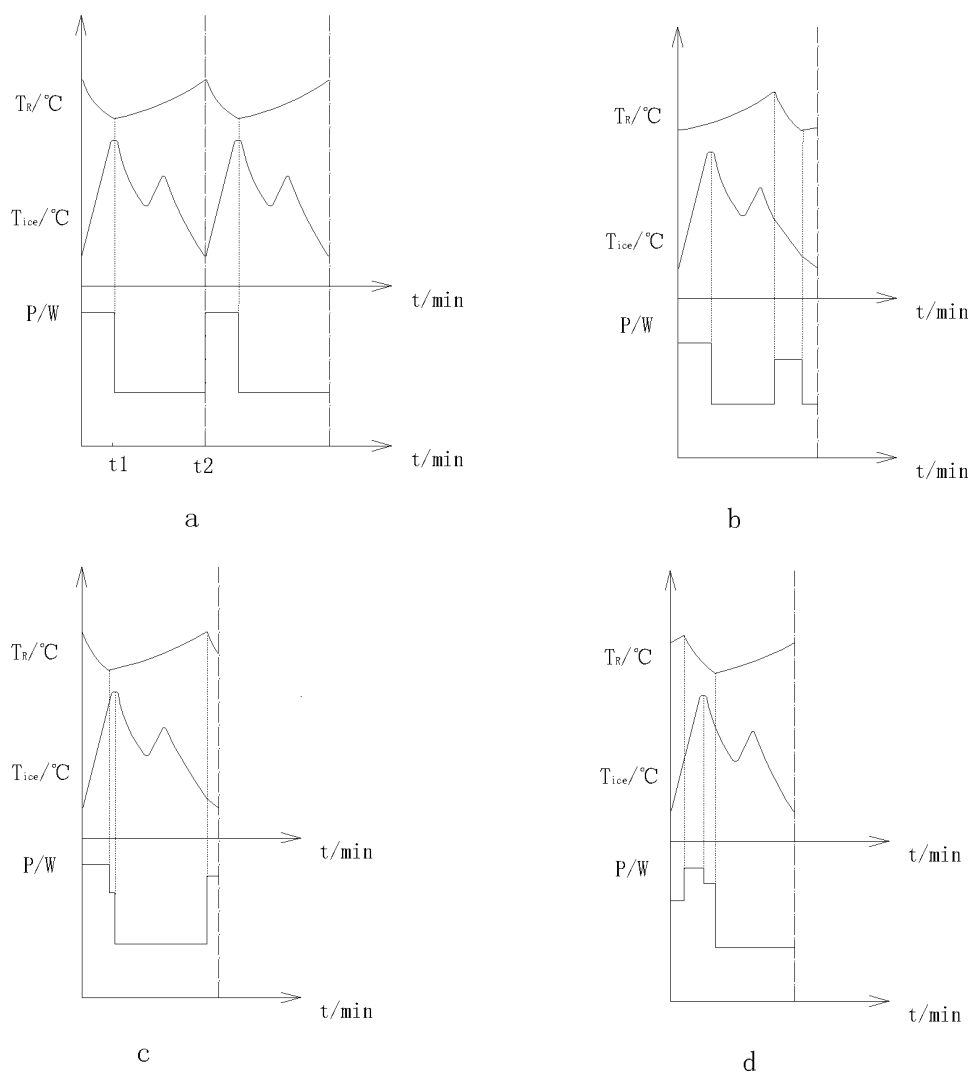


Fig. 5

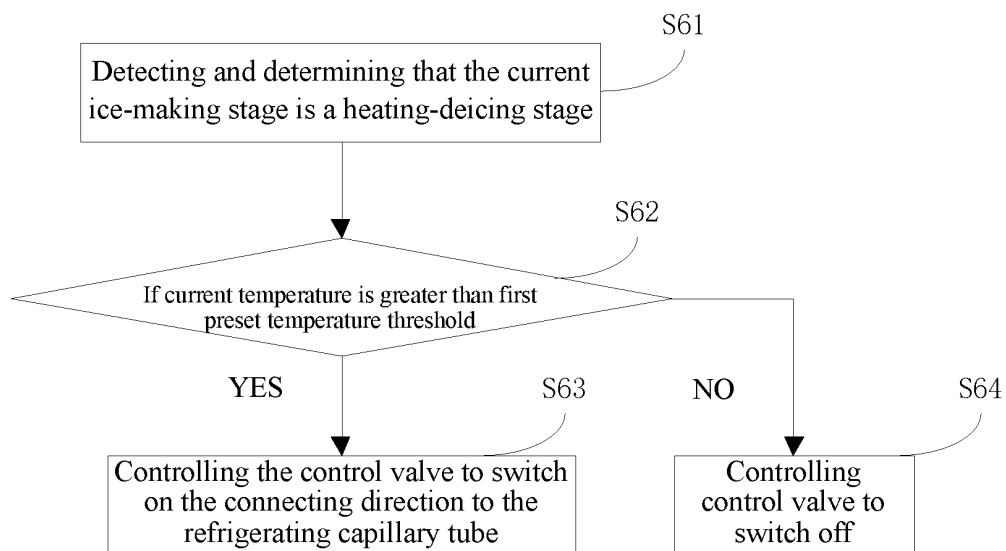


Fig. 6



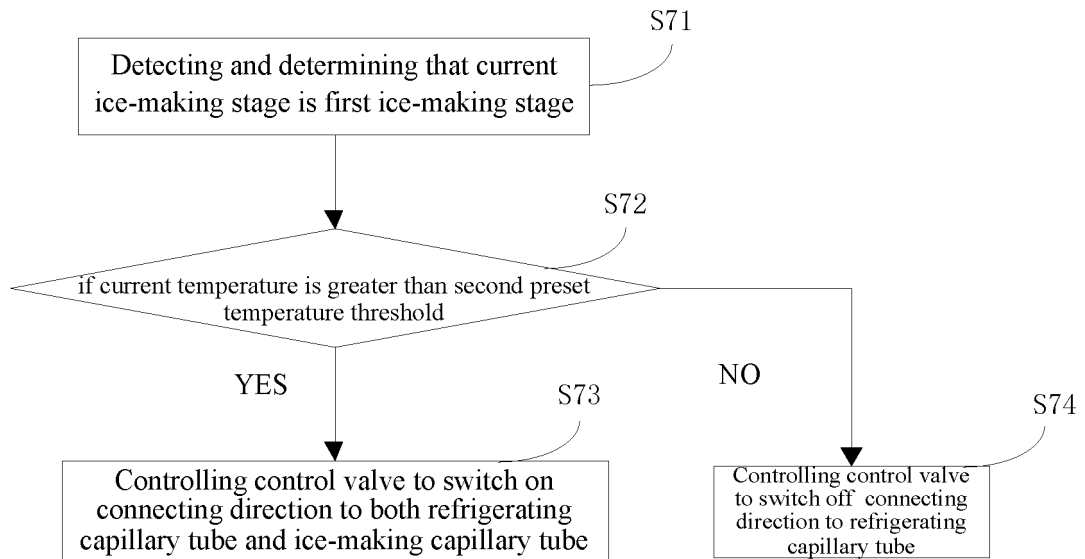


Fig. 7

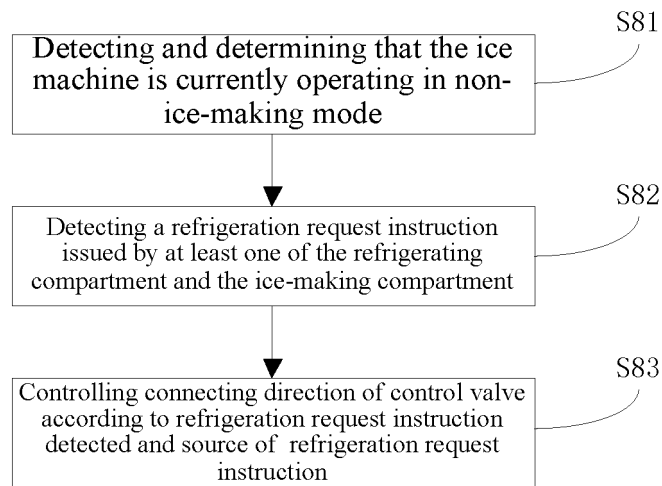


Fig. 8

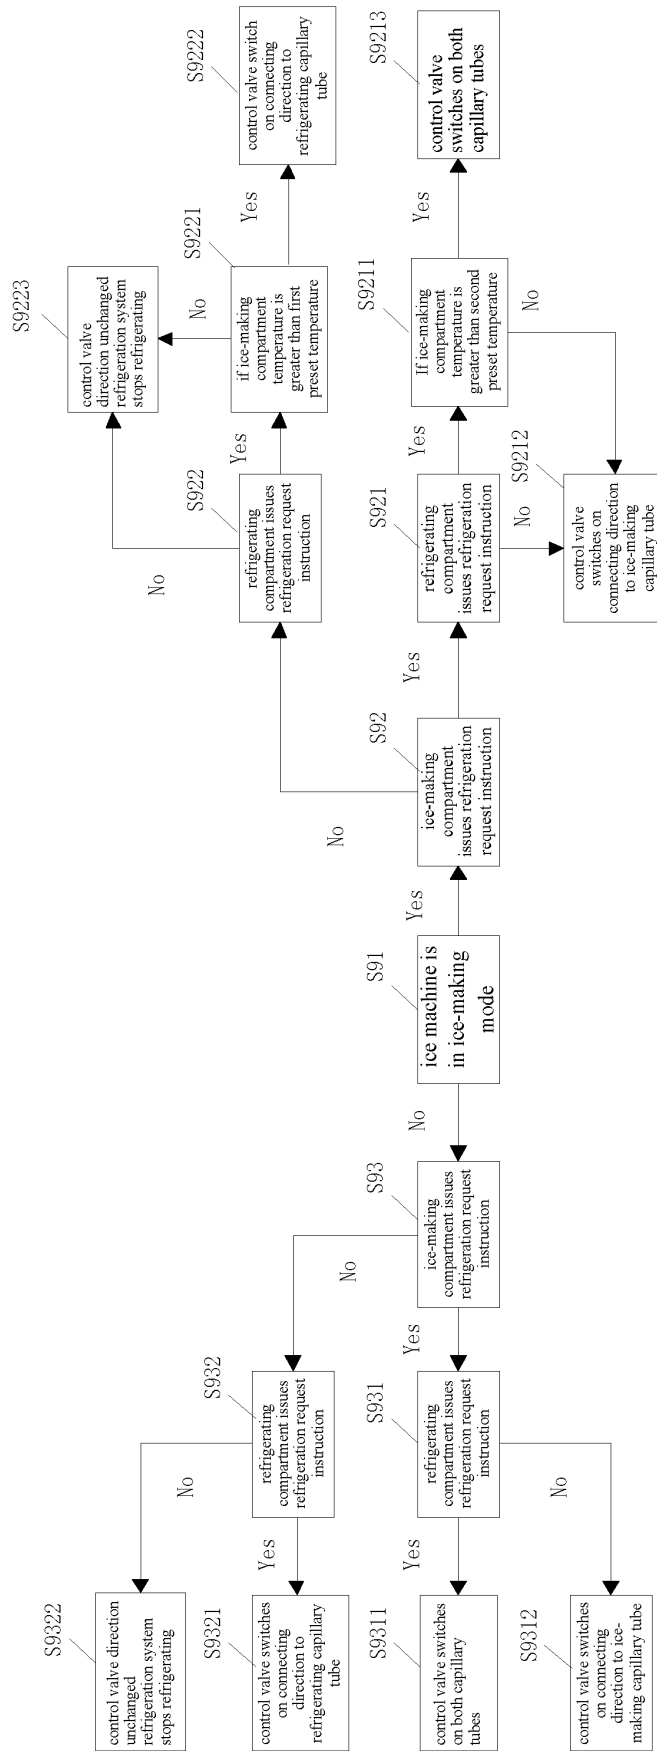


Fig. 9

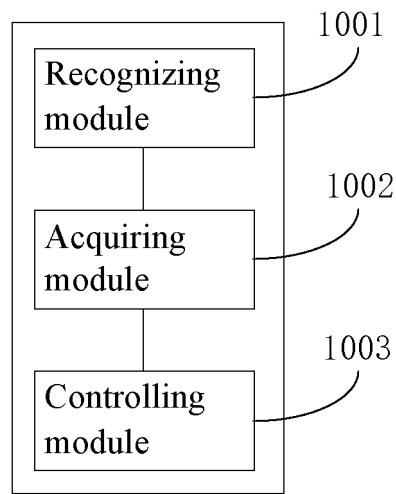


Fig. 10

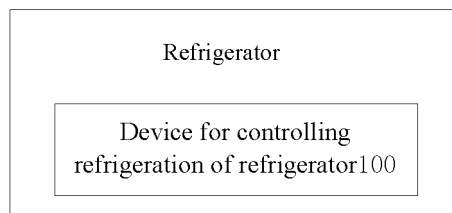


Fig. 11

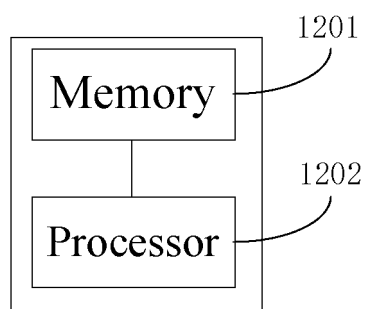


Fig. 12

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2019/070992

5	<b>A. CLASSIFICATION OF SUBJECT MATTER</b> F25D 29/00(2006.01)i; F25D 11/02(2006.01)i  According to International Patent Classification (IPC) or to both national classification and IPC	
10	<b>B. FIELDS SEARCHED</b>  Minimum documentation searched (classification system followed by classification symbols) F25D29/-; F25D11/-  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched	
15	Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNABS,CNXTX,CNKI,DWPI,SIPOABS:美的, 冰箱, 控制, 冷藏, 蒸发器, 毛细管, 阀, 制冰机+制冰室+制冰间室, 阶段, 温度, 加热, 脱冰; refrigerat+, control+, ice, mak+, evaporat+, valve?, capillary, room or chamber, stage or step, temperature, heat+	
20	<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>	
	Category*	Citation of document, with indication, where appropriate, of the relevant passages
		Relevant to claim No.
	E	CN 109764632 A (HEFEI MIDEA REFRIGERATOR CO., LTD. et al.) 17 May 2019 (2019-05-17) entire document
25	X	CN 106885419 A (HEFEI HUALING CO., LTD. et al.) 23 June 2017 (2017-06-23) description, specific embodiment, and figures 1-2
	A	CN 101405551 A (ELECTROLUX HOME PRODUCTS INC.) 08 April 2009 (2009-04-08) entire document
30	A	CN 108679900 A (QINGDAO HAIER CO., LTD.) 19 October 2018 (2018-10-19) entire document
	A	CN 207019365 U (QINGDAO HAIER CO., LTD.) 16 February 2018 (2018-02-16) entire document
	A	KR 20120084095 A (LG ELECTRONICS INC.) 27 July 2012 (2012-07-27) entire document
35	A	KR 20160051226 A (KANG, Y.G.) 11 May 2016 (2016-05-11) entire document
40	<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.	
45	* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
50	Date of the actual completion of the international search  <b>19 September 2019</b>	Date of mailing of the international search report  <b>08 October 2019</b>
55	Name and mailing address of the ISA/CN  <b>China National Intellectual Property Administration No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088 China</b>  Facsimile No. (86-10)62019451	Authorized officer    Telephone No.

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/CN2019/070992**

5  
  
  
10  
  
  
15  
  
  
20  
  
  
25  
  
  
30  
  
  
35  
  
  
40  
  
  
45  
  
  
50  
  
  
55

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2003130519 A (SANYO ELECTRIC CO., LTD.) 08 May 2003 (2003-05-08) entire document	1-21
A	WO 2018041517 A1 (ARCELIK AS.) 08 March 2018 (2018-03-08) entire document	1-21

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2019/070992**

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
CN 109764632 A	17 May 2019	None	
CN 106885419 A	23 June 2017	None	
CN 101405551 A	08 April 2009	WO 2007084824 A2	26 July 2007
		US 7681406 B2	23 March 2010
		CN 101405551 B	04 July 2012
		RU 2419044 C2	20 May 2011
		RU 2008133223 A	20 February 2010
		BR PI0706502 A2	29 March 2011
		EP 1996882 A2	03 December 2008
		KR 20080100426 A	18 November 2008
		MX 2008008988 A	26 November 2008
		AU 2007205999 B2	09 September 2010
		US 2007163282 A1	19 July 2007
		JP 2009523993 A	25 June 2009
		AU 2007205999 A1	26 July 2007
		MX 308983 B	18 April 2013
		KR 1476452 B1	24 December 2014
CN 108679900 A	19 October 2018	None	
CN 207019365 U	16 February 2018	None	
KR 20120084095 A	27 July 2012	KR 101875608 B1	02 August 2018
KR 20160051226 A	11 May 2016	None	
JP 2003130519 A	08 May 2003	None	
WO 2018041517 A1	08 March 2018	TR 201612401 A2	21 March 2018

Form PCT/ISA/210 (patent family annex) (January 2015)