

(19)



(11)

EP 3 896 231 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
17.07.2024 Bulletin 2024/29

(51) International Patent Classification (IPC):
E02F 3/43^(2006.01) E02F 9/26^(2006.01)

(21) Application number: **21165755.6**

(52) Cooperative Patent Classification (CPC):
E02F 9/265; E02F 3/437; E02F 9/262

(22) Date of filing: **30.03.2021**

(54) SYSTEM AND METHOD FOR AUTOMATICALLY PERFORMING AN EARTHMOVING OPERATION

SYSTEM UND VERFAHREN ZUR AUTOMATISCHEN DURCHFÜHRUNG EINES ERDBEWEGUNGSVORGANGS

SYSTÈME ET PROCÉDÉ POUR EFFECTUER AUTOMATIQUEMENT UNE OPÉRATION DE TERRASSEMENT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **ELKINS, Scott A.**
Homer Glen IL 60491 (US)
- **MEOLA, Domenico**
10020 Lauriano (TO) (IT)
- **ABD EL SALAM, Mohamed**
47034 Forlimpopoli (IT)

(30) Priority: **30.03.2020 US 202016834006**

(43) Date of publication of application:
20.10.2021 Bulletin 2021/42

(74) Representative: **CNH Industrial IP Department**
Leon Claeystraat 3A
8210 Zedelgem (BE)

(73) Proprietor: **CNH Industrial Italia S.p.A.**
10156 Torino (IT)

(56) References cited:
DE-A1- 10 028 606 JP-A- 2019 157 362
US-A1- 2005 131 610 US-A1- 2008 097 672

(72) Inventors:
• **BENEVELLI, Alessandro**
42020 Albinea (IT)

EP 3 896 231 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to work vehicles, such as excavators and backhoes, and, more particularly, to systems and methods for automatically performing an earthmoving operation with a work vehicle according to predetermined earthmoving styles.

BACKGROUND OF THE INVENTION

[0002] A wide variety of work vehicles, such as excavators, loaders, shovels, bull-dozers, and/or the like, have been developed for performing various tasks of earthmoving operations, such as carrying loads, moving earth, digging, dumping, and/or the like, at a worksite. These work vehicles have implements, such as buckets, claws, and/or the like of varying sizes, which are selected based on the site and task requirements. A machine operator may control the operation of the work vehicle to perform the various worksite tasks. However, such tasks are often repetitive and time-consuming, which causes operator fatigue and high operating costs. As such, it is desirable to automate as much of the repetitive tasks as possible.

[0003] Examples of automated work vehicles are disclosed in US2005131610A1, US2008097672A1, JP2019157362A. The two-part-form of the independent claims is based on the document DE10028606A1.

[0004] Current automated work vehicles perform many of the repetitive tasks based on applied forces and efficiency calculations. However, such automated vehicles are not capable of automatically performing all of the variations of such repetitive tasks that an operator would otherwise perform depending on the worksite requirements.

[0005] Accordingly, an improved system and method for automatically excavating a worksite would be welcomed in the technology.

BRIEF DESCRIPTION OF THE INVENTION

[0006] Aspects and advantages of the invention will be set forth in part in the following description, or may be obvious from the description, or may be learned through practice of the invention.

[0007] In one aspect, the present subject matter is directed to a system for automatically performing an earthmoving operation according to claim 1.

[0008] In another aspect, the present subject matter is directed to a method for automatically performing an earthmoving operation with a work vehicle, according to claim 5.

[0009] These and other features, aspects and advantages of the present invention will become better understood with reference to the following description and appended claims. The accompanying drawings, which are

incorporated in and constitute a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth in the specification, which makes reference to the appended figures, in which:

FIG. 1 illustrates a side view of one embodiment of a work vehicle in accordance with aspects of the present subject matter;

FIG. 2 illustrates a schematic view of a system for automatically performing an earthmoving operation in accordance with aspects of the present subject matter;

FIG. 3A illustrates a section view of a worksite in accordance with aspects of the present subject matter, particularly illustrating the worksite as a layer-centric implement-fill preset style is performed by a work vehicle;

FIG. 3B illustrates a section view of a worksite in accordance with aspects of the present subject matter, particularly illustrating the worksite as a depth-centric implement-fill preset style is performed by a work vehicle;

FIG. 4A illustrates a section view of a worksite in accordance with aspects of the present subject matter, particularly illustrating the worksite as a spill-centric earth-breaking preset style is performed by a work vehicle;

FIG. 4B illustrates a section view of a worksite in accordance with aspects of the present subject matter, particularly illustrating the worksite as a layer-centric earth-breaking preset style is performed by a work vehicle; and

FIG. 5 illustrates a method for automatically performing an earthmoving operation in accordance with aspects of the present subject matter.

[0011] Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features or elements of the present technology.

DETAILED DESCRIPTION OF THE INVENTION

[0012] Reference now will be made in detail to embodiments of the invention, one or more examples of which are illustrated in the drawings. Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope of the invention as claimed in the appended

set of claims.

[0013] In general, the present subject matter is directed to systems and methods for automatically performing an earthmoving operation. Specifically, in several embodiments, the disclosed system includes a work vehicle having an articulable implement, such as a bucket or claw, that is movable over a full stroke length for each position of the work vehicle. The implement is controlled by a controller to automatically perform an earthmoving operation according to a preset (predetermined) style selected from a plurality of preset styles by an operator of the work vehicle. Each of the plurality of preset styles is associated with a pattern for filling and emptying the implement. Particularly, the plurality of preset styles may include implement-fill styles and earth-breaking styles. When the implement performs earthmoving operations using implement-fill styles, the implement is controlled to remove one implement load of worksite materials at a time either across successive depth layers or down to a desired grade at successive positions along the stroke length. When the implement performs earthmoving operations using earth-breaking styles, the implement is controlled to collect worksite materials across a given portion of the stroke length before being unloaded, with the implement being filled before or at the end of the given portion of the stroke length. Additionally, in some embodiments, the disclosed system may include a vision-based sensor which is used to monitor the filling and emptying of the implement according to such preset styles. Further, such vision-based sensor may be used to monitor the progress of the earthmoving operations.

[0014] Referring now to drawings, FIG. 1 illustrates a perspective view of one embodiment of a work vehicle 10. As shown, the work vehicle 10 is configured as an excavator. However, in other embodiments, the work vehicle 10 may be configured as any other suitable work vehicle, such as a loaders, shovels, bull-dozers, and/or the like.

[0015] As shown in FIG. 1, the work vehicle 10 includes a frame or chassis 14 coupled to and supported by a pair of tracks 16 for movement across a worksite. However, in other embodiments, the chassis 14 may be supported in any other way, for example by wheels, a combination of wheels and tracks, or a fixed platform. In some embodiments, an operator's cab 18 may be supported by a portion of the chassis 14 and may house a user interface 60 (FIG. 2) comprising various input devices for permitting an operator to control the operation of one or more components of the work vehicle 10. However, it should be appreciated that, in some embodiments, one or more components of the user interface 60 may be positioned remotely from the work vehicle 10. Additionally, the work vehicle 10 includes an implement 20 articulable relative to the chassis 14 for performing earth moving operations within a worksite. The chassis 14 may, in some embodiments, be configured such that the operator's cab 18 and/or the articulable implement 20 is rotatable about a chassis axis 14A.

[0016] More particularly, the implement 20 is part of a linkage assembly 22 comprising a boom arm 24 and a dipper arm 26. The boom arm 24 extends between a first end 24A and a second end 24B. Similarly, the dipper arm 26 extends between first end 26A and a second end 26B. The first end 24A of the boom arm 24 is pivotably coupled to the chassis 14 about a first pivot axis 28, and the second end 24B of the boom arm 24 is pivotably coupled to the first end 26A of the dipper arm 26 about a second pivot axis 30. Further, the implement 20 is pivotably coupled to the second end 26B of the dipper arm 26 about a third pivot axis 32. The implement 20, in one embodiment, is configured as a bucket having a cavity 20A and a plurality of teeth 20B, where the teeth 20B help to break up worksite materials for collection within the cavity 20A. However, in other embodiments, the implement 20 may be configured as any other suitable ground engaging tool, such as a claw, and/or the like.

[0017] The linkage assembly 22 further includes a plurality of actuators for articulating components 20, 24, 26 of the linkage assembly 22. For instance, a first actuator 34A is coupled between the boom arm 24 and the chassis 14 for pivoting the boom arm 24 relative to the chassis 14. Similarly, a second actuator 34B is coupled between the boom arm 24 and the dipper arm 26 for pivoting the dipper arm 26 relative to the boom arm 24. Further, a third actuator 34C is coupled between the dipper arm 26 and the implement 20 (hereafter referred to as "bucket 20" for the sake of simplicity and without intent to limit) for pivoting the bucket 20 relative to the dipper arm 26. In one embodiment, the actuators 34A, 34B, 34C are configured as hydraulic cylinders. However, it should be appreciated that the actuators 34A, 34B, 34C may be configured as any other suitable actuators or combination of actuators. By selectively pivoting the components 24, 24, 26 of the linkage assembly 22, the bucket 20 may perform various earthmoving operations within a worksite. In particular, the bucket 20 may be actuatable over a stroke length 260, where the stroke length 260 generally extends from adjacent the tracks 16 to where the bucket 20 is fully extended away from the cab 18. As will be described below in greater detail, the actuators 34A, 34B, 34C of the work vehicle 10 may be controlled by a controller of the disclosed system to automatically perform one or more tasks of an earthmoving operation for a worksite. For instance, the actuators 34A, 34B, 34C of the work vehicle 10 may be used to determine the current fill of the bucket 20 (e.g., based on the force(s) of the actuator(s) used to actuate the bucket 20) and/or the position of the bucket 20 along the stroke length 260 and/or relative to the desired profile of the worksite.

[0018] It should be appreciated that the position of the bucket 20 along the stroke length 260 and/or relative to the desired profile of the worksite may be determined in any other suitable way. For instance, one or more position sensors (not shown) may be positioned on one or more components of the work vehicle 10 for determining and/or monitoring the position of the bucket 20. For example,

the position sensor(s) may comprise accelerometer(s), gyroscope(s), inertial measurement unit(s) (IMU(s)), rotational sensor(s), proximity sensor(s), a combination of such sensors, and/or the like.

[0019] Still referring to FIG. 1, in accordance with aspects of the present invention, the work vehicle 10 may further include one or more vision-based sensors 36 configured to generate data indicative of the bucket 20 and/or the worksite. For instance, the vision-based sensor(s) 36 may be positioned such that a field of view 36A of each vision-based sensor 36 is directable towards the bucket 20 and/or the worksite. For example, the vision-based sensor(s) 36 may be supported on the operator's cab 18, the bucket 20, and/or the arm(s) 24, 26. In some embodiments, the vision-based sensor(s) 36 may be movable relative to the respective portion of the work vehicle 10 on which it is supported (e.g., the cab 18, the bucket 20, and/or arms 24, 26). More specifically, in embodiments where the vision-based sensor(s) 36 is configured to generate data indicative of the bucket 20, the vision-based sensor(s) 36 may generate data indicative of a volume of the cavity 26A of the bucket 20, the filled volume of the cavity 26A of the bucket 20, and/or wear on one or more of the teeth 26B of the bucket 20. Similarly, in embodiments where the vision-based sensor(s) 36 is configured to generate data indicative of the worksite, the vision-based sensor(s) 36 may generate data indicative of the contour of the worksite. The vision-based sensor(s) 36 may be configured as any suitable device or combination of devices for generating such data, such as a camera(s), a radio detection and ranging (RADAR) sensor(s), and/or a light detection and ranging (LIDAR) device. Such data may be used to control the operation of the bucket 20 and/or monitor the performance of the bucket 20 during an earth moving operation, as will be described in greater detail below.

[0020] It should be appreciated that the configuration of the work vehicle 10 described above and shown in FIG. 1 is provided only to place the present subject matter in an exemplary field of use. Thus, it should be appreciated that the present subject matter may be readily adaptable to any manner of work vehicle configuration. For example, in an alternative embodiment, the work vehicle 10 may further include any other tools, implements, and/or components appropriate for use with a work vehicle 10.

[0021] Referring now to FIG. 2, a schematic view of one embodiment of a system 200 for automatically performing an earthmoving operation is illustrated in accordance with aspects of the present subject matter. In general, the system 200 will be described herein with reference to the work vehicle 10 described above with reference to FIG. 1. However, it should be appreciated by those of ordinary skill in the art that the disclosed system 200 may generally be utilized with work vehicles having any suitable vehicle configuration. Additionally, it should be appreciated that, for purposes of illustration, communicative links or electrical couplings of the system 200

shown in FIG. 2 are indicated by dashed lines.

[0022] In several embodiments, the system 200 may include a controller 202 and various other components configured to be communicatively coupled to and/or controlled by the controller 202, such as a user interface (e.g., user interface 60) having one or more input devices, and/or various components of the work vehicle 10 (e.g., actuator(s) 34A, 34B, 34C). The user interface 60 described herein may include, without limitation, any combination of input and/or output devices that allow an operator to provide operator inputs to the controller 202 and/or that allow the controller 202 to provide feedback to the operator, such as a keyboard, keypad, pointing device, buttons, knobs, touch sensitive screen, mobile device, audio input device, audio output device, and/or the like. Additionally, in some embodiments, the controller 202 may be communicatively coupled to the vision-based sensors 36.

[0023] In general, the controller 202 may correspond to any suitable processor-based device(s), such as a computing device or any combination of computing devices. Thus, as shown in FIG. 2, the controller 202 may generally include one or more processor(s) 204 and associated memory devices 206 configured to perform a variety of computerimplemented functions (e.g., performing the methods, steps, algorithms, calculations and the like disclosed herein). As used herein, the term "processor" refers not only to integrated circuits referred to in the art as being included in a computer, but also refers to a controller, a microcontroller, a microcomputer, a programmable logic controller (PLC), an application specific integrated circuit, and other programmable circuits. Additionally, the memory 206 may generally comprise memory element(s) including, but not limited to, computer readable medium (e.g., random access memory (RAM)), computer readable non-volatile medium (e.g., a flash memory), a floppy disk, a compact disc-read only memory (CD-ROM), a magneto-optical disk (MOD), a digital versatile disc (DVD) and/or other suitable memory elements. Such memory 206 may generally be configured to store information accessible to the processor(s) 204, including data 208 that can be retrieved, manipulated, created and/or stored by the processor(s) 204 and instructions 210 that can be executed by the processor(s) 204.

[0024] It should be appreciated that the controller 202 may correspond to an existing controller for the work vehicle 10 or may correspond to a separate processing device. For instance, in one embodiment, the controller 202 may form all or part of a separate plug-in module that may be installed in operative association with the work vehicle 10 to allow for the disclosed system and method to be implemented without requiring additional software to be uploaded onto existing control devices of the work vehicle 10.

[0025] In several embodiments, the data 208 may be stored in one or more databases. For example, the memory 206 may include a worksite parameters database 212

for storing parameters of the worksite received from an operator and/or from the vision-based sensor(s) 36. For instance, the operator may be configured to input data indicative of the location of the worksite relative to the work vehicle 10 (such as by moving the articulable implement 20 to a starting point of the worksite, inputting a starting coordinate via the user interface 60, or otherwise indicating the location of the worksite). Further, data indicative of the current grade of the worksite may be received from the operator (e.g., by uploading a 3D map previously generated for the current worksite grade via the user interface 60) and/or from the vision-based sensor(s) 36. For instance, the sensor(s) 36 may be configured to continuously or periodically capture data associated with a portion of the worksite, such as immediately before or at the start of the performance of an earthmoving operation, which may be used as an indicator of the initial grade of the worksite. It should be appreciated that, as used herein, the data received from the sensor(s) 36 may include any suitable type of data that allows for the worksite to be analyzed, including images, image-related data (e.g., scan data and/or the like), RADAR data, LIDAR data, and/or any other suitable data. Additionally, data indicative of a desired grade of the worksite (e.g., trench dimensions and/or a 3D map generated for the desired worksite grade) may be received from the operator via the user interface 60. However, the data indicative of the desired grade of the worksite may be received from any other source, such as a database. The term worksite data 212 may include any suitable data transmitted to the controller 202 from the operator, the sensor(s) 36, and/or any other suitable source and stored within the worksite parameter database 212 for subsequent processing and/or analysis.

[0026] Similarly, the memory 206 may include an implement parameters database 214 for storing implement parameters of the implement(s) received from the operator and/or from the vision-based sensor(s) 36. For instance, the operator may be configured to input data indicative of the volume of the implement(s) (e.g., the dimensions of bucket 20 and/or a model of the bucket 20), the wear on the tool attachment(s) (e.g., wear on the teeth 26B of the bucket 20), and/or a stroke length of the tool attachment (e.g., stroke length 260 of bucket 20). Alternatively, or additionally, the vision-based sensor(s) 36 may be configured to generate data indicative of such parameters. It should be appreciated that the data received from the sensor(s) 36 may include any suitable type of data that allows for the implement parameters to be determined, including images, image-related data (e.g., scan data and/or the like), RADAR data, LIDAR data and/or other suitable data. The term implement data 214 may include any suitable type of data transmitted to and stored within the implement parameters database 212 for subsequent processing and/or analysis.

[0027] Additionally, the memory 206 may include a preset styles database 216 for storing preset styles for performing earthmoving operations within the worksite. In

general, the preset styles indicate the priorities of an operator for performing an earthmoving operation that allows the automatic earthmoving operation to more closely simulate a manual earthmoving operation. For instance, the preset styles may indicate an implement-direction priority, an implement-emptying priority, and/or an implement-filling priority for performing the earthmoving operation. For example, the implement-direction priority may indicate that it is desirable to prioritize removing worksite materials down to the desired grade or across an entire layer along the stroke length 260. When the implement-direction priority is across the stroke length 260, the implement-emptying priority may indicate whether it is desirable to empty the bucket 20 each time the bucket 20 is filled to a predetermined fill amount or to work a designated portion of the stroke length 260 before emptying the bucket 20. If the implement-emptying priority indicates that a portion of the stroke length must be worked before emptying the bucket 20, the implement-filling priority indicates whether the bucket should be filled at or before the end of the designated portion of the stroke length.

[0028] Referring to FIGS. 3A-4B, example embodiments of preset styles for performing earthmoving operations within a worksite are illustrated in accordance with aspects of the present subject matter. In particular, FIG. 3A illustrates a worksite as a layer-centric implement-fill style is being used to perform an earthmoving operation within a worksite. Similarly, FIG. 3B illustrates a worksite as a depth-centric implement-fill style is being used to perform an earthmoving operation within a worksite. Further, FIG. 4A illustrates a worksite as a spill-centric earth-breaking style is being used to perform an earthmoving operation within a worksite. Additionally, FIG. 4B illustrates a worksite as a layer-centric earth-breaking style is being used to perform an earthmoving operation within a worksite.

[0029] As shown in FIGS. 3A and 3B, the bucket 20 may be controlled to provide respective implement-fill styles for performing earthmoving operations at a worksite. More particularly, the worksite 250 may have a target profile 252 disposed at a target depth 254 below the initial worksite surface 256. The target profile 252 and the target depth 254 may be predetermined from a 3D model of the worksite stored within or uploaded to the controller 202 indicating the desired contours of the worksite. The bucket 20 may be articulable over at least a portion of the stroke length (e.g., stroke length 260) while performing the respective implement-fill style to reach the desired target depth 254 for the worksite. During such implement-fill styles, the implement-emptying priority is to empty the bucket 20 each time the bucket 20 is filled to a predetermined fill amount or level. The predetermined fill amount may be selected by an operator (e.g., via the user interface 60) or may otherwise be selected and stored within the preset styles database 216.

[0030] In one embodiment, the implement-fill style corresponds to a layer-centric implement-fill style in which

the implement-direction priority is to remove site materials along the stroke length at a first depth before removing site materials at a deeper depth. For example, as shown in FIG. 3A, the bucket 20 may collect materials across the stroke length 260 starting from an initial stroke position 264(1) at a first depth 258A until the bucket 20 is filled to the predetermined fill amount (e.g., when the bucket 20 reaches a second stroke position 264(2)). The bucket 20 may then be emptied (e.g., at a dump location) and returned to its previous position (e.g., the second stroke position 264(2)). The bucket 20 may subsequently collect materials across the stroke length 260 starting from the second stroke position 264(2) at the first depth 258A until the bucket 20 is again filled to the predetermined fill amount (e.g., when the bucket 20 reaches a third stroke position 264(3)). The bucket 20 is again emptied and returned to the previous position (e.g., the third stroke position 264(3)). This process of collecting materials across the stroke length 260 at the first depth 258A is repeated until the worksite materials have been removed across the entire first depth 258A along the stroke length 260 for the current position of the work vehicle 10. The bucket 20 may then be controlled to remove materials one bucket at a time in the same manner along the stroke length 260 at a next depth relative to the initial worksite surface 256 (e.g., depth 258B).

[0031] In another embodiment, the implement-fill pattern corresponds to a depth-centric implement-fill style in which the implement-direction priority is to remove site materials down to the target depth along one section of the stroke length before removing site materials along another section of the stroke length. For example, as shown in FIG. 3B, the bucket 20 may first collect materials starting from an initial stroke position 264(1)' at the first depth 258A until the bucket 20 is filled to the predetermined fill amount (e.g., when the bucket 20 reaches the second stroke position 264(2)') as done in FIG. 3A. The bucket 20 may then be emptied (e.g., at a dump location). However, unlike the layer-centric implement-fill style of FIG. 3A, the bucket 20 is then controlled to remove worksite materials starting again from the first stroke position 264(1)', now at the second depth 258B, until the bucket 20 is again filled to the predetermined fill amount (e.g., when the bucket 20 reaches the second stroke position 264(2)' at the second depth 258B) and emptied. This process of collecting materials along one section of the stroke length 260 at increasing depths is repeated until the worksite materials have been removed down to the target depth 252. The bucket 20 may then be controlled to remove materials one bucket at a time in the same manner down to the target depth 252 along an adjacent section of the stroke length (e.g., a section starting at the second stroke position 264(2)' at the first depth 258A).

[0032] It should be appreciated that the depth(s) (258A, 258B, 258C) at which the bucket 20 performs such implement-fill styles may, in one embodiment, correspond to a depth of the bucket 20. However, the depth(s) (258A, 258B, 258C) at which the bucket 20 performs such

implement-fill styles may correspond to any other suitable depth. For instance, the depth(s) 258A, 258B, 258C may be selected by an operator via the user interface 60.

[0033] As shown in FIGS. 4A and 4B, the implement-direction priority is to remove site materials along the stroke length, however, unlike the layer-centric implement-fill style of FIG. 3A, the implement-emptying priority is to empty the bucket 20 only after the bucket 20 works an entire designated portion of the stroke length 260, which helps to break up or remove compacted top layers of the site. Thus, subsequent earthmoving operations may be performed with considerably less force.

[0034] In one embodiment, the earth-breaking style corresponds to a spill-over earth-breaking style in which the implement-filling priority is to fill the implement before the end of the designated portion of the stroke length. For example, as shown in FIG. 4A, the bucket 20 may collect materials at the first depth 266A across a portion of the stroke length 260 between an initial stroke position 268(1) and a second stroke position 268(2). In the embodiment shown, the portion of the stroke length 260 traversed between the initial and second stroke positions 268(1), 268(2) corresponds to an entirety of the stroke length 260. However, in other embodiments, the portion of the stroke length 260 may cover less than the entire stroke length 260. The first depth 266A may be selected such that the bucket 20 is filled before the bucket 20 reaches the second stroke position 268(2) (e.g., when the bucket reaches an intermediate stroke position 268(in)). In one embodiment, the first depth 266A may be selected by an operator or may be predetermined by the controller 202 based on at least one of the portion of the stroke length 260 or the capacity of the cavity 26A. As such, worksite materials flow around the filled bucket 20 (as indicated with a dashed line) as the bucket 20 moves between the intermediate stroke position 268(in) and the second stroke position 268(2).

[0035] In another embodiment, the earth-breaking style corresponds to a layer-centric earth-breaking style in which the implement-filling priority is to fill the implement to the predetermined fill amount or level when the implement reaches the end of the designated portion of the stroke length. For example, as shown in FIG. 4B, the bucket 20 may collect materials at the second depth 266B across a portion of the stroke length 260 between an initial stroke position 268(1)' and a second stroke position 268(2)'. Again, the portion of the stroke length 260 between the initial and second stroke positions 268(1)', 268(2)' essentially corresponds to the entire stroke length 260 of the bucket 20. However, the portion of the stroke length 260 between the initial and second stroke positions 268(1)', 268(2)' may correspond to less than the entire stroke length 260. The second depth 266B may be selected such that the bucket 20 is filled to the predetermined fill amount when the bucket 20 reaches the second stroke position 268(2)'. The second depth 266B may be selected by the operator via the user interface 60 or may be predetermined by the controller 202 based

on the portion of the stroke length 260 and the capacity of the cavity 26A. The bucket 20 may be emptied after reaching the second stroke position 268(2). By filling the bucket 20 at the end of the stroke length 260, the bucket 20 may remove the entire top layer across the designated portion of the stroke length 260.

[0036] It should be appreciated that, when the bucket 20 begins to encroach upon the end of the stroke length 260 closest to the tracks 16 (FIG. 1) during any of the above disclosed styles, the bucket 20 is directed along a safety path 270. The safety path 270 is designed such that the bucket 20 does not contact the tracks 16 (FIG. 1) or any other portion of the work vehicle 10 (e.g., cab 18) when reaching the end of the stroke length 260 closest to the tracks 16. In some embodiments, the safety path 270 may be the same for each depth layer (e.g., depths 258A, 258B, 258C) as shown. However, in other embodiments, the safety path 270 may be different for each depth layer (e.g., depths 258A, 258B, 258C). For example, the safety path 270 may begin earlier along the stroke length 260 and/or may be steeper for deeper depths.

[0037] Referring back to FIG. 2, in some embodiments, the instructions 210 stored within the memory 206 of the controller 202 may be executed by the processor(s) 204 to implement a control module 220. The control module 220 may generally be configured to control the work vehicle 10 to perform an automatic earthmoving operation based on the selected one of the preset earthmoving styles stored in the preset styles database 216. The control module 220 may more particularly be configured to control the operation of one or more components of the work vehicle 14, such as by controlling the operation of one or more of the actuators 34A, 34B, 34C to control the implement 20 based on the selected preset earthmoving style. For instance, the control module 220 may monitor one or more of the fill of the bucket, the position of the implement 20 along the stroke length (or designated portion of the stroke length), and the position of the implement 20 relative to the desired grade of the worksite (e.g., based on data from at least one of the vision-based sensor(s) or the actuators 34A, 34B, 34C) to control the implement 20 based on the selected preset earthmoving style.

[0038] Additionally, the instructions 210 stored within the memory 206 of the controller 202 may be executed by the processor(s) 204 to implement a performance module 222. In general, the performance module 222 may be configured to assess the worksite data 212 and the implement data 214 deriving from the sensor(s) 36 to determine a performance of the implement 20 in performing the automatic earthmoving operation. For instance, as indicative above, in one embodiment, data may be captured corresponding to the current grade of the worksite. In such embodiment, the performance module 222 may be configured to compare the current grade of the worksite to the desired or expected grade of the worksite to determine a percentage completion, for ex-

ample, to assess the performance of the implement 20. Similarly, in one embodiment, data may be captured corresponding to the wear on the implement (e.g., on the teeth 20B). In such embodiment, the performance module 222 may be configured to compare the wear on the implement to a threshold wear to assess the efficiency of the implement in performing the earthmoving operation.

[0039] Moreover, as shown in FIG. 2, the controller 202 may also include a communications interface 224 to provide a means for the controller 202 to communicate with any of the various other system components described herein. For instance, one or more communicative links or interfaces (e.g., one or more data buses) may be provided between the communications interface 224 and the user interface 60 to allow operator inputs to be received by the controller 202 and/or to allow the controller 202 to control the operation of one or more components of the user interface 60 to present one or more ground engaging styles and/or one or more indicators of the progress of the earthmoving operation to the operator. Similarly, one or more communicative links or interfaces (e.g., one or more data buses) may be provided between the communications interface 224 and the sensor(s) 36 to allow data transmitted from the sensor(s) 36 to be received by the controller 202. Additionally, one or more communicative links or interfaces (e.g., one or more data buses) may be provided between the communications interface 224 and the machine actuator(s) 34A, 34B, 34C for allowing the controller 202 to control the operation of one or more operations of the actuator(s) 34A, 34B, 34C.

[0040] Referring now to FIG. 5, a flow diagram of one embodiment of a method 300 for automatically performing an earthmoving operation is illustrated in accordance with aspects of the present subject matter. In general, the method 300 will be described herein with reference to the work vehicle 10 shown in FIG. 1, as well as the various system components of the system 200 shown in FIG. 2. However, it should be appreciated that the disclosed method 300 may be implemented with work vehicles having any other suitable configurations, and/or within systems having any other suitable system configuration. In addition, although FIG. 5 depicts steps performed in a particular order for purposes of illustration and discussion, the method steps discussed herein are not limited to any particular order or arrangement. One skilled in the art, using the disclosures provided herein, will appreciate that various steps of the methods disclosed herein can be omitted, rearranged, combined, and/or adapted in various ways without deviating from the scope of the present disclosure.

[0041] As shown in FIG. 5, at (302), the method 300 may include receiving an operator input via a user interface associated with performing an earthmoving operation with an implement of a work vehicle according to one of a plurality of earthmoving styles. For example, the controller 202 may receive an input from an operator of the work vehicle 10 via a user interface (e.g., user interface

60) selecting one of the plurality of preset earthmoving styles for performing an earthmoving operation stored in the preset styles database 216 of the memory 206. For instance, as described above, the operator may select one of a layer-centric implement-fill preset style, a depth-centric implement-fill preset style, a spill-centric earth-breaking preset style, or a layer-centric earth-breaking preset style.

[0042] Additionally, at (304), the method 300 may include controlling the operation of the work vehicle to perform the earthmoving operation with the implement within the worksite based at least in part on the one of the plurality of earthmoving styles. For instance, as indicated above, the controller 202 may be configured to control the actuator(s) 34A, 34B, 34C associated with the implement (e.g., bucket 20) to perform an earthmoving operation according to the selected one of the plurality of preset earthmoving styles to create a desired profile of the worksite.

[0043] It is to be understood that the steps of the method 300 are performed by the controller 202 upon loading and executing software code or instructions which are tangibly stored on a tangible computer readable medium, such as on a magnetic medium, e.g., a computer hard drive, an optical medium, e.g., an optical disk, solid-state memory, e.g., flash memory, or other storage media known in the art. Thus, any of the functionality performed by the controller 202 described herein, such as the method 300, is implemented in software code or instructions which are tangibly stored on a tangible computer readable medium. The controller 202 loads the software code or instructions via a direct interface with the computer readable medium or via a wired and/or wireless network. Upon loading and executing such software code or instructions by the controller 202, the controller 202 may perform any of the functionality of the controller 202 described herein, including any steps of the method 300 described herein.

[0044] The term "software code" or "code" used herein refers to any instructions or set of instructions that influence the operation of a computer or controller. They may exist in a computer-executable form, such as machine code, which is the set of instructions and data directly executed by a computer's central processing unit or by a controller, a human-understandable form, such as source code, which may be compiled in order to be executed by a computer's central processing unit or by a controller, or an intermediate form, such as object code, which is produced by a compiler. As used herein, the term "software code" or "code" also includes any human-understandable computer instructions or set of instructions, e.g., a script, that may be executed on the fly with the aid of an interpreter executed by a computer's central processing unit or by a controller.

Claims

1. A system (200) for automatically performing an earthmoving operation, comprising a work vehicle (10) having an implement (20), the implement (20) being articulable by the work vehicle (10) over a stroke length (260), the system (200) further comprising a user interface (60), the system (200) comprising :

a controller (202) communicatively coupled to the user interface (60), the controller (202) being configured to:

receive an operator input via the user interface (60) associated with performing an earthmoving operation with the implement (20) of the work vehicle (10) according to one of a plurality of predetermined earthmoving styles; and

control the operation of the work vehicle (10) to perform the earthmoving operation with the implement (20) based at least in part on the one of the plurality of predetermined earthmoving styles, the system being **characterised in that**

each of the plurality of predetermined earthmoving styles is associated with a pattern for filling and emptying the implement; and **in that** the one of the plurality of predetermined earthmoving styles comprises an implement-fill style associated with emptying the implement (20) each time the implement (20) reaches a predetermined fill amount.

2. The system (200) as in claim 1, wherein the implement-fill style comprises a layer-centric implement-fill style during which the controller (202) is configured to control the operation of the implement (20) to remove a first layer (258A) of worksite materials extending to a depth along the stroke length (260) before removing a second layer (258B) of worksite materials positioned below the first layer (258A) of worksite materials, with the implement (20) reaching the predetermined fill amount at least once before removing the first layer (258A) of the worksite materials along the stroke length (260).

3. The system (200) as in claim 1, wherein the implement-fill style comprises a depth-centric implement-fill style during which the controller (202) is configured to control the operation of the implement (20) to remove worksite materials down to a target depth (254) along a given section (264(2')) of the stroke length (260) before removing worksite materials along another section of the stroke length (260), with the implement (20) reaching the predetermined fill

amount at least once before removing the worksite materials down to the target depth (254).

4. The system (200) as in any preceding claim, wherein each of the plurality of earthmoving styles is stored within a memory (206) of the controller (202).

5. A method for automatically performing an earthmoving operation with a work vehicle (10), the work vehicle (10) having an implement (20) that is articulable over a stroke length (260), the method comprising :

receiving, with a controller (202), an operator input via a user interface (60) associated with performing an earthmoving operation with the implement (20) of the work vehicle (10) according to one of a plurality of predetermined earthmoving styles; and

controlling, with the controller (202), the operation of the work vehicle (10) to perform the earthmoving operation with the implement (20) based at least in part on the one of the plurality of earthmoving styles,

the system being **characterised in that**

each of the plurality of predetermined earthmoving styles is associated with a pattern for filling and emptying the implement; and **in that** the one of the plurality of predetermined earthmoving styles comprises an implement-fill style associated with emptying the implement (20) each time the implement (20) reaches a predetermined fill amount.

6. The method as in claim 5, wherein the implement-fill style comprises a layer-centric implement-fill style during which controlling the operation of the work vehicle (10) to perform the earthmoving operation comprises controlling the operation of the work vehicle (10) to remove a first layer (258A) of worksite materials extending to a depth along the stroke length (260) before removing a second layer (258B) of worksite materials positioned below the first layer (258A) of worksite materials, with the implement (20) reaching the predetermined fill amount at least once before removing the first layer (258A) of the worksite materials along the stroke length (260).

7. The method as in claim 5, wherein the implement-fill style comprises a depth-centric implement-fill style during which controlling the operation of the work vehicle (10) to perform the earthmoving operation comprises controlling the operation of the work vehicle (10) to remove worksite materials down to a target depth (254) along a given section (264(2')) of the stroke length (260) before removing worksite materials along another section of the stroke length (260), with the implement (20) reaching the predetermined fill amount at least once before removing

the worksite materials down to the target depth (254).

Patentansprüche

1. System (200) zur automatischen Durchführung eines Erdbewegungsvorgangs, aufweisend ein Arbeitsfahrzeug (10) mit einem Arbeitsgerät (20), wobei das Arbeitsgerät (20) durch das Arbeitsfahrzeug (10) über eine Hublänge (260) gelenkbewegbar ist, wobei das System (200) weiterhin eine Benutzerschnittstelle (60) aufweist, wobei das System (200) umfasst:

eine Steuerung (202), die mit der Benutzerschnittstelle (60) in Kommunikationsverbindung steht, wobei die Steuerung (202) zu Folgendem eingerichtet ist:

Erhalten einer Bediener-Eingabe über die Benutzerschnittstelle (60), die der Durchführung eines Erdbewegungsvorgangs mit dem Arbeitsgerät (20) des Arbeitsfahrzeugs (10) gemäß einem aus einer Mehrzahl von vorbestimmten Erdbewegungs-Modi zugeordnet ist; und Steuern des Betriebs des Arbeitsfahrzeugs (10), um den Erdbewegungsvorgang mit dem Arbeitsgerät (20) zumindest teilweise auf Basis des einen aus der Mehrzahl von vorbestimmten Erdbewegungs-Modi durchzuführen, wobei das System **dadurch gekennzeichnet ist, dass**

jeder aus der Mehrzahl von vorbestimmten Erdbewegungs-Modi einem Muster zum Befüllen und Entleeren des Arbeitsgeräts zugeordnet ist; und der eine aus der Mehrzahl von vorbestimmten Erdbewegungs-Modi einen Arbeitsgerät-Füllmodus umfasst, der der Entleerung des Arbeitsgeräts (20) immer dann zugeordnet ist, wenn das Arbeitsgerät (20) eine vorbestimmte Füllmenge erreicht.

2. System (200) nach Anspruch 1, wobei der Arbeitsgerät-Füllmodus einen schicht-orientierten Arbeitsgerät-Füllmodus aufweist, bei dem die Steuerung (202) dazu eingerichtet ist, den Betrieb des Arbeitsgeräts (20) zu steuern, um eine erste Schicht (258A) von Baustellenmaterial zu entfernen, das sich bis zu einer Tiefe entlang der Hublänge (260) erstreckt, bevor eine zweite Schicht (258B) von Baustellenmaterial entfernt wird, die sich unter der ersten Schicht (258A) von Baustellenmaterial befindet, wobei das Arbeitsgerät (20) die vorbestimmte Füllmenge zumindest einmal erreicht, bevor die erste Schicht (258A) des Baustellenmaterials entlang der Hublänge (260) entfernt wird.
3. System (200) nach Anspruch 1, wobei der Arbeitsgerät-Füllmodus einen tiefenorientierten Arbeitsge-

rät-Füllmodus aufweist, bei dem die Steuerung (202) dazu eingerichtet ist, den Betrieb des Arbeitsgeräts (20) zu steuern, um Baustellenmaterial bis zu einer Soll-Tiefe (254) hinunter entlang eines bestimmten Abschnitts (264(2)') der Hublänge (260) zu entfernen, bevor Baustellenmaterial entlang eines weiteren Abschnitts der Hublänge (260) entfernt wird, wobei das Arbeitsgerät (20) die vorbestimmte Füllmenge mindestens einmal erreicht, bevor das Baustellenmaterial bis zur Soll-Tiefe (254) hinunter entfernt wird.

4. System (200) nach einem der vorhergehenden Ansprüche, wobei jeder aus der Mehrzahl von Erdbewegungs-Modi in einer Speichereinrichtung (206) der Steuerung (202) gespeichert ist.
5. Verfahren zur automatischen Durchführung eines Erdbewegungsvorgangs mit einem Arbeitsfahrzeug (10), wobei das Arbeitsfahrzeug (10) ein Arbeitsgerät (20) umfasst, das über eine Hublänge (260) gelenkbeweglich ist, wobei das Verfahren die folgenden Schritte umfasst:

Erhalten, mit einer Steuerung (202), einer Bediener-Eingabe über eine Benutzerschnittstelle (60), die der Durchführung eines Erdbewegungsvorgangs mit dem Arbeitsgerät (20) des Arbeitsfahrzeugs (10) gemäß einem aus einer Mehrzahl von vorbestimmten Erdbewegungs-Modi zugeordnet ist; und

Steuern, mit der Steuerung (202), des Betriebs des Arbeitsfahrzeugs (10), um den Erdbewegungsvorgang mit dem Arbeitsgerät (20) zumindest teilweise auf Basis des einen aus der Mehrzahl von Erdbewegungs-Modi durchzuführen, wobei das Verfahren **dadurch gekennzeichnet ist, dass**

jeder aus der Mehrzahl von vorbestimmten Erdbewegungs-Modi einem Muster zum Befüllen und Entleeren des Arbeitsgeräts zugeordnet ist; und der eine aus der Mehrzahl von vorbestimmten Erdbewegungs-Modi einen Arbeitsgerät-Füllmodus umfasst, der der Entleerung des Arbeitsgeräts (20) immer dann zugeordnet wird, wenn das Arbeitsgerät (20) eine vorbestimmte Füllmenge erreicht.

6. Verfahren nach Anspruch 5, wobei der Arbeitsgerät-Füllmodus einen schichtorientierten Arbeitsgerät-Füllmodus umfasst, bei dem das Steuern des Betriebs des Arbeitsfahrzeugs (10), um den Erdbewegungsvorgang durchzuführen, das Steuern des Betriebs des Arbeitsfahrzeugs (10) umfasst, um eine erste Schicht (258A) von Baustellenmaterial zu entfernen, die sich bis zu einer Tiefe entlang der Hublänge (260) erstreckt, bevor eine zweite Schicht (258B) von Baustellenmaterial entfernt wird, die sich

unter der ersten Schicht (258A) von Baustellenmaterial befindet, wobei das Arbeitsgerät (20) die vorbestimmte Füllmenge zumindest einmal erreicht, bevor die erste Schicht (258A) des Baustellenmaterials entlang der Hublänge (260) entfernt wird.

7. Verfahren nach Anspruch 5, wobei der Arbeitsgerät-Füllmodus einen tiefenorientierten Arbeitsgerät-Füllmodus umfasst, bei dem das Steuern des Betriebs des Arbeitsfahrzeugs (10), um den Erdbewegungsvorgang durchzuführen, das Steuern des Betriebs des Arbeitsfahrzeugs (10) umfasst, um Baustellenmaterial bis zu einer Soll-Tiefe (254) hinunter entlang eines bestimmten Abschnitts (264(2)') der Hublänge (260) zu entfernen, bevor Baustellenmaterial entlang eines weiteren Abschnitts der Hublänge (260) entfernt wird, wobei das Arbeitsgerät (20) die vorbestimmte Füllmenge mindestens einmal erreicht, bevor das Baustellenmaterial bis zur Soll-Tiefe (254) hinunter entfernt wird.

Revendications

1. Un système (200) pour effectuer automatiquement une opération de terrassement, comprenant un véhicule de travail (10) équipé d'un outil (20), l'outil (20) pouvant être articulé par le véhicule de travail (10) sur une longueur de course (260), le système (200) comprenant en outre une interface utilisateur (60), le système (200) comprenant :
un contrôleur (202) couplé de manière communicative à l'interface utilisateur (60), le contrôleur (202) étant configuré pour :

recevoir une saisie de l'opérateur via l'interface utilisateur (60) combinée à l'exécution d'une opération de terrassement avec l'outil (20) du véhicule de travail (10) selon l'un d'une pluralité de styles de terrassement prédéterminés ;
contrôler le fonctionnement du véhicule de travail (10) pour effectuer l'opération de terrassement avec l'outil (20) sur la base au moins en partie de l'un d'une pluralité de styles de terrassement prédéterminés,
le système étant **caractérisé en ce que** chacun de la pluralité de styles de terrassement prédéterminés est associé à un modèle pour remplir et vider l'outil ; et **en ce que** l'un de la pluralité de styles de terrassement prédéterminés comprend un style de remplissage d'outil associé à la vidange de l'outil (20) chaque fois que l'outil (20) atteint une quantité de remplissage prédéterminée.

2. Le système (200) selon la revendication 1, dans lequel le style de remplissage d'outil comprend un style de remplissage d'outil axé sur la couche pendant

- lequel le contrôleur (202) est configuré pour contrôler le fonctionnement de l'outil (20) afin de retirer une première couche (258A) de matériaux de chantier s'étendant jusqu'à une profondeur le long de la longueur de course (260) avant de retirer une seconde couche (258B) de matériaux de chantier positionnée en dessous de la première couche (258A) de matériaux de chantier, l'outil (20) atteignant la quantité de remplissage prédéterminée au moins une fois avant le retrait de la première couche (258A) de matériaux de chantier le long de la longueur de course (260).
3. Le système (200) selon la revendication 1, dans lequel le style de remplissage d'outil comprend un style de remplissage d'outil axé sur la profondeur pendant lequel le contrôleur (202) est configuré pour contrôler le fonctionnement de l'outil (20) afin de retirer les matériaux de chantier jusqu'à une profondeur cible (254) le long d'une section donnée (264(2')) de la longueur de course (260) avant de retirer les matériaux de chantier le long d'une autre section de la longueur de course (260), l'outil (20) atteignant la quantité de remplissage prédéterminée au moins une fois avant de retirer les matériaux de chantier jusqu'à la profondeur cible (254).
4. Le système (200) selon l'une quelconque des revendications précédentes, dans lequel chacun de la pluralité de styles de terrassement est stocké dans une mémoire (206) du contrôleur (202).
5. Un procédé pour effectuer automatiquement une opération de terrassement avec un véhicule de travail (10), le véhicule de travail (10) étant équipé d'un outil (20) qui peut être articulé sur une longueur de course (260), le procédé comprenant :
- la réception, avec un contrôleur (202), d'un opérateur via l'interface utilisateur (60) combinée à l'exécution d'une opération de terrassement avec l'outil (20) du véhicule de travail (10) selon l'un d'une pluralité de styles de terrassement prédéterminés ;
- le contrôle, avec le contrôleur (202), du fonctionnement du véhicule de travail (10) pour effectuer l'opération de terrassement avec l'outil (20) sur la base au moins en partie de l'un de la pluralité de styles de terrassement,
- le système étant **caractérisé en ce que** chacun de la pluralité de styles de terrassement prédéterminés est associé à un modèle pour remplir et vider l'outil ; et **en ce que** l'un de la pluralité de styles de terrassement prédéterminés comprend un style de remplissage d'outil associé à la vidange de l'outil (20) chaque fois que l'outil (20) atteint une quantité de remplissage prédéterminée.
6. Le procédé selon la revendication 5, dans lequel le style de remplissage d'outil comprend un style de remplissage d'outil axé sur la couche au cours duquel le contrôle du fonctionnement du véhicule de travail (10) pour effectuer l'opération de terrassement comprend le contrôle du fonctionnement du véhicule de travail (10) afin de retirer une première couche (258A) de matériaux de chantier s'étendant jusqu'à une profondeur le long de la longueur de course (260) avant de retirer une seconde couche (258B) de matériaux de chantier positionnée en dessous de la première couche (258A) de matériaux de chantier, l'outil (20) atteignant la quantité de remplissage prédéterminée au moins une fois avant le retrait de la première couche (258A) de matériaux de chantier le long de la longueur de course (260).
7. Le procédé selon la revendication 5, dans lequel le style de remplissage d'outil comprend un style de remplissage d'outil axé sur la profondeur au cours duquel le contrôle du fonctionnement du véhicule de travail (10) pour effectuer l'opération de terrassement comprend le contrôle du fonctionnement du véhicule de travail (10) afin de retirer les matériaux de chantier jusqu'à une profondeur cible (254) le long d'une section donnée (264(2')) de la longueur de course (260) avant de retirer les matériaux de chantier le long d'une autre section de la longueur de course (260), l'outil (20) atteignant la quantité de remplissage prédéterminée au moins une fois avant de retirer les matériaux de chantier jusqu'à la profondeur cible (254).

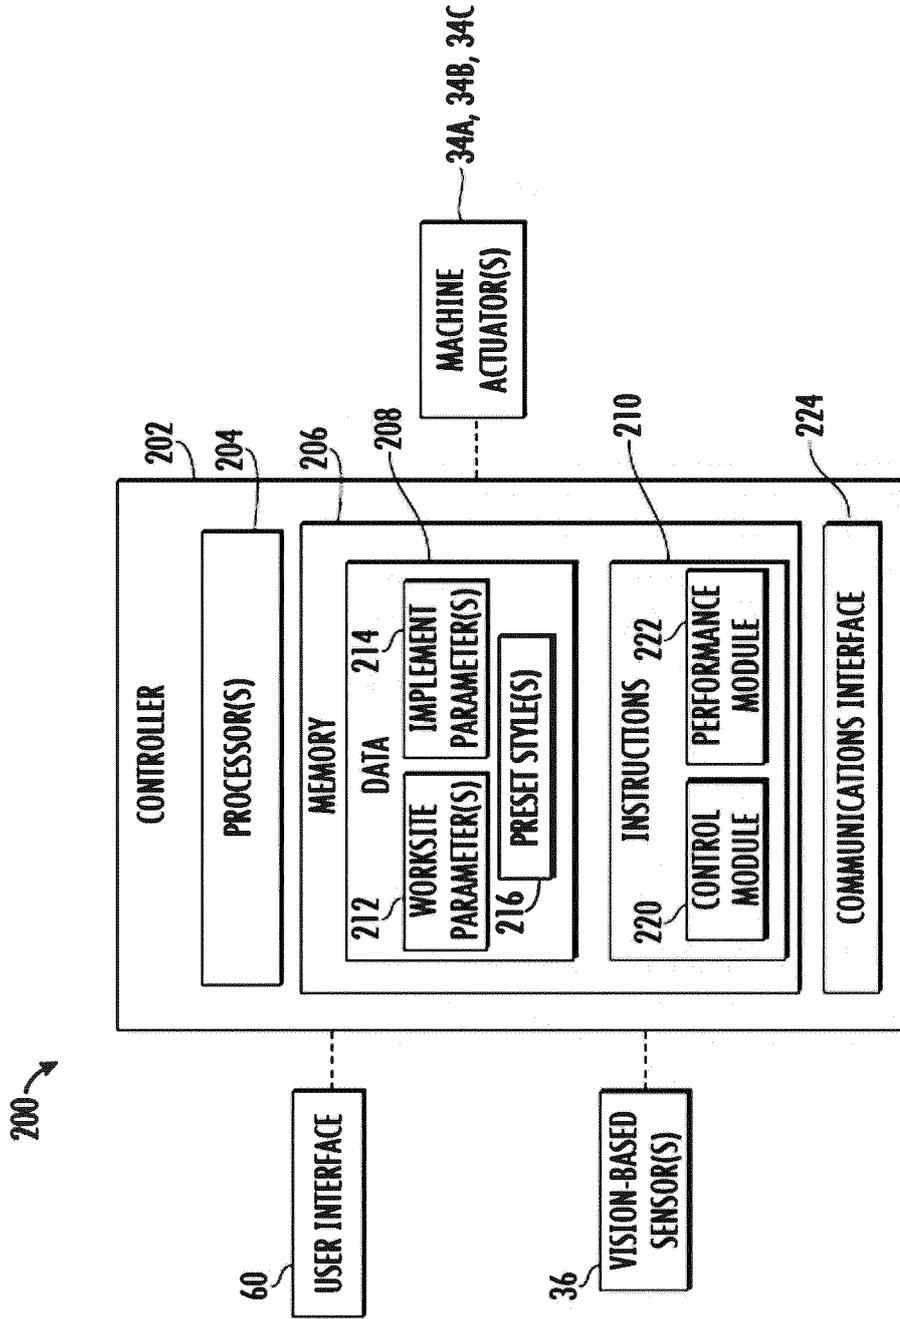
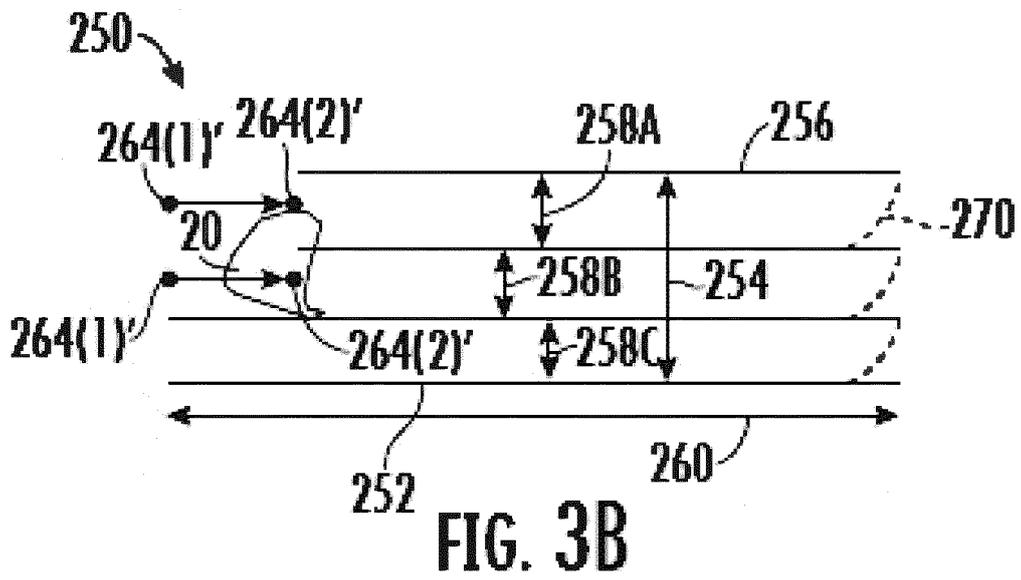
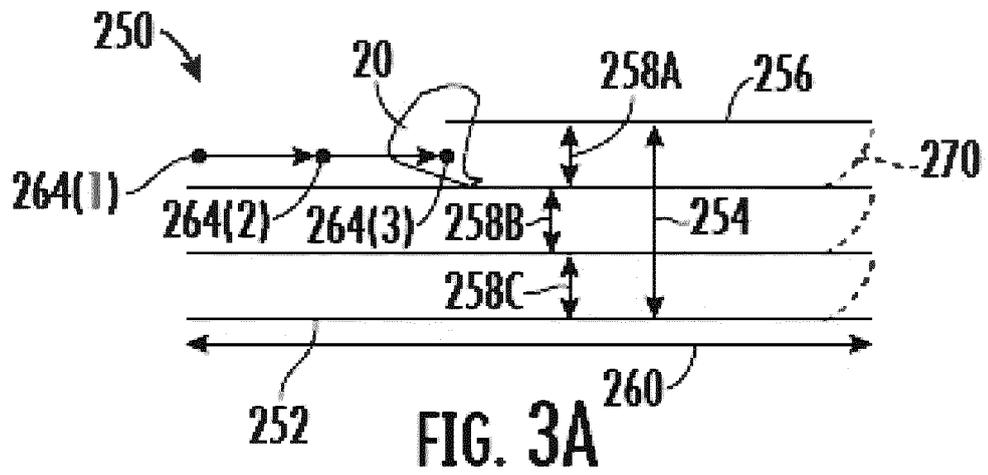
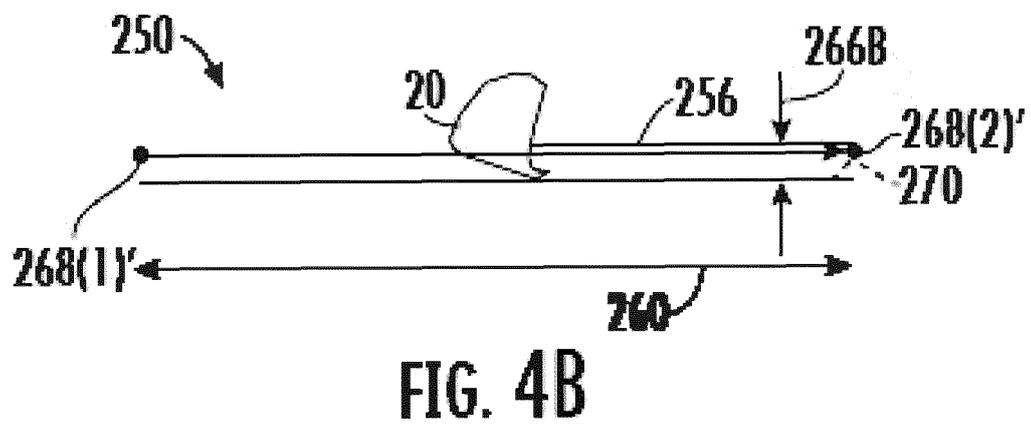
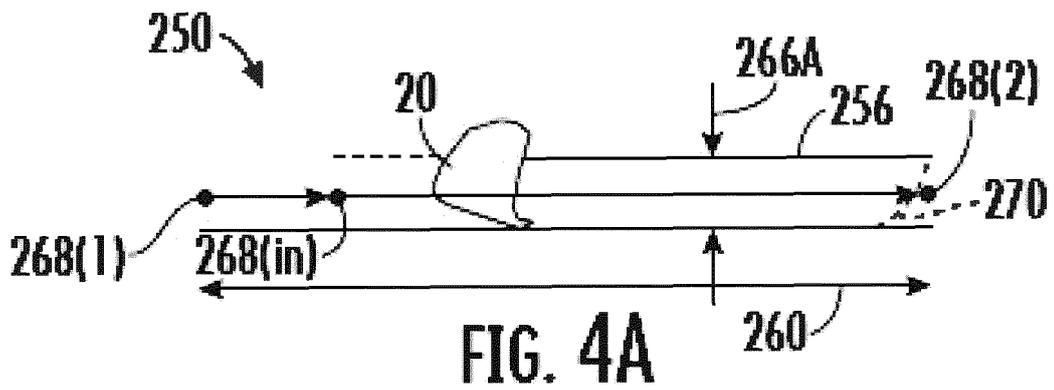


FIG. 2





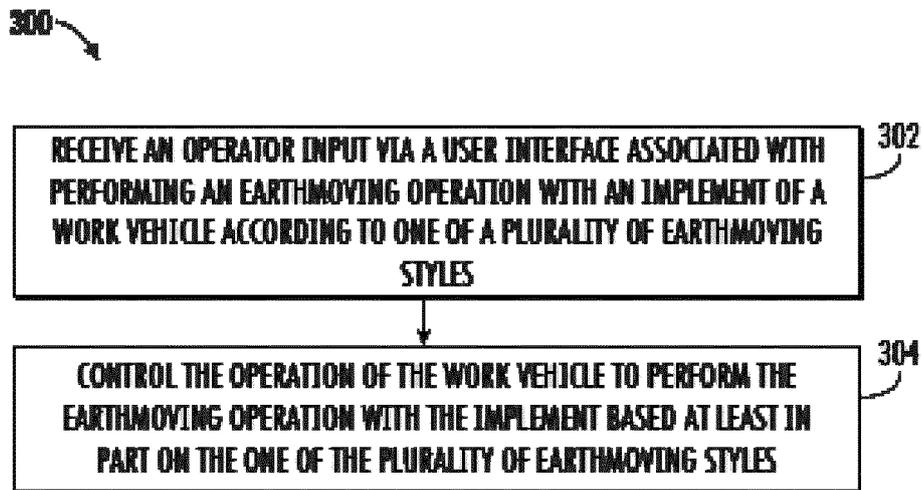


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2005131610 A1 [0003]
- US 2008097672 A1 [0003]
- JP 2019157362 A [0003]
- DE 10028606 A1 [0003]