



(11) **EP 3 919 154 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) International Patent Classification (IPC):
B01D 39/20 ^(2006.01) **B01D 46/00** ^(2022.01)
C04B 38/08 ^(2006.01) **F01N 3/022** ^(2006.01)
F01N 3/24 ^(2006.01) **C04B 35/195** ^(2006.01)

(48) Corrigendum issued on:
16.03.2022 Bulletin 2022/11

(52) Cooperative Patent Classification (CPC):
F01N 3/021; B01D 39/20; B01D 46/2429;
B01D 46/24492; B01D 46/2498; C04B 35/195;
C04B 35/63488; C04B 35/6365; C04B 38/08;
F01N 3/022; F01N 3/24; C04B 2235/3218;
C04B 2235/3418; C04B 2235/349;
C04B 2235/5436; (Cont.)

(43) Date of publication:
08.12.2021 Bulletin 2021/49

(21) Application number: **20784174.3**

(86) International application number:
PCT/JP2020/006164

(22) Date of filing: **18.02.2020**

(87) International publication number:
WO 2020/202847 (08.10.2020 Gazette 2020/41)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **ISHIHARA Mikio**
Kariya-city, Aichi 448-8661 (JP)
• **MIZUTANI Keisuke**
Nisshin-city, Aichi 470-0111 (JP)

(74) Representative: **Kuhnen & Wacker**
Patent- und Rechtsanwaltsbüro PartG mbB
Prinz-Ludwig-Straße 40A
85354 Freising (DE)


(30) Priority: **29.03.2019 JP 2019068162**

(71) Applicant: **DENSO CORPORATION**
Kariya-shi,
Aichi 448-8661 (JP)

(54) **EXHAUST GAS PURIFICATION FILTER**

(57) An exhaust gas purification filter (1) is configured to be disposed in an exhaust passage of a gasoline engine. The exhaust gas purification filter (1) includes partition walls (11) including a plurality of pores (110), a plurality of cells (12) partitioned by the partition walls (11), and sealing parts (13) that alternately seal ends of the plurality of cells (12) in the exhaust gas purification filter. The exhaust gas purification filter (1) is, with an average pore diameter of the partition wall (11) as A(μm) and an average surface opening diameter of the pores (110) at a surface of the partition wall as B(μm), adapted such that $A \geq B$ is satisfied, with A of 5 μm or more and less than 15 μm, and such that a proportion calculated from a formula of $100 \times (A - B)/B$ is 30% or less.

FIG. 12

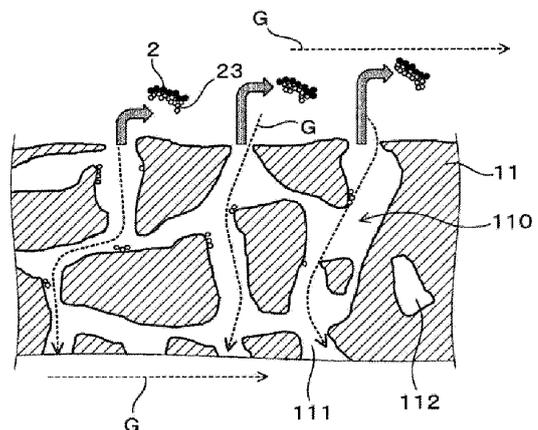

EP 3 919 154 A8

(52) Cooperative Patent Classification (CPC): (Cont.)
C04B 2235/5472; C04B 2235/6021