



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.01.2022 Bulletin 2022/01

(51) Int Cl.:
E21B 17/02^(2006.01) E21B 17/042^(2006.01)

(21) Application number: **20183128.6**

(22) Date of filing: **30.06.2020**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Sandvik Mining and Construction Tools AB**
81181 Sandviken (SE)

(72) Inventor: **HAMMARGREN, John**
81181 Sandviken (SE)

(74) Representative: **Sandvik**
Sandvik Mining and Construction Oy
Patent Department
PL 100
33311 Tampere (FI)

(54) **THREAD CLEARANCE**

(57) A female portion to form part of a thread joint for a percussive drilling tool comprising a mounting sleeve having an axial end, wherein the mounting sleeve surrounds an internal cavity having an axial inner wall at the opposing end of the mounting sleeve compared to the axial end; wherein the mounting sleeve has at least one substantially cylindrical internally threaded section hav-

ing a length L_1 , a thread entrance towards the axial end and a thread exit towards the axial inner wall; a thread clearance section positioned between the axial inner wall and the thread exit having a length L_2 and a diameter D_1 ; a guiding section positioned between the thread entrance and the axial end of the sleeve having a length, L_3 ; characterized in that: $0 < L_3 - L_2 < 12$.

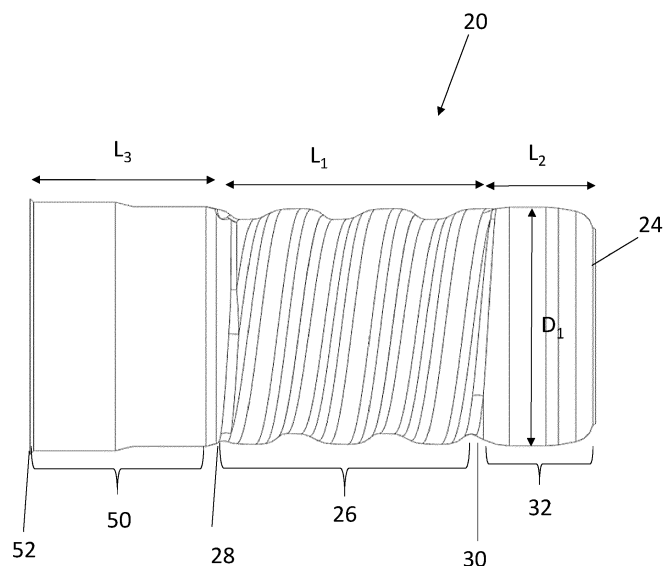


Fig. 5

Description**Technical field**

- 5 **[0001]** The present invention relates to a female portion to form part of a thread joint for a percussive drilling tool, especially for, although not exclusively for drill bits and drill rods.

Background

- 10 **[0002]** Percussion drilling is used to create a long borehole via a plurality of elongate drill string rods coupled together end-to-end by interconnected male and female threads. Alternatively, a drill bit may be connected to a single rod. The well-established technique breaks rock by hammering impacts transferred from the rock drill bit to the rock at the bottom of the borehole. The rock drill bit is mounted at one end of the drill string via a male thread on the endmost drill string rod to a female thread on the drill bit. Typically, the energy required to break the rock is generated by a hydraulically driven piston that contacts the end of the drill string (via a shank adaptor) to create a stress (or shock) wave that propagates through the drill string to a drill bit. Conventional threaded joints are described in US 4,332,502; US 4,398,756; US 4,687,368 and DE 2800887.

- 15 **[0003]** Threaded joints in the percussive drilling tool, such as those between drill string rods and between the endmost drill string rod and the drill bit are subjected to bending forces during drilling from the stress waves that propagate the drill string. These bending moments fatigue the threaded joints and lead to breakage within the threaded portion of the joint. Eventually the stress will cause the threaded joint to get worn out and eventually fail.

- 20 **[0004]** Therefore, it is desirable to reduce the stress in the threaded joint to improve the performance of the percussive drilling tool and reduce the risk of the failure in the threaded joint. One solution to reducing stresses in the threaded joint is to increase the diameter of the male thread, however the problem with this is that it weakens the female part of the threaded joint meaning it is more likely to break. Consequently, the problem to be solved is how to decrease stress in the threaded joint to therefore increase their lifetime.

Summary

- 30 **[0005]** It is an objective of this invention to provide a novel and improved design for threaded joints for percussive drilling tools. The objective is achieved by providing a female portion to form part of a thread joint for a percussive drilling tool comprising: a mounting sleeve having an axial end, wherein the mounting sleeve surrounds an internal cavity having an axial inner wall at the opposing end of the mounting sleeve compared to the axial end; wherein the mounting sleeve has at least one substantially cylindrical internally threaded section having a length L_1 , a thread entrance towards the axial end and a thread exit towards the axial inner wall; a thread clearance section positioned between the axial inner wall and the thread exit having a length L_2 and a diameter D_1 ; a guiding section positioned between the thread entrance and the axial end of the sleeve having a length, L_3 ; characterized in that: $0 < L_3 - L_2 < 12$. More preferably, $5 < L_3 - L_2 < 11.5$, even more preferably $7 < L_3 - L_2 < 11.1$.

- 35 **[0006]** Advantageously, this reduces the stress in the female portion of the threaded joint, meaning the risk of breakages in the female portion is decreased. Furthermore, if the stress in the female portion is increased then the diameter of the male threaded part can be increased which improves the performance of the percussive drilling tool.

- 40 **[0007]** Preferably, L_1 is between 25-56 mm, more preferably between 30-45 mm. Preferably, the total length of the female thread ($L_1 + L_2 + L_3$) is between 70 to 86 mm. Advantageously, this is the most optimal length of threaded section for increased performance.

- 45 **[0008]** Preferably, $L_2 / L_1 > 0.01 \times D_1$. Advantageously, by increasing the ratio of the length of the thread clearance area compared to the length of the threaded section means that the stress in thread clearance area decreases.

- [0009]** Preferably, $L_2 / L_1 > 26\%$, more preferably $L_2 / L_1 > 32\%$. Advantageously, increasing the ratio of the length of the thread clearance area compared to the length of the threaded section means that the stress in thread clearance area decreases.

- 50 **[0010]** Preferably, $L_2 / L_1 < 65\%$, more preferably $< 50\%$. Advantageously, this provides sufficient length in the threaded section to achieve a secure threaded connection.

- [0011]** Preferably, $L_2 / D_1 > 30\%$, more preferably $L_1 / D_1 > 38\%$. Advantageously, increasing the ratio of the length of the thread clearance area compared to the diameter of the threaded section means that the stress in thread clearance area decreases. Therefore, the diameter of the thread clearance and female thread can be increased and consequently so can the diameter of the male part, which leads to increased performance of the male part and less risk of skirt failures in the female part.

- 55 **[0012]** Preferably, $L_2 / D_1 < 65\%$, more preferably $< 50\%$. Advantageously, this enables a secure threaded connection.

- [0013]** In one embodiment, the female portion is a drill bit. In an alternative embodiment, the female portion is a female

end of a drill string rod.

Brief description of the drawing

5 **[0014]** A specific implementation of the present invention will now be described, by way of example only, and with reference to the accompanying drawings:

Figure 1: Perspective view of a percussive drilling tool having one male and one female end.

10 Figure 2: Perspective view of a drill rod having two male ends.

Figure 3: Cross section of the female end of a drill rod.

15 Figure 4: Cross section of a drill bit.

Figure 5: Cross section of an internal profile of the cavity of the female portion to form part of a thread joint for a percussive drilling tool.

Detailed description

20 **[0015]** Figure 1 shows a percussive drilling tool 2 whereby a drill rod 4 is threadedly coupled to a drill bit 6 of conventional design. The percussive drilling tool 2 is especially used for top hammer drilling. Shockwaves generated by a surface piston (not shown) are translated through the mated surfaces from the drill rod 4 to the drill bit 6. The drill rod 4 comprises an axially extending main length section 8 that is terminated at one end by a male end 10 and at a second opposite end
25 by a female end 12 having a longitudinal axis 14. The drill rod 4 is capable of being coupled end-to-end with other further drill rods to form a drill string (not shown) via another thread joint. Figure 2 shows that alternatively the drill bit 6 may be connected to a single drill rod 4 having two male ends 10.

[0016] Figure 3 shows a cross section of the female end 12 of the drill rod 4 having a mounting sleeve 18 and an internal cavity 20, which is a hollow space, for receiving the male end 10 of the drill rod.

30 **[0017]** Figure 4 shows a cross section of the drill bit 6 comprising an axially forwardmost drill head 16 of convention design for example comprising a rock crushing means, most typically this is a plurality of wear resistant cutting buttons projecting axially forward from the drill head (not shown); a mounting sleeve 18 that comprises an axially extending internal cavity 20 for receiving the male end 10 of the drill rod 4.

35 **[0018]** The present invention relates to a special design for a female portion 22 that forms part of a thread joint for a percussive drilling tool 2. The female portion 22 could be either the female end 12 on the drill rod 4 or the drill bit 6.

[0019] Figure 5 shows a cross section of an internal profile of the cavity 20 of the female portion 22, in other words figure 5 is an enlargement of the interior of figure 3 or figure 4. The cavity 20 has an axial inner wall 24 for abutment with a male end 10 of a drill rod 4. Further, the cavity 20 has at least one substantially cylindrical internally threaded section 26 having a thread entrance 28 at the axially opposite end compared to the axial inner wall 24 and a thread exit 30 nearer to the axial inner wall 24. The threaded section 26 has a length, L_1 , which is defined as the length between
40 the thread entrance 28 and the thread exit 30. The cavity 20 of the female portion 22 also has a thread clearance section 32 positioned between the axial inner wall 24 and the threaded section 26. The thread clearance section 32 is circumferential concave recess. The thread clearance section 32 has a length, L_2 , which is defined as the length between the thread exit 30 and the axial inner wall 24. The thread clearance section has a diameter, D_1 . There is a guiding section 50 on the opposing end of the threaded section 26 compared to the thread clearance section 32 for guiding the male end 10 of the rod 4 into the correct position. The guiding section 50 has a length, L_3 , which is defined as the length
45 between the thread entrance 28 and an axial end 52 of the sleeve 18. The guiding section 50 can either be a constant diameter across the whole of the guiding section 50 or it could optionally be stepped so that it has at least two different diameters.

50 **[0020]** Compared to conventional designs the ratio L_2 compared to L_1 and / or L_3 has been increased.

[0021] $L_3 - L_2$ for female portions 22 according to the present invention is <12 , more preferably <11.5 , even more preferably <11 . $L_3 - L_2$ for female portions 22 according to the present invention is >0 , more preferably >5 , even more preferably >7 . In one embodiment L_1 is between 25-56 mm, more preferably between 30-45 mm.

[0022] In one embodiment $L_2/L_1 > 0.01 \times D_1$.

55 **[0023]** In one embodiment $L_2 / L_1 > 26\%$, more preferably $>32\%$.

[0024] In one embodiment $L_2 / L_1 < 65\%$, more preferably $<50\%$.

[0025] In one embodiment $L_2 / D_1 > 30\%$, more preferably $>38\%$.

[0026] In one embodiment $L_2 / D_1 < 65\%$, more preferably $<50\%$.

[0027] Software simulation programming with bending force added to the female portion 22 of inventive and non-inventive female portions was performed. Table 1 shows a summary of stress measurements for prior art and inventive female portions 22, it can clearly be seen that the stress in the region of the thread clearance is lower for the inventive samples.

Table 1: Summary of stress measurements

Example	D ₁ (mm)	L ₃ -L ₂	Stress (MPa) in the region of the thread clearance on the female portion of a threaded joint.
1 (prior art)	33.1	12.7	305
2 (invention)	33.1	11.0	290
3 (prior art)	36.5	14.3	300
4 (invention)	36.5	10.5	275

Claims

1. A female portion (22) to form part of a thread joint (34) for a percussive drilling tool (2) comprising:

a mounting sleeve (18) having an axial end (52), wherein the mounting sleeve (18) surrounds an internal cavity (20) having an axial inner wall (24) at the opposing end of the mounting sleeve (18) compared to the axial end (52); wherein the mounting sleeve (18) has at least one substantially cylindrical internally threaded section (26) having a length L₁, a thread entrance (28) towards the axial end (52) and a thread exit (30) towards the axial inner wall (24);

a thread clearance section (32) positioned between the axial inner wall (24) and the thread exit (30) having a length L₂ and a diameter D₁;

a guiding section (50) positioned between the thread entrance (28) and the axial end (52) of the sleeve (18) having a length, L₃;

characterized in that:

$$0 < L_3 - L_2 < 12.$$

2. The female portion (22) according to claim 1, wherein L₁ is between 25-56 mm.

3. The female portion (22) according to claim 1 or claim 2, wherein $L_2/L_1 > 0.01 \times D_1$.

4. The female portion (22) according to any of the previous claims, wherein $L_2 / L_1 > 26\%$.

5. The female portion (22) according to any of the previous claims, wherein $L_2 / L_1 < 65\%$.

6. The female portion (22) according to any of the previous claims, wherein $L_2 / D_1 > 30\%$.

7. The female portion (22) according to any of the previous claims, wherein $L_2 / D_1 < 65\%$.

8. The female portion (22) according to any of the previous claims wherein the female portion (22) is part of a drill bit (6).

9. The female portion (22) according to any of the previous claims wherein the female portion (22) is a female end (12) of a drill string rod (4).

10. A drill string rod comprising a female portion (22) according to any of claims 1-7.

11. A drill bit comprising a female portion (22) according to any of claims 1-7.

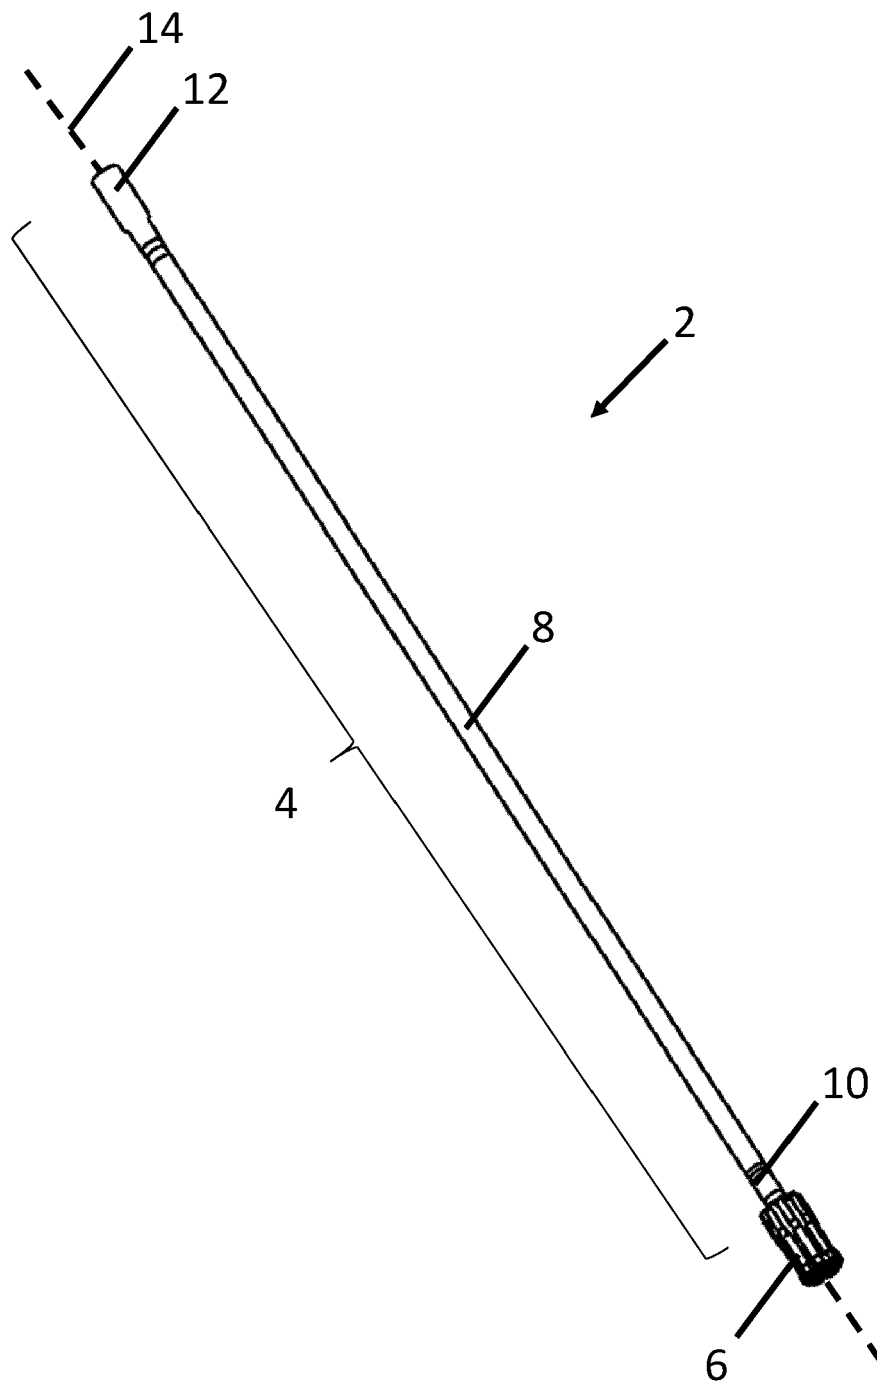


Fig. 1

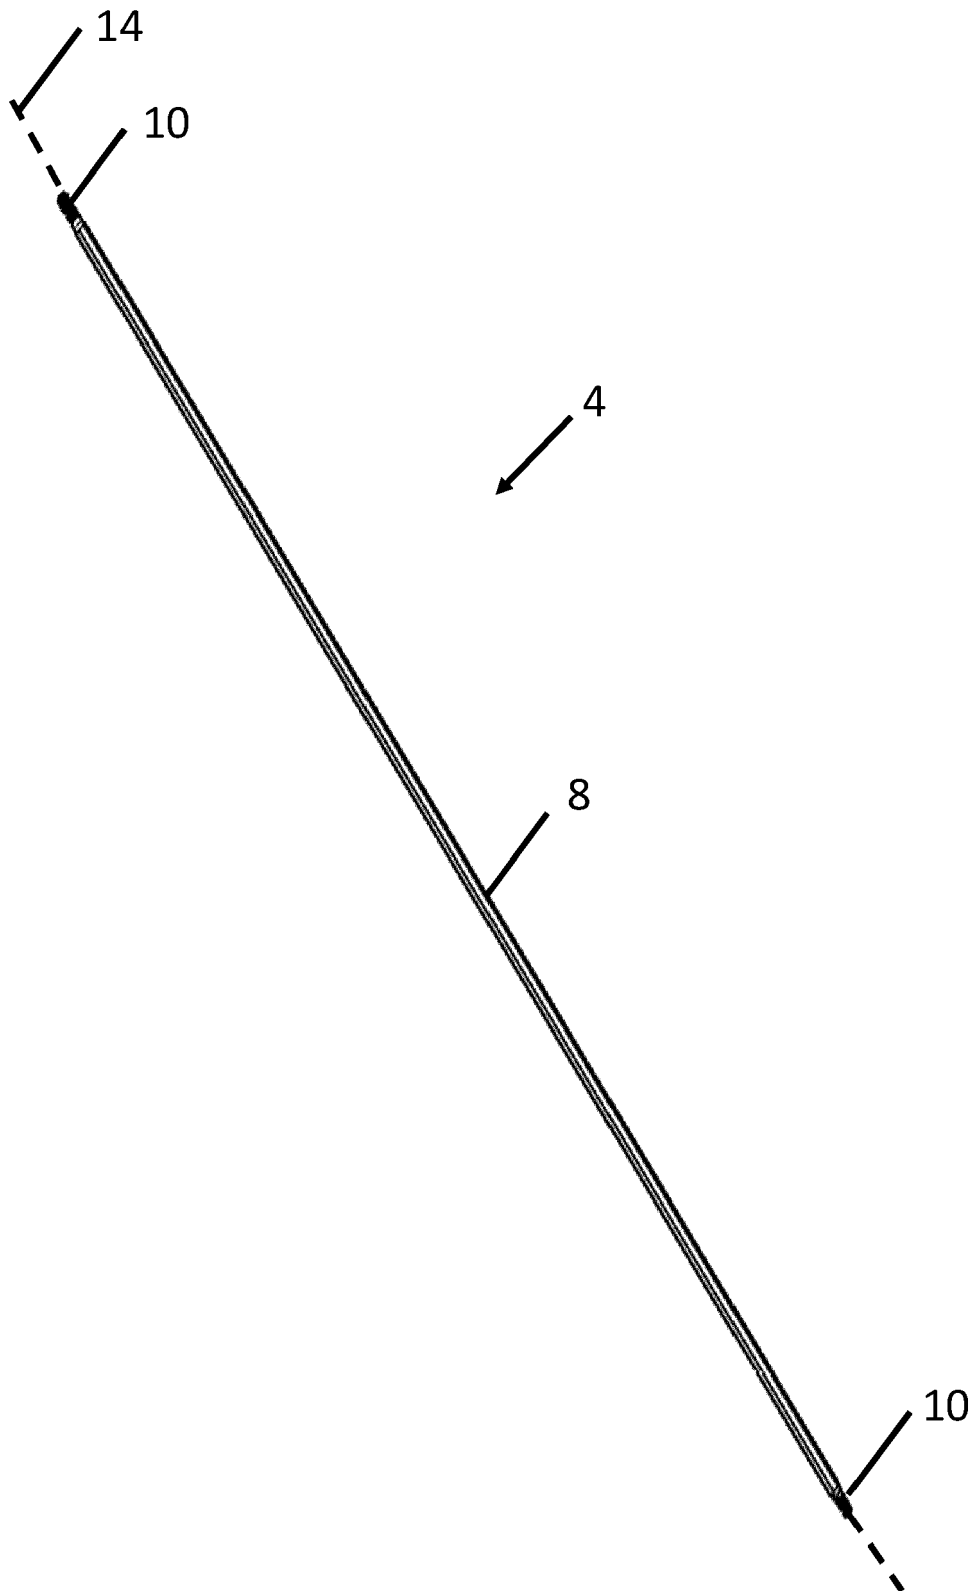


Fig. 2

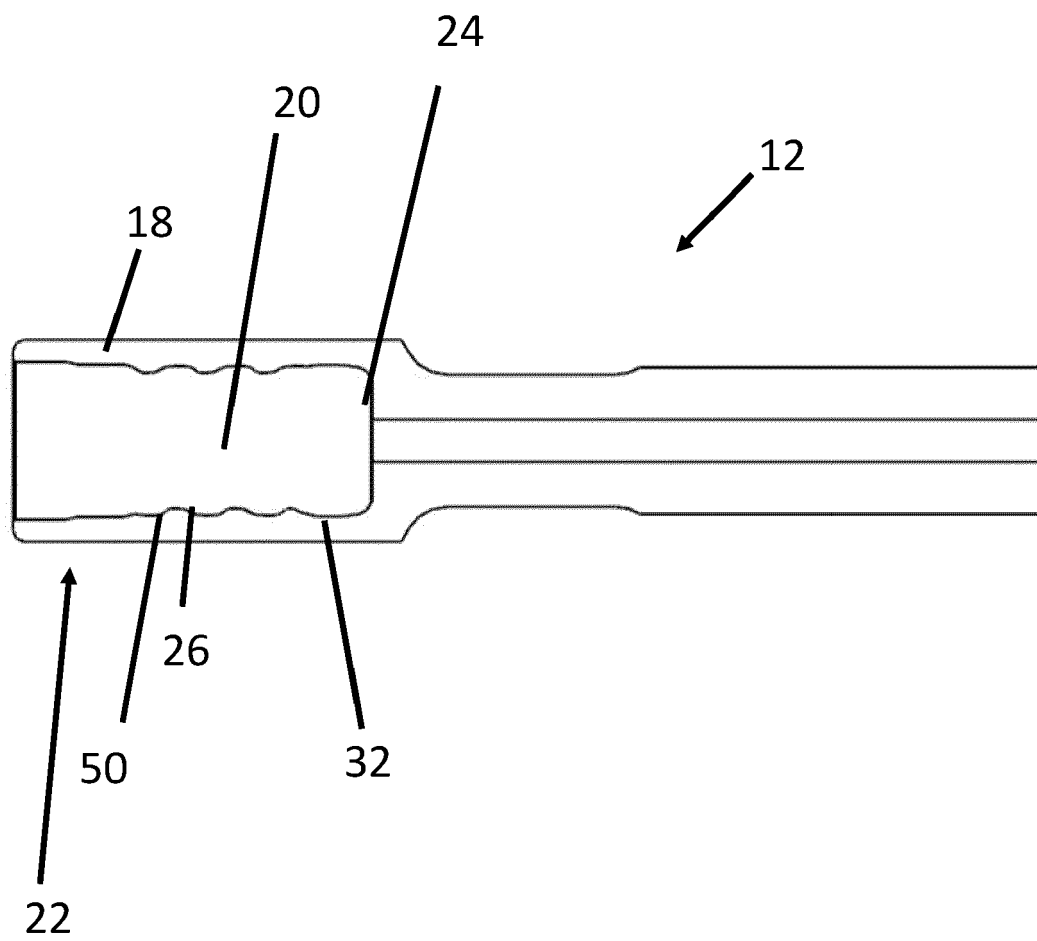


Fig. 3

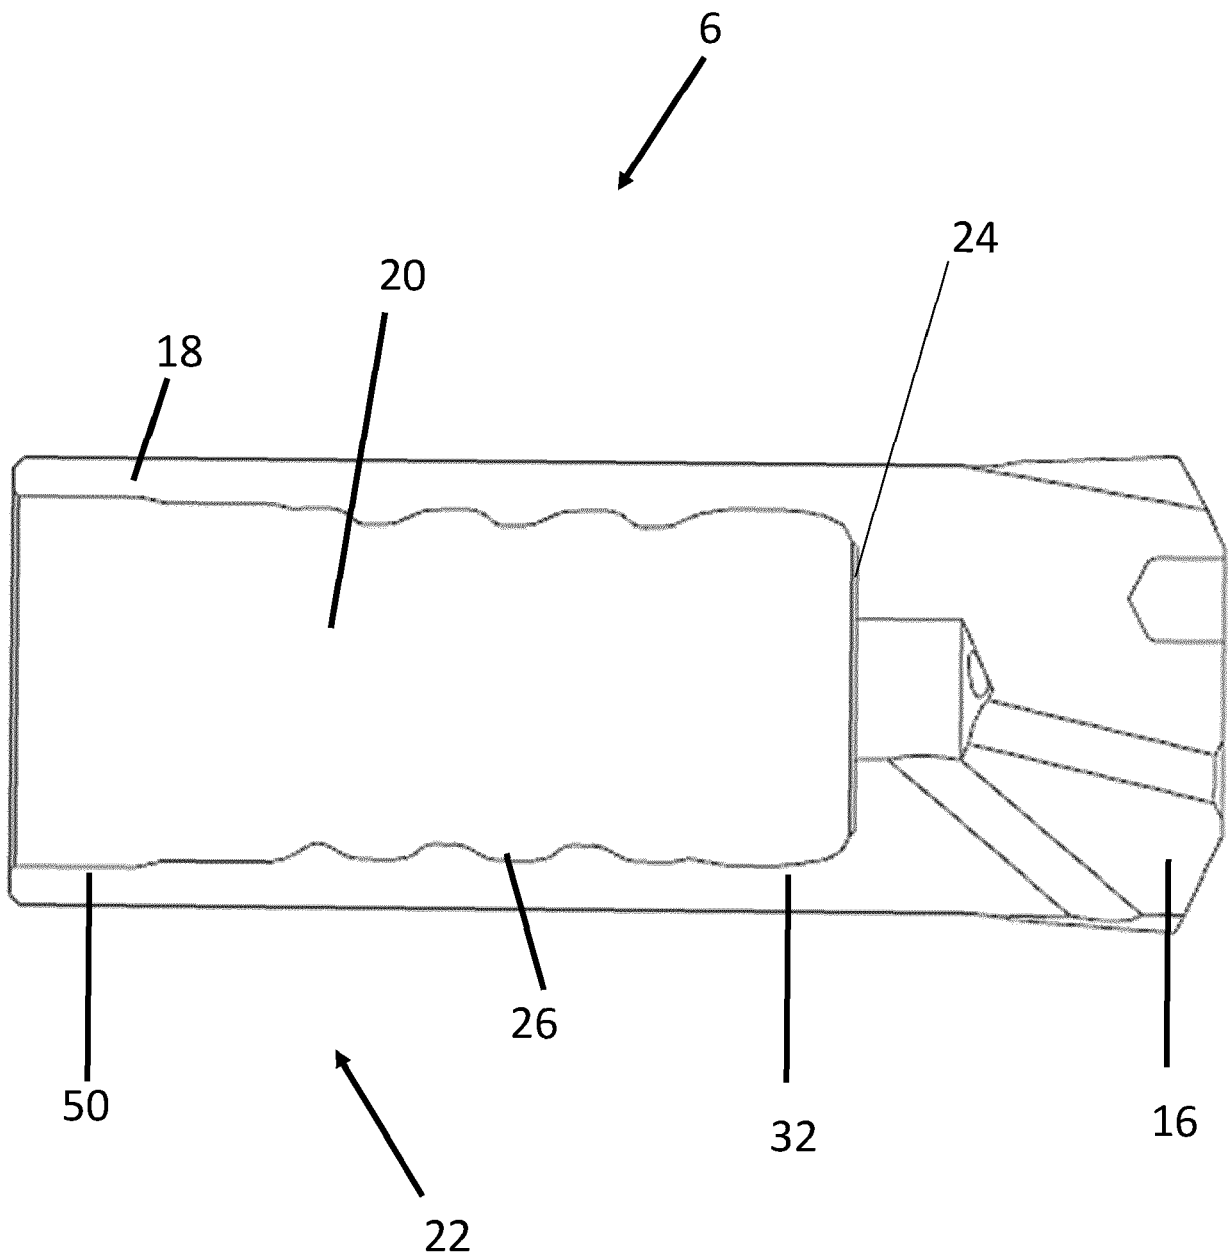


Fig. 4

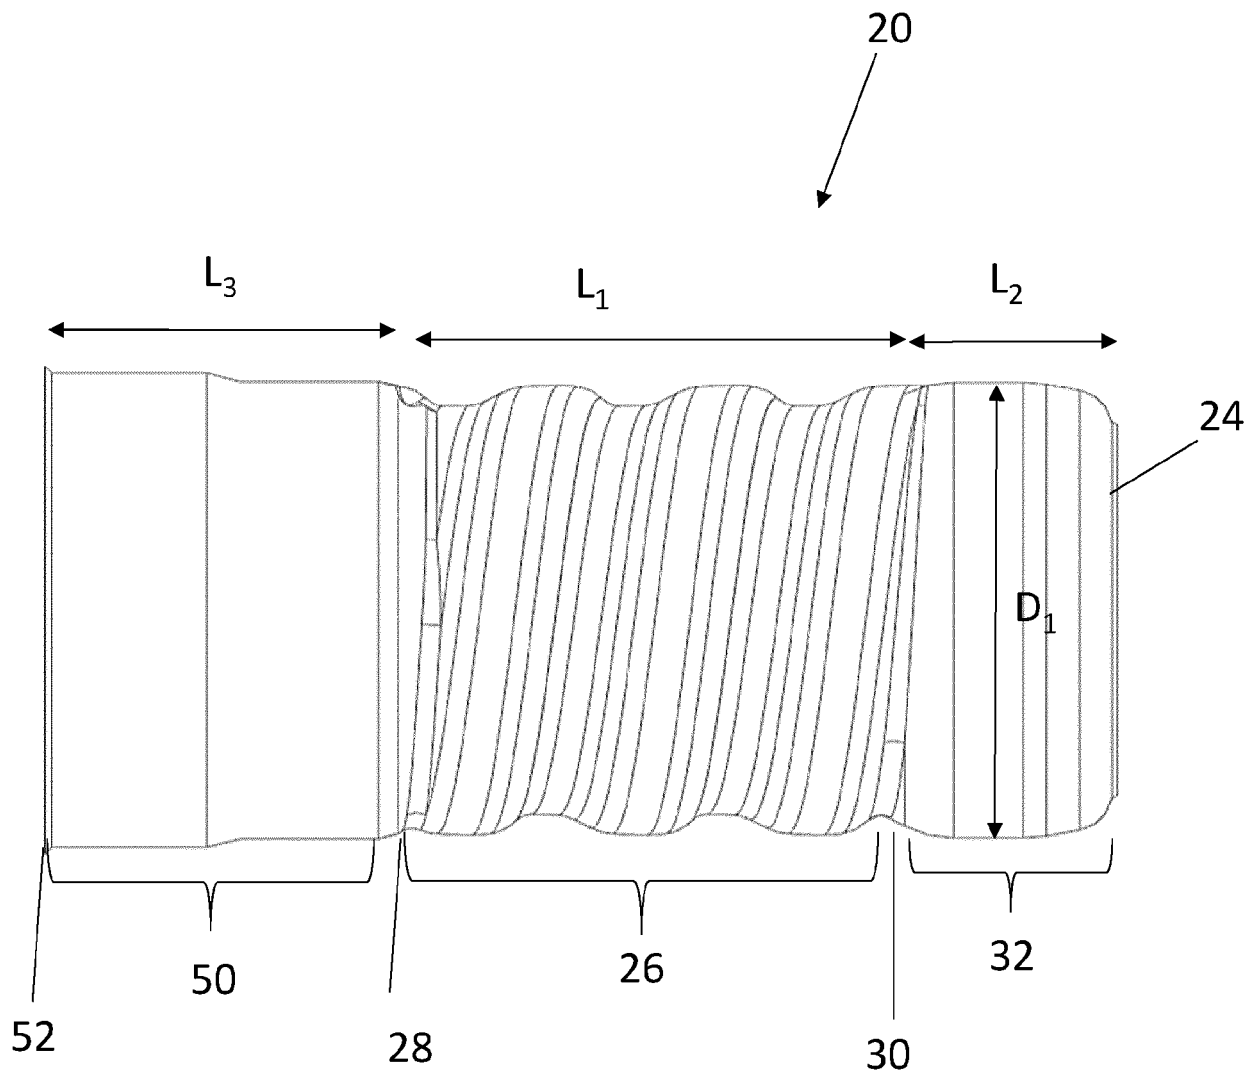


Fig. 5



EUROPEAN SEARCH REPORT

Application Number
EP 20 18 3128

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 968 068 A (LARSSON L KENNETH [SE]) 6 November 1990 (1990-11-06) * abstract; figures 1-2 * * column 2, line 42 - column 3, line 10; claims 1,7 *	1-11	INV. E21B17/02 E21B17/042
X	SE 520 077 C2 (SANDVIK AB [SE]) 20 May 2003 (2003-05-20) * abstract; figure 4 * * paragraphs [0011], [0013] *	1-11	
X	WO 03/042493 A1 (SANDVIK AB [SE]; LILJEBRAND PER-OLOF [SE]) 22 May 2003 (2003-05-22) * abstract; figures 1a,2 * * page 4, paragraph 2 - page 5, paragraph 1; claim 1 *	1-8,11	
X	US 3 537 738 A (FISCHER HANS CHRISTIAN PEDER ET AL) 3 November 1970 (1970-11-03) * abstract; figure 3 * * column 3, paragraph 2-3; claims 1-2 *	1-8,11	TECHNICAL FIELDS SEARCHED (IPC)
X	EP 2 383 420 A1 (SANDVIK INTELLECTUAL PROPERTY [SE]) 2 November 2011 (2011-11-02) * abstract; figure 2 * * paragraphs [0011] - [0020]; claim 1 *	1-8,11	E21B
X	WO 01/38686 A1 (SANDVIK AB [SE]) 31 May 2001 (2001-05-31) * abstract; figure 4 *	1-11	
X	WO 96/02729 A1 (SANDVIK AB [SE]; LARSSON KENNETH [SE]) 1 February 1996 (1996-02-01) * abstract * * claim 1 *	1-11	
----- -/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 November 2020	Examiner Wehland, Florian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 20 18 3128

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2007/133145 A1 (SANDVIK INTELLECTUAL PROPERTY [SE]; NAVA PETER [SE] ET AL.) 22 November 2007 (2007-11-22) * abstract; figure 10 * -----	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 November 2020	Examiner Wehland, Florian
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 20 18 3128

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-11-2020

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4968068 A	06-11-1990	AT 100175 T	15-01-1994
		AU 633829 B2	11-02-1993
		BR 8903284 A	13-02-1990
		CA 1317281 C	04-05-1993
		DE 68912234 T2	28-04-1994
		EP 0354887 A1	14-02-1990
		FI 893322 A	09-01-1990
		IE 64152 B1	12-07-1995
		JP 2937345 B2	23-08-1999
		JP H0280885 A	20-03-1990
		SE 469603 B	02-08-1993
		US 4968068 A	06-11-1990
SE 520077 C2	20-05-2003	AU 2003245195 A1	19-01-2004
		CA 2483951 A1	08-01-2004
		CN 1662726 A	31-08-2005
		EP 1516102 A1	23-03-2005
		HK 1079262 A1	31-03-2006
		JP 4485944 B2	23-06-2010
		JP 2005530944 A	13-10-2005
		KR 20050008786 A	21-01-2005
		RU 2302506 C2	10-07-2007
		SE 520077 C2	20-05-2003
		US 2004050592 A1	18-03-2004
		WO 2004003334 A1	08-01-2004
WO 03042493 A1	22-05-2003	ZA 200408788 B	26-07-2006
		AT 367507 T	15-08-2007
		CA 2460727 A1	22-05-2003
		EP 1434924 A1	07-07-2004
		KR 20050034600 A	14-04-2005
		RU 2287659 C2	20-11-2006
		US 2008304904 A1	11-12-2008
US 3537738 A	03-11-1970	WO 03042493 A1	22-05-2003
		ZA 200402669 B	23-02-2005
EP 2383420 A1	02-11-2011	NONE	
		AU 2011245728 A1	11-10-2012
		BR 112012027706 A2	08-05-2018
		CA 2795743 A1	03-11-2011
		CN 102859110 A	02-01-2013
		EP 2383420 A1	02-11-2011
		KR 20130103308 A	23-09-2013
		RU 2012151155 A	10-06-2014
		US 2013213718 A1	22-08-2013

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 18 3128

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-11-2020

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
		WO 2011136714 A1	03-11-2011	
		ZA 201207896 B	30-04-2014	

WO 0138686	A1	31-05-2001	AT 271183 T	15-07-2004
			AU 775893 B2	19-08-2004
			BR 0015601 A	09-07-2002
			CA 2391158 A1	31-05-2001
			DE 60012216 T2	18-11-2004
			EP 1232321 A1	21-08-2002
			JP 3806033 B2	09-08-2006
			JP 2003515022 A	22-04-2003
			US 6767156 B1	27-07-2004
			WO 0138686 A1	31-05-2001

WO 9602729	A1	01-02-1996	AU 684380 B2	11-12-1997
			BR 9508260 A	23-12-1997
			CA 2192204 A1	01-02-1996
			EP 0771388 A1	07-05-1997
			FI 970181 A	16-01-1997
			JP H10504077 A	14-04-1998
			WO 9602729 A1	01-02-1996

WO 2007133145	A1	22-11-2007	AU 2007250550 A1	22-11-2007
			CA 2652275 A1	22-11-2007
			CN 101443528 A	27-05-2009
			EP 2019902 A1	04-02-2009
			KR 20090018056 A	19-02-2009
			PL 2019902 T3	31-01-2017
			RU 2008149698 A	27-06-2010
			US 2009152014 A1	18-06-2009
			WO 2007133145 A1	22-11-2007
			ZA 200809739 B	27-02-2013

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4332502 A [0002]
- US 4398756 A [0002]
- US 4687368 A [0002]
- DE 2800887 [0002]