



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.03.2022 Bulletin 2022/11

(21) Application number: **21195916.8**

(22) Date of filing: **10.09.2021**

(51) International Patent Classification (IPC):
E04B 7/16 (2006.01) **E05D 15/06** (2006.01)
E06B 3/46 (2006.01) **E06B 3/96** (2006.01)
E06B 1/60 (2006.01) **E06B 3/964** (2006.01)

(52) Cooperative Patent Classification (CPC):
E06B 3/4636; E04B 7/166; E05D 15/0665;
E06B 1/60; E06B 3/9636; E06B 3/9642

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(30) Priority: **10.09.2020 CN 202021968088 U**


(71) Applicant: **Yotrio Group Co., Ltd.**
Linhai City
Zhejiang 317004 (CN)

(72) Inventors:
• **GU, Zubin**
Linhai City, 317004 (CN)
• **XIE, Jianqiang**
Linhai City, 317004 (CN)

(74) Representative: **Schulz Junghans**
Patentanwälte PartGmbH
Großbeerenstraße 71
10963 Berlin (DE)

(54) **SLIDING DOOR BORDER STRUCTURE FOR AN OUTDOOR TENT**

(57) The utility model pertains to the field of outdoor supplies and specifically relates to a sliding door border structure for an outdoor tent. The sliding door border structure comprises an upper horizontal sliding door border tube, a lower horizontal sliding door border tube, a left vertical sliding door border tube and a right vertical sliding door border tube. The four border tubes are mounted in a fit manner by means of first fasteners. Non-metallic parts are built in the upper and lower ends of the vertical sliding door border tubes, respectively. The non-metallic parts have guide holes. The guide holes are used to provide guidance for the connection of the first fasteners between the horizontal sliding door border tubes and the vertical sliding door border tubes. The present utility model has the following beneficial effects: The vertical sliding door border tubes adopt vertically symmetrical structures, and the holes and slots matched with the vertical sliding door border tubes are all designed to be symmetrical to simplify the process and avoid confusion during assembly; and the horizontal sliding door border tubes are designed to have first openings and tapping screws are used to simplify the assembly between the horizontal sliding door border tubes and the vertical sliding door border tubes.

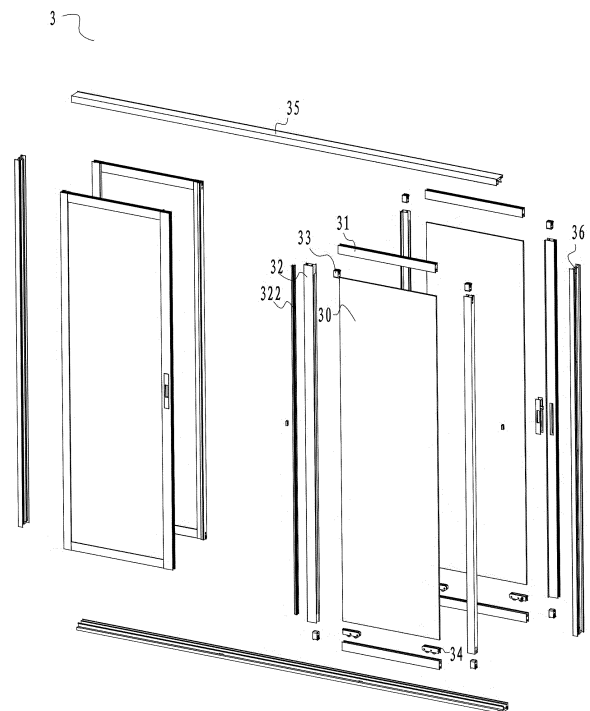

[Figure No.] Fig. 2

Description

TECHNICAL FIELD

[0001] The present utility model pertains to the field of outdoor supplies and specifically relates to a sliding door border structure for an outdoor tent.

BACKGROUND ART

[0002] Outdoor sliding-door tents are outdoor tent products. In general, a rack constitutes the main body of an outdoor sliding-door tent, the top of the rack has a canopy structure that can be opened and closed, sliding door assemblies are provided around the rack, each sliding door assembly comprises a door frame structure fixed on the rack and sliding doors that can be opened and closed on the door frame structure, and each sliding door comprises a border structure and a door body embedded in the border structure. A conventional border structure generally comprises two horizontal sliding door border tubes and two vertical sliding door border tubes. The prior art has the following problems: 1. The assembly of the four borders is troublesome. In particular, when screws are used for fixation, it is difficult to align the positions of the holes. As the border structure is a rectangular structure, it will be impossible to correctly assemble all borders when the assembly of a corner has an error; 2. It is noisy to open or close a sliding door assembly; 3. The structure of the vertical sliding door borders is vertically asymmetrical, resulting in a complex manufacturing process; 4. The chute tubes are groove tube structures that are integrated with the vertical sliding door border tubes of the sliding door. The chute tubes are used to contact the door frame or another sliding door when the present sliding door is closed, and have a sealing effect. As only some of the vertical sliding door border tubes need to be provided with chute tubes, normally both vertical sliding door border tubes with chute tubes and vertical sliding door border tubes without chute tubes need to be manufactured, adding difficulties to the manufacturing. Further, the vertical sliding door border tubes with chute tubes and the vertical sliding door border tubes without chute tubes are not interchangeable, causing inconvenience for assembly.

SUMMARY OF THE UTILITY MODEL

[0003] In order to make up for the defects of the prior art, the present utility model provides a technical solution for a sliding door border structure for an outdoor tent.

[0004] The sliding door border structure for an outdoor tent, comprising an upper horizontal sliding door border tube, a lower horizontal sliding door border tube, a left vertical sliding door border tube and a right vertical sliding door border tube, which are mounted in a fit manner by means of first fasteners, wherein non-metallic parts are built, respectively, in the upper and lower ends of the

vertical sliding door border tubes, the non-metallic parts have guide holes, and the guide holes are used to provide guidance for the connection of the first fasteners between the horizontal sliding door border tubes and the vertical sliding door border tubes.

[0005] The sliding door border structure for an outdoor tent, wherein the guide holes on the non-metallic parts are aligned with first mounting holes on the horizontal sliding door border tubes and second mounting holes on the vertical sliding door border tubes, respectively, and the first fasteners are simultaneously connected to the second mounting holes, the guide holes and the first mounting holes.

[0006] The sliding door border structure for an outdoor tent, wherein the horizontal sliding door border tubes comprise horizontal sliding door border tube bodies and horizontal sliding door border tube slots used for mounting a door panel, and a guide wheel assembly is mounted in a fit manner inside the horizontal sliding door border tube body of at least one of the upper horizontal sliding door border tube and the lower horizontal sliding door border tube.

[0007] The sliding door border structure for an outdoor tent, wherein a guide wheel frame of the guide wheel assembly is mounted to the vertical sliding door border tubes by means of second fasteners, the non-metallic parts have guide slots, and the guide slots are used to provide guidance for the connection of the second fasteners between the guide wheel frame and the vertical sliding door border tubes.

[0008] The sliding door border structure for an outdoor tent, wherein the guide slots on the non-metallic parts are aligned with third mounting holes on the guide wheel frame and mounting ports on the vertical sliding door border tubes, respectively, and the second fasteners are simultaneously connected to the mounting ports, the guide slots and the third mounting holes.

[0009] The sliding door border structure for an outdoor tent, wherein the first mounting holes are first openings, which are formed by first grooves arranged on the horizontal sliding door border tube bodies.

[0010] The sliding door border structure for an outdoor tent, wherein the vertical sliding door border tubes comprise vertical sliding door border tube bodies used for mounting non-metallic parts, and vertical sliding door border tube slots mounted in cooperation with the horizontal sliding door border tubes and the door panel.

[0011] The sliding door border structure for an outdoor tent, wherein the vertical sliding door border tubes adopt vertically symmetrical structures.

[0012] The sliding door border structure for an outdoor tent, wherein the non-metallic parts adopt plastic structures.

[0013] The sliding door border structure for an outdoor tent, wherein chute tubes on the vertical sliding door border tubes are snap-fit with the vertical sliding door border tubes.

[0014] The present utility model has the following ben-

eficial effects:

- 1) The vertical sliding door border tubes adopt vertically symmetrical structures and the holes and slots matched with the vertical sliding door border tubes are all designed to be symmetrical to simplify the process and avoid confusion during assembly;
- 2) The horizontal sliding door border tubes are designed to have first openings and fasteners are used to simplify the assembly between the horizontal sliding door border tubes and the vertical sliding door border tubes;
- 3) Non-metallic parts are built in the two ports of each vertical sliding door border tube, and the horizontal sliding door border tubes are fixed with fasteners through the guide holes of the non-metallic parts, showing effects of guidance, reinforcement, and reducing noise during sliding of the sliding door;
- 4) The vertical sliding door border tubes and the chute tubes are designed to be split buckle structures, to minimize the border tubes of the sliding door and simplify the manufacturing process of the vertical sliding door border tubes. The left vertical sliding door border tube and the right vertical sliding door border tube are interchangeable and it is not necessary to produce two types of vertical sliding door border tubes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Fig. 1 is a structural schematic view of an outdoor sliding-door tent structure in which the present utility model is used;

Fig. 2 is an exploded structural schematic view of a sliding door assembly in an outdoor sliding-door tent in which the present utility model is used;

Fig. 3 is a structural schematic front view of sliding doors in an outdoor sliding-door tent in which the present utility model is used. Four sliding doors are shown in the figure;

Fig. 4 is a structural schematic top view of sliding doors in an outdoor sliding-door tent in which the present utility model is used. Four sliding doors are shown in the figure;

Fig. 5 is a schematic view of the end face when a vertical sliding door border tube is connected to a chute tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 6 is a structural schematic right view of vertical sliding door border tubes in an outdoor sliding-door tent in which the present utility model is used. Two vertical sliding door border tubes are shown in the figure;

Fig. 7 is a locally enlarged structural schematic view of a vertical sliding door border tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 8 is a structural schematic view of the connection between vertical sliding door border tubes and a lower horizontal door frame tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 9 is a structural schematic view of the connection between vertical sliding door border tubes and an upper horizontal door frame tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 10 is a structural schematic view of a non-metallic part in an outdoor sliding-door tent in which the present utility model is used;

Fig. 11 is a structural schematic view of the connection between a vertical sliding door border tube and a vertical supporting and fixing frame tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 12 is a structural schematic view of the end face of a vertical supporting and fixing frame tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 13 is a structural schematic view of a horizontal sliding door border tube in an outdoor sliding-door tent in which the present utility model is used;

Fig. 14 is a structural schematic view of a guide wheel assembly in an outdoor sliding-door tent in which the present utility model is used.

DETAILED DESCRIPTION

[0016] The present utility model will be further illustrated with reference to accompanying drawings.

[0017] The figures show a sliding door border structure for an outdoor tent, which is used in an outdoor sliding-door tent. The outdoor sliding-door tent comprises a rack 1, a canopy structure 2 is mounted at the top of the rack 1 in a fit manner, and sliding door assemblies 3 are mounted in a fit manner on the front, left and right sides of the rack 1. Each sliding door assembly 3 comprises a door frame structure and four sliding doors that are slidably embedded in the door frame structure. Each sliding

door comprises a door panel 30 and a border structure surrounding the door panel 30, the border structure comprises an upper horizontal sliding door border tube 31, a lower horizontal sliding door border tube 31, a left vertical sliding door border tube 32 and a right vertical sliding door border tube 32, and the four border tubes are mounted in a fit manner by means of first fasteners. Specifically, non-metallic parts 33 are built in the upper and lower ends of the vertical sliding door border tubes, respectively, the non-metallic parts 33 have guide holes 330, and the guide holes 330 are counter bores and used to provide guidance for the connection of the first fasteners between the horizontal sliding door border tubes 31 and the vertical sliding door border tubes 32.

[0018] As an optimization: The horizontal sliding door border tubes 31 comprise horizontal sliding door border tube bodies 310 and horizontal sliding door border tube slots 311 used for mounting a door panel 30, and a guide wheel assembly 34 is mounted in a fit manner inside the horizontal sliding door border tube body 310 of the lower horizontal sliding door border tube 31; a guide wheel frame 340 of the guide wheel assembly 34 is mounted to the vertical sliding door border tubes 32 by means of second fasteners, the non-metallic parts 33 have guide slots 331, and the guide slots 331 are used to provide guidance for the connection of the second fasteners between the guide wheel frame 340 and the vertical sliding door border tubes 32.

[0019] More specifically, the guide holes 330 on the non-metallic parts 33 are aligned with first mounting holes 312 on the horizontal sliding door border tubes 31 and second mounting holes 320 on the vertical sliding door border tubes 32, respectively, and the first fasteners are simultaneously connected to the second mounting holes 320, the guide holes 330 and the first mounting holes 312; the guide slots 331 on the non-metallic parts 33 are aligned with third mounting holes 3400 on the guide wheel frame 340 and mounting ports 321 on the vertical sliding door border tubes 32, respectively, and the second fasteners are simultaneously connected to the mounting ports 321, the guide slots 331 and the third mounting holes 313.

[0020] Still further, the first mounting holes 312 are first openings in an inner-hexagon shape, which are formed by first grooves 313 arranged on the horizontal sliding door border tube bodies 310.

[0021] As an optimization: The vertical sliding door border tubes 32 comprise vertical sliding door border tube bodies 323 used for mounting non-metallic parts 33, and vertical sliding door border tube slots 324 mounted in cooperation with the horizontal sliding door border tubes 31 and the door panel 30.

[0022] As an optimization: The non-metallic parts 33 are built in the ports of the vertical sliding door border tube bodies 323.

[0023] As an optimization: The non-metallic parts 33 adopt plastic structures.

[0024] As an optimization: The vertical sliding door bor-

der tubes 32 adopt vertically symmetrical structures.

[0025] As an optimization: Chute tubes 322 on the vertical sliding door border tubes 32 are snap-fit with the vertical sliding door border tubes 32. More specifically, clamp slots 325 are arranged on both sides of the end of each vertical sliding door border tube 32 facing away from a door body 30, clamp bars 3220 used for buckling the clamp slots 325 are arranged on both sides of the chute tubes 322, and the clamp bars 3220 have wedge bulges that can be snapped into the clamp slots 325.

[0026] As an optimization: The door frame structure comprises an upper horizontal door frame tube 35, a lower horizontal door frame tube 35, a left vertical supporting and fixing frame tube 36 and a right vertical supporting and fixing frame tube 36, the four frame tubes are mounted in a fit manner, second grooves 350 are arranged on main bodies of the horizontal door frame tubes 35, the second grooves 350 form second openings 351 in an inner-hexagon shape and the second openings 351 are fixed and mounted to the corresponding vertical supporting and fixing frame tubes 36 by means of third fasteners. Here, the main bodies of the horizontal door frame tubes 35 are rectangular tube structures. Guide rails 352 are arranged on the main bodies of the horizontal door frame tubes 35. The guide rails 352 adopt hook structures.

[0027] In the foregoing structures, groove portions 360 formed from outward depression are arranged on the vertical supporting and fixing frame tubes 36 and are fixed and mounted to a ring beam of a rack 1 by means of fourth fasteners, so that the fourth fasteners are concealed in the groove portions 360 and not exposed.

[0028] In the foregoing structures, only one double-rib structure 361 used for fitting a vertical sliding door border tube 32 is arranged on the inner side of each vertical supporting and fixing frame tube 36.

[0029] As an optimization: Side panels 4 are further mounted in a fit manner on the two sides of the rack 1 and between the corresponding door frame structure and canopy structure. The side panels 4 adopt triangular structures, so that the canopy structure in the present utility model is in a tilted state. The canopy structure 2 comprises a plurality of roof panels arranged in a stepped manner and can be opened and closed by sliding the roof panels. Specifically, lower roof panels slide to the lower ends of higher roof panels to open the canopy. On the contrary, the canopy can be closed. The canopy structure 2 is prior art and can achieve the sliding of roof panels manually or electrically.

[0030] As an optimization: The guide wheel assembly 34 in the present utility model is a retractable structure with an adjustable height to facilitate the adjustment to the balance of the sliding door. The guide wheel assembly 34 can be achieved using prior art.

[0031] The foregoing door panel 30 is a glass pane, and the foregoing side panels 4 are polycarbonate hollow sheets. The foregoing fasteners are all tapping screws.

[0032] The present utility model has the following features:

1) The vertical sliding door border tubes 32 adopt vertically symmetrical structures and the holes and slots matched with the vertical sliding door border tubes are all designed to be symmetrical to simplify the process and avoid confusion during assembly;

2) The horizontal sliding door border tubes 31 are designed to have first openings and tapping screws are used for easy assembly to simplify the assembly between the horizontal sliding door border tubes and the vertical sliding door border tubes;

3) Non-metallic parts 33 are built in the two ports of each vertical sliding door border tube 32, and the horizontal sliding door border tubes 31 are fixed with tapping screws through the guide holes 330 of the non-metallic parts 33, showing effects of guidance, reinforcement, and reducing noise during sliding of the sliding door;

4) Only one double-rib structure 361 is provided for each vertical supporting and fixing frame tube 36 to fit the vertical sliding door border tubes 32. There are no redundant exposed double-ribs, and the appearance is better;

5) The vertical supporting and fixing frame tubes 36 are designed to have groove portions 360, and the screw heads are arranged inside the groove portions and not exposed, so the appearance is better;

6) The vertical sliding door border tubes 32 and the chute tubes 322 are designed to be split buckle structures, to minimize the border tubes of the sliding door and simplify the manufacturing process of the vertical sliding door border tubes 32. The left vertical sliding door border tube 32 and the right vertical sliding door border tube 32 are interchangeable and it is not necessary to produce two types of vertical sliding door border tubes;

7) Second openings 351 are arranged on the horizontal door frame tubes 35, and tapping screws are used to simplify the assembly between the horizontal door frame tubes 35 and the vertical supporting and fixing frame tubes 36.

[0033] Lastly it should be noted that the foregoing embodiments are intended to describe and not to limit the technical solutions of the present utility model. Although the present utility model has been elaborated by referring to the foregoing embodiments, those of ordinary skill in the art should understand that they still can modify the technical solutions of the foregoing embodiments, or equivalently replace some or all of the technical features therein; and such modifications or replacements will not result in essential departure of the corresponding technical solutions from the scope of the technical solutions

of the embodiments of the present utility model.

Claims

1. A sliding door border structure for an outdoor tent, comprising an upper horizontal sliding door border tube (31), a lower horizontal sliding door border tube (31), a left vertical sliding door border tube (32) and a right vertical sliding door border tube (32), which are mounted in a fit manner by means of first fasteners, wherein non-metallic parts (33) are built, respectively, in the upper and lower ends of the vertical sliding door border tubes (32), the non-metallic parts (33) have guide holes (330), and the guide holes (330) are used to provide guidance for the connection of the first fasteners between the horizontal sliding door border tubes (31) and the vertical sliding door border tubes (32).
2. The sliding door border structure for an outdoor tent according to claim 1, wherein the guide holes (330) on the non-metallic parts (33) are aligned with first mounting holes (312) on the horizontal sliding door border tubes (31) and second mounting holes (320) on the vertical sliding door border tubes (32), respectively, and the first fasteners are simultaneously connected to the second mounting holes (320), the guide holes (330) and the first mounting holes (312).
3. The sliding door border structure for an outdoor tent according to claim 1, wherein the horizontal sliding door border tubes (31) comprise horizontal sliding door border tube bodies (310) and horizontal sliding door border tube slots (311) used for mounting a door panel (30), and a guide wheel assembly (34) is mounted in a fit manner inside the horizontal sliding door border tube body (310) of at least one of the upper horizontal sliding door border tube (31) and the lower horizontal sliding door border tube (31).
4. The sliding door border structure for an outdoor tent according to claim 3, wherein a guide wheel frame (340) of the guide wheel assembly (34) is mounted to the vertical sliding door border tubes (32) by means of second fasteners, the non-metallic parts (33) have guide slots (331), and the guide slots (331) are used to provide guidance for the connection of the second fasteners between the guide wheel frame (340) and the vertical sliding door border tubes (32).
5. The sliding door border structure for an outdoor tent according to claim 4, wherein the guide slots (331) on the non-metallic parts (33) are aligned with third mounting holes (3400) on the guide wheel frame (340) and mounting ports (321) on the vertical sliding door border tubes (32), respectively, and the second fasteners are simultaneously connected to the

mounting ports (321), the guide slots (331) and the third mounting holes (313).

6. The sliding door border structure for an outdoor tent according to claim 2, wherein the first mounting holes (312) are first openings, which are formed by first grooves (313) arranged on the horizontal sliding door border tube bodies (310). 5
7. The sliding door border structure for an outdoor tent according to any of claims 1 to 6, wherein the vertical sliding door border tubes (32) comprise vertical sliding door border tube bodies (323) used for mounting non-metallic parts (33), and vertical sliding door border tube slots (324) mounted in cooperation with the horizontal sliding door border tubes (31) and the door panel (30). 10 15
8. The sliding door border structure for an outdoor tent according to any of claims 1 to 6, wherein the vertical sliding door border tubes (32) adopt vertically symmetrical structures. 20
9. The sliding door border structure for an outdoor tent according to any of claims 1 to 6, wherein the non-metallic parts (33) adopt plastic structures. 25
10. The sliding door border structure for an outdoor tent according to any of claims 1 to 6, wherein chute tubes (322) on the vertical sliding door border tubes (32) are snap-fit with the vertical sliding door border tubes (32). 30


35

40


45

50


55

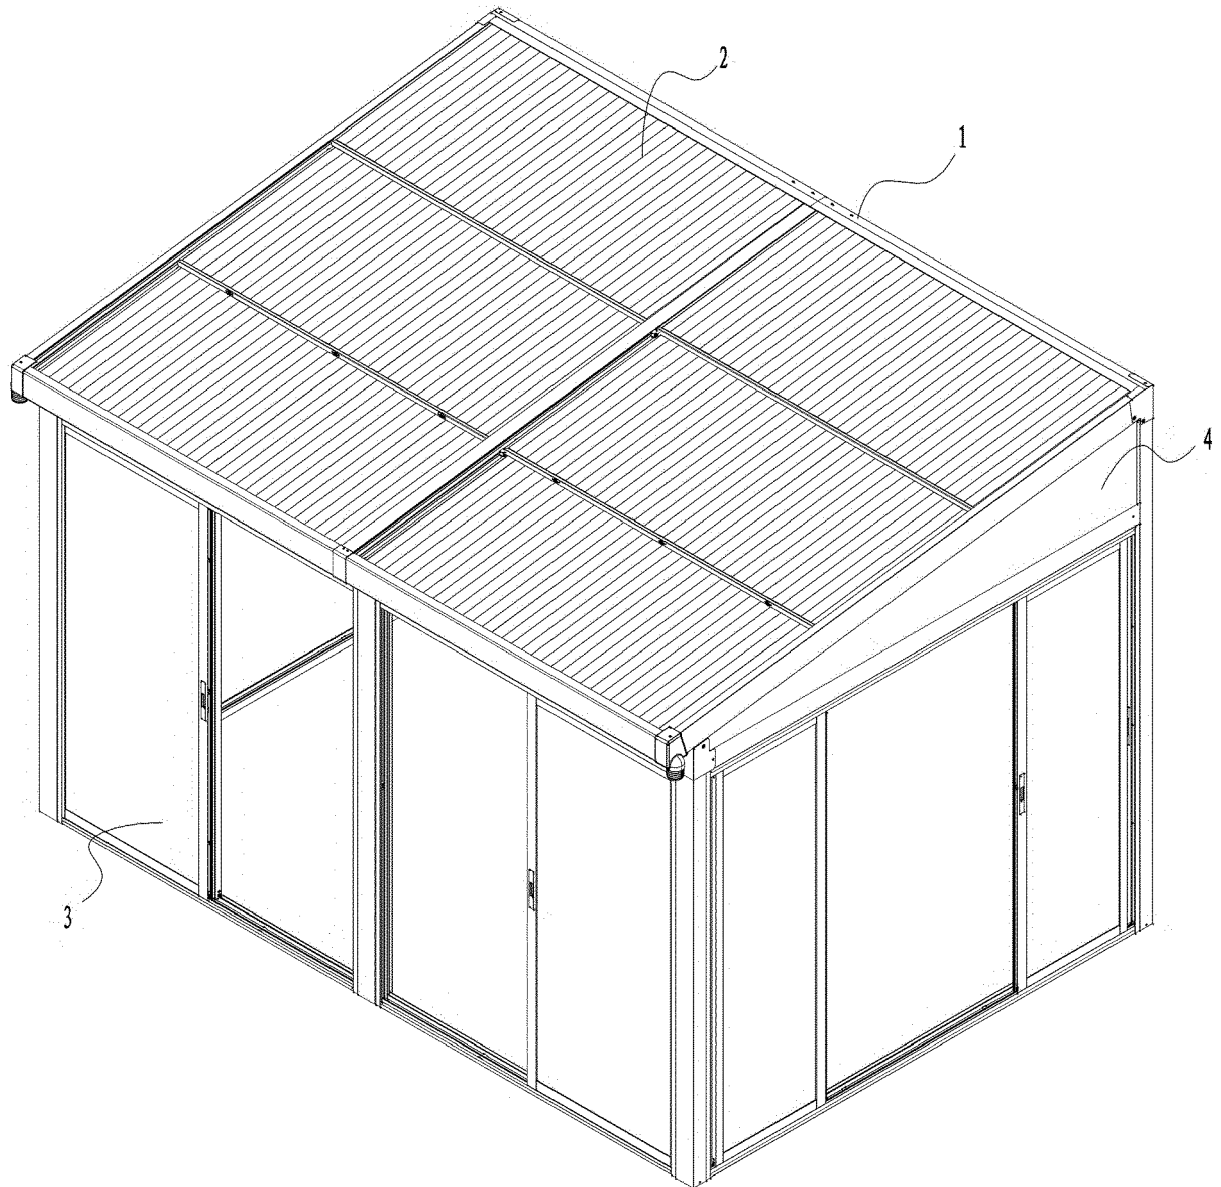


[Figure No.] Fig. 1

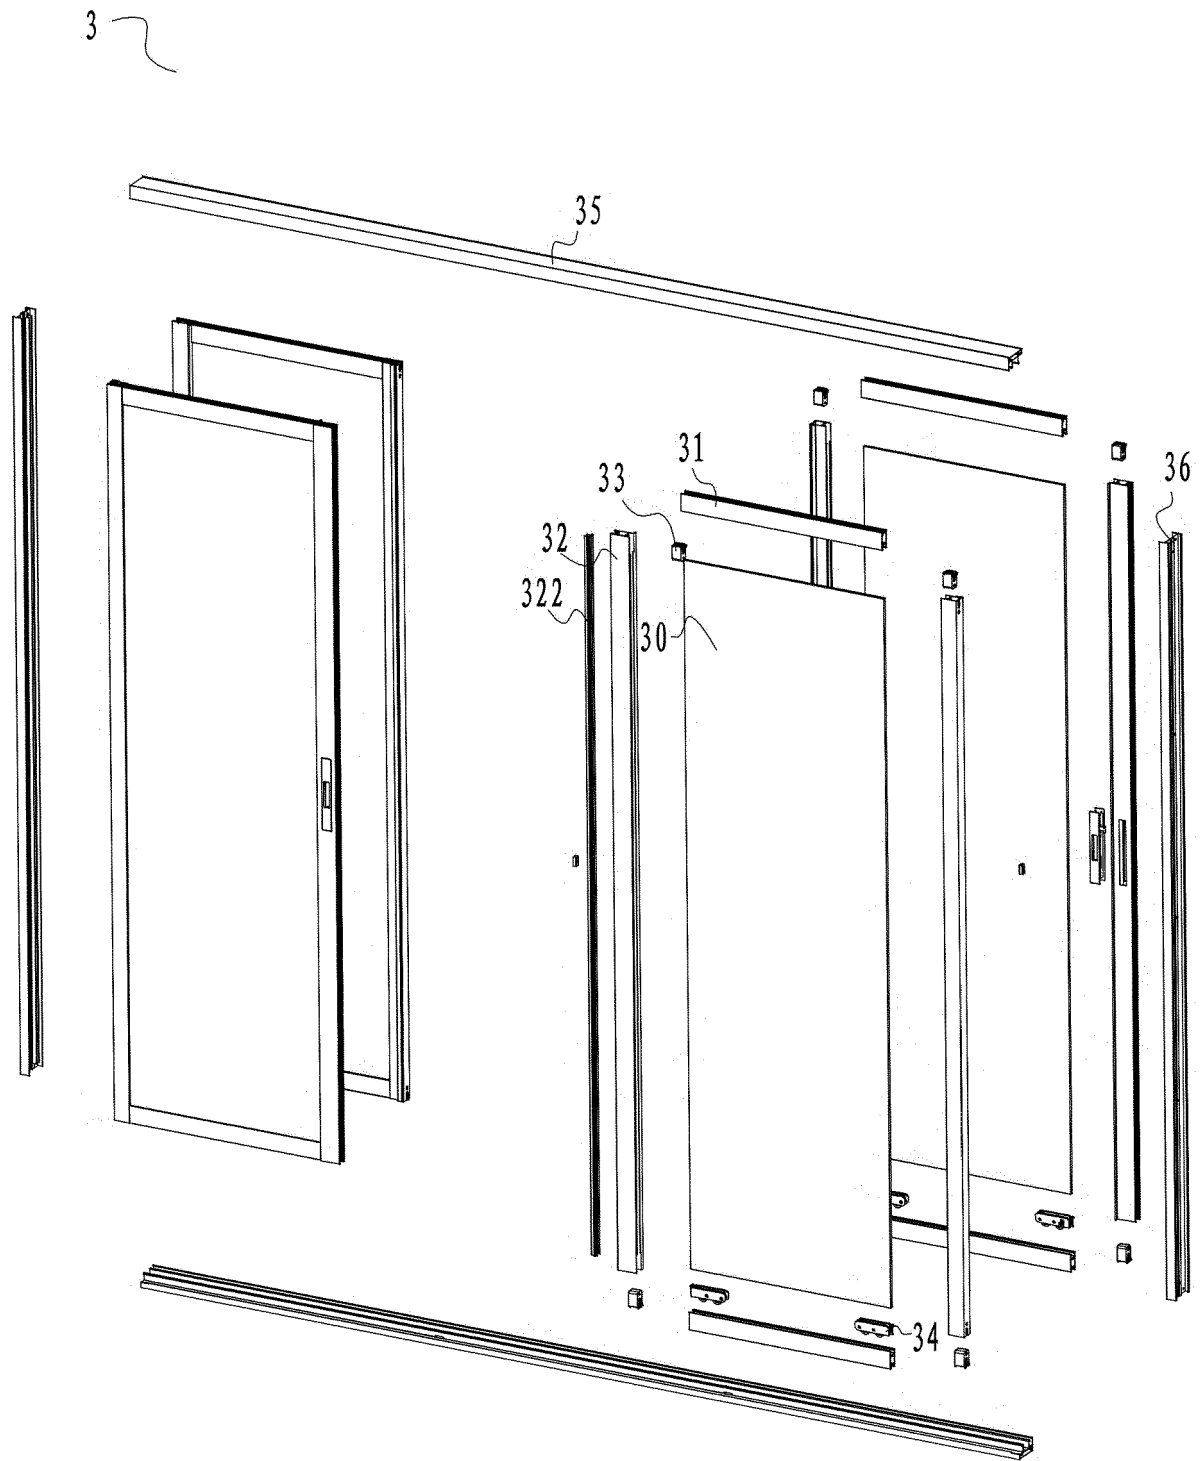


[Figure No.] Fig. 2

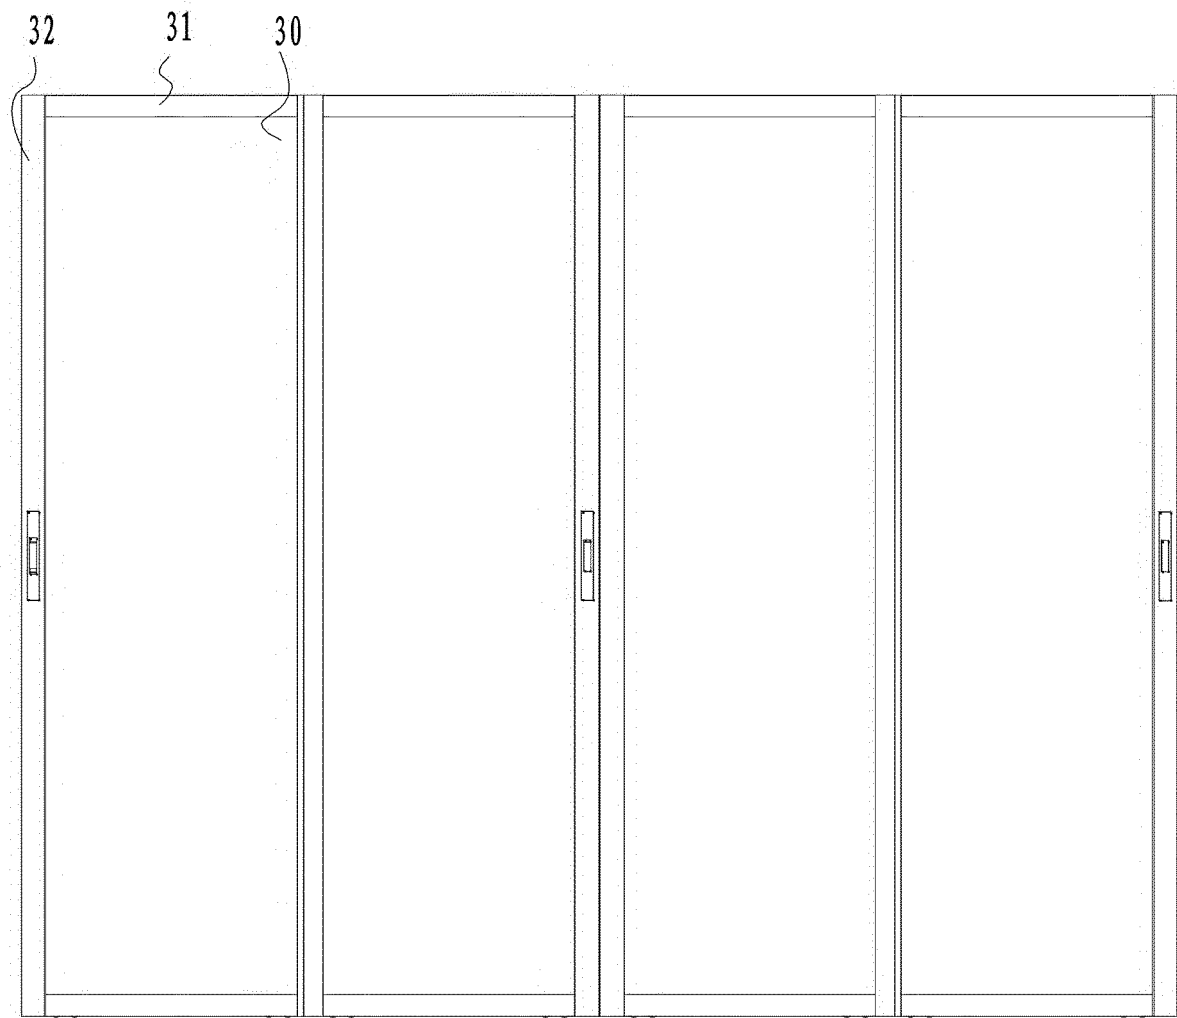


[Figure No.] Fig. 3

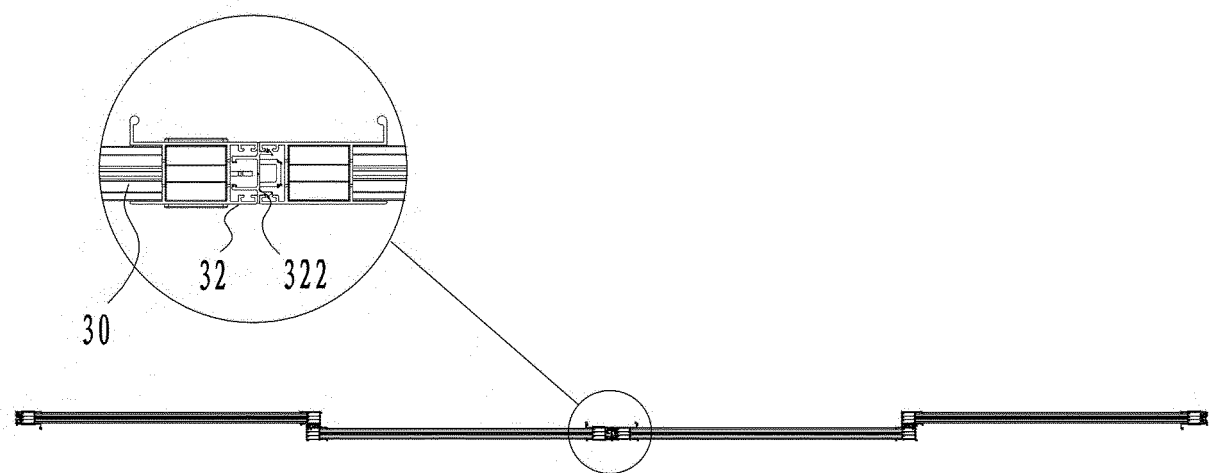


[Figure No.] Fig. 4

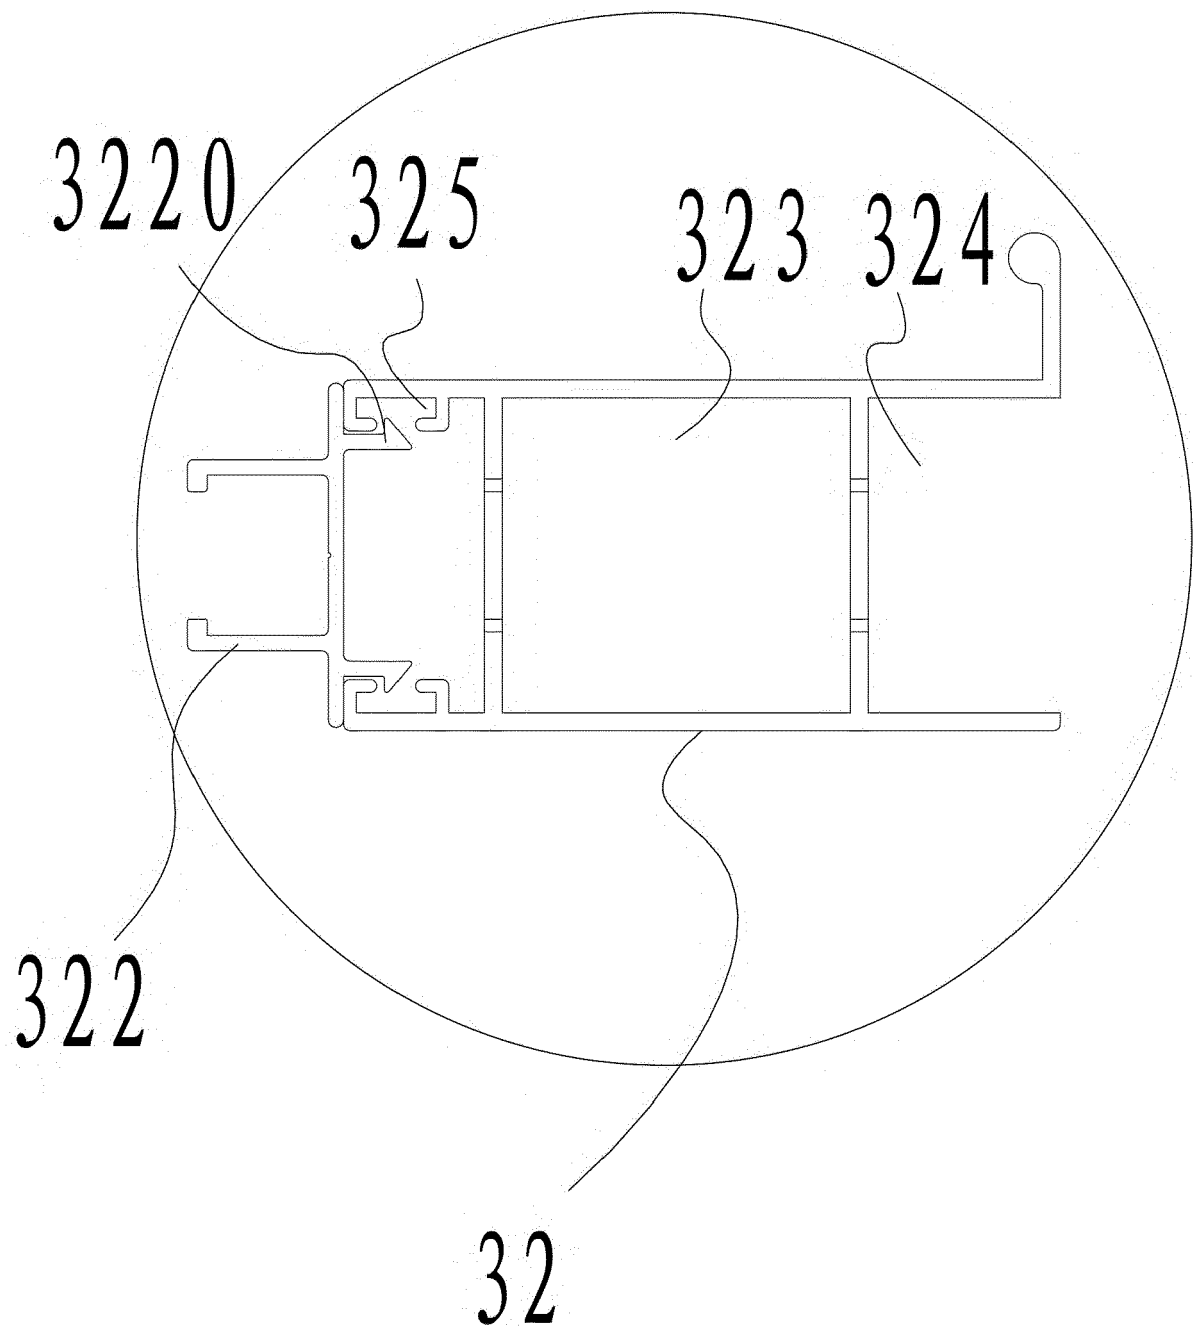


[Figure No.] Fig. 5

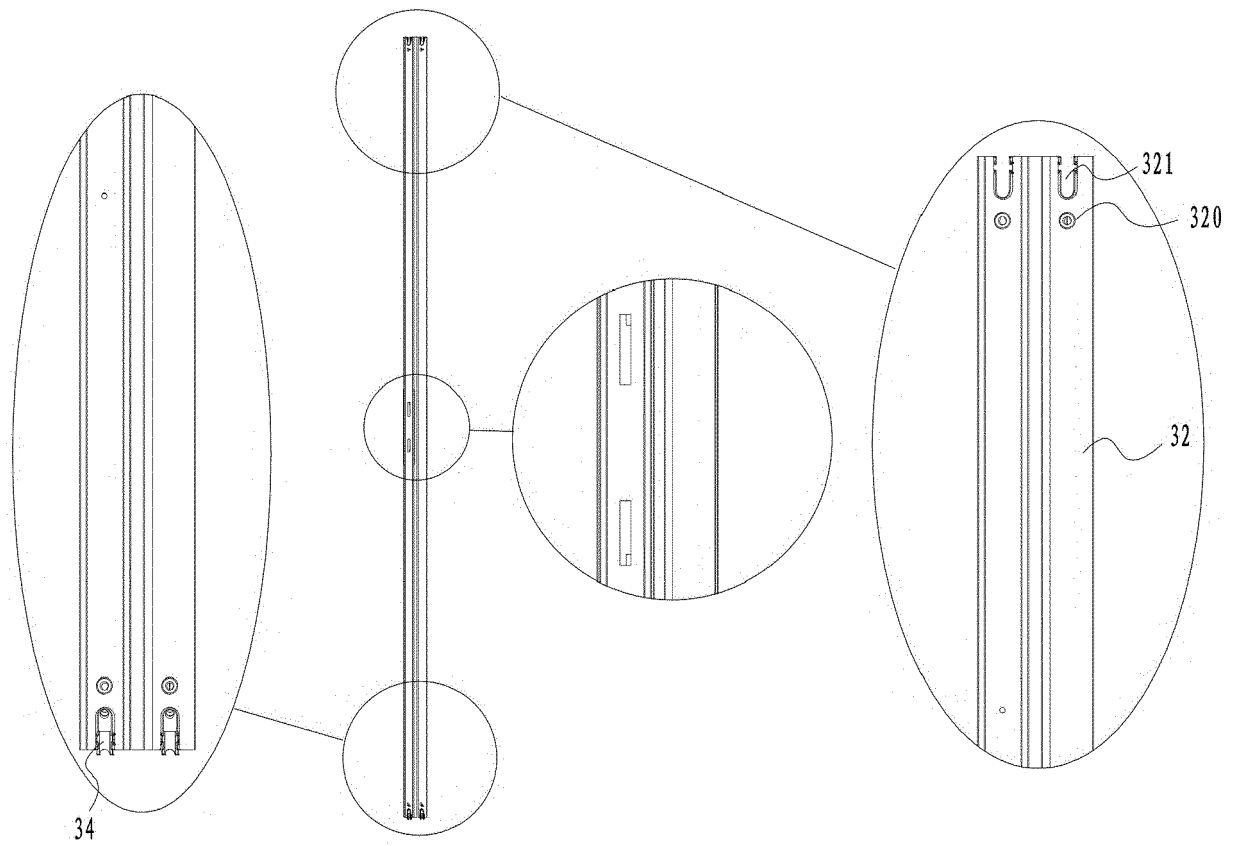


[Figure No.] Fig. 6

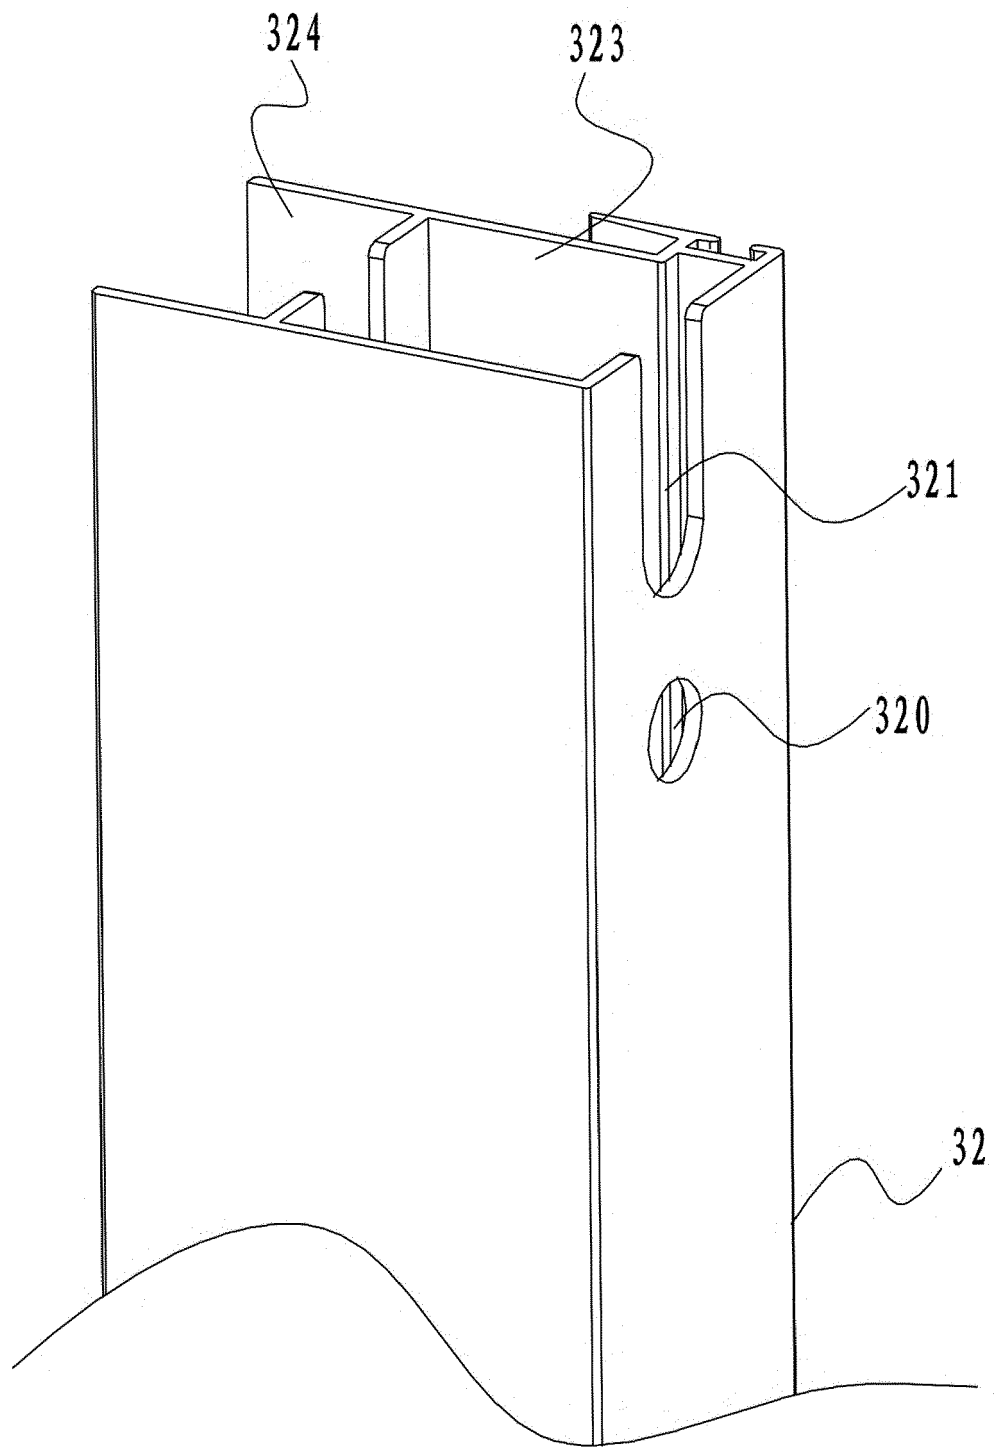


[Figure No.] Fig. 7

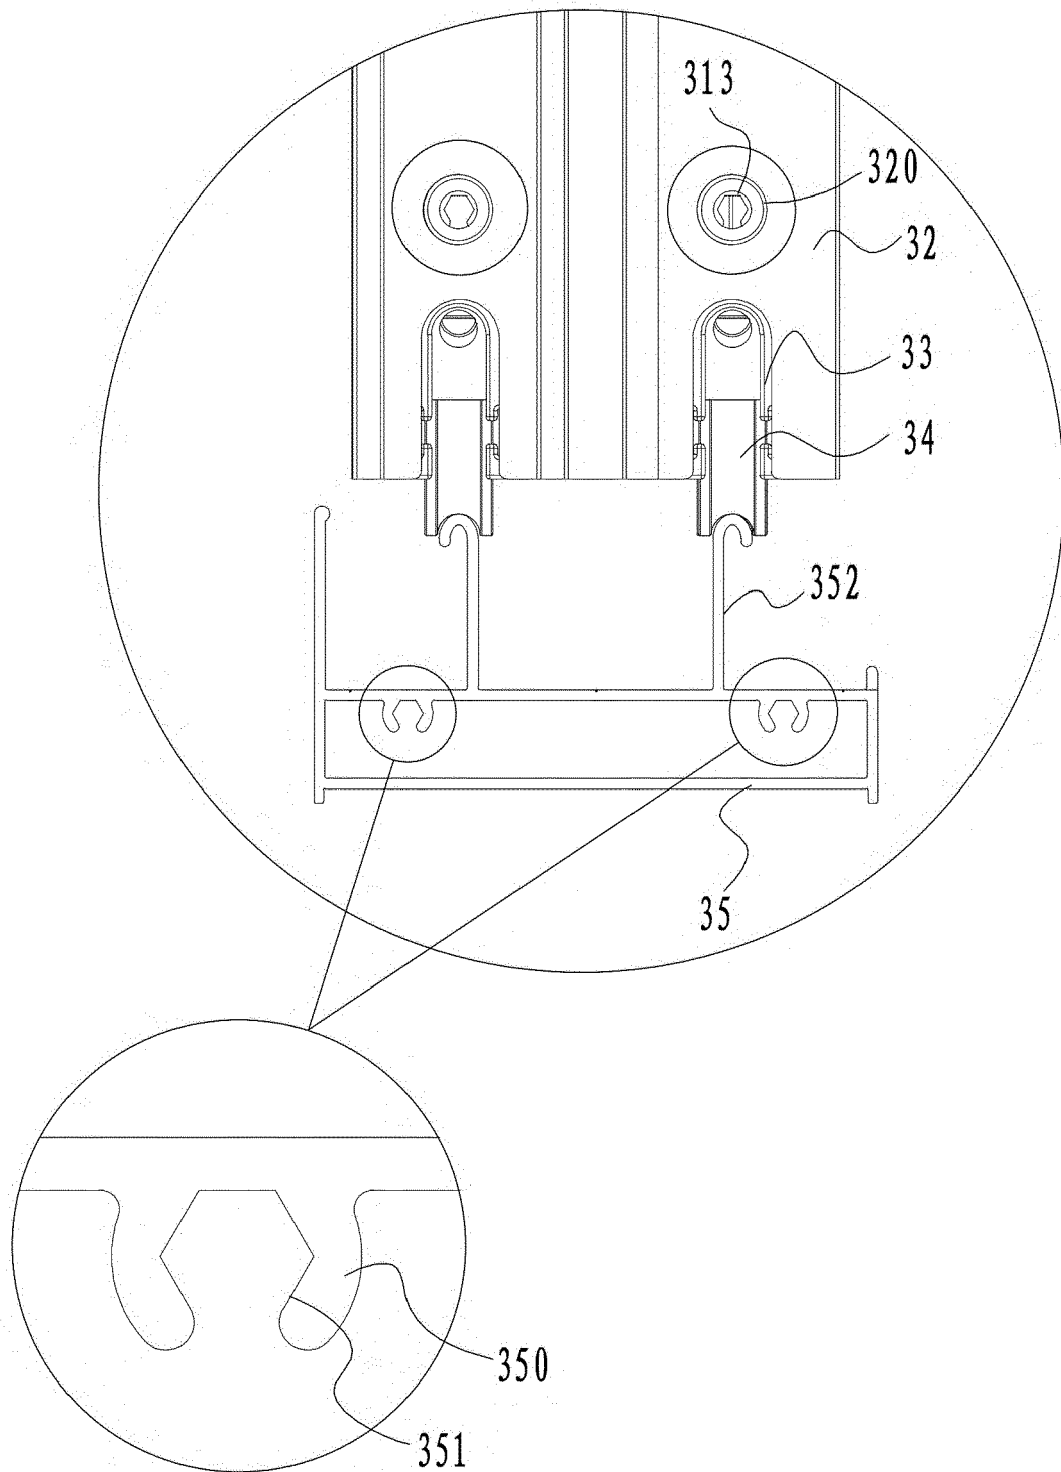


[Figure No.] Fig. 8

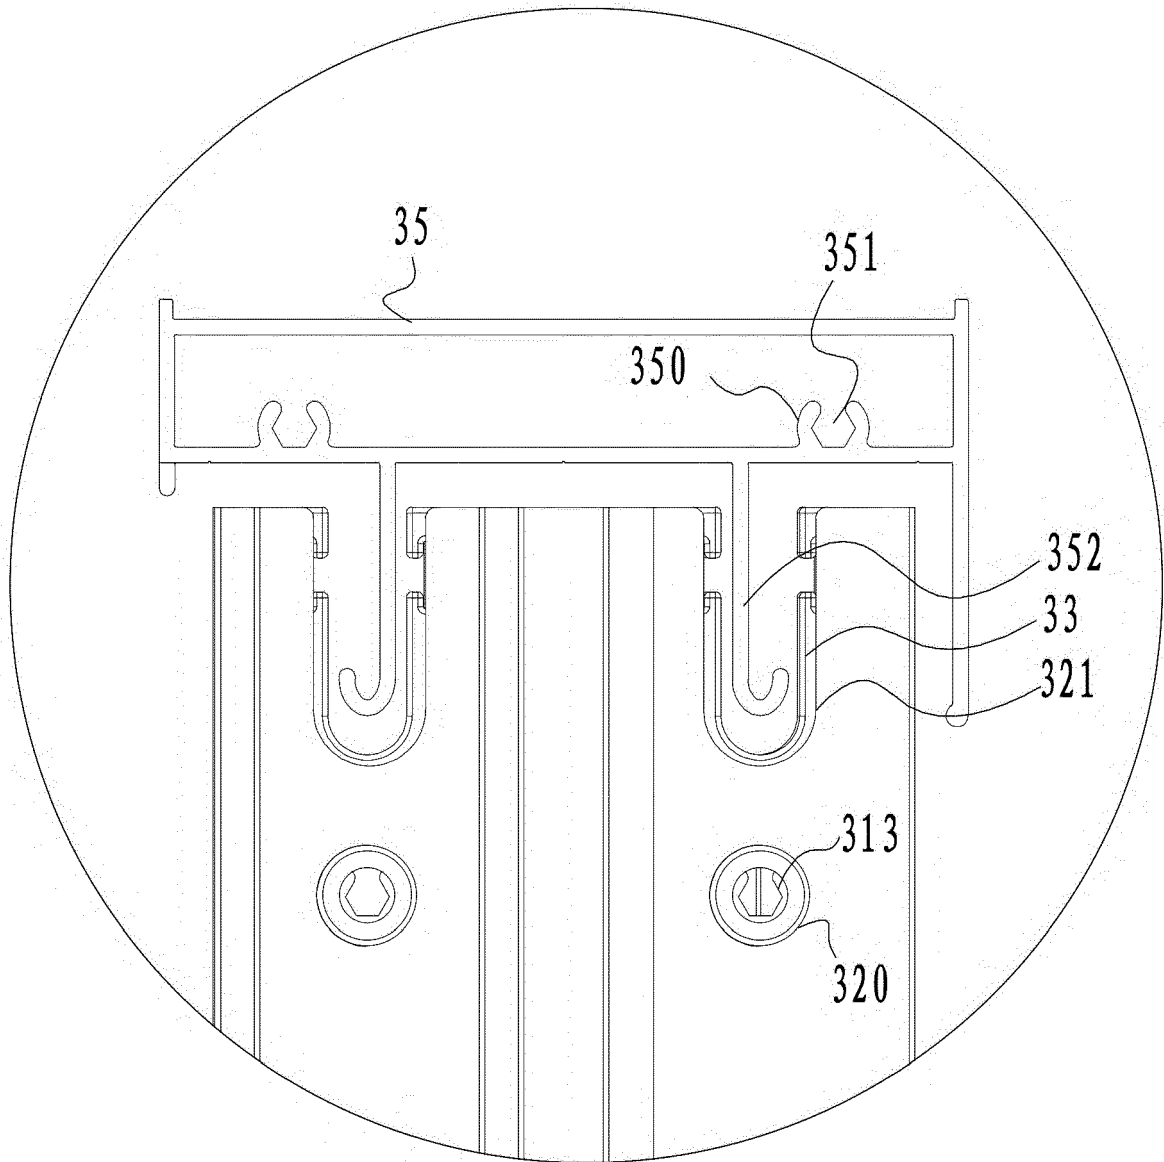


[Figure No.] Fig. 9

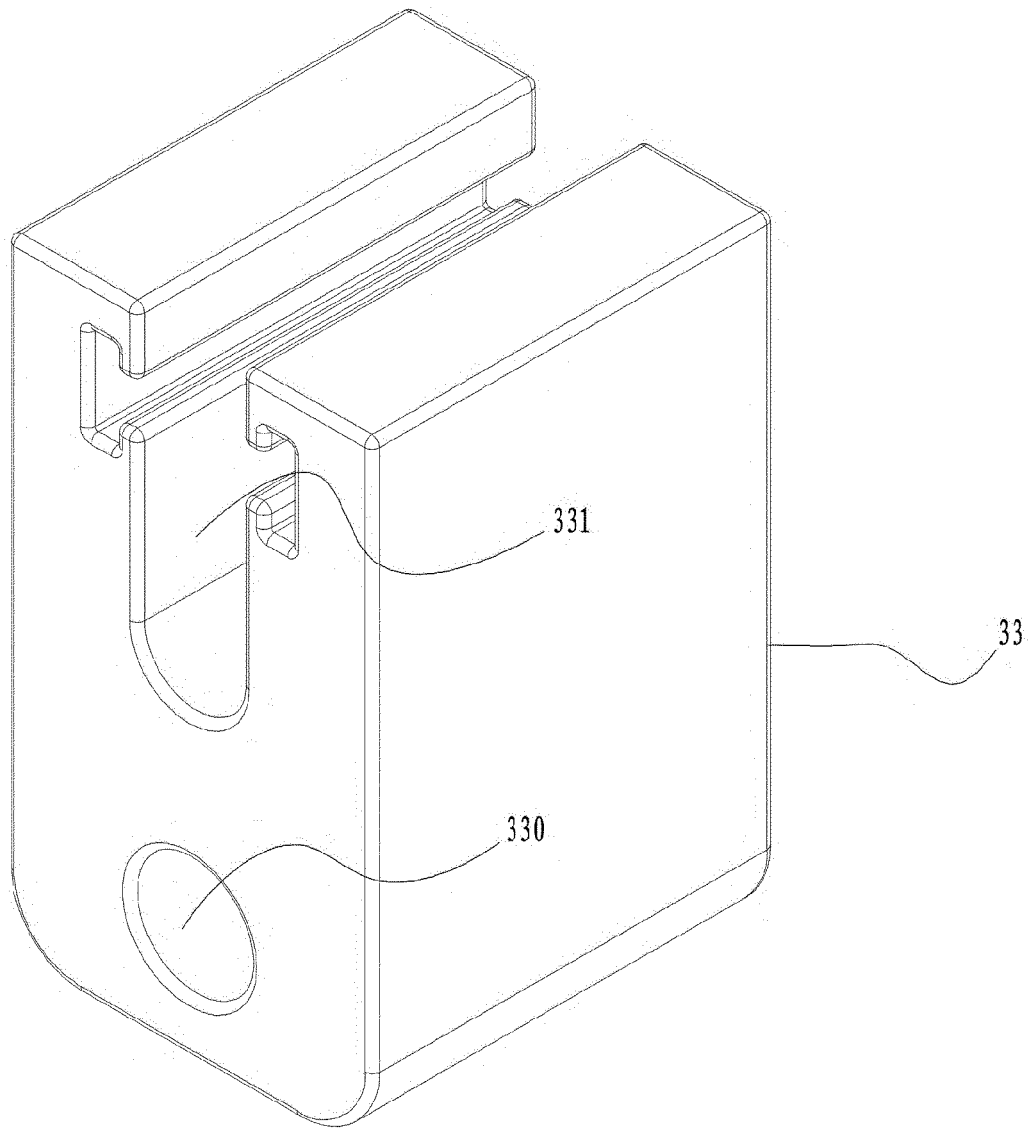


[Figure No.] Fig. 10

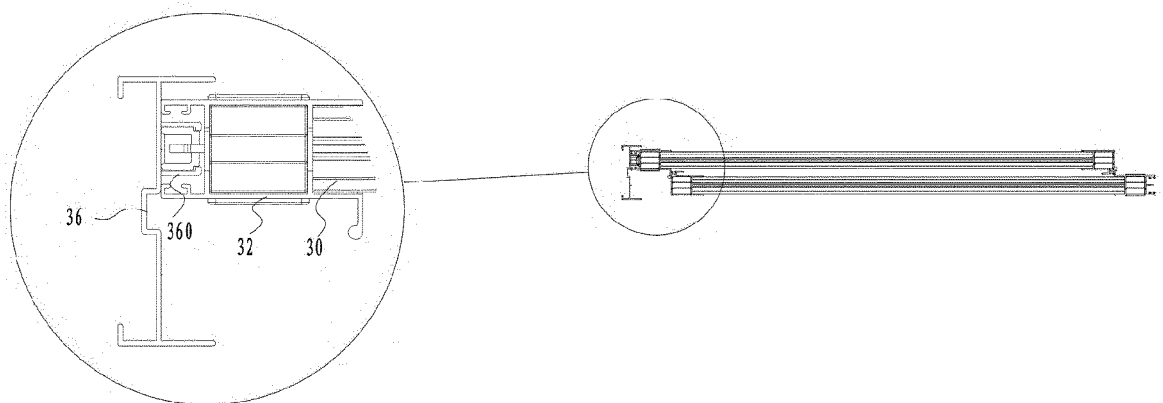


[Figure No.] Fig. 11

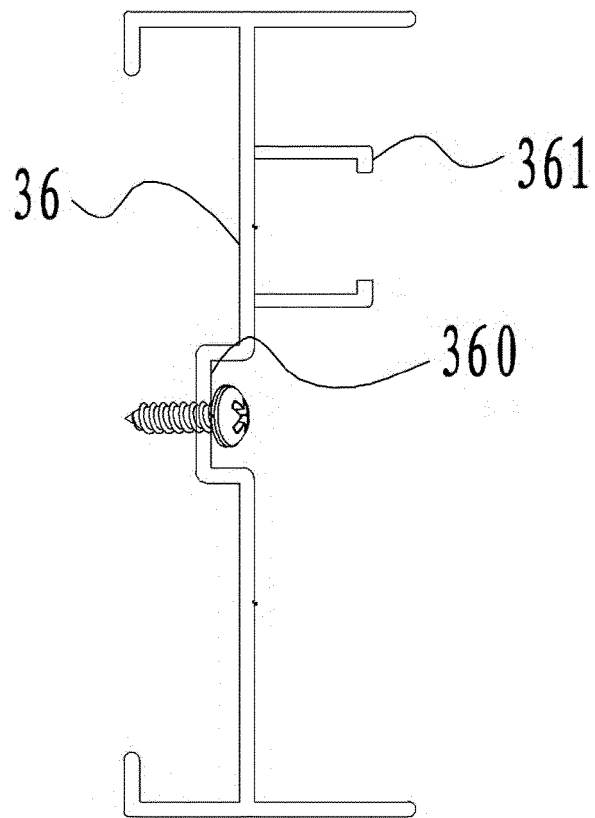

[Figure No.] Fig. 12

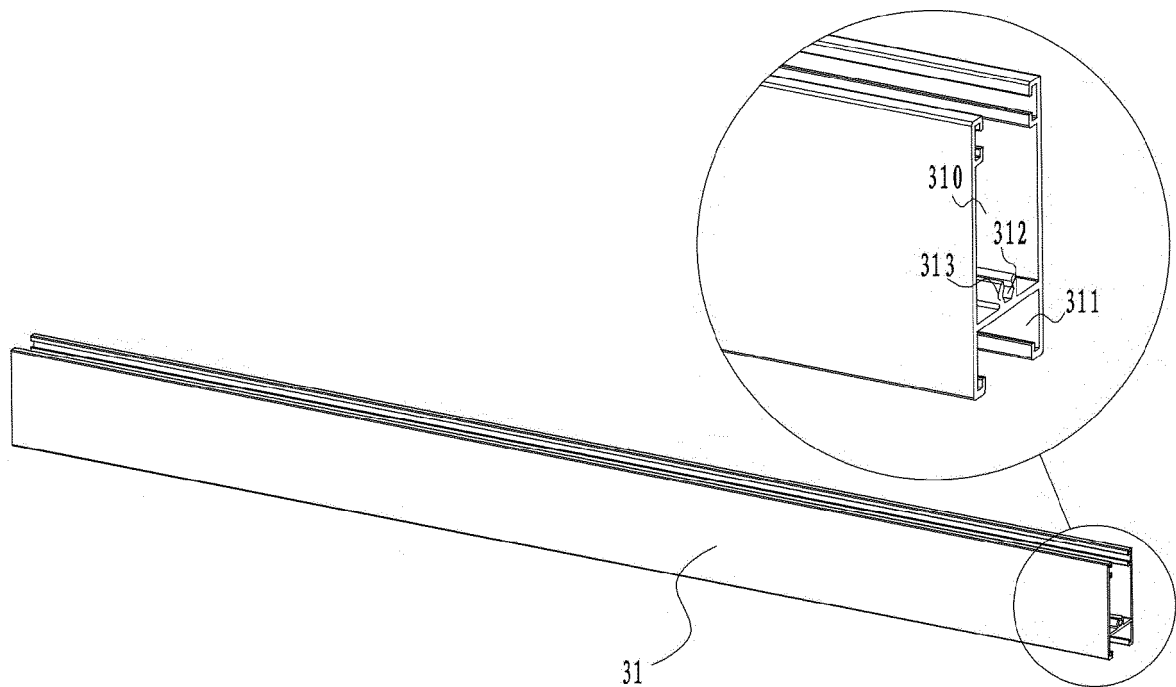

[Figure No.] Fig. 13

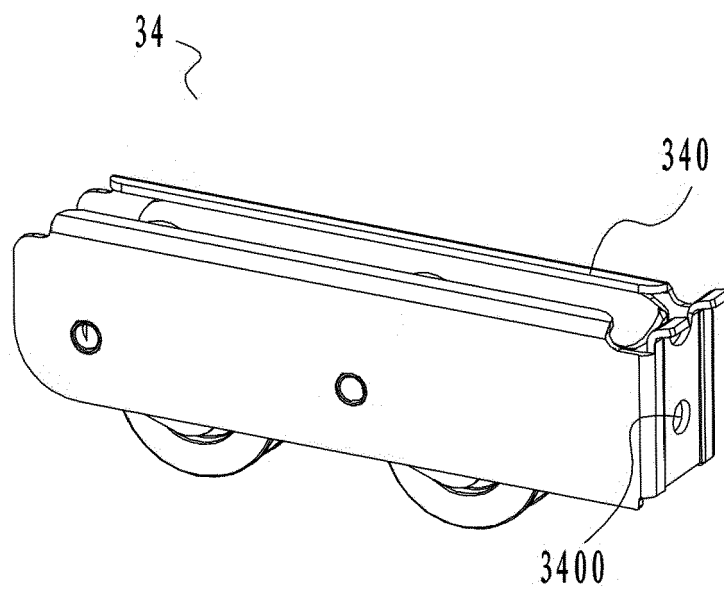

[Figure No.] Fig. 14



EUROPEAN SEARCH REPORT

Application Number

EP 21 19 5916

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	FR 2 241 683 A1 (FILDIER SA [FR]) 21 March 1975 (1975-03-21) * figures 10, 11 *	1-10	INV. E04B7/16 E05D15/06 E06B3/46
X	JP S53 151237 U (UNKNOWN) 28 November 1978 (1978-11-28) * figures *	1-3, 6-10	E06B3/96 E06B1/60 E06B3/964
X	EP 2 602 418 A2 (NEHER MULTIRAUM GMBH [DE]) 12 June 2013 (2013-06-12) * figures 1-3, 6-10 *	1-3, 6-10	
X	WO 94/08123 A1 (HYDRO ALUMINIUM SYSTEMS SPA [IT]; ZANONI EDOARDO [IT]) 14 April 1994 (1994-04-14) * figures 1-3, 5, 6, 8-13 *	1-3, 6-10	
X	FR 2 911 162 A1 (CROISEE D S SA [FR]) 11 July 2008 (2008-07-11) * figures 1-3 *	1-3, 6-10	
X	US 3 111 209 A (RIEGELMAN HARRY M) 19 November 1963 (1963-11-19) * figures *	1-3, 6-10	TECHNICAL FIELDS SEARCHED (IPC) E04B E05G E05D E06B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 16 January 2022	Examiner Demeester, Jan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 19 5916

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-01-2022

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2241683 A1	21-03-1975	NONE	
JP S53151237 U	28-11-1978	JP S5755501 Y2 JP S53151237 U	30-11-1982 28-11-1978
EP 2602418 A2	12-06-2013	DE 102011088058 A1 EP 2602418 A2	13-06-2013 12-06-2013
WO 9408123 A1	14-04-1994	AU 5108493 A IT 1256155 B SI 9300527 A WO 9408123 A1	26-04-1994 29-11-1995 30-06-1994 14-04-1994
FR 2911162 A1	11-07-2008	NONE	
US 3111209 A	19-11-1963	NONE	