



(19)

Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 3 977 897 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.04.2024 Bulletin 2024/15

(21) Application number: **20814462.6**

(22) Date of filing: **16.04.2020**

(51) International Patent Classification (IPC):
A47C 7/14 (2006.01) A45F 3/22 (2006.01)
A47C 4/04 (2006.01)

(52) Cooperative Patent Classification (CPC):
A45F 3/26; A47C 4/04; A47C 7/02; A47C 7/282

(86) International application number:
PCT/JP2020/016676

(87) International publication number:
WO 2020/241107 (03.12.2020 Gazette 2020/49)

(54) **STRETCH FUNCTION-ADDED LOADING SHEET, AND CHAIR PROVIDED HEREWITH**

LADEPLATTE MIT HINZUGEfügTER DEHNFUNKTION UND DAMIT AUSGERÜSTETER STUHL

FEUILLE DE CHARGEMENT À FONCTION D'ÉTIREMENT AJOUTÉE ET CHAISE ÉQUIPÉE DE
CELLE-CI

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **24.05.2019 JP 2019098150**

(43) Date of publication of application:
06.04.2022 Bulletin 2022/14

(73) Proprietor: **Kawaguchi, Kiyoshi
Kitakyuushuu-si, Fukuoka 801-0851 (JP)**

(72) Inventor: **Kawaguchi, Kiyoshi
Kitakyuushuu-si, Fukuoka 801-0851 (JP)**

(74) Representative: **Daub, Thomas
Patent- und Rechtsanwaltskanzlei Daub
Bahnhofstrasse 5
88662 Überlingen (DE)**

(56) References cited:
WO-A1-2019/107283 JP-A- 2019 062 994
JP-A- 2019 062 994 JP-U- 3 185 845
US-A1- 2014 084 575 US-A1- 2014 084 575

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Technical Field**

[0001] The present invention pertains to a stretch function-added loading sheet, and a chair comprising the same.

Background Art

[0002] As devices for placing a person or an object on a single sheet, devices, such as a chair using a sheet for the seating surface, etc. (see Patent Document 1), and a hammock formed by suspending a single sheet by strings, etc. (see Patent Document 2), are known. Fabrics with good air permeability are widely used for such sheet materials.

[0003] As the first requirement of a container for loading an object, etc., a sufficient strength is required to withstand the weight of the object, etc. to be loaded. Wooden boards, metal boards, metal mesh, cardboard, etc. are generally used as the main material of such a container for satisfying the required strength. As the second requirement of a container for loading an object, etc., certain elasticity is required for the purpose of improving comfort when a person is placed thereon or preventing a loaded object from being damaged due to jolts caused when the container is moved. In addition, there is also required an effect of increasing the contacting area between the container and the object placed and thereby reducing the distribution of load applied to each portion of the object placed (the load applied per unit contact area), which is achieved by having the shape of the container conform to the shape of each of various objects placed in any location in the container (shape conformability). The shape conformability also provides the effect of suppressing the slippage of the loaded object. However, the required elasticity and shape conformability cannot be obtained solely by the above-mentioned main material of the container. Accordingly, in some cases, a cushioning material, such as wadding, springs, an air cushion, or Styrofoam, is placed between the main material and the loaded object. It tends to be thought that a typical general-purpose sheet has sufficiently elasticity. However, when using only a single sheet for a container for loading an object, provided that the weight of the object to be loaded is approximately the same as the weight of a person, and that the sheet material is a general-purpose sheet having a thickness of approximately 1 mm or less, it is hardly possible to find such a sheet material satisfying the required strength and elasticity. As a sheet is a continuous flexible membrane, the form of the sheet is determined only by the frame or the suspension fulcrums for fixing the sheet and the object to be loaded, and thus a single sheet does not have much shape conformability to correspond to variations in the shape or the location of the object to be loaded. Conventionally used chairs, hammocks, etc. do not have adequate elasticity

and shape conformability, and have a problem of comfort when a person is placed thereon, and thus such conventional ones have not been widely used in general households.

[0004] Meanwhile, as a sheet of which elasticity, stretchability, etc. are considered, a sheet to which stretchability is imparted by using a fibrous stretchable material has been invented (see Patent Document 3). However, the stretchable sheet described in Patent Document 3 requires the sheet itself to be made of stretchable fibers, etc., and thus this is not a technique capable of imparting stretchability, etc. to a general-purpose sheet.

Prior Art Documents**Patent Documents****[0005]**

20 Patent Document 1: JP 3185845U
 Patent Document 2: JP 2017-196436A
 Patent Document 3: H07-144383A

Summary of the invention**Problem to be solved by the invention**

[0006] The present invention is made based on the foregoing considerations, and it is an object of the invention to provide a stretch function-added loading sheet that has elasticity regardless of the material of the sheet body itself, and a chair comprising such a stretch function-added loading sheet.

Means for solving the problem

[0007] As defined in claim 1, one aspect of the present invention made for solving the above-mentioned problem is: a stretch function-added loading sheet, comprising one sheet body, and any number of forced crimping units, the forced crimping unit including two pinching block plates and one pinching jig, wherein the two pinching block plates are fixed on one surface of the sheet body on both sides of a folding centerline on the sheet body, the pinching jig is fixed to the two pinching block plates so as to sandwich the two pinching block plates in a state where the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the stretch function-added loading sheet has a stretch function in which the sheet body extends as the pinching jig opens by means of an opening/closing mechanism that the pinching jig has, which is caused by an application of a tensile force in a direction perpendicular to the folding centerline to the sheet body, while the sheet body contracts as the pinching jig closes by means of the opening/closing mechanism that the pinching jig has when the tensile force is reduced.

[0008] It is preferable that the stretch function-added loading sheet is provided with the plurality of forced crimping units.

[0009] The "pinching jig" is a device, such as a clip, etc., capable of sandwiching the two overlapping pinching block plates and maintaining this state. The wording "pinching jig opens" means that the interspace is widened between the portions where the targets (the two pinching block plates) are sandwiched. For example, in a hooked clip described below, this means that the interspace (clip opening width) is widened between a pair of opposing clip side walls. The wording "pinching jig closes" means that the interspace is narrowed between the portions where the targets (the two pinching block plates) are sandwiched from the state where the pinching jig opens. For example, in the hooked clip described below, this means that the interspace (clip opening width) is narrowed between the pair of opposing clip side walls from the state where the hooked clip opens.

[0010] The stretch function-added loading sheet is preferably configured such that:

the two pinching block plates have the same shape, each of the pinching block plates is a rectangular plate having a block thickness, and a clip-fixing notch is provided in one surface of this plate in such a manner that the center of a notch length is aligned with the position of a longitudinal centerline of the block plate;

the pinching jig is a hooked clip;

the hooked clip has a structure formed by bending one rectangular metal plate and including a clip upper wall and a pair of opposing clip side walls connected to both ends of the clip upper wall, and the hooked clip is configured to be in a closed state where distal ends of the pair of opposing clip side walls come close to each other, and a state where the pair of opposing clip side walls are opened due to elastic deformation of metal when a clip-opening force is applied in a direction to the outside of each of the pair of opposing clip side walls, which constitutes the opening/closing mechanism;

fixing hooks each bent inward at a right angle are formed each at each distal end of the pair of clip side walls;

the two pinching block plates are situated symmetrically with respect to the folding centerline in a state where surfaces opposite to the surfaces in which the clip-fixing notches are provided face the sheet body, the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the fixing hooks of the hooked clip are fitted in the clip-fixing notches of the pinching block plates in a state where the hooked clip in an opened state so as to sandwich the two pinching block plates is attached; and

the stretch function-added loading sheet is secured

by any method and used such that an object to be loaded is placed on the sheet body.

[0011] The stretch function-added loading sheet is preferably configured such that:

the two pinching block plates have the same shape; each of the pinching block plates is a rectangular plate having a block thickness, and a clip-fixing notch is provided in one surface of this plate in such a manner that the center of a notch length is aligned with the position of the longitudinal centerline of the block plate;

the pinching jig is a stopper-attached hooked clip; the stopper-attached hooked clip includes one clip stopper, one perforated hooked clip, two screws, and two nuts;

the clip stopper has a structure including a stopper upper wall in which two screw-insertion holes are provided, and a pair of opposing stopper side walls that are fixed at both ends of the stopper upper wall; the perforated hooked clip has a structure formed by bending one rectangular metal plate and including a clip upper wall and a pair of opposing clip side walls connected to both ends of the clip upper wall, and the perforated hooked clip is configured to be in a closed state where distal ends of the pair of opposing clip side walls come close to each other, and a state where the pair of opposing clip side walls are opened due to elastic deformation of metal when a clip-opening force is applied in a direction to the outside of each of the pair of opposing clip side walls, which constitutes the opening/closing mechanism;

fixing hooks each bent inward at a right angle are formed each at each distal end of the pair of clip side walls;

the clip upper wall is provided with two screw-insertion holes;

the stopper-attached hooked clip has a structure in which the clip stopper is placed over the perforated hooked clip, and in a state where the two screw-insertion holes of the perforated hooked clip are matched with the two screw-insertion holes of the clip stopper, the screws are passed through the screw-insertion holes, respectively, and fixed with the nuts;

the two pinching block plates are situated symmetrically with respect to the folding centerline in a state where surfaces opposite to the surfaces in which the clip-fixing notches are provided face the sheet body, the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the fixing hooks of the stopper-attached hooked clip are fitted in the clip-fixing notches of the pinching block plates in a state where the stopper-attached hooked clip in an opened state so as to sandwich the two pinching block plates is at-

tached; and

the stretch function-added loading sheet is secured by any method and used such that an object to be loaded is placed on the sheet body.

[0012] The stretch function-added loading sheet preferably:

further comprises a stopper band, which is a flexible sheet, placed on a surface of the sheet body opposite to the surface in which the forced crimping unit is placed, wherein:

both end portions of the stopper band are tightly fixed to the sheet body on both sides of the folding centerline, respectively; and

the stopper band is placed such that the portion between both end portions of the stopper band is curved or bent in a state where the tensile force is not applied to the sheet body, and the portion between both end portions of the stopper band is flat-shaped in a state where the tensile force of a predetermined magnitude or greater is applied.

[0013] It is preferable that the stretch function-added loading sheet comprises a control component (control mechanism) that controls the maximum opening width of the pinching jig of the forced crimping unit. The control component (control mechanism) may include the clip stopper, the stopper band, etc.

[0014] The stretch function-added loading sheet preferably:

further comprises two fixing parallel frames, wherein:

the number of forced crimping units is even; the sheet body has a rectangular shape, and two common folding centerlines that are parallel and symmetrical with respect to the sheet width centerline of the sheet body are located;

a half of the forced crimping units are attached in one row at equal intervals in such a manner that one of the common folding centerlines overlaps the folding centerline of each of the forced crimping units; the remaining half of the forced crimping units are attached in one row at equal intervals in such a manner that the other of the common folding centerlines overlaps the folding centerline of each of the forced crimping units;

the half of the forced crimping units and the other half of the forced crimping units are symmetrically situated with respect to the sheet width centerline; the two fixing parallel frames are attached to both end portions each located between each end edge of the sheet body in the sheet width direction and each of the rows of the forced crimping units, so as to be parallel to the sheet width centerline;

the two fixing parallel frames are fixed to any locations by any method; and

the stretch function-added loading sheet is used

such that an object to be loaded is placed between the two rows of the forced crimping units.

[0015] In each of the two rows of the forced crimping units of the stretch function-added loading sheet, it is preferable that a plurality of forced crimping units is attached. The lower limit of the number of the forced crimping units attached in one row is preferably three, and more preferably five. The upper limit of this number may be, for example, a hundred or twenty.

[0016] The stretch function-added loading sheet is preferably configured such that:

the sheet body is a fabric made of cotton;

the pinching block plates are made of wood; and the sheet body and the pinching block plates are fixed by an adhesive containing ethylene-vinyl acetate copolymer resin.

[0017] The other aspect of the present invention made for solving the above-mentioned problem is: a chair comprising the stretch function-added loading sheet according to one aspect of the present invention, as at least one of a seating surface and a backrest.

25

Effect of the Invention

[0018] According to the present invention, it is possible to provide a stretch function-added loading sheet that has elasticity regardless of the material of the sheet body itself, and a chair comprising such a stretch function-added loading sheet.

Brief Description of the Drawings

35

[0019]

[Fig. 1A] Fig. 1A is a first view showing procedure of assembling one forced crimping unit included in a stretch function-added loading sheet of a first embodiment of the present invention.

[Fig. 1B] Fig. 1B is a second view showing procedure of assembling the one forced crimping unit included in the stretch function-added loading sheet of the first embodiment of the present invention.

[Fig. 1C] Fig. 1C is a third view showing procedure of assembling the one forced crimping unit included in the stretch function-added loading sheet of the first embodiment of the present invention.

[Fig. 1D] Fig. 1D is an enlarged view of the forced crimping unit of Fig. 1C.

[Fig. 2A] Fig. 2A is a perspective view of a pinching block plate used for the stretch function-added loading sheet of the first embodiment.

[Fig. 2B] Fig. 2B is a three-plane drawing of the pinching block plate of Fig. 2A.

[Fig. 3A] Fig. 3A is a perspective view showing a hooked clip in a closed state used for the stretch

40

45

50

55

4

function-added loading sheet of the first embodiment.

[Fig. 3B] Fig. 3B is a three-plane drawing of the hooked clip in the state shown in Fig. 3A.

[Fig. 3C] Fig. 3C is a perspective view showing the hooked clip in an opened state used for the stretch function-added loading sheet of the first embodiment.

[Fig. 3D] Fig. 3D is a three-plane drawing of the hooked clip in the state shown in Fig. 3C.

[Fig. 4A] Fig. 4A is a perspective view of the stretch function-added loading sheet of the first embodiment of the present invention.

[Fig. 4B] Fig. 4B is an enlarged view of the forced crimping unit included in the stretch function-added loading sheet of Fig. 4A.

[Fig. 4C] Fig. 4C is a view showing a turned-over state of the stretch function-added loading sheet of Fig. 4A.

[Fig. 4D] Fig. 4D is a perspective view showing a state in which a tensile force is applied to the stretch function-added loading sheet of Fig. 4A.

[Fig. 4E] Fig. 4E is an enlarged view of the forced crimping unit included in the stretch function-added loading sheet in the state shown in Fig. 4D.

[Fig. 4F] Fig. 4F shows a turned-over state of the stretch function-added loading sheet in the state shown in Fig. 4D.

[Fig. 5A] Fig. 5A is a first view showing procedure of assembling a stretch function-added loading sheet of a second embodiment of the present invention.

[Fig. 5B] Fig. 5B is a second view showing procedure of assembling the stretch function-added loading sheet of the second embodiment of the present invention.

[Fig. 5C] Fig. 5C is a third view showing procedure of assembling the stretch function-added loading sheet of the second embodiment of the present invention.

[Fig. 5D] Fig. 5D is a fourth view showing procedure of assembling the stretch function-added loading sheet of the second embodiment of the present invention.

[Fig. 6A] Fig. 6A is a perspective view of the stretch function-added loading sheet of the second embodiment of the present invention.

[Fig. 6B] Fig. 6B is a perspective view showing a state in which an object to be loaded is placed in the center of the stretch function-added loading sheet in the state shown in Fig. 6A.

[Fig. 7A] Fig. 7A is a front view of the state shown in Fig. 6B.

[Fig. 7B] Fig. 7B is a bottom view of the state shown in Fig. 6B.

[Fig. 7C] Fig. 7C is a right-side view of the state shown in Fig. 6B.

[Fig. 8A] Fig. 8A is an assembly view of a stopper-attached hooked clip used for a stretch function-add-

ed loading sheet of a third embodiment of the present invention.

[Fig. 8B] Fig. 8B is a perspective view of the stopper-attached hooked clip used for the stretch function-added loading sheet of the third embodiment of the present invention.

[Fig. 9A] Fig. 9A is a perspective view of the stretch function-added loading sheet of the third embodiment of the present invention.

[Fig. 9B] Fig. 9B is an explanatory view showing the stopper-attached hooked clip in a closed state in the stretch function-added loading sheet of Fig. 9A.

[Fig. 9C] Fig. 9C is an explanatory view showing the stopper-attached hooked clip in an opened state in the stretch function-added loading sheet of Fig. 9A.

[Fig. 10A] Fig. 10A is a perspective view of a chair of a fifth embodiment of the present invention.

[Fig. 10B] Fig. 10B is a three-plane drawing of the chair of Fig. 10A.

[Fig. 10C] Fig. 10C is a perspective view showing a sheet body, etc. of the chair of Fig. 10A.

[Fig. 10D] Fig. 10D is a perspective view showing a frame, etc. of the chair of Fig. 10A.

[Fig. 11A] Fig. 11A is a perspective view showing a chair of a sixth embodiment of the present invention.

[Fig. 11B] Fig. 11B is a three-plane drawing of the chair of Fig. 11A.

[Fig. 12A] Fig. 12A is a perspective view showing a sheet body, etc. of the chair of Fig. 11A.

[Fig. 12B] Fig. 12B is a perspective view showing a frame, etc. of the chair of Fig. 11A.

[Fig. 13A] Fig. 13A is a top view of a stopper band used for a stretch function-added loading sheet of a seventh embodiment of the present invention.

[Fig. 13B] Fig. 13B is a perspective view showing tight attachment regions for the stopper band in the sheet body of the stretch function-added loading sheet of the first embodiment.

[Fig. 13C] Fig. 13C is a perspective view showing the stretch function-added loading sheet of the seventh embodiment in which the stopper band is placed on the stretch function-added loading sheet of the first embodiment.

[Fig. 14A] Fig. 14A is a partial cutaway view of the stretch function-added loading sheet of Fig. 13C.

[Fig. 14B] Fig. 14B is a partial cutaway view showing the state in which a tensile force is applied to the stretch function-added loading sheet of Fig. 13C.

[Fig. 15A] Fig. 15A is a top view showing connecting stopper bands used for a stretch function-added loading sheet of an eighth embodiment of the present invention.

[Fig. 15B] Fig. 15B is a perspective view showing tight attachment regions for the stopper bands in the sheet body of the stretch function-added loading sheet of the second embodiment.

[Fig. 15C] Fig. 15C is a perspective view showing the stretch function-added loading sheet of the

eighth embodiment in which the stopper bands are placed on the stretch function-added loading sheet of the second embodiment.

[Fig. 16A] Fig. 16A is a perspective view showing a staple used for a stretch function-added loading sheet of a ninth embodiment of the present invention.

[Fig. 16B] Fig. 16B is a perspective view showing a middle stage of assembling the stretch function-added loading sheet of the ninth embodiment.

[Fig. 16C] Fig. 16C is an enlarged view showing the staple mounted portions shown in Fig. 16B using hidden lines.

Embodiments for Carrying Out the Invention

[0020] The following is a detailed description of embodiment pertaining to a stretch function-added loading sheet and a chair with reference to the drawings as appropriate.

(A first embodiment)

[0021] In a stretch function-added loading sheet of a first embodiment of the present invention, a device for imparting a stretch function to a sheet (sheet body (1)) is referred to as a forced crimping unit (2). First, the structure, etc. of the forced crimping unit (2) will be described below.

[0022] Fig. 1A to Fig. 1D illustrates procedure of assembling one forced crimping unit (2). In Fig. 1A (Step 1), two pinching block plates (3) are fixed on one surface of one sheet body (1) that is planarly unfolded. The two pinching block plates (3) have the same shape.

[0023] The sheet body (1) is a thin and broad thing having a light weight and flexibility, the material of which may include cloth made of natural or chemical fibers, a polymeric resin sheet (plastic sheet), paper, as well as one containing a metal material, etc. The sheet body (1) is intended for loading, and thus a load-bearing capacity is required that is capable of withstanding the load of an object placed on the sheet that is fixed to a frame or suspension fulcrums and unfolded. In other words, the sheet body (1) may be a load-bearing sheet. The tensile strength of the sheet body (1) may be, for example, 1 N/50 mm or greater, may be 10 N/50 mm or greater, or may be 100 N/50 mm or greater. The tensile strength of the sheet body (1) may be, for example, 10 kN/50 mm or smaller, or may be 4 kN/50 mm or smaller. The tensile strength of the sheet body (1) may be of a value measured by the strip method as specified in the JIS L1096. As the unfolded shape of the sheet body (1), an example of a rectangular shape is shown in Fig. 1A, etc., but this can be any shape.

[0024] As shown in Figs. 2A and 2B, the pinching block plate (3) is a rectangular plate having a size of a block length (4) by a block height (5) and having a block thickness (6), and sufficient rigidity is obtained by increasing the block thickness (6). The material of the pinching block

plate (3) includes wood, plastic, metal, etc. A clip-fixing notch (10) having a size of a notch length (7) by a notch width (8) by a notch depth (9) is provided in one surface of the pinching block plate (3), which is placed in such a manner that the center of the notch length (7) is aligned with the position of the block plate longitudinal centerline (11). The clip-fixing notch (10) is provided near one end in the block height (5) direction (near the upper end in the perspective view of Fig. 2A).

[0025] In Fig. 1A (Step 1), surfaces of the two pinching block plates (3), which are opposite to the surfaces in which the clip-fixing notches (10) are provided, are made to face the sheet body (1), and the two pinching block plates (3) are situated in a symmetrical and parallel manner with respect to a folding centerline (12) on the sheet body (1) with the clip-fixing notches (10) being located on outer sides. The entire contact surfaces of the pinching block plates (3) and the sheet body (1) are tightly attached and fixed. The method of tightly fixing includes, a method using an adhesive and a method of forming the sheet body (1) integrally with the pinching block plates (3) made of a plastic material, etc., and so on.

[0026] Fig. 1B (Step 2) illustrates the state that is changed from the state shown in Fig. 1A (Step 1) to the state in which the sheet body (1) is folded along the folding centerline (12) in such a manner that the two pinching block plates (3) overlap each other with the sheet body (1) interposed therebetween. When doing so, the portions of the sheet body (1) that are tightly fixed to the two pinching block plates (3) are also overlapped each other. The bending angle of the crimped portion that is formed by folding the sheet body (1) varies so that the stretch function of the sheet body (1) is achieved. In addition, a hooked clip (13) that is an example of a pinching jig used in Fig. 1C (Step 3) is also shown.

[0027] Fig. 1C (Step 3) illustrates the state in which the hooked clip (13) is set to the two pinching block plates (3) in the state of Fig. 1B (Step 2), and one forced crimping unit (2) is thereby completed.

[0028] Figs. 3A to 3D illustrate the structure and operation of the hooked clip (13) made of metal. The hooked clip (13) has the same form and works according to the same operational principle as typical clips made of metal and used for binding documents, etc. As illustrated in Figs. 3A and 3B, the hooked clip (13) is formed by bending one rectangular metal plate to have a structure including a clip upper wall (14) and a pair of opposing symmetrical clip side walls (15) connected to both ends of the clip upper wall (14). In the hooked clip (13), the clip upper wall (14) and each of the clip side walls (15) form an acute angle therebetween, so that the distal ends of the pair of opposing clip side walls (15) are close to or in contact with each other. When no force is applied as such, the clip is in a closed state as shown in Figs. 3A and 3B. Meanwhile, as shown in Figs. 3C and 3D, the pair of opposing clip side walls (15) can be opened by an application of a clip-opening force (16) to each of the pair of clip side walls (15) in an outward direction. This

is caused by elastic deformation of metal, and thus a clip-opening width (17) is increased as the clip-opening force (16) is increased, and the state returns to the closed state shown in Figs. 3A and 3B again when the clip-opening force (16) is made zero. The relation between the clip-opening width (17) and the clip-opening force (16), which indicates elasticity, is determined by the elastic modulus of the metal material, the thickness, width, and bending shape, etc. of the metal plate of the hooked clip (13) and is designed to be optimal in use for loading after completion. Typical clips for binding documents, etc. accepts a possibility of slippage of a clip attached to documents. In contrast, for having the hooked clips (13) fixed without being slipped, fixing hooks (19) each bent inward at a right angle by a fixing hook width (18) in a distal end center portion are formed at the distal ends of the pair of clip side walls (15). As typical clips, jig-insertion tubes (20), which are formed by bending the distal ends of the clip side walls (15) outward into a circular shape, are attached to both sides of each of the fixing hooks (19). This is for fitting jigs into the jig insertion tubes (20) so as to open/close the clip from the outside and used for convenience during the assembly of the forced crimping unit (2), and thus this is not normally used when the stretch function-added loading sheet is in use for loading after the completion. In Figs. 1C (Step 3) and 1D, the hooked clip (13) in an opened state of Figs. 3C and 3D is attached so as to sandwich the two overlaid pinching block plates (3), and the fixing hooks (19) are fitted in the clip-fixing notches (10) and fixed therein.

[0029] Here, the internal clip width dimension (21) is equal to or greater than the total of the double of the block thickness (6) and the double of the thickness of the sheet body (1); the internal clip height dimension (22) is equal to or greater than the notch height (23) of the pinching block plate (3); the fixing hook width (18) is equal to or smaller than the notch length (7); and the fixing hook length (24) is equal to or smaller than the notch depth (9).

[0030] When no force is applied from the outside, a force in the closing direction is applied to the opened hooked clip (13) so that the opposing two pinching block plates (3) are forcibly closed (Fig. 1C (Step 3)). The hooked clip (13) is opened by an application of an external tensile force to portions of the sheet body (1) located in the left and right perpendicular direction with respect to the folding centerline (12) with respect to the forced crimping unit (2). The opening/closing of the hooked clip (13) caused by elastic deformation directly constitutes a change in the bending angle of the sheet body (1) in the crimped portion, and the stretch function with elasticity is thereby achieved.

[0031] Any number of the forced crimping units (2) are placed in any positions on one sheet body (1) in any shape, and the stretch function-added loading sheet pertaining to the first embodiment of the present invention is thus completed. The stretch function-added loading sheet is fixed to each of various loading devices by any method, and used such that an object to be loaded is

placed on the sheet body (1).

[0032] Figs. 4A to 4F are explanatory views showing the operations of the stretch function-added loading sheet of the first embodiment. Regarding the sheet body (1) in which one completed forced crimping unit (2) in the same state as shown in Fig. 1C (Step 3) is placed, Fig. 4A shows the device side and Fig. 4C shows the back side, wherein no external force is applied. In Fig. 4C in which Fig. 1C (Step 3) is seen from the back side, the forced crimping unit (2) cannot be seen but only one crimp groove (38) can be seen. The crimp gap (39) represents the width of the crimp groove (38). Here, the clip-opening width (17) of the hooked clip (13) is identical with the thickness of the two pinching block plates (3) (block thickness (6) x 2) and the two sheet bodies (1), wherein, because of the operational principle described above, no external force is applied, and thus a force compressing the two pinching block plates (3) is applied correspondingly, so that the portions of the sheet body (1) tightly fixed to the overlaid pinching block plates (3) are also compressed and the crimp gap (39) is thereby eliminated. Figs. 4D to 4F illustrate the state changed from the state shown in Figs. 4A to 4C to a state in which a tensile force (40) in the perpendicular direction with respect to the folding centerline (12) is applied to portions of the sheet body (1) located in the left and right perpendicular direction with respect to the folding centerline (12) of the forced crimping unit (2), wherein Fig. 4D is a schematic view of the device side, and Fig. 4F is a schematic view of the back side. This tensile force (40) is transmitted from the sheet body (1) to the pinching block plates (3) that are tightly fixed thereto, and this acts on the fixing hooks (19) of the hooked clip (13), which are fixed in the clip-fixing notches (10) of the pinching block plates (3). Accordingly, the tensile force (40) acts as a force applied to the same points and in the same direction as the clip-opening force (16) shown in Fig. 3C, and serves as a force for opening the hooked clip (13). Since the opening/closing of the hooked clip (13) is caused by elastic deformation, an application of the tensile force (40), which is equal to or greater than the force compressing the two pinching block plates (3) in the state where the hooked clip (13) is opened as shown in Figs. 4A to 4C, causes the clip-opening width (17) to increase from the state shown in Figs. 4A to 4C, and a gap is thereby generated between the portions of the sheet body (1) that are tightly fixed to the two pinching block plates (3) (crimp gap (39) > 0). When the tensile force (40) is further increased, the clip-opening width (17) is increased, and the crimp gap (39) is also increased. When the tensile force (40) is reduced again, the crimp gap (39) is also decreased. Naturally, the size of the crimp gap (39) is directly added to an initial sheet width (41) in a direction perpendicular to the folding centerline, and thus the stretch function with elasticity of the sheet body (1) is achieved. Furthermore, this forced crimping unit (2) is intended for forcibly generating a crimp (wrinkle) in any position in the sheet body (1), and thus the forced crimping unit (2) can be used as a novel

element for controlling the shape of a sheet other than the elements such as the frame or suspension fulcrums for securing the sheet as well as an object to be loaded, and designing for improving shape conformability is enabled.

[0033] As the sheet body (1) is required to have flexibility, the sheet body (1) is thin and lightweight, and is likely to be torn when a force is locally applied. Therefore, as shown in Figs. 4D to 4F, when the tensile force (40) that serves as the clip-opening force (16) of the hooked clip (13) is applied via the sheet body (1), the sheet body (1) at the contact points between the hooked clip (13) and the sheet body (1) may be easily damaged if these contact points are small. Accordingly, the pinching block plates (3), which are thicker than the sheet body (1) and have rigidity and are less susceptible to damage, are placed between the hooked clip (13) and the sheet body (1), and the contact surfaces of the pinching block plates (3) and the sheet body (1) are made to have large areas and tightly fixed to each other, and the tensile force (40) is thereby distributed by the area of the contact surfaces and it is possible to suppress the damage to the sheet body (1) as well.

(A second embodiment)

[0034] As an example of placing the forced crimping units (2) on the sheet body (1), a stretch function-added loading sheet will be described, which is implemented with the placement in two parallel rows at both ends which constitutes a simple structure and can be applied to various loading devices. Figs. 5A to 5D illustrate procedure of assembling the stretch function-added loading sheet as the second embodiment. The steps shown in Fig. 5A (Step 1), Fig. 5B (Step 2) and Fig. 5C (Step 3) correspond to the procedure shown in Fig. 1A (Step 1), Fig. 1B (Step 2) and Fig. 1C (Step 3), respectively. Fig. 5A (Step 1) illustrates the procedure of placing and fixing the pinching block plates (3) on the sheet body (1). The sheet body (1) has a rectangular shape, and two common folding centerlines (44) are located, which are parallel and symmetrical with respect to the sheet width centerline (26). After completion, an object to be loaded is placed between the two common folding centerlines (44), and thus the spacing between the two common folding centerlines (44) is designed accordingly. Each of fixing parallel frames (28) shown in Fig. 5D (Step 4) is placed between each of the common folding centerlines (44) and each of edges of the sheet body (1) in the sheet width direction (27) located on outer sides of the common folding centerlines (44), and thus the spacing therebetween is designed accordingly. As Fig. 1A (Step 1), the two pinching block plates (3), which are used for forming one forced crimping unit (2), are situated in a symmetrical and parallel manner with respect to the common folding centerline (44) with the clip-fixing notches (10) being located on outer sides. Here, in the placement of the present embodiment, in order to place a plurality of forced crimp-

ing units (2) at equal intervals on the two common folding centerlines (44), a plurality of combinations of two pinching block plates (3) are placed at equal intervals on the common folding centerlines (44). That is, the folding centerline (12) (see Fig. 1A, etc.) of each of the forced crimping units (2) overlaps either of the two common folding centerlines (44).

5 The relationship of placement of the pinching block plates (3) on the two common folding centerlines (44) on the left and right is such that the pinching block plates (3) are situated so as to be symmetrical with respect to the sheet width centerline (26) so that the locations, quantities, and spacings in the sheet length direction (29) are all identical, and the entire contact surfaces of all of the pinching block plates (3) and the sheet body (1) are tightly fixed. In Fig. 5A (Step 1), eight forced crimping units (2), that is, eight sets of two pinching block plates (3) are placed on one common folding centerline (44), which indicates that a total of sixteen forced crimping units (2) are being assembled.

10 **20** **[0035]** Fig. 5B (Step 2) illustrates the procedure of having the two pinching block plates (3) constituting each of the forced crimping units (2) overlaid with each other with the sheet body (1) interposed therebetween from the state shown in Fig. 5A (Step 1), and this procedure is completed by making folds along the two entire common folding centerlines (44).

15 **25** **30** **[0036]** Fig. 5C (Step 3) illustrates the state in which each one of the hooked clips (13) is set to each of all of the two overlaid pinching block plates (3) in the state shown in Fig. 5B (Step 2), and the forced crimping units (2) are thereby completed. Fig. 5C (Step 3) illustrates that a total of sixteen forced crimping units (2) are completed.

35 **40** **45** **[0037]** As thus described, in the present embodiment, the number of forced crimping units (2) is even, and a half of the forced crimping units (2) are attached in one row at equal intervals in such a manner that one of the common folding centerlines (44) coincides with the folding centerline of each of the forced crimping units (2). Also, the remaining half of the forced crimping units (2) are attached in one row at equal intervals in such a manner that the other of the common folding centerlines (44) coincides with the folding centerline of each of the forced crimping units (2). The half of the forced crimping units (2) and the remaining half of the forced crimping units (2) are situated to be symmetrical with respect to the sheet width centerline (26).

50 **55** **[0038]** Fig. 5D (Step 4) illustrates the state in which the sheet body (1) on which the forced crimping units (2) of Fig. 5C (Step 3) are placed is attached to the two fixing parallel frames (28), and the stretch function-added loading sheet of the present embodiment is thereby completed. The two fixing parallel frames (28) are attached to both end portions each located between each of the edges in the sheet width direction (27) of the sheet body (1) and each of the rows of the forced crimping units (2), so as to be parallel to the sheet width centerline (26), i.e., parallel to the sheet length direction (29). The two fixing

parallel frames (28) attached are fixed in any location by any method so that their positional relation is fixed and stationary. When an object to be loaded is actually placed, the side on which the forced crimping units (2) are placed is a back surface of the sheet body (1) and oriented to face downward, and the object to be loaded is placed on the surface that is a front surface of the sheet body (1) on which the forced crimping units (2) are not placed. The object to be loaded is placed on the sheet body (1) in the location between the two rows of the forced crimping units (2). As the object to be loaded is placed on the sheet body (1) in the location between the two fixing parallel frames (28) and a load is thereby applied, a force is applied in an inward direction perpendicular to the fixing parallel frames (28). As described above, any method can be used for keeping the positional relation, such as a method of withstanding this force and securing the distance between the two fixing parallel frames (28). The relation between the width in the sheet width direction (27) of the sheet body (1) and the distance between the two fixing parallel frames (28) is designed in consideration of the elongation of the material itself when the sheet body (1) after completion is used for loading, and the target degree of sagging, etc. Specific methods for attaching the sheet body (1) to the fixing parallel frames (28) may be any methods and include: a method of forming sheet edge tubes (43) that continues from the sheet on the left and right edges in the sheet width direction (27) of the sheet body (1), and inserting the fixing parallel frames (28) therethrough; and a method of driving studs or staples through the sheet body (1) into wooden fixing parallel frames (451) (see a fifth embodiment and a sixth embodiment).

[0039] Fig. 6A is a view in which the completed stretch function-added loading sheet of the second embodiment of Fig. 5D (Step 4) is turned over to show the vertical positional relation in normal use, wherein the two rows of the forced crimping units (2), which are attached to both ends in the sheet width direction (27) to be parallel to the sheet length direction (29), are seen as the crimp grooves (38) when the sheet is turned over. At this time, the sheet body (1) is designed to be flat without any slack except the crimp grooves (38). Fig. 6B is a schematic view showing the deformation state of the sheet body (1) from the state of Fig. 6A when a spherical-object load (42) is placed in the center of the stretch function-added loading sheet of the second embodiment. Fig. 6A shows that the crimp gap (39) is zero regardless of the position in the sheet length direction (29), whereas Fig. 6B shows that the crimp gap (39) near the center where the spherical-object load (42) is placed is the largest, and the crimp gap (39) decreases as the distance from both ends in the sheet length direction (29) decreases. Figs. 7A to 7C is a three-plane drawing (a front view, a bottom view, and a right-side view) showing the same state as the state shown in Fig. 6B. Fig. 7A illustrates a state in which the sheet body (1) has a shape in which a portion near the center is sagging, which indicates that the spherical-ob-

ject load (42) placed near the center acts as the clip-opening force (16) of the hooked clips (13) of the forced crimping units (2) in the rows located on both sides, and widens the clip opening width (17), thereby increasing the width in the sheet width direction (27) of the sheet body (1). Fig. 7B illustrates that the clip-opening width (17) of each of the hooked clips (13) is the widest, which are components of the forced crimping units (2) on the left and right near the center in the sheet length direction (29) where the spherical-object load (42) is placed, while the clip opening width (17) decreases as the distance from both ends in the sheet length direction (29) decreases, which indicates that there occur differences in opening/closing of the hooked clips (13) according to the locations in the sheet length direction (29) conforming to the location in the sheet length direction (29) and shape of the loaded object. Fig. 7C illustrates a state in which the sheet body (1) has a shape in which a portion near the center is sagging, which indicates that the width in the sheet width direction (27) of the sheet body (1) in the location near the center in the sheet length direction (29) is most expanded because of the differences in opening/closing of the hooked clips (13) according to the locations in the sheet length direction (29) shown in Fig. 7B, while the width in the sheet width direction (27) of the sheet body (1) decreases as the distance from both ends in the sheet length direction (29) decreases. In this way, in the stretch function-added loading sheet of the second embodiment, there occur differences in opening/closing of the hooked clips (13) according to the locations in the sheet length direction (29), which results from the load depending on the location in the sheet length direction (29) and the shape of the loaded object, and there occur variation in the width in the sheet width direction (27) of the sheet body (1) conforming to the location in the sheet length direction (29) and the shape of the loaded object, so that the sheet body (1) has a shape conforming to the loaded object, and the contact surfaces of the loaded object and the sheet body (1) are thereby increased, and the load applied to the loaded object per unit contact area is decreased, and it is possible to improve the shape conformability which suppresses the slippage of the loaded object. In addition, the positional difference in the sheet width direction (27) provides a small difference in the effect yielded by the forced crimping units (2), and thus it is preferable that the location of the object to be loaded is in the center in the sheet width direction (27). Also, during the transitional period of deformation of the sheet body (1) caused by load variation, the shock applied to the loaded object is alleviated by the elasticity exerted by the opening/closing of the hooked clips (13).

(A third embodiment)

[0040] The elastic force exerted by the opening/closing of the hooked clip (13) used for the forced crimping unit (2) is determined by the type of metal, metal thickness,

shape, etc. of the hooked clip (13), and is designed according to the type of the object to be regularly loaded and the elasticity required in use after completion of the loading sheet. However, if a load that is greater than a normal load is suddenly applied, the clip-opening width (17) of the hooked clip (13) may open too wide, which may cause the hooked clip (13) to be detached from the pinching block plates (3), or may cause the metal itself to deteriorate due to deformation beyond the elastic limit of the metal of the hooked clip (13). Therefore, a stretch function-added loading sheet will now be described, which uses a stopper-attached hooked clip (291) as the pinching jig to suppress excessive opening of the clip-opening width (17) of the hooked clip (13). Fig. 8A shows an assembly view of the stopper-attached hooked clip (291) used for the stretch function-added loading sheet of the third embodiment, and Fig. 8B shows a completion view.

[0041] Fig. 8A shows the assembly view of the stopper-attached hooked clip (291). One stopper-attached hooked clip (291) is composed of one clip stopper (31), one perforated hooked clip (30), two screws (32), and two nuts (36). The clip stopper (31) is attached from above the perforated hooked clip (30) with the two screws (32).

[0042] The clip stopper (31) has a structure including a stopper upper wall (34) in which two screw-insertion holes (33) are provided, and a pair of opposing symmetrical stopper side walls (35) that are fixed at both ends of the stopper upper wall (34). The clip stopper (31) is more rigid than the perforated hooked clip (30). For example, the clip stopper (31) can be made of a metal plate that is thicker than the metal plate that forms the perforated hooked clip (30).

[0043] The perforated hooked clip (30) is one in which two screw-insertion holes (33) are provided in the clip upper wall (14) of the hooked clip (13) described in the first embodiment in the positions corresponding to the two screw-insertion holes (33) of the stopper upper wall (34). The details of the perforated hooked clip (30) are the same as the hooked clip (13) described in the first embodiment, except that the screw-insertion holes (33) are provided, and thus the explanations will not be repeated.

[0044] The clip stopper (31) is placed over the perforated hooked clip (30), and the two screw-insertion holes (33) of the perforated hooked clip (30) are matched with the two screw-insertion holes (33) of the clip stopper (31), which the two screws (32) are passed through, and the screws (32) are fixed with the nuts (36). The stopper-attached hooked clip (291) is thus completed as shown in Fig. 8B.

[0045] The stretch function-added loading sheet of the third embodiment may be the same as the descriptions of the stretch function-added loading sheets of the first and second embodiments, except that the stopper-attached hooked clip (291) is used as the pinching jig.

[0046] The stopper-attached hooked clip (291) has a

mechanism that, when the clip-opening width (17) of the perforated hooked clip (30) increases by the clip-opening force (16) shown in Fig. 3C, the clip side walls (15) come into contact with the stopper side walls (35) of the clip stopper (31) before the clip opening width (17) reaches the width that would cause a problem, so as to suppress a further increase of the clip opening width (17). Therefore, the stopper opening width (37) of the clip stopper (31) is set to the stopper opening width (37) that corresponds to the value smaller than the clip-opening width (17) which may cause a problem. The rigidity of the clip stopper (31) is designed so as to be capable of exerting a stopper function against the clip-opening force (16) caused by the maximum predicted load when the sheet body (1) with the forced crimping units (2) placed thereon is in use. This stopper-attached hooked clip (291) is used instead of the hooked clip (13) that is a component of the forced crimping unit (2), so that the stretch function-added loading sheet is completed, which is equipped with the forced crimping unit (2) which suppresses abrupt excessive widening of the clip-opening width (17) of the stopper-attached hooked clip (291).

[0047] Fig. 9A illustrates a view in which the sheet body (1) equipped with the one forced crimping unit (2) using the stopper-attached hooked clip (291) shown in Fig. 8B as a component of the forced crimping unit (2), that is, the stretch function-added loading sheet of the third embodiment is completed. Fig. 9B illustrates the cross-section of the stretch function-added loading sheet of the third embodiment when no tensile force is applied. Fig. 9C illustrates the cross-section of the stretch function-added loading sheet of the third embodiment when the predicted maximum tensile force (40) is applied. In Fig. 9C, the clip side walls (15) of the perforated hooked clip (30) come into contact with the stopper side walls (35) of the clip stopper (31) so as to suppress a further increase of the clip-opening width (17) of the perforated hooked clip (30). It is thereby possible to suppress detachment of the perforated hooked clip (30) from the pinching block plates (3), and deterioration of the metal of the perforated hooked clip (30) due to deformation beyond the elastic limit. In addition, by designing the elasticity of opening/closing of the stopper side walls (35) of the clip stopper (31), only the elasticity of opening/closing of the clip side walls (15) of the perforated hooked clip (30) initially works during the transitional period in which the load exerted by the loaded object is applied, but after the clip side walls (15) and the stopper side wall (35) come into contact with each other as shown in Fig. 9C, the elasticity of opening/closing of the stopper side walls (35) is added, and therefore the elasticity in two levels can be designed, and the mitigation of shock to the loaded object can be further precisely performed.

55 (A fourth embodiment)

[0048] The stretch function-added loading sheet as a fourth embodiment is any of the stretch function-added

loading sheets of the other embodiments, wherein:

the sheet body (1) is a fabric made of cotton; the pinching block plates (3) is made of wood; and the sheet body (1) and the pinching block plates (3) are fixed by an adhesive containing an ethylene-vinyl acetate copolymer resin.

The adhesive used in manufacturing the stretch function-added loading sheet may be an adhesive of which main component is an ethylene-vinyl acetate copolymer resin emulsion and of which solvent is water. The present embodiment is the same as the descriptions of the other embodiments, except those of the materials and the type of the adhesive.

[0049] The fabric made of cotton used as the material of the sheet body (1) includes canvas which is also used as a sheet material of conventional chairs and as a material of hammocks, as examples of commonly used products. Cotton, which is a natural plant fiber, has high fiber strength, low elongation, and moisture absorbency, and can be used as the sheet body (1) with sufficient load-bearing capacity against a load approximately of the weight of a person by increasing the thickness of the fabric by using twisted yarn or basket weaving. An adhesive containing an ethylene-vinyl acetate copolymer resin, which has excellent adhesion properties with the fabric made of cotton, is used as the adhesive for tightly fixing the pinching block plates (3). As the material of the pinching block plates (3), wood is used, which is a natural plant material having excellent adhesion properties with the ethylene-vinyl acetate copolymer resin.

[0050] This combination of the materials has advantages such as, when the target to be loaded is a person, securing of the load-bearing capacity, an improvement in comfort of the person, and low cost. Cotton fiber has high strength and low elongation, and thus, when a fabric made of cotton fiber is used as the sheet body (1), the elongation of the dimensions of the material itself due to load accumulation time is suppressed, which makes it a suitable material for the sheet body (1). Cotton fiber has high moisture absorbency, in a case when the target to be loaded is a person and the climate is warm, the sweat of the person will be absorbed, and the comfort of the person will be improved. In addition, it is possible to reduce the cost of cotton products. Unlike airtight sheets made of a polymeric resin, etc., fabrics have good air permeability. Adhesives containing an ethylene-vinyl acetate copolymer resin are used as typical adhesives for fabrics and wood. Cotton is a plant fiber itself, and wood is an aggregate of plant fibers, and thus it is considered that the water-soluble adhesive of which main component is an ethylene-vinyl acetate copolymer resin emulsion has adhesive properties that are similarly superior with respect to both the sheet body (1) made of cotton and the pinching block plates (3) made of wood.

(A fifth embodiment)

[0051] The chair pertaining to the embodiment of the present invention includes the stretch function-added loading sheet pertaining to the embodiments of the present invention as at least one of a seating surface and a backrest. The chair may be, for example, one including the stretch function-added loading sheet of the second embodiment as at least one of the seating surface and the backrest, and a structure body that supports the two fixing parallel frames of the stretch function-added loading sheet. The chair is preferably configured in such a manner that when a person is seated thereon, the two fixing parallel frames are placed in parallel on the left and right sides of the central plane of the person's trunk.

[0052] The chair of Figs. 10A and 10B uses, for the seating surface and the backrest, the stretch function-added loading sheet on which a plurality of forced crimping units is placed in two rows in a parallel manner at both ends, which is similar to the one shown as the second embodiment. In Fig. 10A, two crimp grooves (38), which are parallel to the sheet length direction (29), are located at both ends in the sheet width direction (27) of the sheet body (1), which constitutes the seating surface and backrest of the chair, and the two crimp grooves (38) extend from the top end to the bottom end. Fig. 10B illustrates that, on the back sides of the two crimp grooves (38), the forced crimping units (2) forming said grooves are placed, eight of which are placed on the seating surface side and seven of which are placed on the backrest side in one row.

[0053] Fig. 10C illustrates the sheet body (1), etc. of the chair shown in Figs. 10A and 10B. Fig. 10D illustrates the frames, etc., to which the sheet body (1), etc., is attached. The sheet body (1) is attached to the fixing parallel frames (28) by passing a total of four fixing parallel frames (28), each fixed to both left and right ends of the frames shown in Fig. 10D in positions corresponding to the seating surface as well as both left and right ends of the frames in positions corresponding to the backrest, through the sheet edge tubes (43) attached to both left and right edges of the sheet body (1) in the sheet width direction (27).

45 (A sixth embodiment)

[0054] Figs. 11A and 11B illustrate a chair pertaining to a sixth embodiment of the present invention in which, for the seating surface and the backrest of a hanging-type chair, there is used the stretch function-added loading sheet on which a plurality of forced crimping units is placed in two rows in a parallel manner at both ends, which is similar to the one shown as the second embodiment. In Fig. 11A, two crimp grooves (38), which are parallel to the sheet length direction (29), are located at both ends in the sheet width direction (27) of the sheet body (1) of the seating surface, and extend in straight lines from the back end to the front end. The backrest

also includes two crimp grooves (38) parallel to the sheet length direction (29) which are located at both ends in the sheet width direction (27) of the sheet body (1) and extend in straight lines from the top end to the bottom end. Fig. 11B illustrates that, on the back sides of the two crimp grooves (38) of the seating surface and the backrest, the forced crimping units (2) forming said grooves are placed, seven of which are placed on the seating surface and six of which are placed on the backrest in one row, respectively.

[0055] Fig. 12A illustrates the sheet body (1), etc. of the hanging-type chair shown in Figs. 11A and 11B. In addition, the frames to which the sheet body (1), etc. are attached are shown in Fig. 12B. The seating surface is attached by inserting the left and right fixing parallel frames (28) through the sheet edge tubes (43) attached to the left and right edges in the sheet width direction (27) of the sheet body (1). The backrest is assembled by driving staples, etc. through the left and right end portions in the sheet width direction (27) of the sheet body (1) into the left and right wooden fixing parallel frames (451).

(A seventh embodiment)

[0056] As a seventh embodiment, a stretch function-added loading sheet will now be described, which uses a stopper band (45) as a means for suppressing excessive opening of the clip-opening width (17) of the hooked clip (13) besides the above-described third embodiment.

[0057] The stopper band (45) is a rectangular flexible sheet as shown in Fig. 13A, which is divided into three regions with respect to a perpendicular corresponding direction to the folding centerline (46). The regions in both end portions of the perpendicular corresponding direction to the folding centerline (46) are tight attachment regions (48A) having a tight attachment width (47), and the region sandwiched between the tight attachment regions (48A) is a variable curvature region (50) having a variable curvature width (49). The entire stopper band (45) is a rectangle having an area of a band length (51) x (the variable curvature width (49) + the tight attachment width (47) x 2). Fig. 13B is a view showing a turned-over state of the sheet body (1) on which one completed forced crimping unit (2) in the same state as in Fig. 1C (Step 3) is placed thereon. Fig. 13B illustrates the state in which the forced crimping unit (2) cannot be seen as being hidden behind the sheet body (1) while one crimp groove (38) can be seen. As shown in Fig. 1C (Step 3), the forced crimping unit centerline (52) is an imaginary straight line which is drawn on the sheet body (1) to be perpendicular to the folding centerline (12) while passing through the center position of the clip width (25) of the hooked clip (13) that is a component of the forced crimping unit (2). Rectangular tight attachment regions (48B) are defined on the sheet body (1), which are located to be symmetrical with respect to the crimp groove (38), and each have an area of the band length (51) x the tight attachment width (47). The tight attachment regions (48B) are locat-

ed in such a manner that each edge along the band length (51) of the tight attachment regions (48B) on the sheet body (1) is parallel to the crimp groove (38), and that the forced crimping unit centerline (52) passes through the center of the edge along the band length (51). A pair of tight attachment regions (48A) of the stopper band (45) and a pair of tight attachment regions (48B) of the sheet body (1) have the same area, and the pair of tight attachment regions (48A) of the stopper band (45) and the pair of tight attachment regions (48B) of the sheet body (1) are tightly fixed as shown in Fig. 13C. In this way, the stopper band (45) is placed on the surface of the sheet body (1) opposite to the surface on which the forced crimping unit (2) is placed, and both end portions of the stopper band (45) (the pair of tight attachment regions (48A)) are tightly fixed to the sheet body (1) on both sides of the folding centerline (12), respectively. When the material of the sheet body (1) and the stopper band (45) is cloth, sewing can be used as a method of tightly attaching and fixing the tight attachment regions (48A) of the stopper band (45) to the tight attachment regions (48B) of the sheet body (1).

[0058] Fig. 14A is a partial cutaway view in which the sheet body (1) is vertically cut along a cutting line (53) on the sheet body (1) shown in Fig. 13C. As no force is applied to the sheet body (1), it is in a state in which the hooked clip (13) is closed and the two pinching block plates (3) overlap each other, and the variable curvature region (50) of the stopper band (45) is curved. At this time, the variable curvature region (50) may be bent. Fig. 14B illustrates a state in which the maximum predicted tensile force (40) is applied from the above-mentioned state. As the tensile force (40) gradually increases from zero, the hooked clip (13) gradually opens, and the curvature of the variable curvature region (50) of the stopper band (45) gradually decreases. The opening of the hooked clip (13) stops when the tensile force (40) becomes equal to or greater than a predetermined magnitude and the variable curvature region (50) is fully extended and becomes flat (Fig. 14B). The maximum opening width of the hooked clip (13) is determined by the variable curvature width (49) of the stopper band (45). Therefore, the variable curvature width (49) of the stopper band (45) is designed so that the hooked clip (13) would not be detached from the pinching block plates (3), or the opening width of the hooked clip (13) would not reach the width that would cause deterioration of the metal due to deformation of the metal of the hooked clip (13) beyond its elastic limit. The stopper band (45) can be designed to entirely cover the crimp groove (38), and thus can also have a function of preventing foreign matters from entering the crimp groove (38).

(An eighth embodiment)

[0059] As the stretch function-added loading sheet of the second embodiment shown in Fig. 5D, when the stopper band is used for a stretch function-added loading

sheet on which a plurality of forced crimping units (2) is set on the common folding centerline (44), a stopper band (54) (connecting stopper band) can be used, which is in a form in which stopper bands set to the respective forced crimping units (2) are connected to each other. It is thereby possible to control, with respect to the plurality of forced crimping units (2), the maximum opening width of each of the hooked clips (13) by one stopper band (54). Figs. 15A to 15C illustrate an example of using the stopper band (54) for the stretch function-added loading sheet of the second embodiment. Fig. 15A illustrates two stopper bands (54). Compared to the stopper band (45) of Fig. 13A, the band length (51) of the stopper band (54) of Fig. 15A is required to cover a plurality of forced crimping units (2) and thus made long correspondingly, and the regions to be tightly attached to the sheet body (1) are also long tight attachment regions (55A). Fig. 15B is a view showing the turned-over state of the stretch function-added loading sheet of the second embodiment in the state shown in Fig. 5D. Each pair of elongated rectangular tight attachment regions (55B), which correspond to the tight attachment regions (55A) of the stopper band (54) shown in Fig. 15A, is located in the same way as in Fig. 13B with respect to a pair of crimp grooves (38) located at both ends in the sheet width direction (27) of the sheet body (1). The two stopper bands (54) shown in Fig. 15A are used for the pair of crimp grooves (38), respectively, and in the same way as in Fig. 13C, the pair of tight attachment regions (55A) of the stopper band (54) and the pair of tight attachment regions (55B) of the sheet body (1) are tightly fixed along each of the crimp grooves (38), so that the setting of the stopper bands (54) of the second embodiment is completed as shown in Fig. 15C.

(A ninth embodiment)

[0060] As a ninth embodiment, an embodiment of reinforcing the adhesion between the sheet body (1) and the pinching block plates (3) by means of staples (56) will be shown. When the material of the pinching block plates (3) is wood and the method of tightly fixing the sheet body (1) and the pinching block plates (3) is the tight fixation by means of an adhesive, a metal staple (56) shown in Fig. 16A can be used to reinforce the adhesion. Fig. 16B illustrates that the sheet body (1) in the state of Fig. 1A (Step 1) is turned over, and four staples (56) are driven into the pinching block plates (3) from above the sheet body (1). Since the pinching block plates (3) cannot be seen as being hidden behind the sheet body (1), the enlarged view A of Fig. 16C shows the pinching block plates (3), etc. using hidden lines. Here, one staple (56) is driven into each of the left and right positions of each of the pinching block plates (3).

(Other embodiments)

[0061] The present invention is not limited to the above-mentioned embodiments, and various modifica-

tions may be added within the scope that would not deviate from the gist of the present invention. For example, to the configuration of one of the embodiments, the configuration of the other one of the embodiments can be

5 added, or a part of the configuration of one of the embodiments can be replaced with the configuration of the other one of the embodiments or with a well-known technique. Furthermore, a part of the configuration of one of the embodiments can be removed. In addition, a well-known technique can be added to the configuration of one of the embodiments.

[0062] For example, the pinching jig constituting the forced crimping unit may be a clip such as the above-mentioned hooked clip, the stopper-attached hooked clip, etc., and further, may be anything other than a clip as long as it has a similar function. Moreover, the two pinching block plates constituting one forced crimping unit neither necessarily have the same shape, nor do they have to be symmetrically situated with respect to 15 the folding centerline on the sheet body, as long as they are fixed on both sides of the folding centerline. The pinching jig may be fixed to the pinching block plates by any means other than a hook structure.

[0063] Moreover, each embodiment of the following [1] to [4] also falls within the scope of the present invention.

[1]: A stretch function-added loading sheet comprising one load-bearing sheet and any number of forced crimping units, wherein: the forced crimping unit is composed of two pinching block plates having the same shape and one hooked clip; each of the pinching block plates is a rectangular plate having a block thickness, and a clip-fixing notch is provided in one surface of the plate in such a manner that the center of the notch length is aligned with the position of a block plate longitudinal centerline; the hooked clip is configured in such a manner that: one rectangular metal plate is bent to form a U-shape made up of a clip upper wall and a pair of symmetrical clip side walls connected to the both ends of the clip upper wall; the clip upper wall and each of the opposing clip side walls are made to form an acute angle therebetween so that ends of the opposing clip side walls are in contact with each other so as to be in a closed state; an opened state of the opposing clip side walls caused by elastic deformation of metal is enabled by an application of a clip-opening force in a direction to the outside of each of the clip side walls; and fixing hooks are attached, formed by bending distal ends of the left and right clip side walls inward each at a right angle; the two pinching block plates of the forced crimping unit are tightly fixed to the load-bearing sheet by any method in such a manner that the surfaces opposite to the surfaces having the clip-fixing notches face the load-bearing sheet and that the two pinching block plates are situated to be symmetrical and parallel to a folding centerline on the load-bearing sheet with the clip-fixing notches being

located outer sides, and after the load-bearing sheet is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the load-bearing sheet interposed therebetween, the hooked clip in an opened state so as to sandwich the two pinching block plates is attached, and when doing so, the fixing hooks of the hooked clip are fitted in the clip-fixing notches in the pinching block plates so that the one forced crimping unit is completed; and by placing the one forced crimping unit on the load-bearing sheet as thus described, the stretch function is achieved, which has elasticity exerted such that by an application of a tensile force in a direction perpendicular to the folding centerline to the portions of the load-bearing sheet located in the left and right perpendicular direction with respect to the folding centerline of the forced crimping unit, the clip side walls of the hooked clip opens so that the load-bearing sheet extends in the direction of the tensile force, while the sheet contracts when the tensile force is reduced; and any number of the forced crimping units is placed on said one load-bearing sheet in any position to complete the load-bearing sheet equipped with the forced crimping unit, which is fixed by any method and used such that an object to be loaded is placed on the load-bearing sheet.

[2]: The stretch function-added loading sheet of [1], comprising one load-bearing sheet, any even number of the forced crimping units, and two fixing parallel frames, wherein:

the load-bearing sheet has a rectangular shape, and two common folding centerlines that are parallel and symmetrical to the sheet width centerline are located, a half of the forced crimping units are attached in one row at equal intervals in such a manner that one of the common folding centerlines overlaps the folding centerline of each of the forced crimping units, and with respect to said placement of the forced crimping units, the remaining half of the forced crimping units are situated on the symmetrical positions with respect to the sheet width centerline so that the forced crimping units are attached in one row at equal intervals in such a manner that the other of the common folding centerlines overlaps each of the folding centerlines, and thereby the placement of the forced crimping units in two parallel rows at both ends of the load-bearing sheet is completed; the two fixing parallel frames are fixed in any location by any method; the left and right fixing parallel frames are fixed by any method, to be parallel to the sheet width centerline, respectively on the left and right spaces each located between one of the left and right edges in the sheet width direction of the

5

10

15

20

25

30

35

40

45

50

55

load-bearing sheet on which the above-explained forced crimping units are placed in two parallel rows at both ends thereof, and one of the left and right rows of the forced crimping units; and

an object to be loaded is placed between the two rows of forced crimping units when being used.

[3]: The stretch function-added loading sheet configured in such a manner that: the stopper-attached hooked clip is composed of one clip stopper, one perforated hooked clip, two screws, and two nuts;

the clip stopper is formed to have a U-shape composed of a stopper upper wall having two screw-insertion holes and a pair of symmetrical stopper side walls fixed to both ends of the stopper upper wall, and the perforated hooked clip is one in which two screw-insertion holes are formed through the clip upper wall of the hooked clip;

the clip stopper is placed over the perforated hooked clip, and the two screw-insertion holes are matched with the corresponding ones, and the screws are inserted therethrough and fixed with the nuts, so that the one stopper-attached hooked clip is completed; and all the hooked clips that are the constituent components of the stretch function-added loading sheet of [1] or [2] are replaced with the stopper-attached hooked clips.

[4]: The stretch function-added loading sheet of [1], [2], or [3], wherein the load-bearing sheet and the pinching block plates, which are the components thereof, are configured in such a manner that: a specific material of the load-bearing sheet is a fabric made of cotton; a specific material of the pinching block plates is wood; the method of tightly fixing the load-bearing sheet and the pinching block plates is fixation with an adhesive; and the main component of the adhesive is an ethylene-vinyl acetate copolymer resin emulsion, and the solvent is water.

Descriptions of Reference Numerals

[0064]

1. sheet body
2. forced crimping unit
3. pinching block plate
4. block thickness
5. notch length
6. clip-fixing notch
7. block plate longitudinal centerline
8. folding centerline
9. hooked clip (pinching jig)

14. clip upper wall	
15. clip side wall	
16. clip-opening force	
19. fixing hook	
26. sheet width centerline	5
27. sheet width direction	
28. fixing parallel frame	
291. stopper-attached hooked clip (pinching jig)	
30. perforated hooked clip	
31. clip stopper	10
32. screw	
33. screw-insertion hole	
34. stopper upper wall	
35. stopper side wall	
36. nut	15
40. tensile force	
44. common folding centerline	
45. stopper band	
54. stopper band (connecting stopper band)	20

Claims

1. A stretch function-added loading sheet, comprising one sheet body, and

any number of forced crimping units, the forced crimping unit including two pinching block plates and one pinching jig, wherein:

the two pinching block plates are fixed on one surface of the sheet body on both sides of a folding centerline on the sheet body, the pinching jig is fixed to the two pinching block plates so as to sandwich the two pinching block plates in a state where the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the stretch function-added loading sheet has a stretch function in which the sheet body extends as the pinching jig opens by means of an opening/closing mechanism that the pinching jig has, which is caused by an application of a tensile force in a direction perpendicular to the folding centerline to the sheet body, while the sheet body contracts as the pinching jig closes by means of the opening/closing mechanism that the pinching jig has when the tensile force is reduced.

2. The stretch function-added loading sheet according to Claim 1, wherein: the two pinching block plates have the same shape,

each of the pinching block plates is a rectangular

plate having a block thickness, and a clip-fixing notch is provided in one surface of this plate in such a manner that the center of a notch length is aligned with the position of a longitudinal centerline of the block plate; the pinching jig is a hooked clip; the hooked clip has a structure formed by bending one rectangular metal plate and including a clip upper wall and a pair of opposing clip side walls connected to both ends of the clip upper wall, and the hooked clip is configured to be in a closed state where distal ends of the pair of opposing clip side walls come close to each other, and a state where the pair of opposing clip side walls are opened due to elastic deformation of metal when a clip-opening force is applied in a direction to the outside of each of the pair of opposing clip side walls, which constitutes the opening/closing mechanism; fixing hooks each bent inward at a right angle are formed each at each distal end of the pair of clip side walls; the two pinching block plates are situated symmetrically with respect to the folding centerline in a state where surfaces opposite to the surfaces in which the clip-fixing notches are provided face the sheet body, the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the fixing hooks of the hooked clip are fitted in the clip-fixing notches of the pinching block plates in a state where the hooked clip in an opened state so as to sandwich the two pinching block plates is attached; and the stretch function-added loading sheet is secured by any method and used such that an object to be loaded is placed on the sheet body.

3. The stretch function-added loading sheet according to Claim 1, wherein: the two pinching block plates have the same shape,

each of the pinching block plates is a rectangular plate having a block thickness, and a clip-fixing notch is provided in one surface of this plate in such a manner that the center of a notch length is aligned with the position of a longitudinal centerline of the block plate; the pinching jig is a stopper-attached hooked clip; the stopper-attached hooked clip includes one clip stopper, one perforated hooked clip, two screws, and two nuts; the clip stopper has a structure including a stopper upper wall in which two screw-insertion holes are provided, and a pair of opposing stop-

per side walls that are fixed at both ends of the stopper upper wall;

the perforated hooked clip has a structure formed by bending one rectangular metal plate and including a clip upper wall and a pair of opposing clip side walls connected to both ends of the clip upper wall, and the perforated hooked clip is configured to be in a closed state where distal ends of the pair of opposing clip side walls come close to each other, and a state where the pair of opposing clip side walls are opened due to elastic deformation of metal when a clip-opening force is applied in a direction to the outside of each of the pair of opposing clip side walls, which constitutes the opening/closing mechanism;

fixing hooks each bent inward at a right angle are formed each at each distal end of the pair of clip side walls;

the clip upper wall is provided with two screw-insertion holes;

the stopper-attached hooked clip has a structure in which the clip stopper is placed over the perforated hooked clip, and in a state where the two screw-insertion holes of the perforated hooked clip are matched with the two screw-insertion holes of the clip stopper,

the screws are passed through the screw-insertion holes, respectively, and fixed with the nuts; the two pinching block plates are situated symmetrically with respect to the folding centerline in a state where surfaces opposite to the surfaces in which the clip-fixing notches are provided face the sheet body,

the sheet body is folded along the folding centerline in such a manner that the two pinching block plates overlap each other with the sheet body interposed therebetween, and the fixing hooks of the stopper-attached hooked clip are fitted in the clip-fixing notches of the pinching block plates in a state where the stopper-attached hooked clip in an opened state so as to sandwich the two pinching block plates is attached; and

the stretch function-added loading sheet is secured by any method and used such that an object to be loaded is placed on the sheet body.

4. The stretch function-added loading sheet according to Claims 1, 2 or 3, further comprising a stopper band, which is a flexible sheet, placed on a surface of the sheet body opposite to the surface in which the forced crimping unit is placed, wherein:

both end portions of the stopper band are tightly fixed to the sheet body on both sides of the folding centerline, respectively; and

the stopper band is placed such that the portion

5

10

15

20

25

30

35

40

45

50

55

between both end portions of the stopper band is curved or bent in a state where the tensile force is not applied to the sheet body, and the portion between both end portions of the stopper band is flat-shaped in a state where the tensile force of a predetermined magnitude or greater is applied.

5. The stretch function-added loading sheet according to any one of Claims 1 to 4, further comprising two fixing parallel frames, wherein:

the number of forced crimping units is even; the sheet body has a rectangular shape, and two common folding centerlines that are parallel and symmetrical with respect to the sheet width centerline of the sheet body are located; a half of the forced crimping units are attached in one row at equal intervals in such a manner that one of the common folding centerlines overlaps the folding centerline of each of the forced crimping units; the remaining half of the forced crimping units are attached in one row at equal intervals in such a manner that the other of the common folding centerlines overlaps the folding centerline of each of the forced crimping units; the half of the forced crimping units and the other half of the forced crimping units are symmetrically situated with respect to the sheet width centerline;

the two fixing parallel frames are attached to both end portions each located between each end edge of the sheet body in the sheet width direction and each of the rows of the forced crimping units, so as to be parallel to the sheet width centerline;

the two fixing parallel frames are fixed to any locations by any method; and

the stretch function-added loading sheet is used such that an object to be loaded is placed between the two rows of the forced crimping units.

6. The stretch function-added loading sheet according to any one of Claims 1 to 5, wherein:

the sheet body is a fabric made of cotton; the pinching block plates are made of wood; and the sheet body and the pinching block plates are fixed by an adhesive containing an ethylene-vinyl acetate copolymer resin.

7. A chair comprising the stretch function-added loading sheet according to any one of Claims 1 to 6, as at least one of a seating surface and a backrest.

Patentansprüche

1. Stützbahn mit hinzugefügter Dehnfunktion, welche einen Bahnkörper sowie eine beliebige Anzahl von Kraftcrimpeinheiten aufweist, 5 wobei die Kraftcrimpeinheit zwei Klemmblockplatten und eine Spannvorrichtung umfasst, wobei:

die zwei Klemmblockplatten an einer Oberfläche des Bahnkörpers auf beiden Seiten eines Mittelfalzes an dem Bahnkörper befestigt sind; 10 wobei die Einspannvorrichtung so an den beiden Klemmblockplatten befestigt ist, dass sie in einem Zustand, in dem der Bahnkörper entlang des Mittelfalzes gefaltet ist, die beiden Klemmblockplatten sandwichartig so einklemmt, dass die beiden Klemmblockplatten einander überlappen, wobei der Bahnkörper zwischen ihnen angeordnet ist; und 15

wobei die Stützbahn mit hinzugefügter Dehnfunktion eine Dehnfunktion aufweist, derart dass der Bahnkörper gedehnt wird, wenn die Einspannvorrichtung mittels eines der Einspannvorrichtung zugeordneten Öffn-/Schließmechanismus geöffnet wird, und zwar durch Beaufschlagung des Bahnkörpers mit einer Zugkraft in einer Richtung senkrecht zu dem Mittelfalz; während der Bahnkörper sich zusammenzieht, wenn die Einspannvorrichtung mittels des der Einspannvorrichtung zugehörigen Öffn-/Schließmechanismus geschlossen wird, 20 wenn die Zugkraft verringert wird, 25

2. Stützbahn mit hinzugefügter Dehnfunktion nach Anspruch 1, 30

wobei die beiden Klemmblockplatten die gleiche Form aufweisen; 35

wobei jede von den Klemmblockplatten eine rechteckige, eine Blockdicke aufweisende Platte ist und 40

wobei in einer Oberfläche dieser Platte eine Clipfixierkerbe derart vorgesehen ist, dass der Mittelpunkt einer Kerbenlänge mit der Position einer Längenhalbierenden der Blockplatte fluchtet; 45

wobei die Einspannvorrichtung ein hakenförmiger Clip ist; 50

wobei der hakenförmige Clip eine Struktur hat, die durch Biegen einer rechteckigen Metallplatte gebildet wird und eine obere Clipwandung sowie zwei einander gegenüberliegende, mit den beiden Enden der oberen Clipwandung verbundene seitliche Clipwandungen aufweist, und 55

wobei der hakenförmige Clip dazu vorgesehen ist, sich in einem geschlossenen Zustand zu befinden, in dem distale Enden der zwei einander gegenüberliegenden seitlichen Clipwandungen

sich einander annähern, bzw. sich in einem Zustand zu befinden, in dem die zwei einander gegenüberliegenden seitlichen Clipwandungen aufgrund einer elastischen Metallverformung geöffnet sind, wenn eine Clipöffnungskraft in Richtung einer Außenseite von jeder von den zwei einander gegenüberliegenden Seitenwandungen ausgeübt wird - dies stellt den Öffn-/Schließmechanismus dar; 10

wobei jeweils an jedem jeweiligen distalen Ende der beiden seitlichen Clipwandungen Fixierhaken ausgebildet sind, die jeweils rechtwinklig nach innen gebogen sind; wobei in einem Zustand, in dem den Flächen, in denen die Clipfixierkerben angebracht sind, gegenüberliegenden Flächen dem Bahnkörper zugewandt sind, die zwei Klemmblockplatten symmetrisch zum Mittelfalz angeordnet sind; 15

wobei der Bahnkörper entlang des Mittelfalzes derart gefaltet ist, dass die zwei Klemmblockplatten einander überlappen, wobei der Bahnkörper sich zwischen ihnen befindet, und wobei in einem Zustand, in dem der hakenförmige Clip in geöffnetem Zustand so angebracht ist, dass er die beiden Klemmblockplatten sandwichartig einklemmt, die Fixierhaken des hakenförmigen Clips in die Clipfixierkerben der Klemmblockplatten eingepasst sind; und 20

wobei die Stützbahn mit hinzugefügter Dehnfunktion mittels eines beliebigen Verfahrens gesichert ist und verwendet wird, indem eine aufzubringende Last auf dem Bahnkörper platziert wird. 25

35 3. Stützbahn mit hinzugefügter Dehnfunktion nach Anspruch 1,

wobei die beiden Klemmblockplatten die gleiche Form aufweisen; 35

jede von den Klemmblockplatten eine rechteckige, eine Blockdicke aufweisende Platte ist und 40

wobei in einer Oberfläche dieser Platte eine Clipfixierkerbe derart vorgesehen ist, dass der Mittelpunkt einer Kerbenlänge mit der Position einer Längenhalbierenden der Blockplatte fluchtet; 45

wobei die Einspannvorrichtung als mit einem Anschlag versehener hakenförmiger Clip ausgebildet ist; 50

wobei der mit einem Anschlag versehene hakenförmige Clip einen Clipanschlag, einen perforierten hakenförmigen Clip, zwei Schrauben und zwei Muttern aufweist; 55

wobei der Clipanschlag eine Struktur mit einer oberen Anschlagwandung, in der zwei Schraubeneindrehlöcher vorgesehen sind, und mit zwei einander gegenüberliegenden seitlichen Anschlagwandungen, die an beiden Enden der

oberen Anschlagwandung fixiert sind, aufweist; wobei der perforierte hakenförmige Clip eine Struktur hat, die durch Biegen einer rechteckigen Metallplatte gebildet wird und eine obere Clipwandung sowie zwei einander gegenüberliegende, mit den zwei Enden der oberen Clipwandung verbundene seitliche Clipwandungen aufweist, und wobei der perforierte hakenförmige Clip so ausgebildet ist, dass er sich in einem geschlossenen Zustand befindet, wenn distale Enden der zwei einander gegenüberliegenden Clipseitenwandungen sich einander annähern, und in einem geöffneten Zustand, wenn die zwei einander gegenüberliegenden Clipseitenwandungen aufgrund einer elastischen Metallverformung geöffnet sind, wenn eine Clipöffnungskraft in Richtung der Außenseite von jeder von den zwei einander gegenüberliegenden Seitenwandungen ausgeübt wird - dies stellt den Öffnen-/Schließenmechanismus dar; wobei jeweils an jedem distalen Ende der beiden seitlichen Clipwandungen Fixierhaken ausgebildet sind, die jeweils rechtwinklig nach innen gebogen sind; wobei die obere Clipwandung mit zwei Schraubeneindrehlöchern versehen ist; wobei der mit einem Anschlag versehene hakenförmige Clip eine Struktur aufweist, bei der der Clipanschlag über den perforierten hakenförmigen Clip gestülpt ist und wobei in einem Zustand, in dem die zwei Schraubeneindrehlöcher des perforierten hakenförmigen Clips und die zwei Schraubeneindrehlöcher des Clipanschlags zusammenpassen, die Schrauben jeweils durch die Schraubeneindrehlöcher gesteckt und mittels der Muttern fixiert werden; wobei in einem Zustand, in dem den Flächen, in denen die Clipfixierkerben eingebracht sind, gegenüberliegende Flächen dem Bahnkörper zugewandt sind, die zwei Klemmblockplatten symmetrisch zum Mittelfalz angeordnet sind; wobei der Bahnkörper entlang des Mittelfalzes so gefaltet ist, dass die zwei Klemmblockplatten einander überlappen, wobei der Bahnkörper sich zwischen ihnen befindet, und wobei in einem Zustand, in dem der mit einem Anschlag versehene hakenförmige Clip in geöffnetem Zustand so angebracht ist, dass er die beiden Klemmblockplatten sandwichartig einklemmt, die Fixierhaken des mit einem Anschlag versehenen hakenförmigen Clips in die Clipfixierkerben der Klemmblockplatten eingepasst sind; und wobei die Stützbahn mit hinzugefügter Dehnfunktion mittels eines beliebigen Verfahrens gesichert ist und verwendet wird, indem eine aufzubringende Last auf dem Bahnkörper platziert wird.

5 4. Stützbahn mit hinzugefügter Dehnfunktion nach Anspruch 1, 2 oder 3, weiter aufweisend ein Anschlagsband, welches eine flexible Bahn ist, die auf einer Fläche des Bahnkörpers platziert ist, welche der Fläche gegenüberliegt, in der die Kraftcrimpeinheit angeordnet ist, wobei: beide Endbereiche des Anschlagsbandes auf beiden Seiten des Mittelfalzes jeweils eng an dem Bahnkörper fixiert sind und wobei in einem Zustand, in dem keine Zugkraft auf den Bahnkörper ausgeübt wird, das Anschlagsband so angeordnet ist, dass der Bereich zwischen den beiden Endbereichen des Anschlagsbandes gekrümmmt oder gebogen ist, und in einem Zustand, in dem die einen vorgegebenen Betrag oder mehr aufweisende Zugkraft ausgeübt wird, der Bereich zwischen den beiden Endbereichen des Anschlagsbandes eine flache Form hat.

10 5. Stützbahn mit hinzugefügter Dehnfunktion nach einem der Ansprüche 1 bis 4, weiter aufweisend zwei parallele Fixierrahmen, wobei: die Anzahl der Kraftcrimpeinheiten eine gerade Zahl ist; der Bahnkörper eine rechteckige Form sowie zwei gemeinsame Mittelfalze aufweist, die parallel und symmetrisch zu der Bahnbreitenmittellinie des Bahnkörpers angeordnet sind; wobei eine Hälfte der Kraftcrimpeinheiten in gleichen Abständen in einer Reihe angeordnet ist, und zwar so, dass einer der gemeinsamen Mittelfalze den Mittelfalz von jeder jeweiligen Kraftcrimpeinheit überlappt; wobei die andere Hälfte der Kraftcrimpeinheiten in gleichen Abständen in einer Reihe angeordnet ist, und zwar so, dass der andere von den gemeinsamen Mittelfalzen den Mittelfalz von jeder jeweiligen Kraftcrimpeinheit überlappt; wobei die eine Hälfte der Kraftcrimpeinheiten und die andere Hälfte der Kraftcrimpeinheiten symmetrisch zu der Bahnbreitenmittellinie angeordnet sind; dabei sind die beiden parallelen Fixierrahmen so an den beiden Endbereichen angebracht, dass sie jeweils in Bahnbreitenrichtung zwischen den jeweiligen Endkanten des Bahnkörpers und zwischen den Reihen von Kraftcrimpeinheiten angeordnet und zu der Bahnbreitenmittellinie parallel sind; wobei die beiden parallelen Fixierrahmen mit beliebigen Verfahren an beliebigen Stellen fixiert sind und wobei die Stützbahn mit hinzugefügter Dehnfunktion verwendet wird, indem eine aufzubringende Last auf dem Bahnkörper platziert wird.

gende Last zwischen den zwei Reihen von Kraftcrimpeinheiten platziert wird.

6. Stützbahn mit hinzugefügter Dehnfunktion nach einem der Ansprüche 1 bis 5, wobei:

der Bahnkörper ein aus Baumwolle hergestellter Stoff ist;
die Klemmblockplatten aus Holz hergestellt sind und
der Bahnkörper und die Klemmblockblätter mittels eines Klebstoffs fixiert sind, der ein Ethylen-Vinylacetat-Copolymerharz enthält.

7. Stuhl, welcher die Stützbahn mit hinzugefügter Dehnfunktion nach einem der Ansprüche 1 bis 6 aufweist,
und zwar als mindestens eine Sitzfläche und/oder als mindestens eine Rückenlehne.

Revendications

1. Feuille de support à fonction d'étirement ajoutée,

comportant un corps de feuille et un nombre quelconque d'unités à sertissage forcé,
l'unité à sertissage forcé incluant deux plaques-bloc de pinçage et un gabarit de pinçage où :

les deux plaques-bloc de pinçage sont fixées sur une surface du corps de feuille sur les deux côtés d'une ligne-pliage centrale sur le corps de feuille ;
où le gabarit de pinçage est fixé aux deux plaques-bloc de pinçage pour enserrer en sandwich les deux plaques-bloc de pinçage dans un état où le corps de feuille est plié le long de la ligne-pliage centrale de telle manière que les deux plaques-bloc de pinçage se chevauchent, avec le corps de feuille interposé entre-elles ; et
où la feuille de support à fonction d'étirement ajoutée comporte une fonction d'étirement selon laquelle le corps de feuille se dilate si le gabarit de pinçage s'ouvre moyennant un mécanisme d'ouverture/fermeture inclus dans le gabarit de pinçage à cause d'une force de traction appliquée sur le corps de feuille en direction perpendiculaire à la ligne-pliage centrale,
pendant que le corps de feuille contracte si le gabarit de pinçage se ferme moyennant le mécanisme d'ouverture/fermeture inclus dans le gabarit de pinçage si la force de traction est réduite.

2. Feuille de support à fonction d'étirement ajoutée se-

lon la revendication 1, où :

les deux plaques-bloc de pinçage ont la même forme ;
où chacune des plaques-bloc de pinçage est une plaque rectangulaire ayant une épaisseur-bloc, et une encoche de fixement à clip est pourvue dans une surface de ladite plaque de telle manière que le centre d'une longueur d'encoche est aligné avec la position d'une médiatrice de la longueur de la plaque-bloc ;
le gabarit de pinçage est un clip crochu ;
où le clip crochu a une structure formée en pliant une plaque métallique rectangulaire et incluant une paroi de clip supérieure aussi qu'une paire de parois de clip latérales opposées qui sont raccordées aux deux extrémités de la paroi de clip supérieure, le clip crochu étant conçu pour être dans un état fermé si des extrémités distales des deux parois de clip latérales opposées se rapprochent l'une de l'autre, et pour être dans un état où les deux parois de clip latérales opposées sont ouvertes à cause d'une déformation élastique de métal si une force ouvrant-clip est appliquée en direction vers l'extérieur de chacune des deux parois de clip latérales opposées,
ce qui constitue le mécanisme d'ouverture/fermeture ;
où des crochets à fixement, chacun plié vers l'intérieur à angle droit, sont respectivement formés sur chaque extrémité distale des deux parois de clip latérales ;
où les deux plaques-bloc de pinçage sont situées en symétrie par rapport à la ligne-pliage centrale dans un état où des surfaces, opposées aux surfaces dans lesquelles les encoches de fixement à clip sont pourvues, sont tournées vers le corps de feuille ;
où le corps de feuille est plié le long de la ligne-pliage centrale de telle manière que les deux plaques-bloc de pinçage se chevauchent, avec le corps de feuille interposé entre elles, et les crochets à fixement du clip crochu sont ajustés dans les encoches de fixement à clip des plaques-bloc de pinçage dans un état où le clip crochu est attaché en état ouvert pour enserrer en sandwich les deux plaques-bloc de pinçage ; et où
la feuille de support à fonction d'étirement ajoutée est sécurisée par quelconque procédé et est utilisée de telle manière qu'un objet qui est à charger est placé sur le corps de feuille.

3. Feuille de support à fonction d'étirement ajoutée selon la revendication 1,

où les deux plaques-bloc de pinçage ont la mê-

me forme ; où chacune des plaques-bloc de pinçage est une plaque rectangulaire ayant une épaisseur-bloc et une encoche de fixement à clip est pourvue dans une surface de ladite plaque de telle manière que le centre d'une longueur d'encoche est aligné avec la position d'une médiatrice de la longueur de la plaque-bloc ; où le gabarit de pinçage est un clip crochu pourvu de butoir ; le clip crochu pourvu de butoir incluant un butoir de clip, un clip crochu perforé, deux vis et deux écrous ; le butoir de clip ayant une structure qui comprend une paroi de butoir supérieure dans laquelle deux trous de serrage-vis sont pourvus, et incluant une paire de parois de butoir latérales opposées qui sont fixées sur les deux extrémités de la paroi de butoir supérieure ; où le clip crochu perforé a une structure formée en pliant une plaque métallique rectangulaire et incluant une paroi de clip supérieure aussi qu'une paire de parois de clip latérales opposées qui sont liées aux deux extrémités de la paroi de butoir supérieure ; et le clip crochu perforé est conçu pour être en état fermé si des extrémités distales des deux parois de clip latérales opposées se rapprochent l'une de l'autre, et pour être dans un état où les deux parois de clip latérales opposées sont ouvertes à cause de déformation élastique de métal si une force ouvrant-clip est appliquée en direction vers l'extérieur de chacune de la paire de parois de clip latérales opposées, ce qui constitue le mécanisme d'ouverture/fermeture ; où des crochets à fixement, chacun plié vers l'intérieur à angle droit, sont respectivement formés sur chaque extrémité distale des deux parois de clip latérales ; où la paroi de clip supérieure est pourvue de deux trous de serrage-vis ; où le clip crochu pourvu de butoir a une structure où le butoir de clip est placé au-dessus du clip crochu perforé, et dans un état où les deux trous de serrage-vis du clip crochu perforé sont faits correspondre à les deux trous de serrage-vis du butoir de clip, les vis sont respectivement passées à travers les trous de serrage-vis et fixées par les écrous ; où les deux plaques-bloc de pinçage sont situées en symétrie par rapport à la ligne-pliage centrale dans un état où des surfaces, opposées aux surfaces dans lesquelles les encoches de fixement à clip sont pourvues, sont tournées vers le corps de feuille ; où le corps de feuille est plié le long de la ligne-pliage centrale de telle manière que les deux plaques-bloc de pinçage se chevauchent, avec

5
10
15
20
25
30
35
40
45
50
55

le corps de feuille interposé entre elles, et les crochets à fixement du clip crochu pourvu de butoir sont ajustés dans les encoches de fixement à clip des plaques-bloc de pinçage dans un état où le clip crochu pourvu de butoir est attaché en état ouvert de telle manière qu'il enserre les deux plaques-bloc de pinçage en sandwich ; et la feuille de support à fonction d'étiènement ajoutée est sécurisée par quelconque procédé et est utilisée de telle manière qu'un objet qui est à charger est placé sur le corps de feuille.

4. Feuille de support à fonction d'étiènement ajoutée selon l'une des revendications 1, 2 ou 3, comprenant en outre une sangle-butoir qui est une feuille flexible placée sur une surface du corps de feuille opposée à la surface dans laquelle l'unité à sertissage forcé est placé, où :

respectivement les deux parties d'extrémité de la sangle-butoir sont étroitement fixées au corps de feuille sur les deux côtés de la ligne-pliage centrale ; et où la sangle-butoir est placée de telle manière que la partie entre les deux parties d'extrémité de la sangle-butoir est courbée ou pliée dans un état où la force de traction n'est pas appliquée au corps de feuille, et la partie entre les deux parties d'extrémité de la sangle-butoir est en forme plate dans un état où une force de traction ayant une dimension pré-déterminée ou plus est appliquée.

5. Feuille de support à fonction d'étiènement ajoutée selon l'une des revendications 1 à 4,

comprenant en outre deux cadres de fixement parallèles, où le nombre d'unités à sertissage forcé est un nombre pair ; où le corps de feuille a une forme rectangulaire et comprend deux lignes-pliages centrales communes qui sont disposées en parallèle et en symétrie par rapport à la ligne centrale de largeur de feuille du corps de feuille ; où une moitié des unités à sertissage forcé est attachée en une ligne à distances égales de telle manière que l'une des lignes-pliages centrales communes chevauche la ligne-pliage centrale de chacune des unités à sertissage forcé ; où la moitié restante des unités à sertissage forcé est attachée en une ligne à distances égales de telle manière que l'autre ligne-pliage centrale des lignes-pliages centrales communes chevauche la ligne-pliage centrale de chacune des unités à sertissage forcé ; où la moitié des unités à sertissage forcé et

l'autre moitié des unités à sertissage forcé sont situées en symétrie par rapport à la ligne centrale de largeur de feuille ; où les deux cadres de fixement parallèles sont attachés aux deux parties d'extrémité, chacun étant disposé entre les bords d'extrémité respectifs du corps de feuille en direction de largeur de feuille et chacune des lignes d'unités à sertissage forcé, de telle manière qu'ils sont parallèles à la ligne centrale de largeur de feuille ; où les deux cadres de fixement parallèles sont fixés aux lieux quelconque par un procédé quelconque ; et la feuille de support à fonction d'étirement ajoutée est utilisée de telle manière qu'un objet qui est à charger est placé entre les deux lignes d'unités à sertissage forcé.

6. Feuille de support à fonction d'étirement ajoutée selon l'une des revendications 1 à 5, où :

le corps de feuille est un tissu fait de coton ; les plaques-bloc de pinçage sont faites de bois ; et le corps de feuille et les plaques-bloc de pinçage sont fixés par un adhésif contenant un copolymère-résine d'éthylène-acétate de vinyle.

7. Chaise comprenant la feuille de support à fonction d'étirement ajoutée selon l'une des revendications 1 à 6 comme au moins une surface d'assise et/ou un dossier.

35

40

45

50

55

21

FIG. 1A

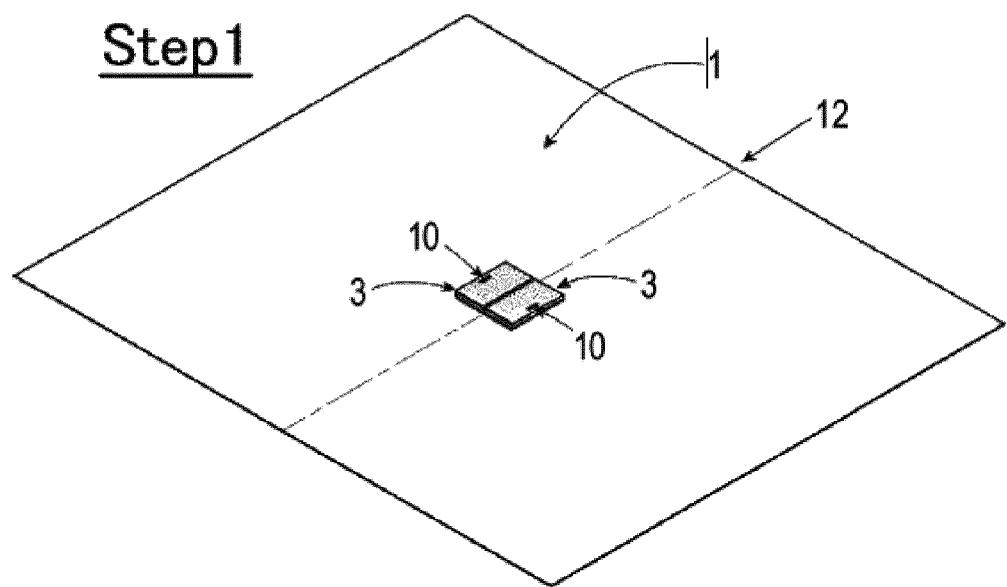


FIG. 1B

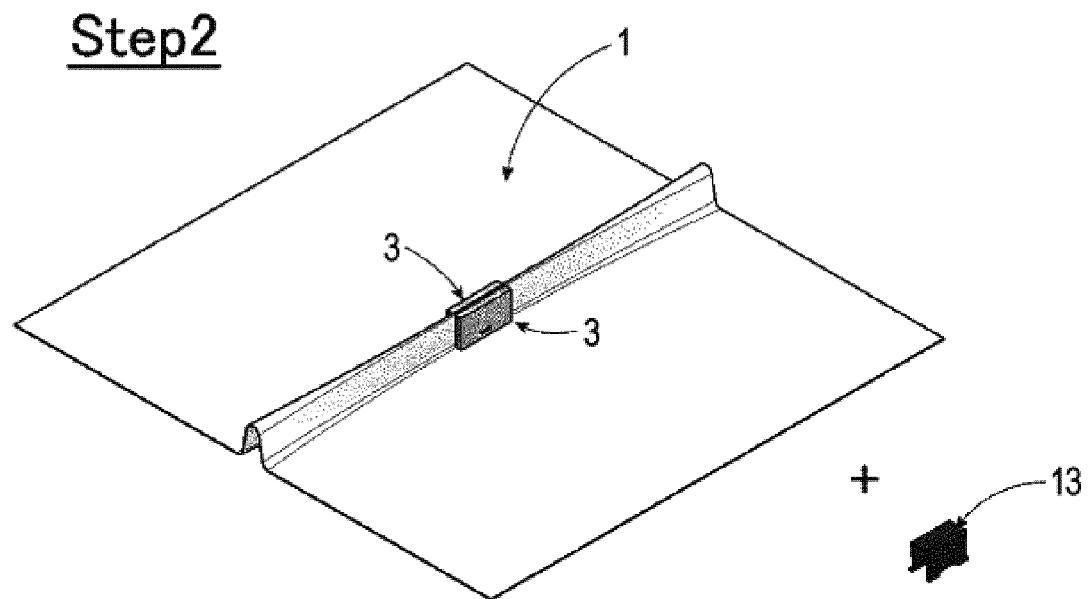


FIG. 1C

Step3



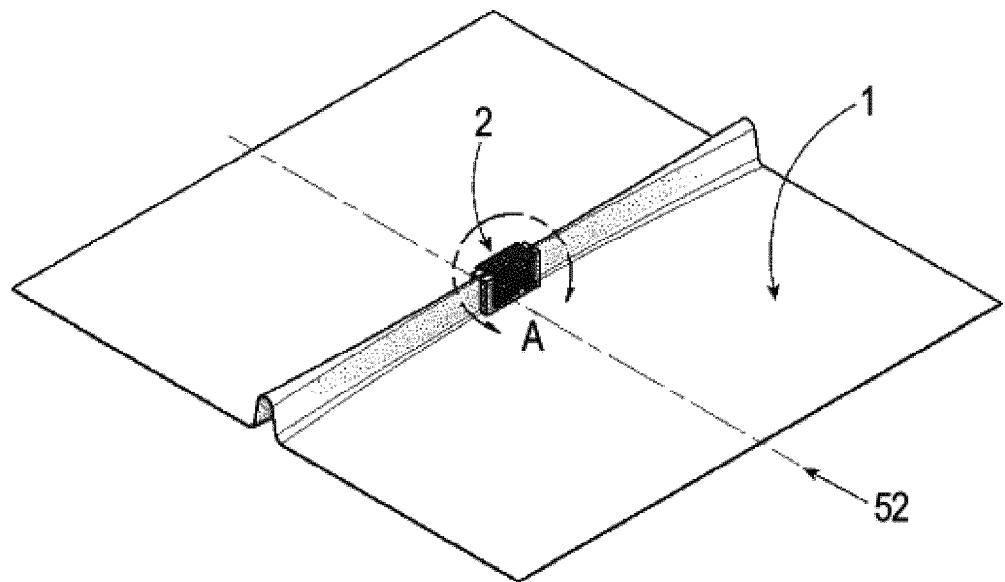


FIG. 1D

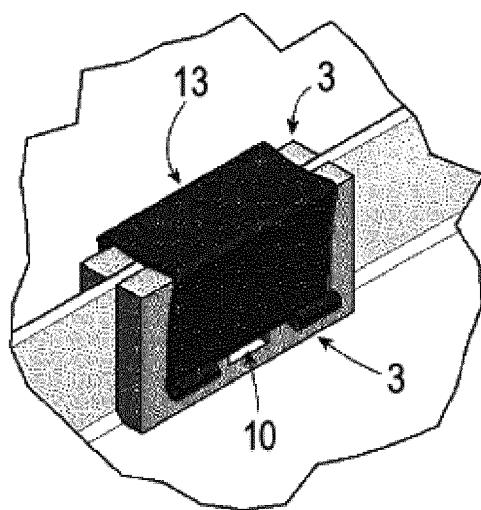


DETAIL A

FIG. 2A

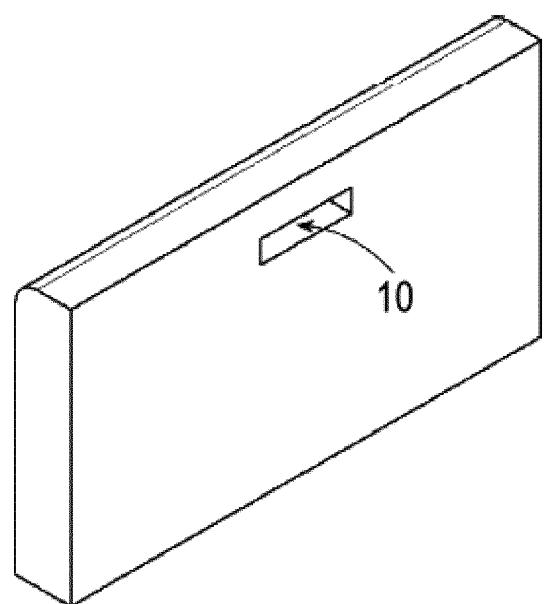


PERSPECTIVE VIEW

FIG. 2B

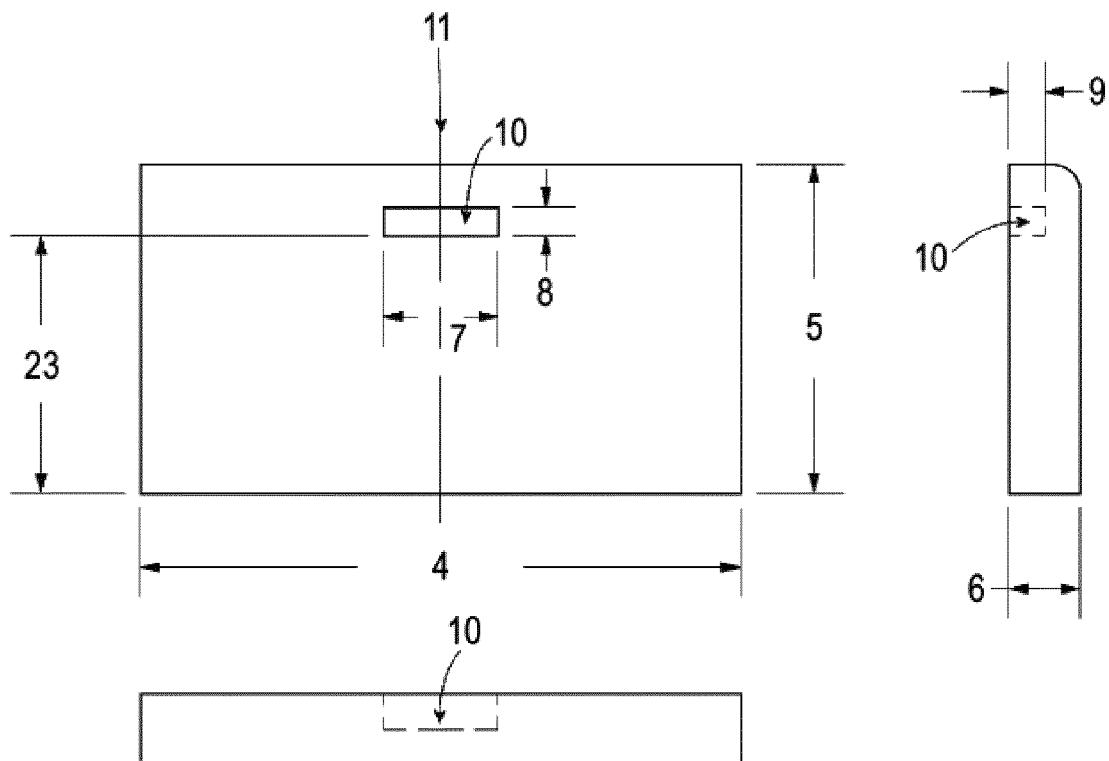


THREE-PLANE DRAWING

FIG. 3A

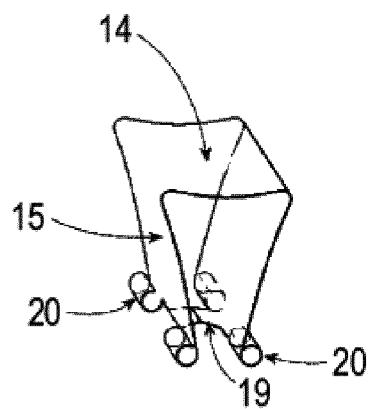


PERSPECTIVE VIEW

FIG. 3B

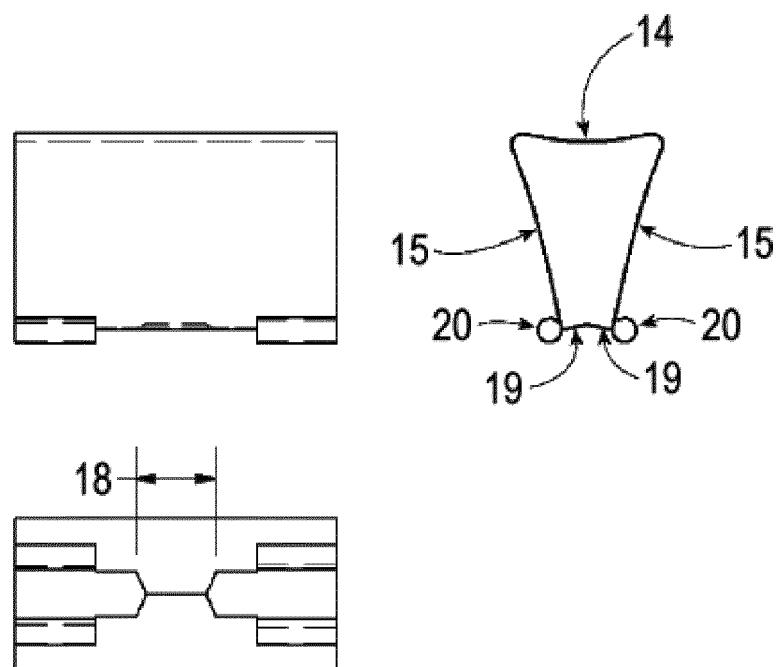


THREE-PLANE DRAWING

FIG. 3C

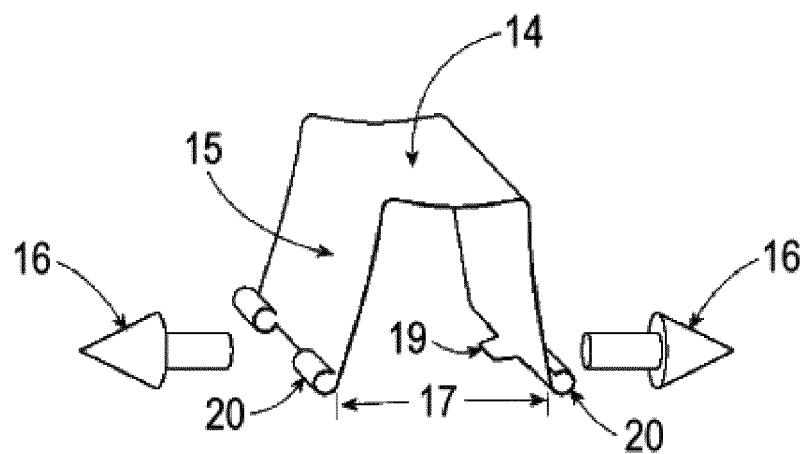

PERSPECTIVE VIEW

FIG. 3D

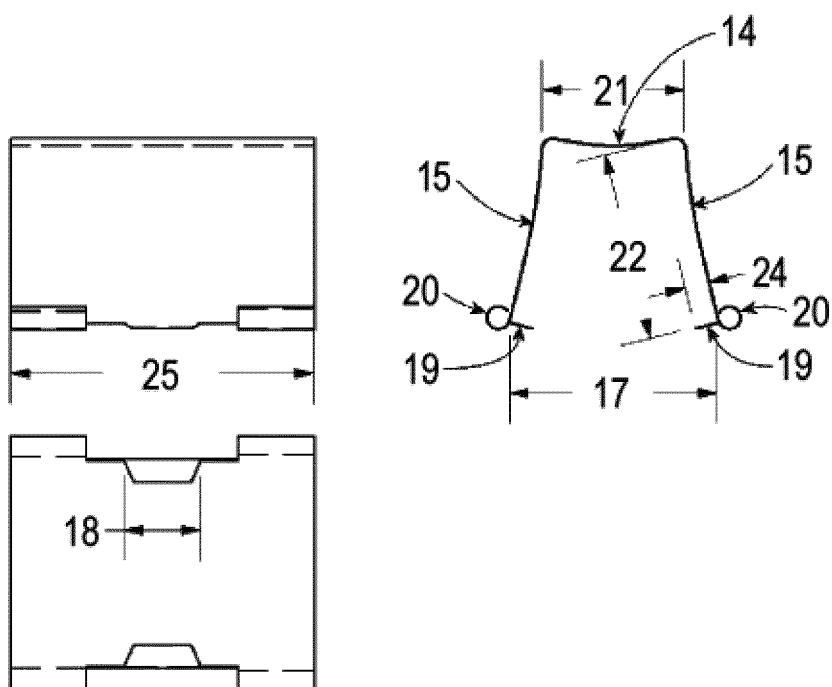

THREE-PLANE DRAWING

FIG. 4A

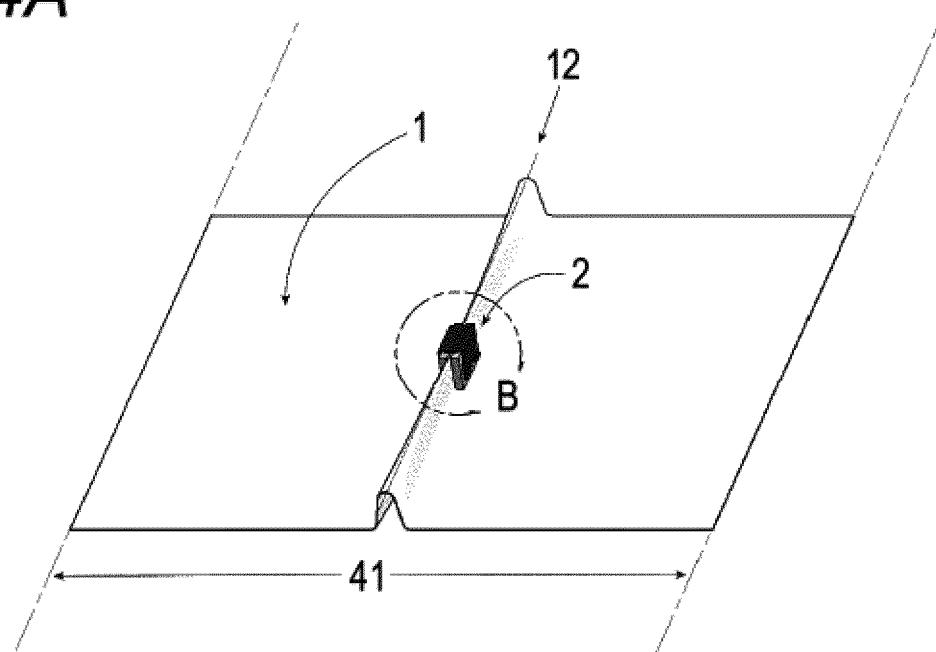


FIG. 4B

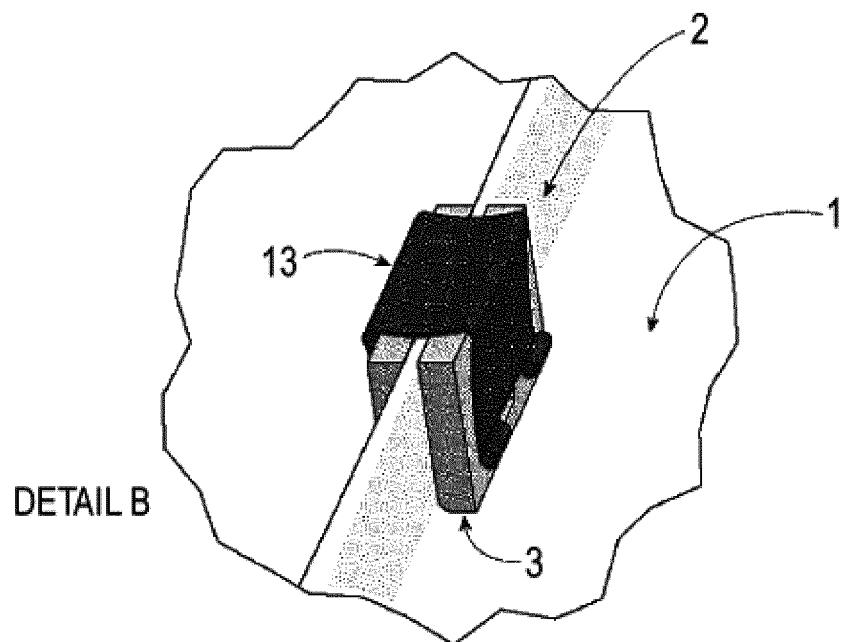


FIG. 4C

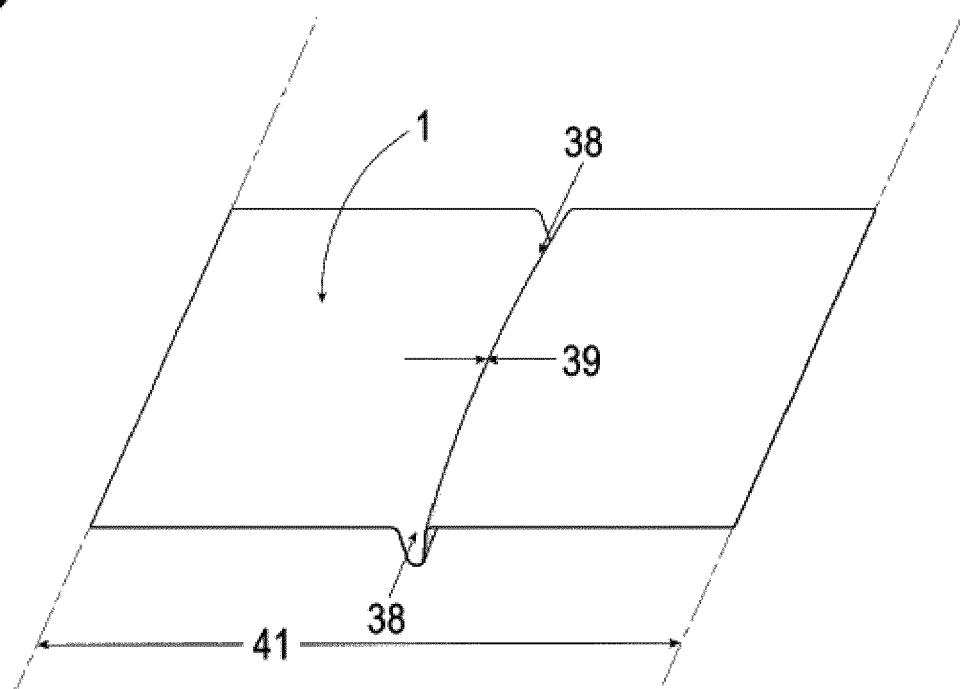


FIG. 4D

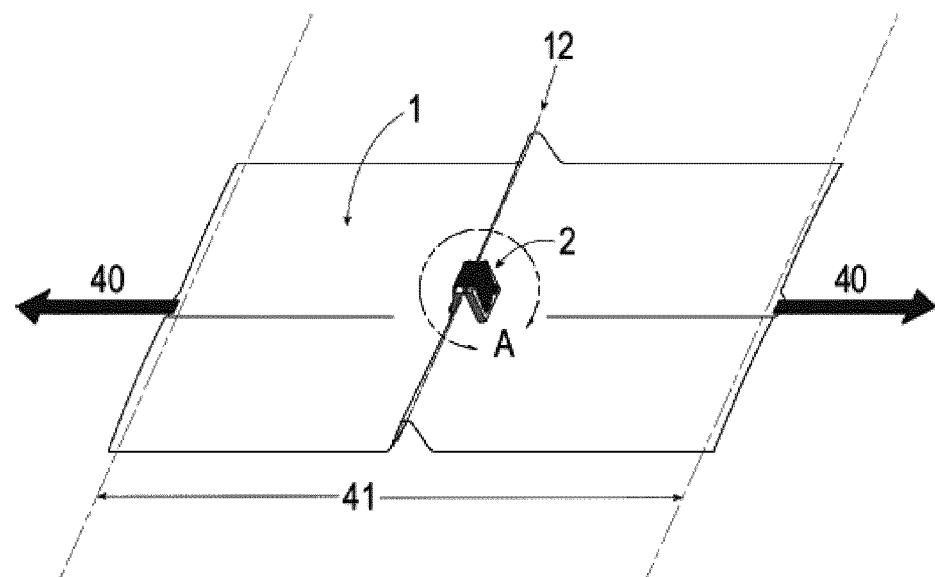


FIG. 4E

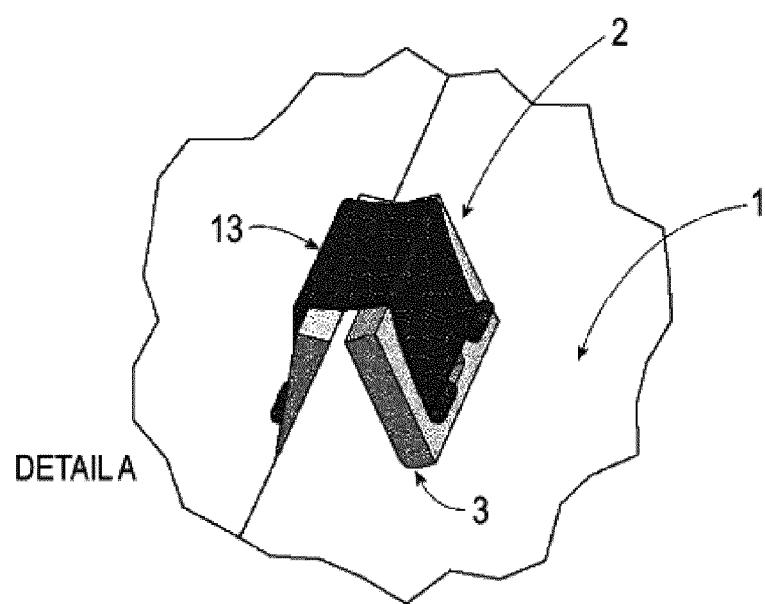


FIG. 4F

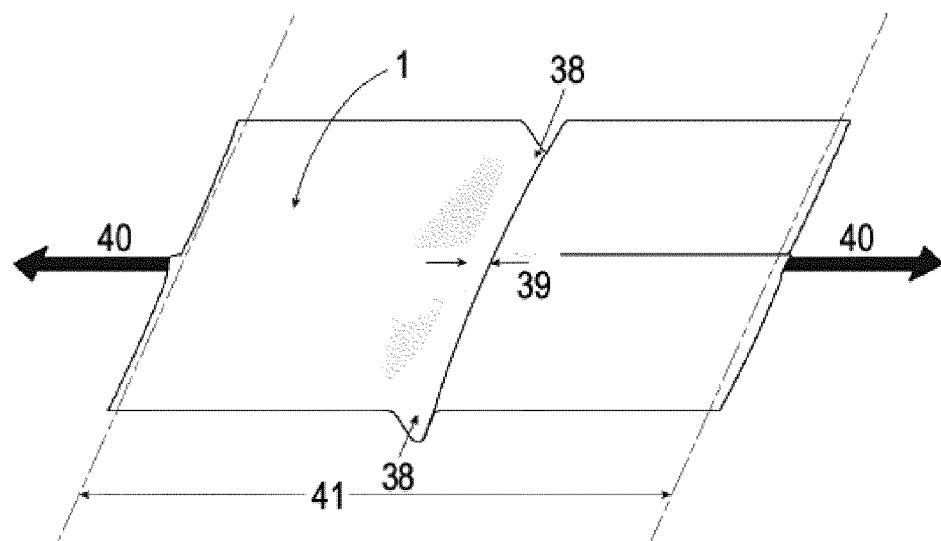


FIG. 5A

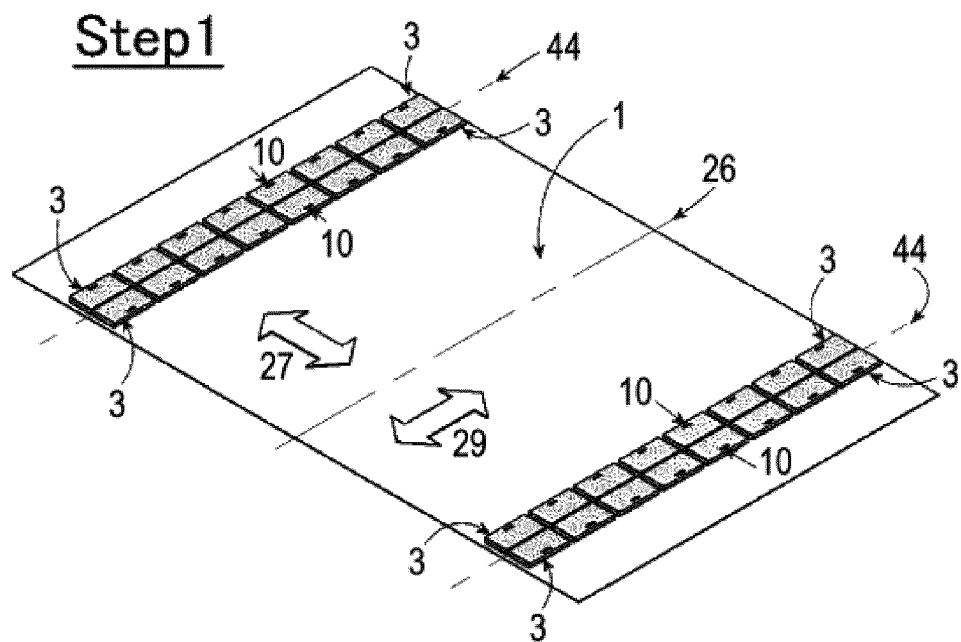


FIG. 5B

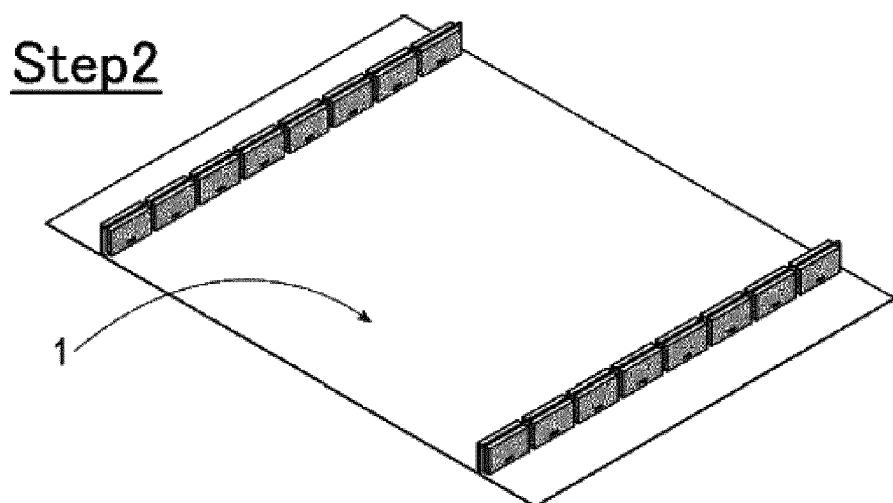


FIG. 5C

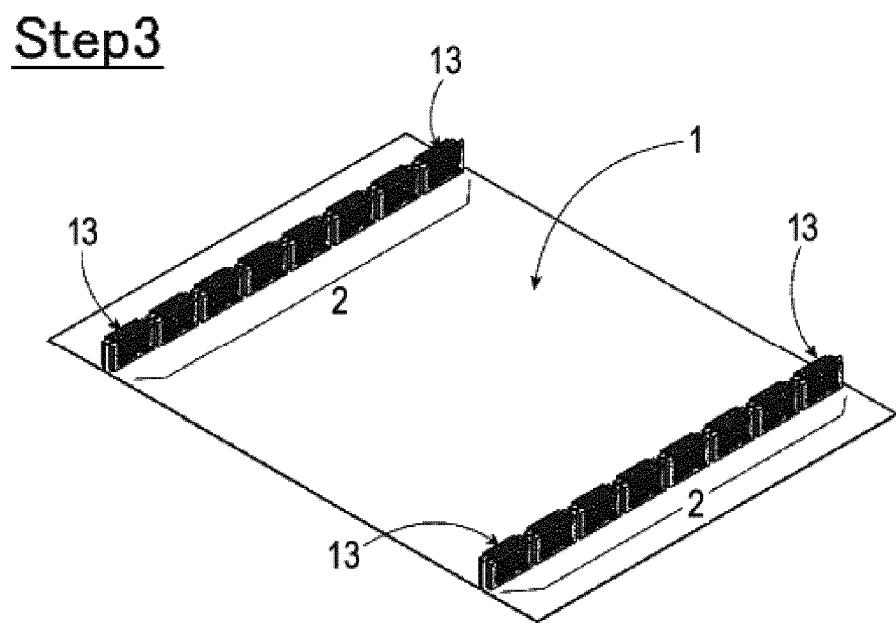


FIG. 5D

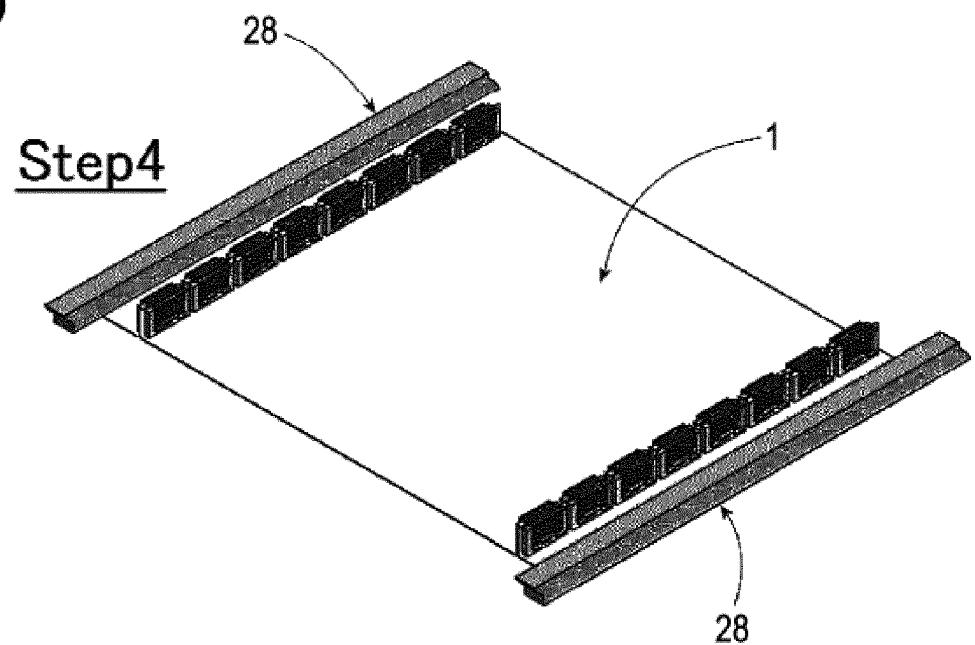


FIG. 6A

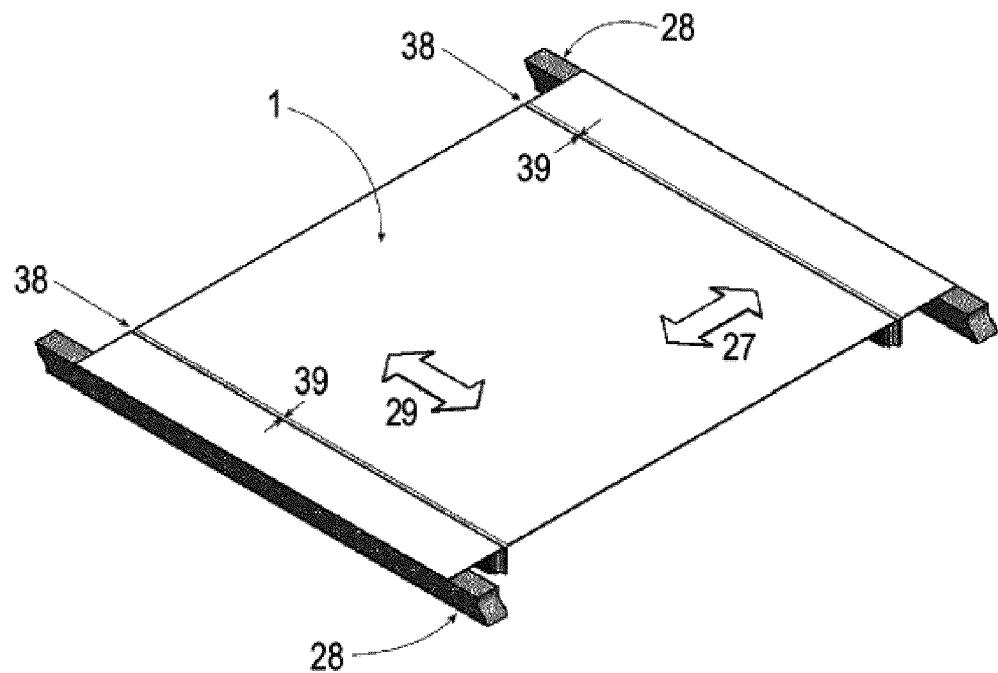


FIG. 6B

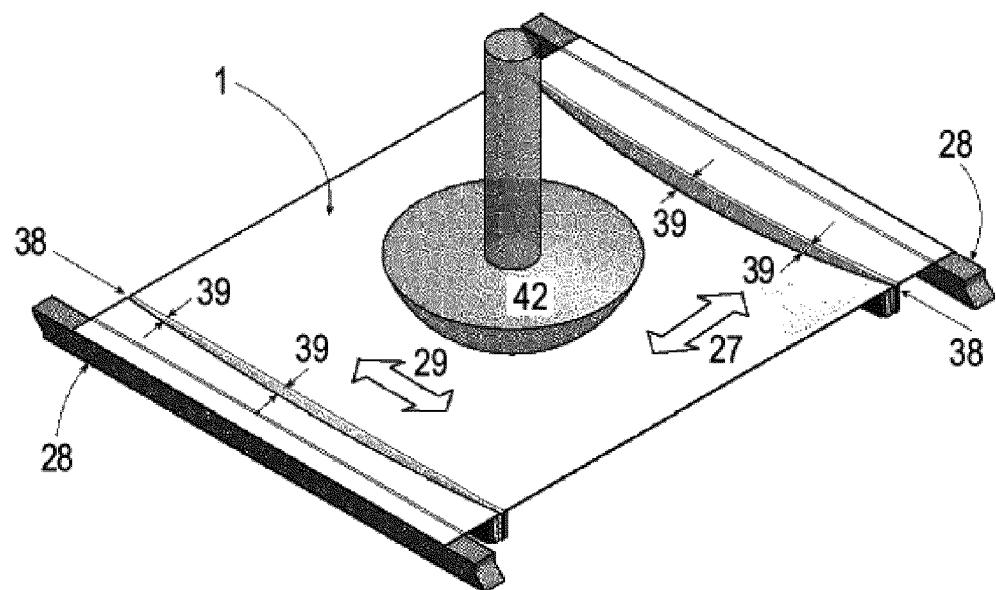


FIG. 7A

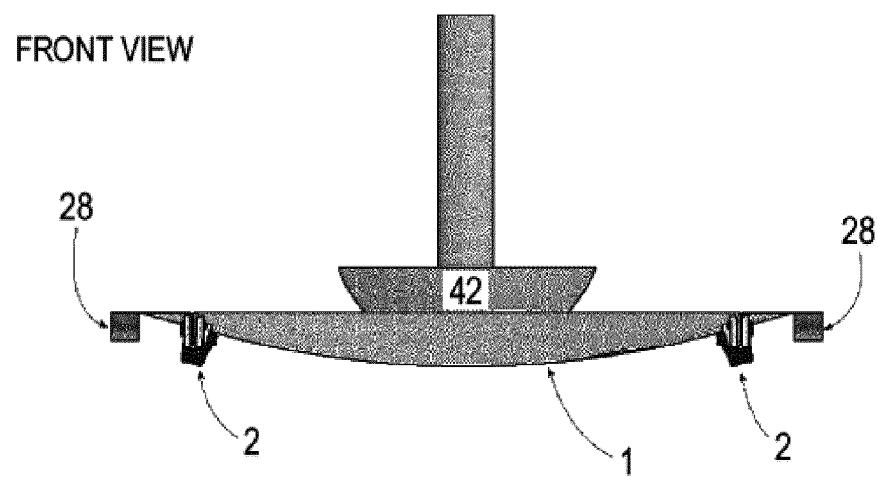


FIG. 7B

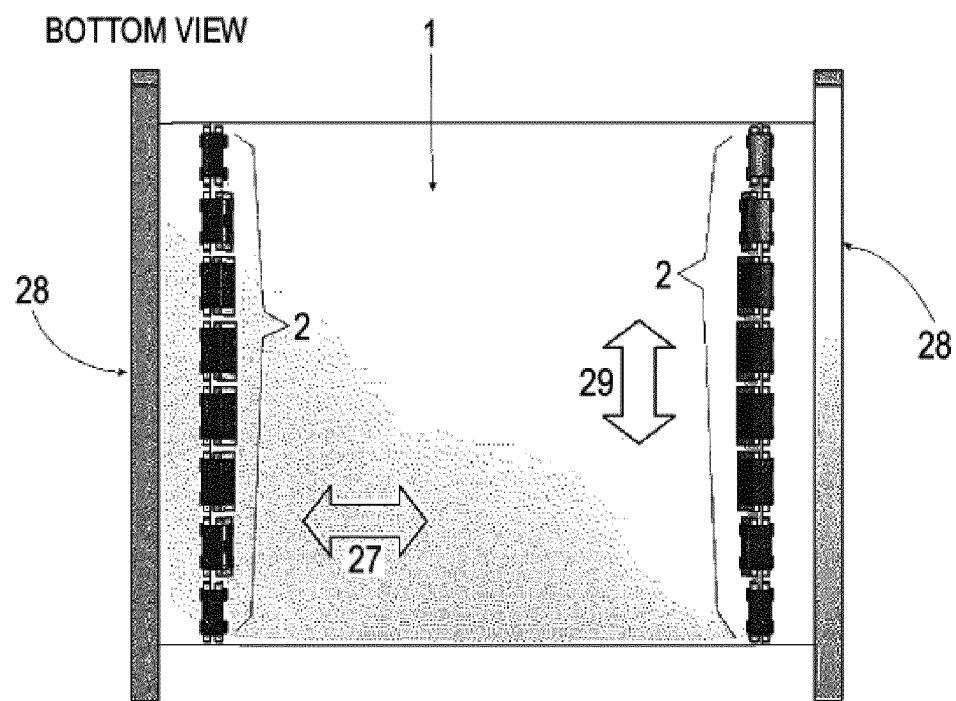


FIG. 7C

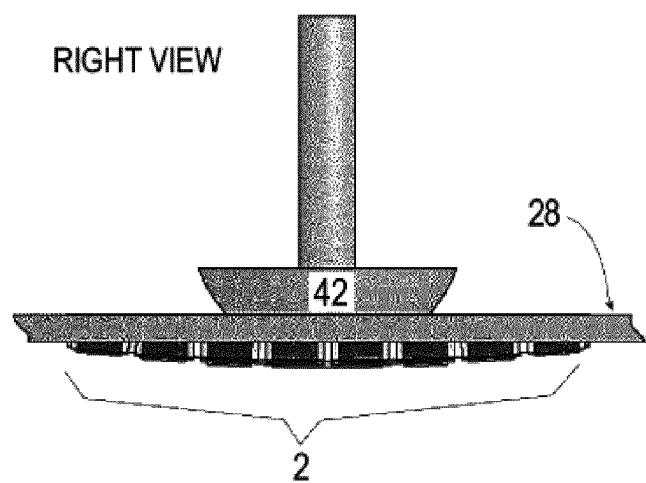


FIG. 8A

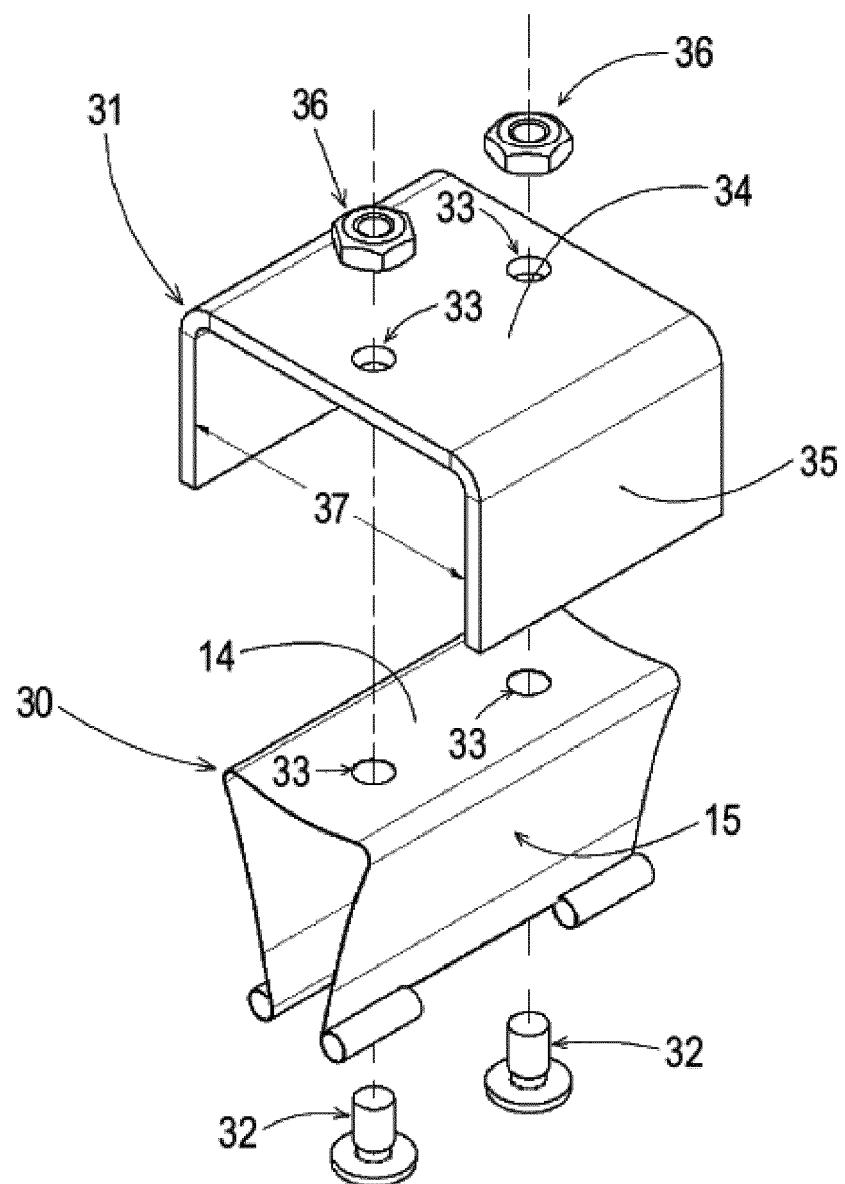


FIG. 8B

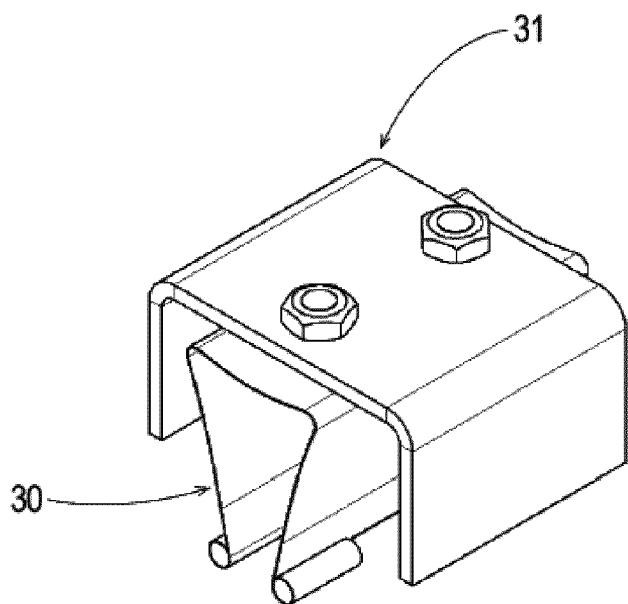


FIG. 9A

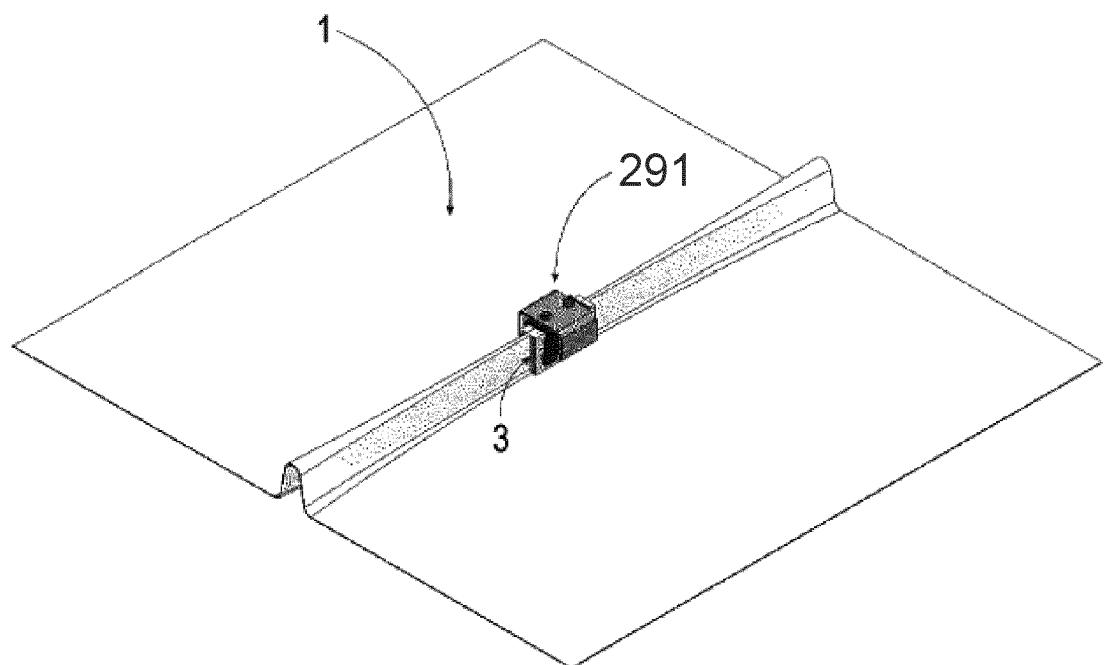


FIG. 9B

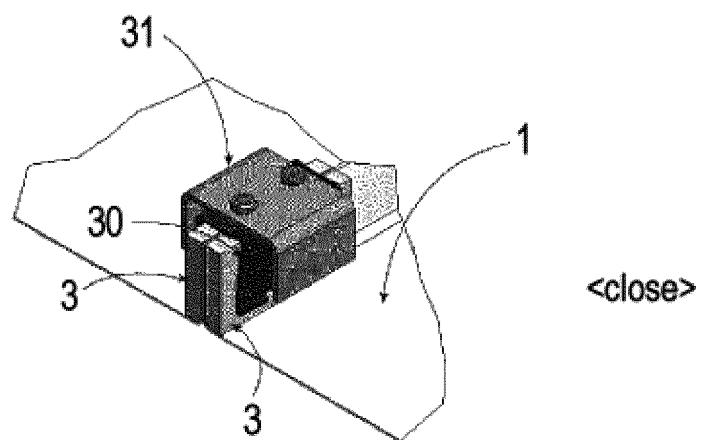


FIG. 9C

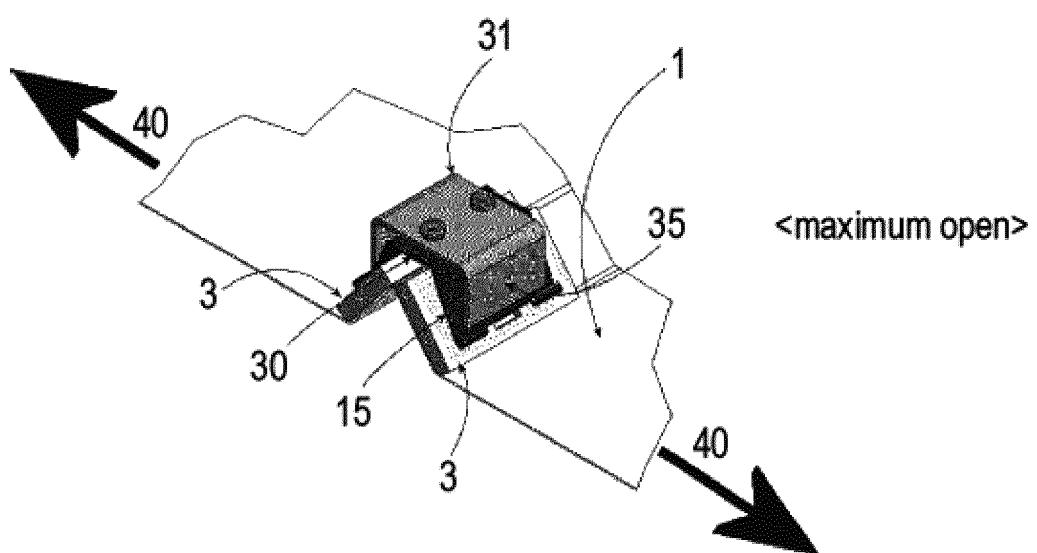


FIG. 10A


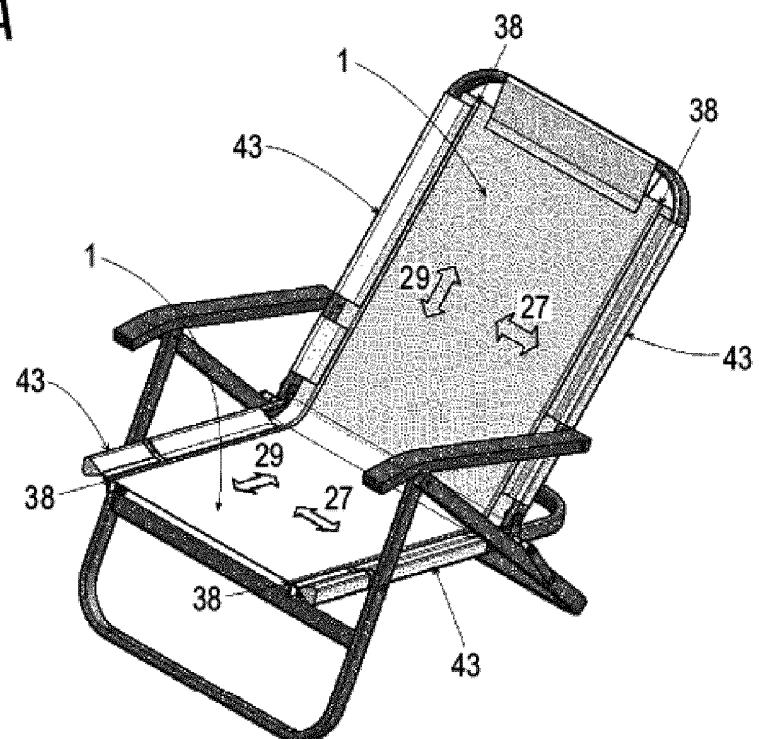


FIG. 10B

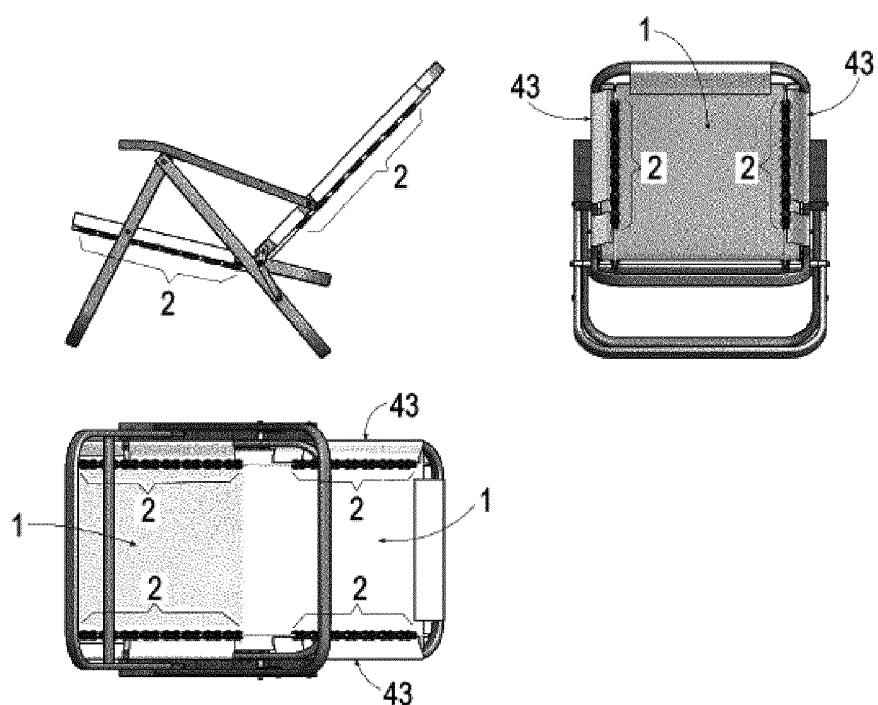

THREE-PLANE DRAWING

FIG. 10C

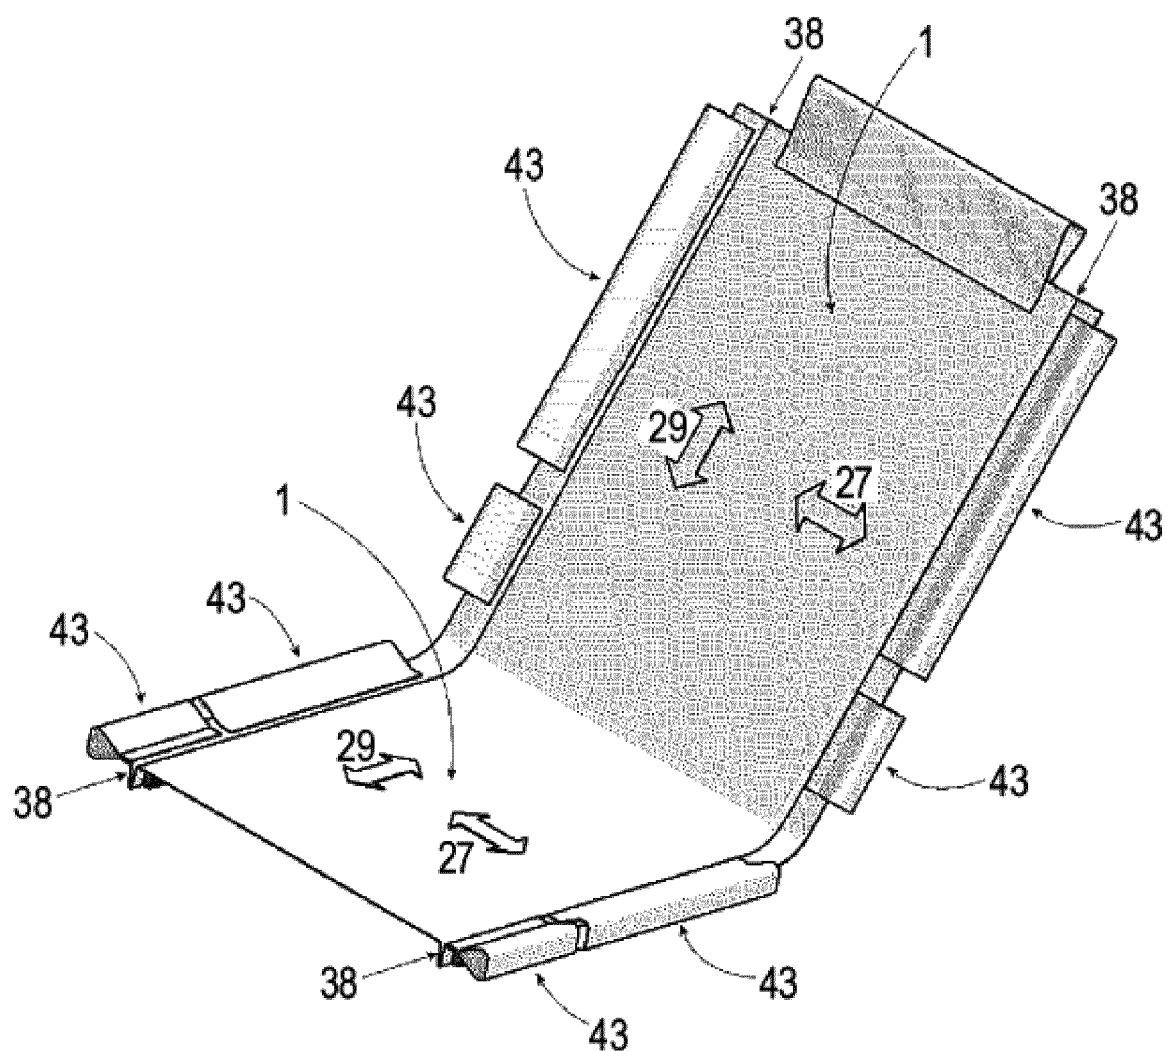


FIG. 10D



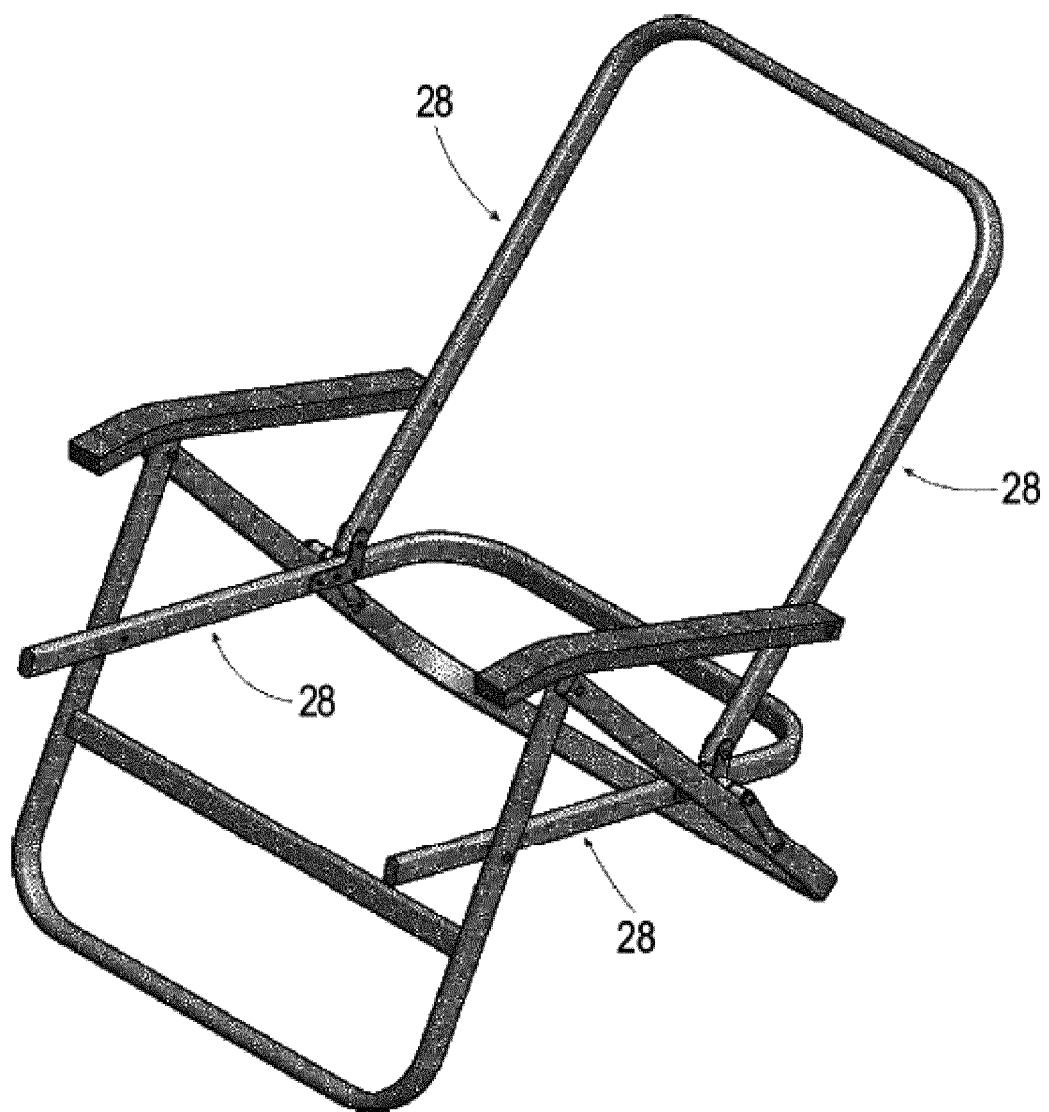


FIG. 11A

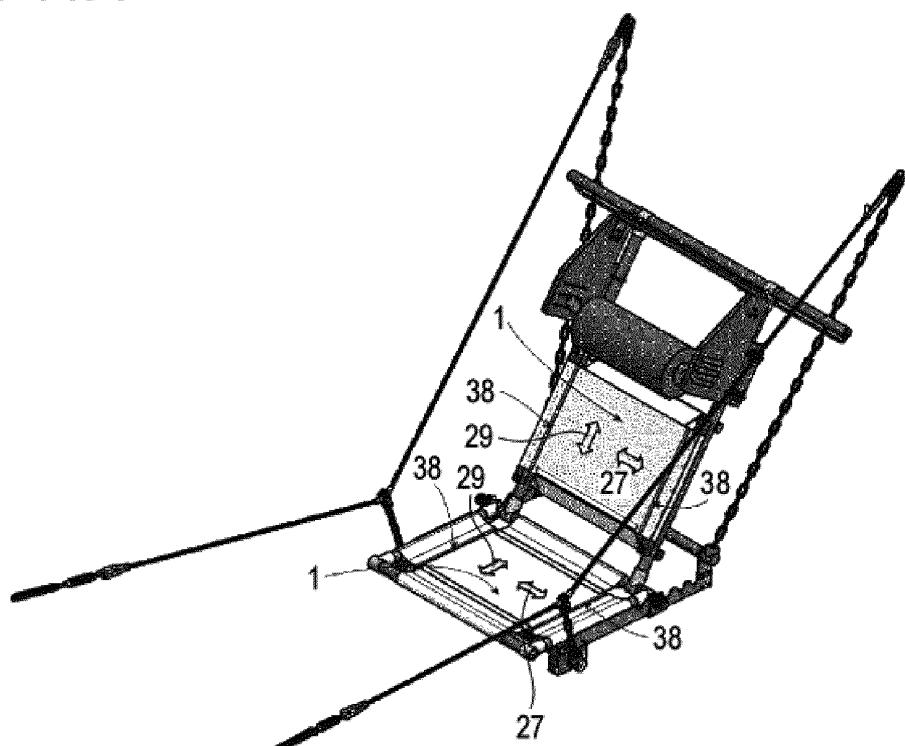

PERSPECTIVE VIEW

FIG. 11B

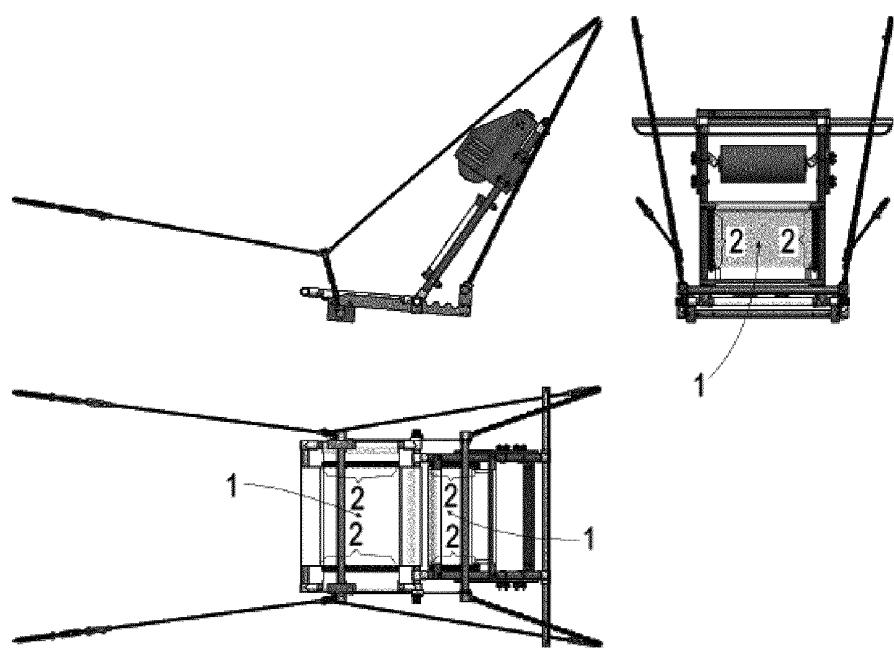

THREE-PLANE DRAWING

FIG. 12A

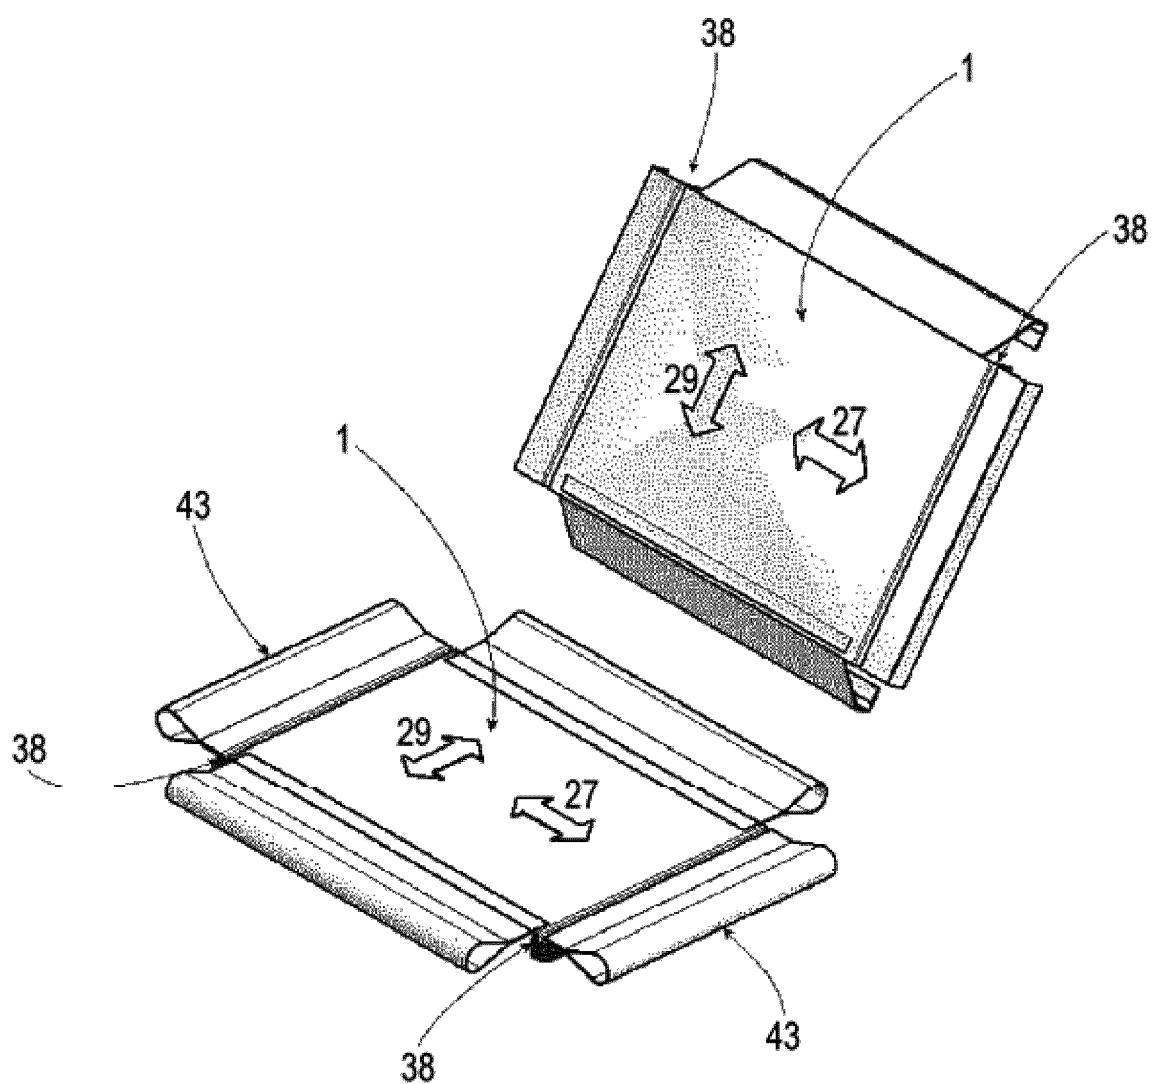


FIG. 12B

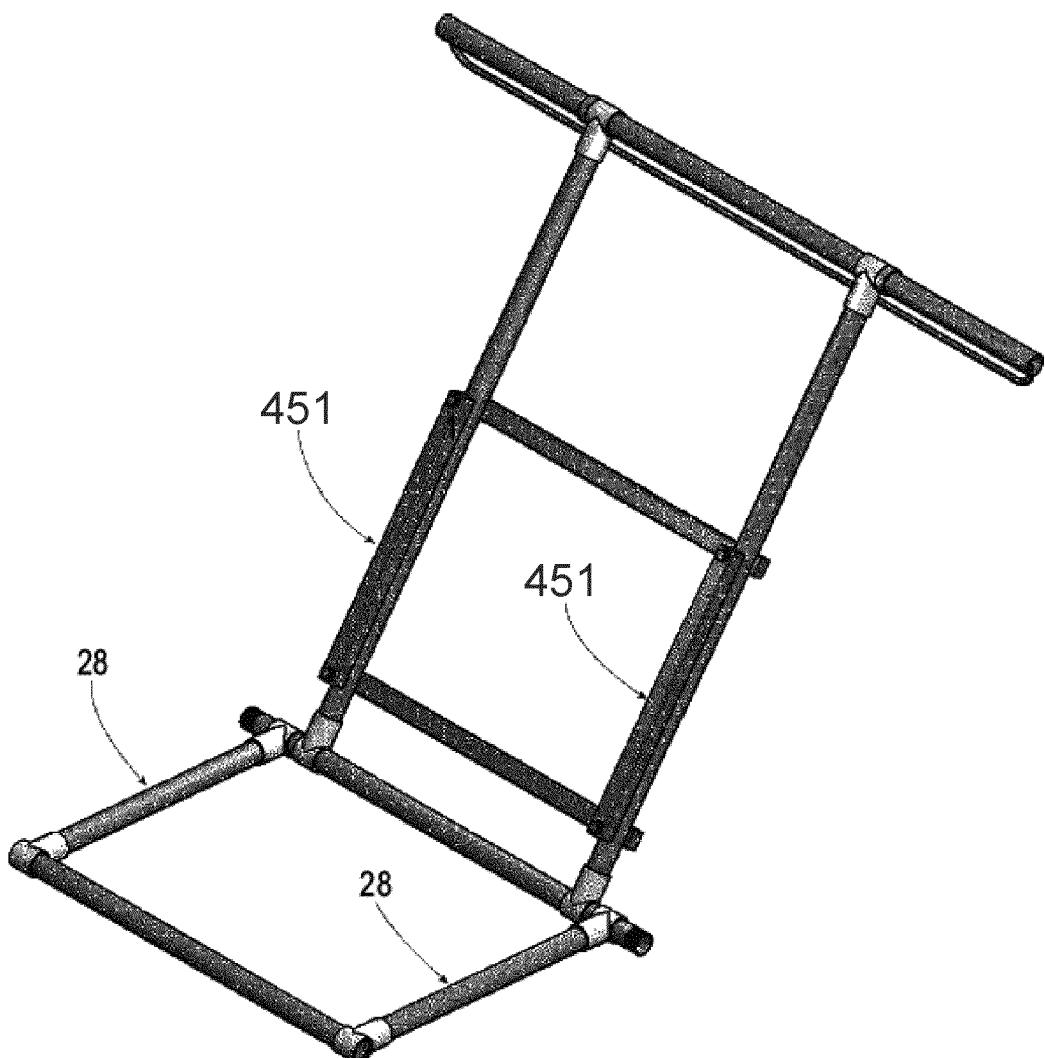


FIG. 13A

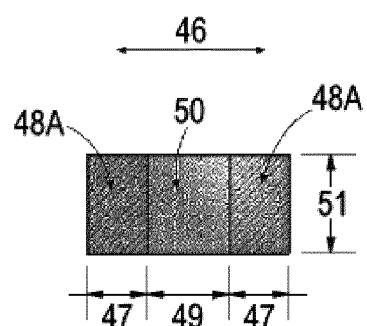


FIG. 13B

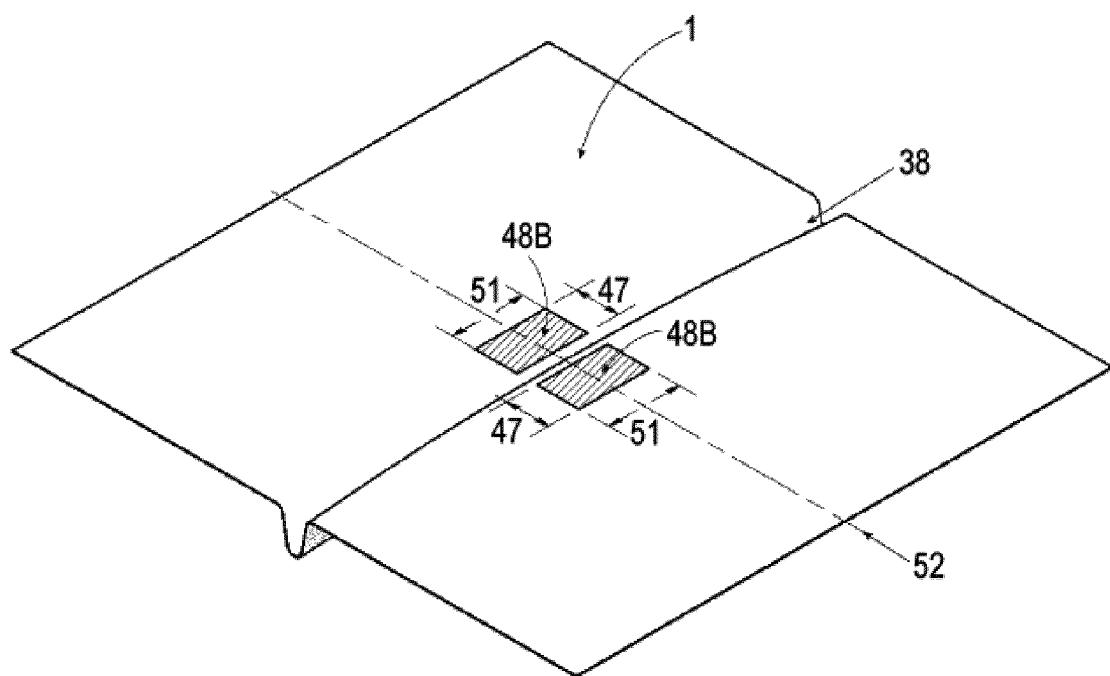


FIG. 13C

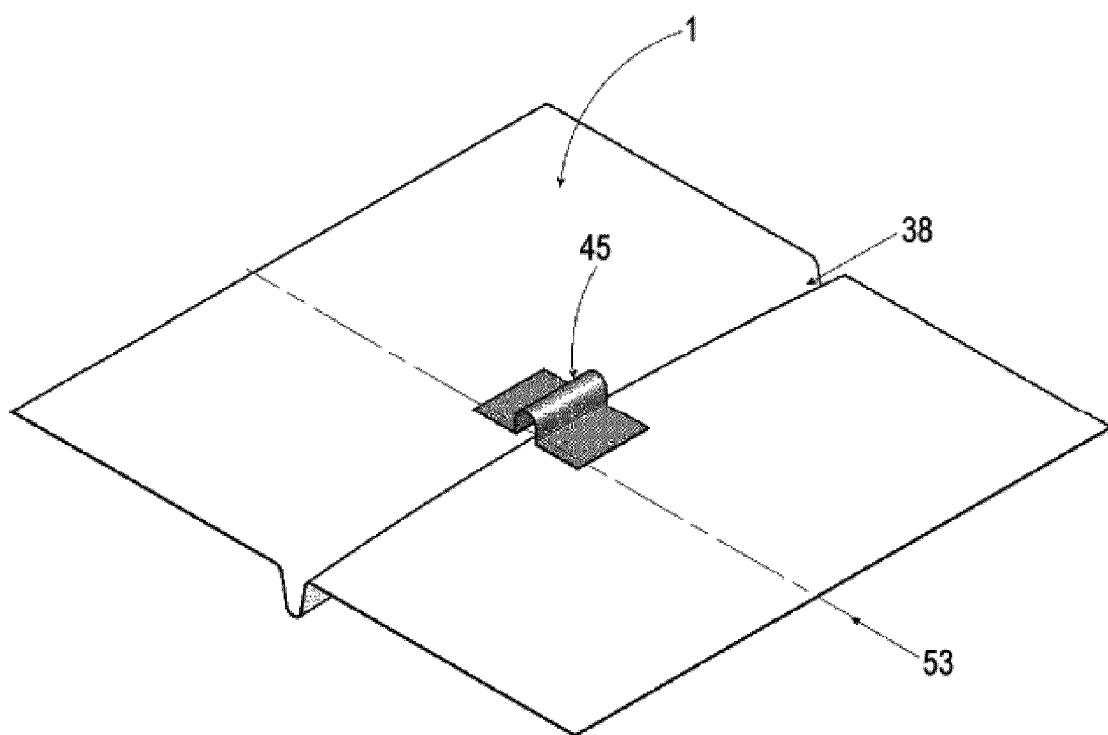


FIG. 14A

<CLOSE>

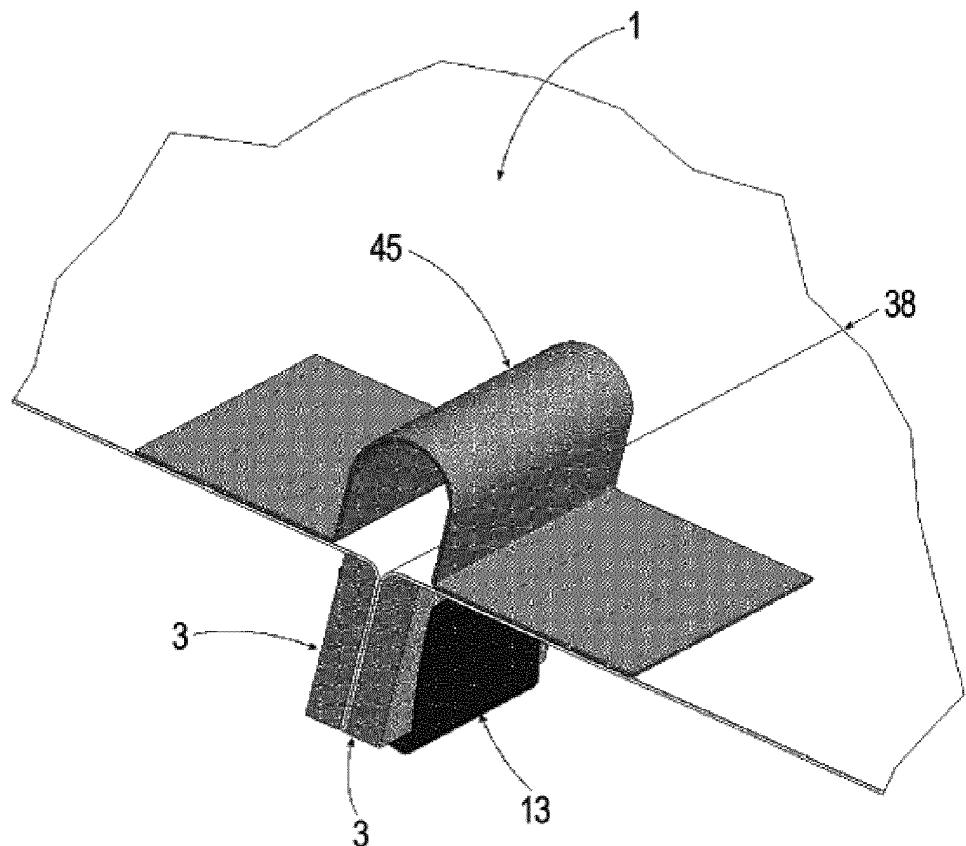


FIG. 14B

<maximum OPEN>

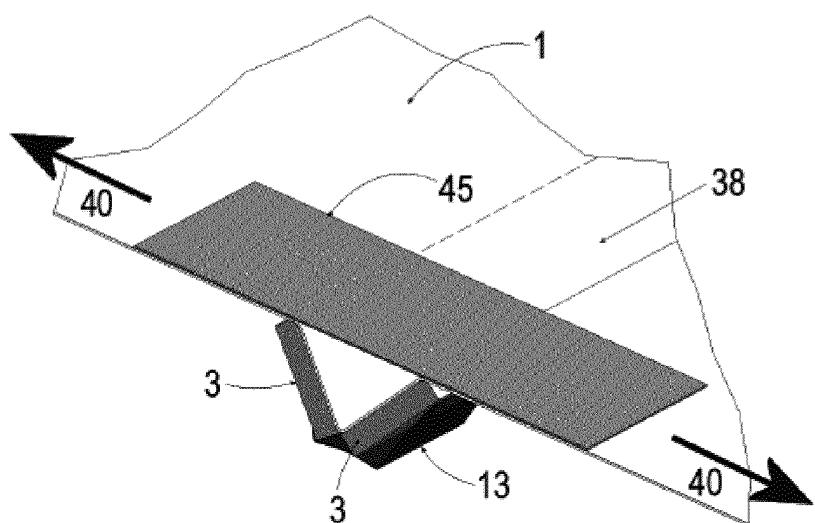


FIG. 15A

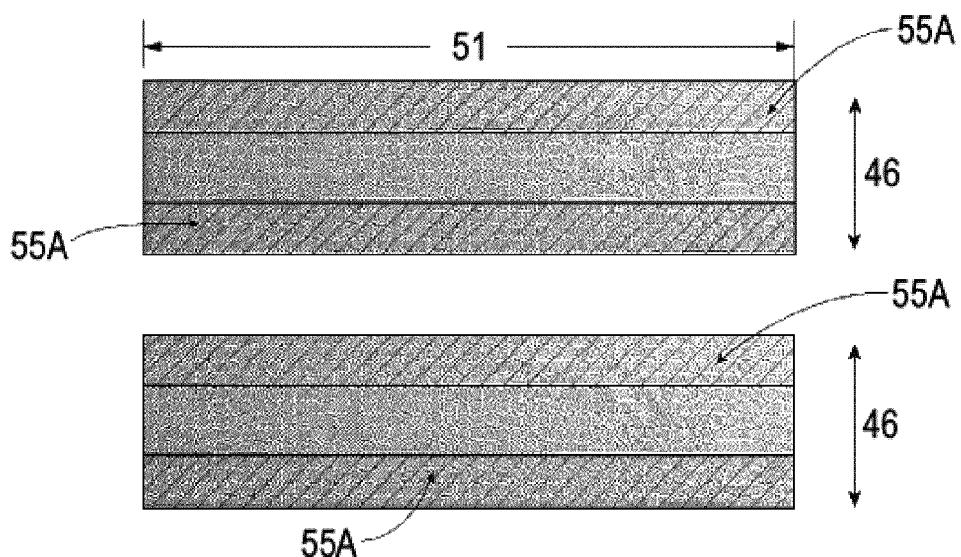


FIG. 15B

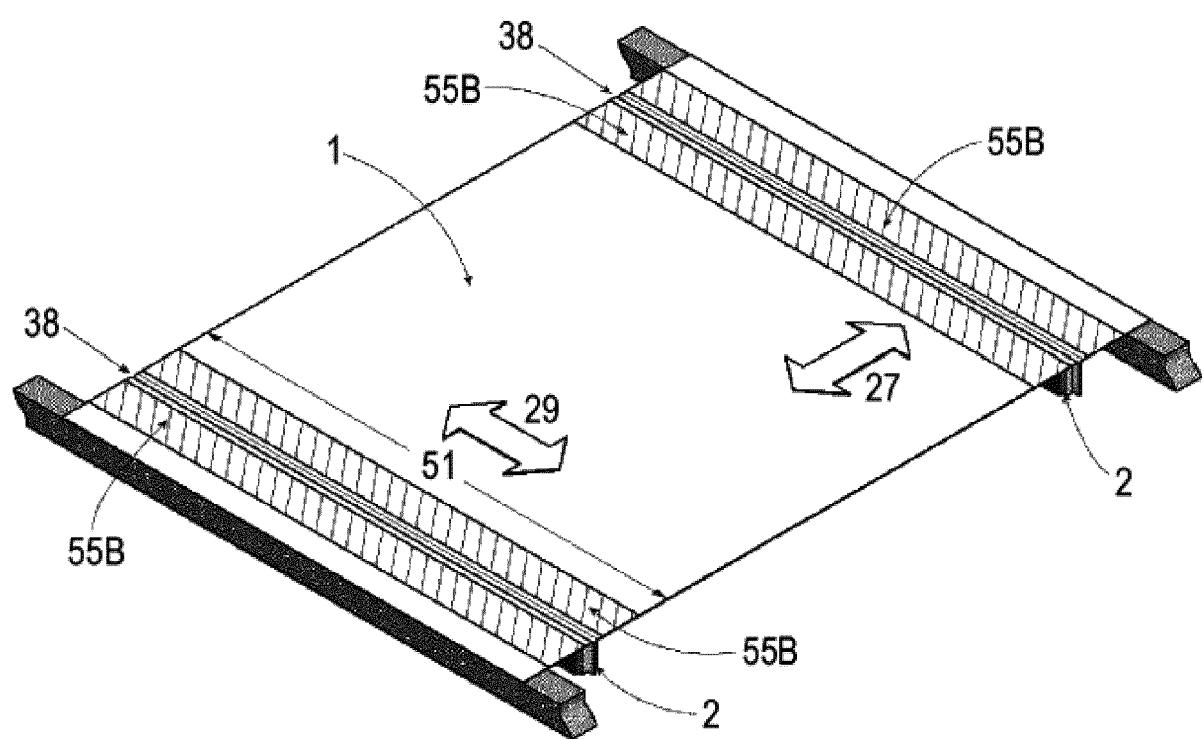


FIG. 15C

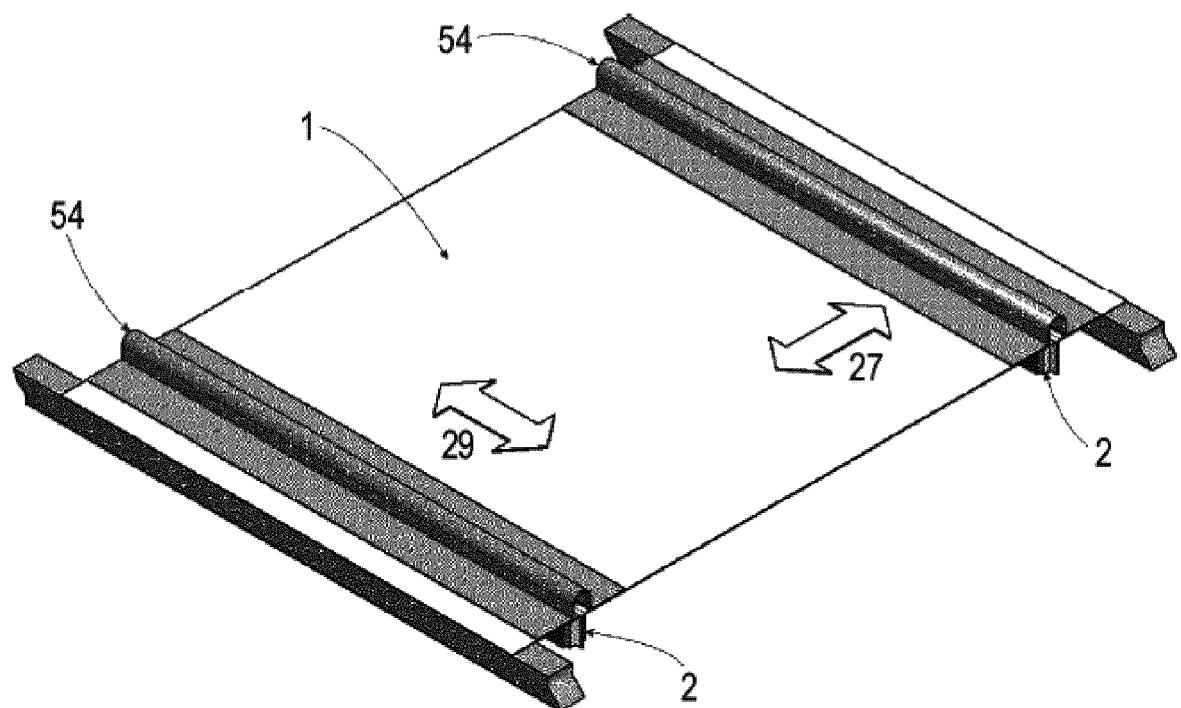


FIG. 16A




FIG. 16B


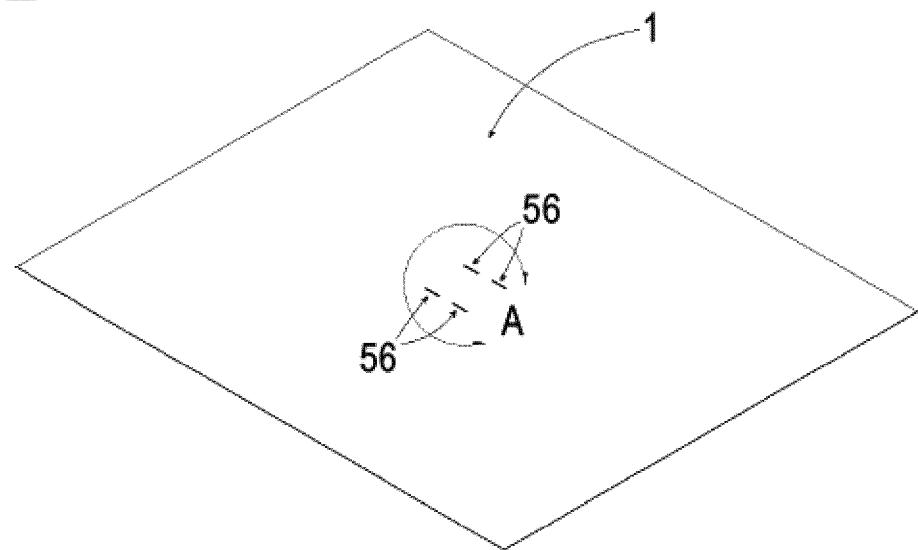


FIG. 16C

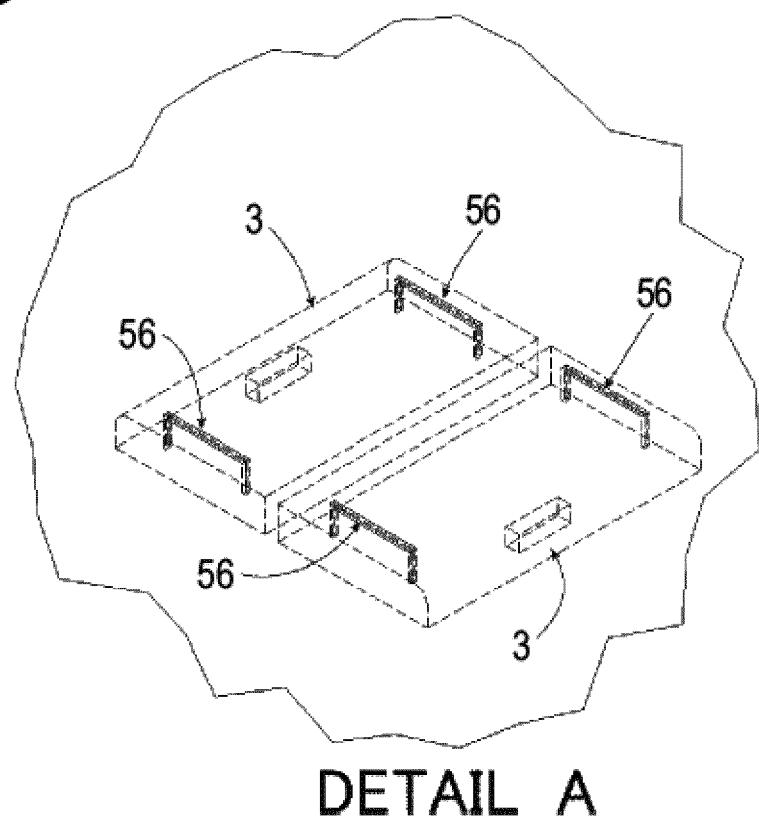

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3185845 U [0005]
- JP 2017196436 A [0005]
- JP H07144383 A [0005]