



EUROPEAN PATENT APPLICATION

(43) Date of publication:
20.04.2022 Bulletin 2022/16

(51) International Patent Classification (IPC):
E06B 7/20 (2006.01)

(21) Application number: **21202248.7**

(52) Cooperative Patent Classification (CPC):
E06B 7/21; E06B 7/20

(22) Date of filing: **12.10.2021**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Göndör, René**
34022 Chudenin (CZ)

(72) Inventor: **Göndör, René**
34022 Chudenin (CZ)

(74) Representative: **Stehlik, Martin**
Langrova, s.r.o
Skretova 48
301 00 Plzen (CZ)

(30) Priority: **13.10.2020 CZ 20200558**

(54) **MOVABLE DOOR LEAF SEALING STRIP ASSEMBLY AND A DOOR LEAF WITH THIS ASSEMBLY**

(57) An assembly includes bottom mechanism (40) with a vertically movable sealing strip (41) for attaching to a door leaf (5). The assembly includes technical means for lifting up the sealing strip (41) from the lower position before opening of the door leaf (5). The assembly includes an upper mechanism (20) controllable by a door handle (2). The assembly includes a lifting element (1) linking the upper mechanism (20) and/or the door handle (2) with the bottom mechanism (40) for transfer of impulse from the door handle (2) to the sealing strip (41). The upper mechanism (20) comprises a pulley (21) being controllable by movement of the door handle (2). At least first cord (4) is arranged between the pulley (21) and the movable sealing strip (41) so it forms the lifting element (1).

The assembly includes a technical means (3) for arresting of the movable sealing strip (41) in the upper position. The assembly may include a technical means for mechanical illustration of the door handle (2) position in the area between the latch tab (27) release position and the retention position of the technical means (3) for arresting of the movable sealing strip (41).

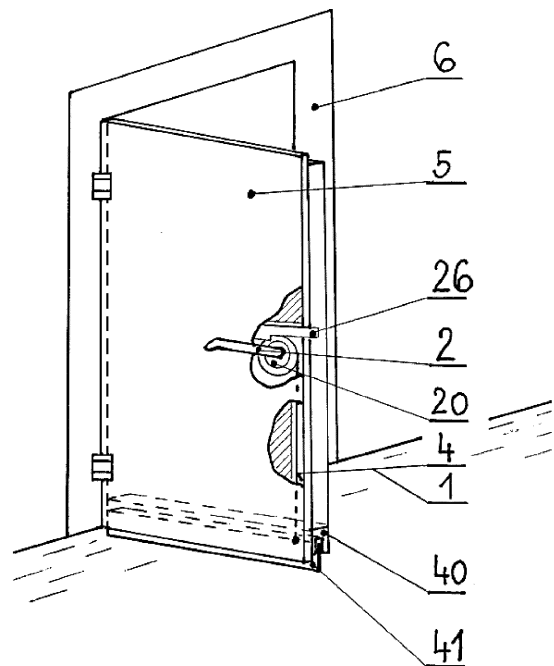


Fig. 4

Description

Field of the invention

[0001] The present invention relates to the field of construction engineering, in particular to the means for barrier-free sealing of space under door.

Background of the invention

[0002] For sealing of the space under closed door, i.e., between a door leaf and a floor, a so-called doorsill is currently used in many variations. The door sill is an object of which one horizontal dimension is substantially larger than the other horizontal dimension and height.

[0003] A standard design is a fixed doorsill attached to the floor in the space of a door frame, i.e., in the place where the closed door is located. A disadvantage is that for operation as intended, it protrudes from the floor, makes the cross-section of the door frame smaller, and causes unevenness of the floor. This is in particular troublesome for immobile people (wheel-chair bound people, hospital beds, and more), however, they may be annoying for walking people as well.

[0004] Alternatively, the bottom of the door leaf may be provided with a sealing strip, preferably vertically movable so that it responds to unevenness of the floor when opening of the door leaf. The sealing strip may comprise a flexible material or a brush. A disadvantage being common to all these designs is the rubbing against the floor when the door leaf moves. The floor surface damage may result.

[0005] Another possibility for sealing of the space under the door is a movable doorsill sunk inside the floor in the door area. The door sill may be controlled by the door to change its height depending on whether the door leaf is open or closed. This is known e.g., from DE 102017101559 A1 and DE 102017101553 A1. A disadvantage of the design is the necessity of the floor modifications in order to allow sinking of the door sill height change mechanism. Despite reduced door sill height when the door is open, there is a protruding element in the form of a sealing strip or partially protruding door sill. Hence, this is not a pure barrier-free solution. Any gap between the movable components undesirably traps impurities, as well as it is sensitive to ingress of water during the floor wiping, and more. Alternatively, a movable strips sunk directly into the door leaf may be used, which lift up from the floor after the door is open and moved away from the door frame. For example, this solution is known from EP 3699386. A mechanism disclosed herein comprises a vertically movable sealing strip of which movement is controllable by a push bar ending in a vertical edge of a door leaf by a door frame. When the door leaf is partially open, a gap between the door leaf and the door frame is created into which the push bar is shifted by a spring. The sealing strip is hereby lifted from the floor and free movement of the door leaf

is possible. When closing the door leaf, nearing to the door frame causes pushing of the push bar, and hence lowering of the sealing strip onto the floor still before full closing of the door leaf. A disadvantage is in particular late lifting of the sealing strip only after partial opening of the door leaf, which results in shear movement of the sealing strip on the floor by the door leaf being open. The floor damage may result. It is impossible to arrest the door leaf at any angle of opening without an additional device. Most often, a small separate retention braking piston (usually controlled by foot), which is pushed towards the floor, and which can be released again by foot, is used for arresting of a door leaf in a partially open position.

[0006] A similar design is known from CN 211573297U. The door leaf disclosed therein is also provided with a movable sealing strip. It uses a distance sensor that detects in real time if objects are near a door leaf. If yes, a microprocessor instructs an electric motor to make a move to lower the sealing strip automatically. Lowering of the sealing strip onto the floor occurs only if the distance sensor detects that the object, which is normally a door frame, is near. The disclosed sealing strip is capable of arresting the door in a given place only if the door is closed in the door frame. If the door leaf is open, the distance sensor detects no present object (the door frame), and the sealing strip is in its upper position.

[0007] DE 3037805A1 discloses a system for closing of a door or window leaf with a full-perimeter sealing. The system is adapted to push a seal to a door frame or a window frame after the door leaf or the window leaf is closed. However, it does not deal with arresting of the door leaf or window leaf open.

[0008] Hence, the technical problem to be solved may be defined as retention of a door leaf in any open position using a movable sealing strip without a risk of damaging a floor surface.

Summary of the invention

[0009] Disclosed is a movable sealing strip assembly for attaching to a door leaf. In the basic embodiment, the assembly includes a bottom mechanism adapted for attachment to bottom portion of a door leaf. As used herein, a bottom portion refers to the bottom half of a door leaf; obviously, the lower the bottom mechanism is attached to the door leaf, the better. The bottom mechanism comprises at least one movable sealing strip being movable between an upper position and a lower position. The sealing strip is an elongated member, preferably provided at least on its bottom side with a soft ribbon (seal). When in lower position, the sealing strip rests on the floor and seals the gap under the door leaf. When in upper position, the sealing strip is not in contact with the floor, the gap under the door leaf is free, and the sealing strip does not hinder the door leaf from movement.

[0010] Additionally, the assembly includes at least one guiding element for vertical guiding of the movable seal-

ing strip movement. The movable sealing strip is adapted to vertical movement in the bottom mechanism. Further, the assembly includes a technical means for temporary lifting up the movable sealing strip from the lower position before opening of the door leaf. The technical means include a cable. It is essential that the means can be mounted on the door leaf with the bottom mechanism and that it is capable of lifting the sealing strip up from the lower position before opening of the door leaf and releasing after closing of the door leaf so that repeated and repeatable return of the sealing strip to the lower position is allowed. Temporary lifting of the movable sealing strip up occurs upon user's instruction by pressing the door handle.

[0011] Further, the assembly includes an upper mechanism being controllable by a door handle. The door handle is linked with a latch tab. Depending on an embodiment the upper mechanism may be a standard mechanism of the door handle controlling the latch tab on the vertical edge of the door leaf to latch inside the door frame, or a second (blind) door leaf. Alternatively, the upper mechanism may be in a form of a mechanism added to said door handle standard mechanism. As used herein, the upper mechanism refers also to a small lever and gears of the mechanism for arresting of the second (blind) door leaf. In this case, the latch tab may be located both in the upper and lower horizontal edge of the door leaf.

[0012] The door handle is mechanical, movable (rotary, compressible, etc.). The door handle has a closed position where the door is not opened by the user. It means that no force is acting on the door handle towards pressing of the door handle and releasing of the latch tab, and the door handle is in rest (usually upper) position. Additionally, the door handle has an open position that occurs after the user presses the door handle. The latch tab is released in the open position. The mechanical door handles have a travel between closed and open position during which the latch tab moves (releases). Thereby, the latch tab is no longer located in the rest closed position which it has in case of the door handle closed position. At the same time, no such change to its position still occurs so that it is released and the door leaf could open. The extent of protection is not limited to the present representative listing of possible embodiments of the upper mechanism, door handle, and latch tab.

[0013] The technical means for lifting the movable sealing strip up from the lower position before opening of the door leaf includes a lifting element linking the upper mechanism and/or door handle with the bottom mechanism to transfer an impulse from the door handle to the movable sealing strip. In particular, the impulse of the mechanical movable (rotary, compressible, etc.) door handle is a move.

[0014] The assembly is made so that the upper mechanism includes a pulley controllable (rotary) by the door handle move. At least on a part of its perimeter, the pulley is provided with a groove. At least first cord is temporarily

placed inside the groove. It is not essential whether the cord upper end is attached to the pulley. It is only essential that the cord is wound or unwound when the pulley rotates. The first cord bottom end is attached to the movable sealing strip so that it forms a lifting element. Thereby, slight rotation of the pulley winds the cord and the movable sealing strip lifts up, and vice versa.

[0015] The first cord may be attached to the first half of the movable sealing strip length to adjust height of the movable sealing strip ends. The second cord is then attached to the other half of the movable sealing strip length. At least temporarily, the second cord is placed inside the pulley groove. Or, the second cord may be attached to the first cord above the movable sealing strip. The second cord and the first cord form the lifting element together. This permits independent adjustment of the movable sealing strip ends height with change to cable lengths, e.g., when there is an uneven floor in the door area.

[0016] Further, the assembly includes a technical means for arresting of the movable sealing strip in the upper position. The means for arresting of the movable sealing strip in the upper position permits a repeated movement of the door leaf without said movement being hindered by rubbing of the movable sealing strip against the floor. The means for arresting of the movable sealing strip includes a convex structure with a spring. The pulley is provided with a concave structure on its surface. The convex structure is arranged for spontaneous fitting in the concave structure of the pulley being just slightly rotated by the door handle. Further, the assembly includes a releasing element linked to the technical means for arresting of the movable sealing strip. The releasing element serves to releasing of the technical means for arresting of the movable sealing strip and hence, to spontaneous lowering of the movable sealing strip from the upper position to the lower position. The door leaf is arrested thereby in a specified open position. Similarly, the releasing element is used for closing of the door leaf when the movable sealing strip is lowered to the lower position, and thereby the gap under the closed door leaf is sealed. Preferably, the releasing element may be located in the same edge of the door leaf as the latch tab is. The releasing element may be an integrated component of the technical means for arresting of the movable sealing strip.

[0017] The releasing element may comprise or may be controlled by the door handle, and it may be a part of the upper mechanism. Said solution applies e.g., in a structure where the concave structure of the pulley is a pit, and the convex structure of the technical means for arresting of the movable sealing strip is a ball. The ball is arranged for spontaneous fitting into the pit of the pulley just slightly rotated by the door handle. A spring may push the ball to outer periphery of the pulley that may rotate despite pressure generated by the ball in correspondence to the door handle motion. Shifting of the door handle to open position and lifting the movable sealing

strip up results in positioning of the pulley pit against the ball. Owing to force generated by the spring, the ball fits in the pit and prevents from slight rotation of the pulley back and dropping of the movable sealing strip to default lower position. When the user desires to lower the movable sealing strip to the lower position, the reverse door handle move from open to closed position rotates reversely the pulley and shifts the pit outside the ball. The force applied by the user when moving the door handle from open to closed position suffices for pulling of the ball against the spring force, and thereby releasing of the technical means for arresting of the movable sealing strip.

[0018] In another embodiment, the concave structure of the pulley may be a notch. Preferably, the notch may be perpendicular to the groove on the outer periphery of the pulley. In this case, the convex structure of the technical means for arresting of the movable sealing strip is a latch. The latch is arranged for spontaneous fitting into the notch of the pulley just slightly rotated by the door handle. In particular, the latch may be arranged tangentially towards the pulley. A spring may push the latch to outer periphery of the pulley that may rotate despite pressure generated by the latch in correspondence to the door handle motion. Shifting of the door handle to open position and lifting the movable sealing strip up results in positioning of the pulley notch against the latch. Owing to force generated by the spring, the latch fits in the notch and prevents from slight rotation of the pulley back and dropping of the movable sealing strip to default lower position.

[0019] When the technical means for arresting of the movable sealing strip is under retention, the door handle remains in open position, and the user is thus informed that the movable sealing strip is arrested in the upper position and the door leaf may be moved freely. In some cases, the door handle may look unaesthetically when in open position. Therefore, the door handle may be provided in a variant embodiment with a spring to return the door handle back to the closed position after retention of the technical means for arresting of the movable sealing strip. In this case, a freewheel connects the door handle to the upper mechanism. The freewheel (so-called one-way bearing) transfers movement of the door handle being open to the upper mechanism. The freewheel and said spring operate together also for spontaneous return of the door handle to the closed position while the technical means for arresting of the movable sealing strip is being under retention after releasing of the door handle by the user. Depending on a specific embodiment, the lower mechanism may be provided with at least one basic flexible element to apply the basic vertical pressing force on the movable sealing strip. For example, the basic flexible element may be at least one spring, preferably a coil spring, or a rubber member, and more. The basic flexible element may be found in particular in structures where the movable sealing strip is too light to sit reliably onto the floor. The basic flexible element applies a pressing

force on the movable sealing strip downwards and pushes it onto the floor.

[0020] The assembly may include a technical means for mechanical illustration of the door handle position in the area between the latch tab release position and the retention position of the technical means for arresting of the movable sealing strip. It is essential that the door handle position between said positions is illustrated, but the positions are not included. As used herein, the mechanical illustration refers to signalling to the user being haptic for the user. Therefore, it may be at least temporary change to resistance of the door handle being open, vibration, non-smooth operation of the door handle, and more. Not essentially, said mechanical illustration may be also audible to the user. Said technical means signals a moment (door handle position) to the user while opening the door handle occurring after releasing of the latch tab and lifting the movable sealing strip to the upper position (the door leaf may be open) but before retention of the technical means for arresting of the movable sealing strip. Said signalling informs the user that the latch tab has already been released and the movable sealing strip is lifted up, but the technical means for arresting of the movable sealing strip has not been put under retention yet. If the user puts the door handle to a position being open more, the technical means for arresting of the movable sealing strip is put under retention. If the user fails to overcome the displayed position of the door handle, the movable sealing strip spontaneously lowers down after releasing of the door handle to the lower position and movement of the door leaf is arrested in open position.

[0021] Said technical means for illustration of the door handle position may include at least one auxiliary flexible element to generate the auxiliary vertical pressing force acting on the movable sealing strip in the position between the upper position and lower position of the movable sealing strip. When the movable sealing strip is lifted up to a certain extent, it comes into contact with the auxiliary flexible element before the technical means for arresting of the movable sealing strip in the upper position is arrested. When the door handle moves from closed position to open position, the resistance of the door handle towards the user increases. Thereby, the door handle position is mechanically illustrated between the latch tab release position and the retention position of the technical means for arresting of the movable sealing strip.

[0022] In another embodiment, the mechanical means for illustration of the door handle position may include said pulley being characterized in non-round shape and/or eccentric axis of rotation. Put it in other words, the pulley forms a cam. The task of the cam is to make the distance of the pulley axis variable from the point where the pulley contacts the cord. It results in a change to lever length and a variable resistance in pushing the door handle, which mechanically illustrates the door handle position in the area between the latch tab release and the position of the technical means for arresting of the mov-

able sealing strip retention.

[0023] In a preferable embodiment, the bottom mechanism may include a means for arresting of the bottom mechanism for arresting of the movable sealing strip in a lifted-up position. It may be operated for manual arresting of the movable sealing strip in the lifted-up position in case of a service intervention or failure of the lifting element, which connects the upper mechanism or the door handle with the bottom mechanism, etc. The lifted-up position may be identical to the upper position.

[0024] A related invention is a door leaf, in particular for building structures, that includes the assembly described above. The bottom mechanism may be arranged in a separate housing attached on the outside of the door leaf or in a cavity inside the bottom portion of the door leaf. The upper mechanism may be arranged in a separate housing attached to the outside of the door leaf (in particular where the door handle is placed) or in a cavity inside the door leaf (in particular where the door handle is placed).

[0025] The proposed invention provides a barrier-free sealing of the space under the door where it effectively provides insulation against noise, dust, liquids, and gases. Also, the assembly operates as a fireproof door retention when appropriate materials are used. As the door sill is eliminated, a flat floor may be achieved at the crossing between rooms, and no floor rubbing occurs when the door leaf moves. Preferably, the assembly may also be used for arresting of the door leaf open (including a blind door leaf) in any position.

Description of drawings

[0026] The exemplary embodiment of the proposed technique is described with reference to the drawings, in which

Fig. 1 - is a side view of a partial cross-section of the upper mechanism with the door handle in closed position;

Fig. 2 - is a side view of a partial cross-section of the upper mechanism with the door handle in open position with the means for arresting of movable sealing strip under retention;

Fig. 3 - is a side view of a partial cross-section through the bottom mechanism, with the sealing strip in lower position on the left and with the sealing strip in upper position on the right;

Fig. 4 - is an axonometric view of the door leaf with the movable sealing strip assembly.

Exemplary embodiment of the invention

[0027] An assembly of a movable sealing strip 41 of a door leaf 5 includes a bottom mechanism 40. The bottom mechanism 40 includes a movable sealing strip 41 being movable between an upper position and a lower position, and two basic flexible elements 43 for generating of basic

vertical pressing force applied on the movable sealing strip 41. The movable sealing strip 41 is provided with a rubber seal in the bottom portion.

[0028] Further, the bottom mechanism 40 includes a guiding element 42 for vertical movement guiding of the movable sealing strip 41. Further, the assembly includes an upper mechanism 20 being controllable by a door handle 2. The door handle 2 is linked with a latch tab 27 that fits in a counterpart in a door frame 6 when the door leaf 5 is closed.

[0029] Further, the assembly includes a technical means for temporary lifting up the movable sealing strip 41 from the lower position before opening of the door leaf 5. Said technical means includes a lifting element 1. The lifting element 1 connects the upper mechanism 20 with the bottom mechanism 40 for impulse (movement) transfer from the mechanical door handle 2 to the movable sealing strip 41.

[0030] The upper mechanism 20 includes a pulley 21 being controllable by movement of the door handle 2. A groove 22 is provided on the periphery of the pulley 21. A first cord 4 is located in the groove 22. Bottom end of the first cord 4 is attached to a first half of the movable sealing strip 41 length. Then, a second cord 4' is attached to the other half of the movable sealing strip 41 length. The second cord 4' is attached to the first cord 4 above the movable sealing strip 41. The first cord 4 and the second cord 4' form together the lifting element 1. Further, the assembly includes a technical means 3 for arresting of the movable sealing strip 41 in the upper position. A releasing element 26 is connected to the technical means 3 for arresting. The releasing element 26 serves to releasing of the technical means 3 for arresting and hence, to spontaneous lowering of the movable sealing strip 41 from the upper position. The releasing element 26 is located on the same edge of the door leaf 5 as the latch tab 27 and has a form of a tab having its side edge bevelled (i.e., a shape identical to the standard latch tab 27).

[0031] The pulley 21 is provided with a notch 25. The technical means 3 for arresting of the movable sealing strip 41 comprises a latch 23 and a spring 24. The latch 23 is arranged for spontaneous fitting into the notch 25 of the pulley 21 just slightly rotated by the door handle 2. The door handle 2 is attached to the upper mechanism 20 via a freewheel for transmission of the door handle 2 being opened to the upper mechanism 20. The door handle 2 is provided with a spring 28 for spontaneous return of the door handle 2 to the closed position with the technical means 3 for arresting of the movable sealing strip 41 retained (and thus with the pulley 21 being arrested).

[0032] The assembly includes a technical means for mechanical illustration of the door handle 2 position in the area between the latch tab 27 release position and the retention position of the technical means 3 for arresting of the movable sealing strip 41. A technical means for mechanical illustration of the door handle 2 position is in this case located in the bottom mechanism 40. The

technical means includes two auxiliary flexible elements 44 to create an auxiliary vertical pressing force acting on the movable sealing strip 41 in the position between the upper position and lower position of the movable sealing strip 41.

[0033] The bottom mechanism 40 includes a bottom mechanism 40 arresting element 45 for arresting of the lifted-up movable sealing strip 41 above the lower position, in this case in the upper position. The arresting element 45 is in a form of holes in the movable sealing strip 41 and the fixed (stationary) portion of the bottom mechanism 40 and the door leaf 5, respectively. The holes are coaxial when the movable sealing strip 41 is lifted up above the lower position. A rod element may be inserted to the coaxial holes from the outside and thereby fix the relative position of the lifted movable sealing strip 41 and of the fixed (stationary) portion of the bottom mechanism 40 and the door leaf 5, respectively.

[0034] The assembly described above is contained inside the door leaf 5 for building structures such as houses. The bottom mechanism 40 is arranged in a cavity inside of the bottom portion of the door leaf 5. The upper mechanism 20 is arranged in a cavity inside of the door leaf 5 in place of the door handle.

[0035] When the user presses the door handle 2, the latch tab 27, which keeps the door leaf 5 in the closed position in the door frame 6, moves. As the door handle 2 axis is rotated, also the pulley 21 rotates and winds the first cord 4 and the second cord 4' onto the pulley 21. The movable sealing strip 41 is lifted up from the lower position thereby. When pressing of the door handle 2 continues, the latch tab 27 retracts outside of the door frame 6 into the door leaf 5. Hence, the door leaf 5 may open after the movable sealing strip 41 lifts up from the lower position.

[0036] When pressing of the door handle 2 continues further, the two auxiliary flexible elements 44, which operate as the technical means for mechanical illustration of the door handle 2 position, are pressed. The auxiliary flexible elements 44 have a form of coil springs arranged above the movable sealing strip 41. When pressing of the door handle 2 continues further, the pulley 21 notch 25 positions against the latch 23 of the technical means 3 for arresting of the movable sealing strip 41 in the upper position. Through the force generated by the spring 24, the latch 23 is pushed into the pulley 21 notch 25. The pulley 21 is hereby retained against rotating back, prevents loosening of the first and second cord 4, 4', and lowering of the movable sealing strip 41 from the upper position. In the view of the fact that the door handle 2 is provided with the freewheel, the door handle 2 returns to the closed position as soon as the user releases the door handle 2.

[0037] The user may in any open position of the door leaf 5 press the releasing element 26 and the latch 23 is taken out against the force of the spring 24. The return movement of the pulley 21, unwinding of the first and second cord 4, 4', and spontaneous lowering of the mov-

able sealing strip 41 from the upper position to the lower position, and sticking onto the floor is allowed thereby due to the force generated by the basic flexible elements 43. The door leaf 5 is arrested against movement thereby.

5 To re-release the door leaf 5, the user presses the door handle 2, thereby the movable sealing strip 41 is lifted up from the lower position, and its optional arresting in the upper position as described above. When the door leaf 5 with the technical means 3 for arresting of the movable sealing strip 41 under retention is retained in the door frame 6, the releasing element 26 is automatically pressed by the door frame 6 and spontaneous lowering of the movable sealing strip 41 to the lower position occurs after the door leaf 5 closes.

15 **[0038]** The exemplary embodiment is shown in Fig. 1 to Fig. 4.

List of reference numerals

20 **[0039]**

- 1 - lifting element
- 2 - door handle
- 3 - technical means for arresting of the movable sealing strip in the upper position
- 25 4 - first cord
- 4' - second cord
- 5 - door leaf
- 6 - door frame
- 30 20 - upper mechanism
- 21 - pulley
- 22 - pulley groove
- 23 - latch
- 24 - spring of the technical means for arresting of the movable sealing strip in the upper position
- 35 25 - notch
- 26 - releasing element
- 27 - latch tab
- 28 - door handle spring
- 40 40 - bottom mechanism
- 41 - movable sealing strip
- 42 - guiding element
- 43 - basic flexible element
- 44 - auxiliary flexible element
- 45 45 - arresting element

Claims

- 50** 1. A movable door leaf (5) sealing strip assembly including bottom mechanism (40) for attachment to bottom portion of the door leaf (5), wherein the bottom mechanism (40) comprises at least a movable sealing strip (41) being movable between an upper position and a lower position,

and at least one guiding element (42) for vertical guiding of the movable sealing strip (41) move-

ment, wherein the assembly further includes technical means for temporary lifting of the movable sealing strip (41) up from the lower position prior to opening of the door leaf (5), **characterized in that**

it further includes upper mechanism (20) controllable by a door handle (2), said door handle (2) is linked with a latch tab (27), wherein the technical means for lifting the movable sealing strip (41) up from the lower position before opening of the door leaf (5) include a lifting element (1) linking the upper mechanism (20) and/or the door handle (2) with the bottom mechanism (40) to transfer an impulse from the door handle (2) to the movable sealing strip (41), wherein the upper mechanism (20) includes pulley (21) controllable by the door handle (2) movement, said pulley (21) is provided with groove (22) on at least a portion of its periphery, in which at least first cord (4) is located at least temporary, wherein bottom end of a first cord (4) is attached to the movable sealing strip (41) so it forms the lifting element (1), and the assembly further includes a technical means (3) for arresting of the movable sealing strip (41) in the upper position and a releasing element (26) linked with said technical means (3) for arresting of the movable sealing strip (41) for releasing of the technical means (3) for arresting of the movable sealing strip (41) and for spontaneous lowering of the movable sealing strip (41) from the upper position, wherein the pulley (21) is provided with a concave structure and the technical means (3) for arresting of the movable sealing strip (41) includes a convex structure with a spring (24) arranged for spontaneous falling to the pulley (21) concave structure just rotated by the door handle (2).

2. The assembly according to claim 1 **characterized in that** the pulley (21) concave structure is a notch (25) and the technical means (3) for arresting of the movable sealing strip (41) convex structure is a latch (23).
3. The assembly according to claim 1 **characterized in that** the pulley (21) concave structure is a pit and the technical means (3) for arresting of the movable sealing strip (41) convex structure is a ball.
4. The assembly according to any one of claims 1 to 3 **characterized in that** the first cord (4) is attached to the first half of the movable sealing strip (41) length, the second cord (4') is attached to the second half of the movable sealing strip (41) length, wherein the second cord (4') is at least partially placed in the

pulley (21) groove (22) and/or attached to the first cord (4) above the movable sealing strip (41) so that it forms the lifting element (1) together with the first cord (4).

5

5. The assembly according to any one of claims 1 to 4 **characterized in that** the door handle (2) is attached to the upper mechanism (20) via a freewheel for transfer of movement of the door handle (2) being open to the upper mechanism (20), and provided with a spring (28) for spontaneous return of the door handle (2) to the closed position when the technical means (3) for arresting of the movable sealing strip (41) is retained.

10

6. The assembly according to any one of claims 1 to 5 **characterized in that** the bottom mechanism (40) comprises at least one basic flexible element (43) for creating of basic vertical pressing force acting on the movable sealing strip (41).

15

7. The assembly according to any one of claims 1 to 6 **characterized in that** it includes technical means for mechanical illustration of the door handle (2) position in the area between the latch tab (27) release position and the retention position of the technical means (3) for arresting of the movable sealing strip (41).

20

8. The assembly according claim 7 **characterized in that** the technical means for illustration of the door handle (2) position comprises at least one auxiliary flexible element (44) for creating auxiliary vertical pressing force acting on the movable sealing strip (41) in the position between the upper position and lower position of the movable sealing strip (41).

25

9. The assembly according to claim 7 **characterized in that** the technical means for mechanical illustration of the door handle (2) position includes the pulley (21) of non-circular shape and/or with eccentric axis of rotation.

30

10. The assembly according to any one of claims 1 to 9 **characterized in that** the bottom mechanism (40) comprises an arresting element (45) of the bottom mechanism (40) for arresting of the lifted movable sealing strip (41) above the lower position.

35

11. A door leaf, in particular for building structures, **characterized in that** it includes the assembly according to any one of preceding claims 1 to 10.

40

12. The door leaf according to claim 11 **characterized in that** the bottom mechanism (40) is arranged in a separate housing attached to the outside to the door leaf (5).

45

13. The door leaf according to claim 11 **characterized in that** the bottom mechanism (40) is arranged in a cavity inside of the bottom portion of the door leaf (5).

5

10

15

20

25

30

35

40

45

50

55

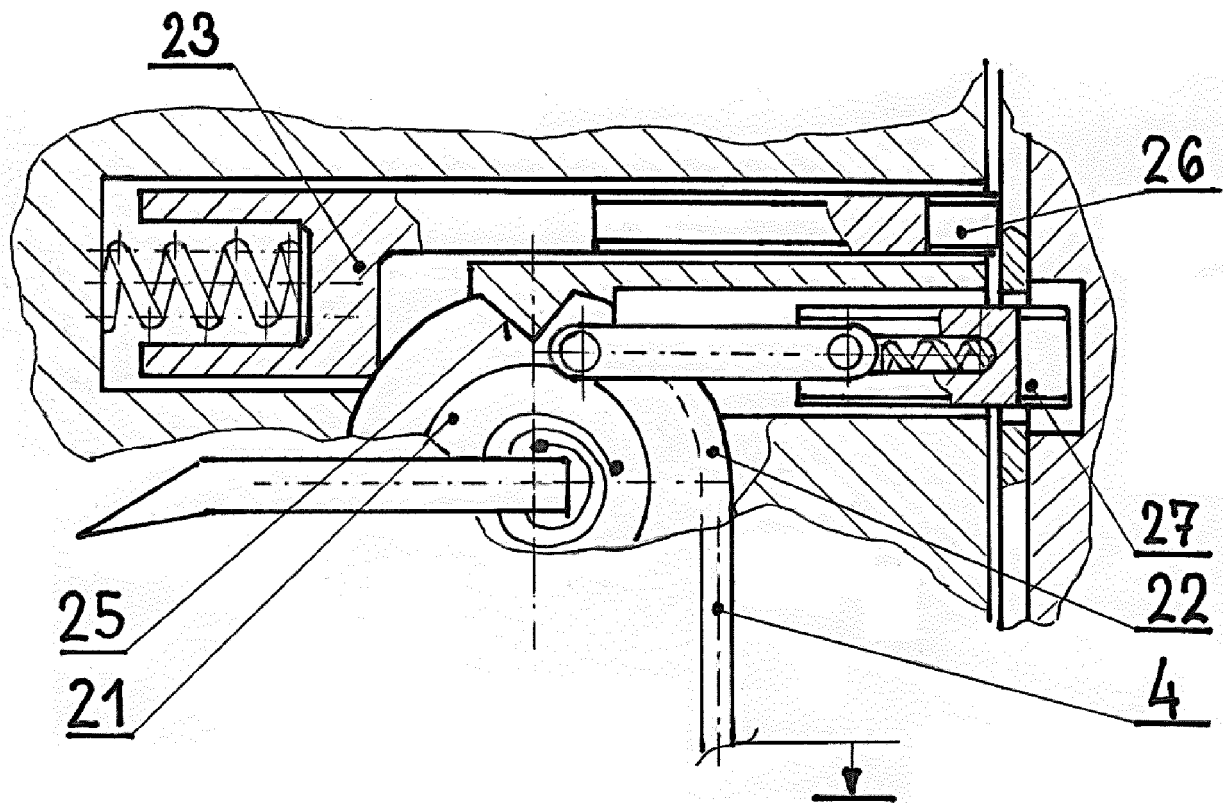


Fig. 1

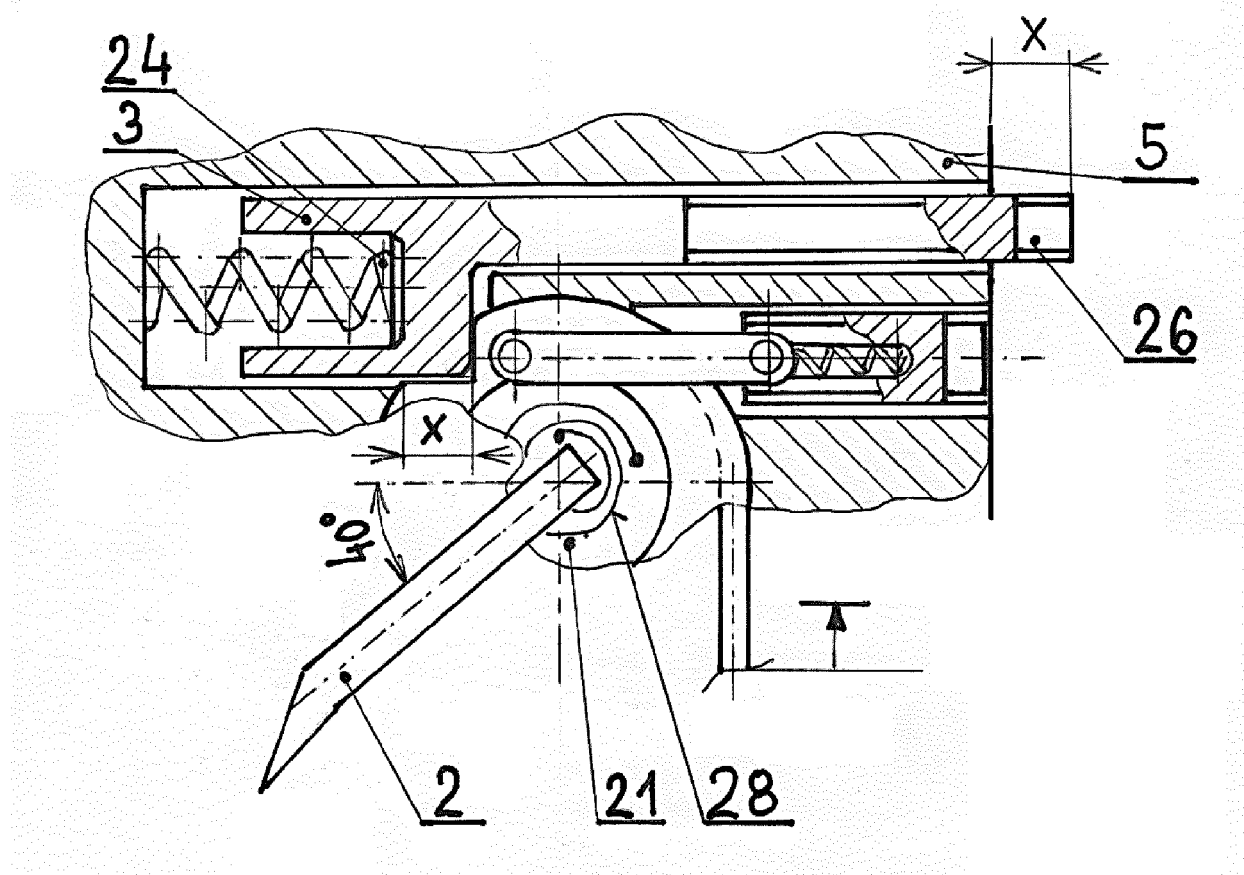


Fig. 2

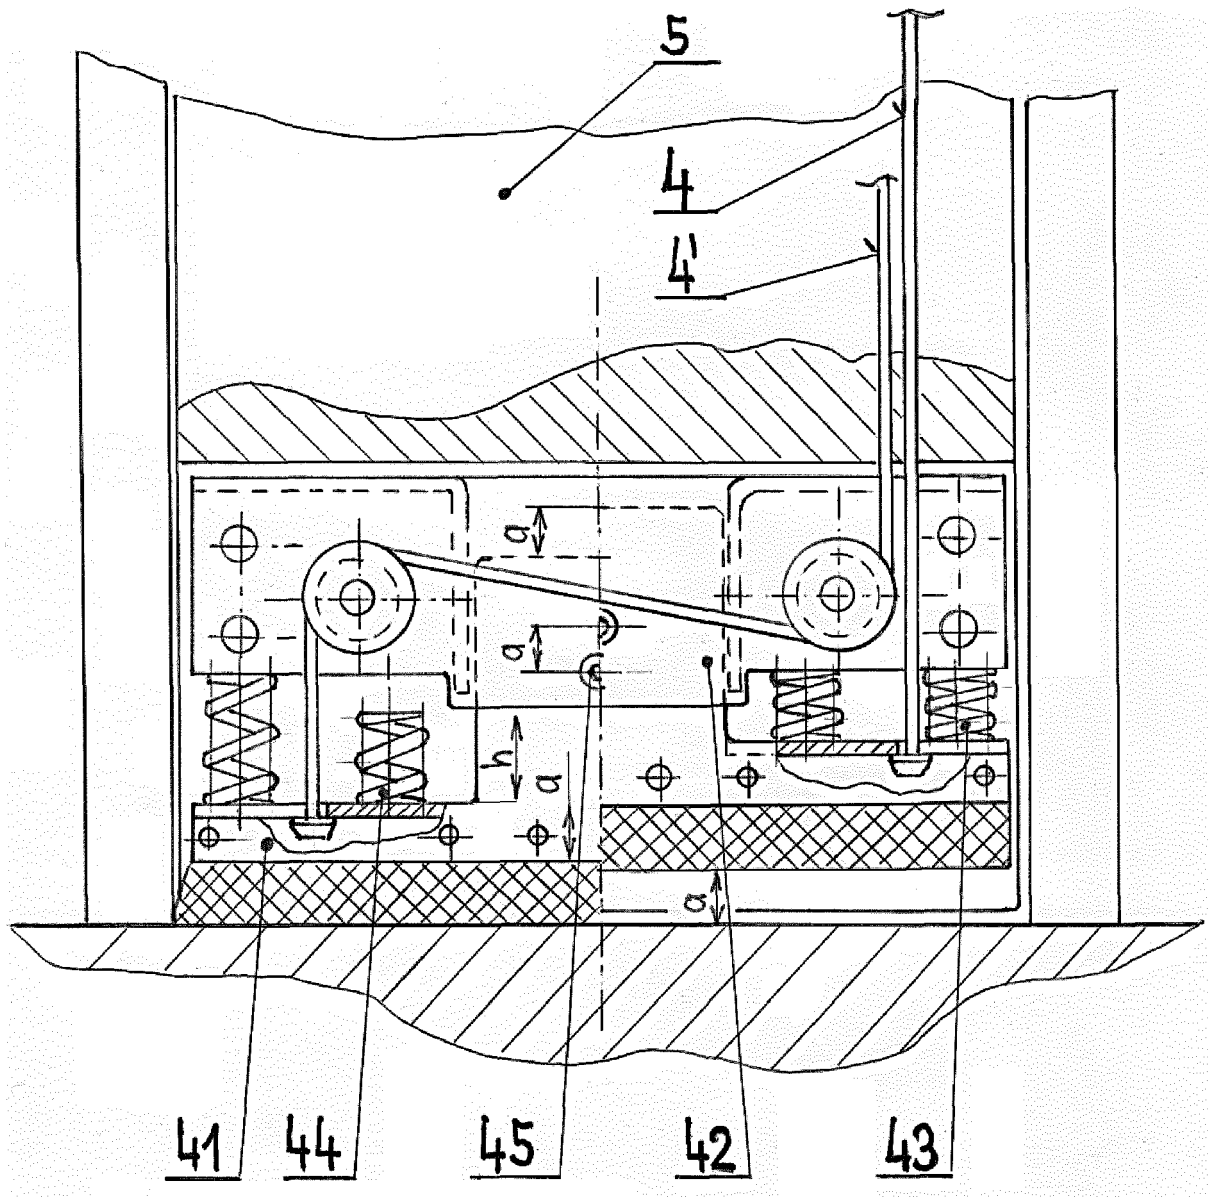


Fig. 3

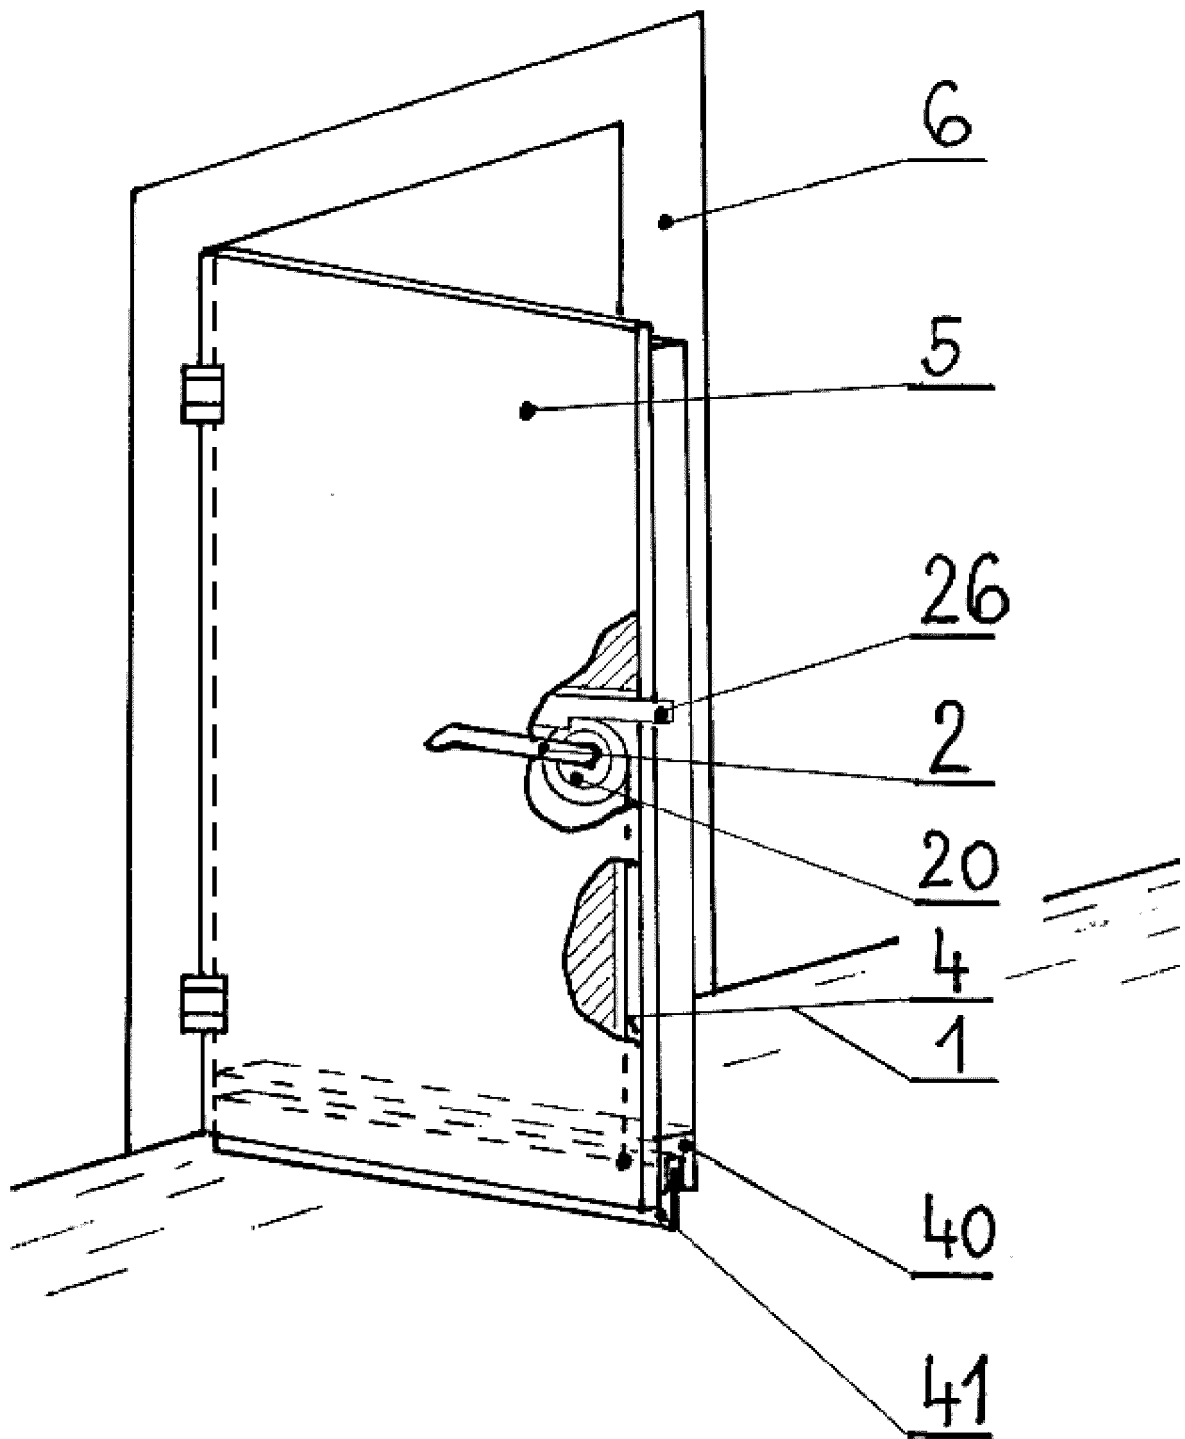


Fig. 4



EUROPEAN SEARCH REPORT

Application Number

EP 21 20 2248

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	DE 592 020 C (HEINRICH GRAEF) 31 January 1934 (1934-01-31) * the whole document *	1-13	INV. E06B7/20
Y	DE 26 57 279 A1 (ATHMER FA F) 29 June 1978 (1978-06-29) * the whole document *	1-13	
Y	DE 297 20 978 U1 (ERNST KELLER GMBH & CO KG [DE]) 12 March 1998 (1998-03-12) * figures 3, 4, 11, 12 *	12	
A	JP H10 96380 A (KAMIMURA YUHEI) 14 April 1998 (1998-04-14) * the whole document *	1-13	
A	CN 110 397 387 A (UNIV BEIJING UNION) 1 November 2019 (2019-11-01) * figures 1-3 *	10	
			TECHNICAL FIELDS SEARCHED (IPC)
			E06B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 February 2022	Examiner Pieper, Fabian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 21 20 2248

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-02-2022

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 592020	C	31-01-1934	NONE
DE 2657279	A1	29-06-1978	NONE
DE 29720978	U1	12-03-1998	NONE
JP H1096380	A	14-04-1998	NONE
CN 110397387	A	01-11-2019	NONE

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 102017101559 A1 **[0005]**
- DE 102017101553 A1 **[0005]**
- EP 3699386 A **[0005]**
- CN 211573297 U **[0006]**
- DE 3037805 A1 **[0007]**