



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Abstract

(51) International Patent Classification (IPC):
G06F 1/18 (2006.01) **H05K 7/14** (2006.01)

(52) Cooperative Patent Classification (CPC):
G06F 1/185; H05K 7/1487

(48) Corrigendum issued on:
21.12.2022 Bulletin 2022/51

(43) Date of publication:
27.04.2022 Bulletin 2022/17

(21) Application number: **20203322.1**

(22) Date of filing: **22.10.2020**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **BULL SAS**
78340 Les Clayes-sous-Bois (FR)

(72) Inventors:
• **HALLI, Sanjayakumar**
582205 GADAG (IN)

- **NAGARAJA, Prakash**
562123 BANGALORE RURAL DISTRICT (IN)
- **ADIGA, Sriprada**
560001 BENGALURU (IN)
- **KUMBHAR, Shubham**
560068 BANGALORE (IN)
- **AVINASH, Kumar**
560066 BENGALURU (IN)
- **SHARMA, Madhu K**
574220 DAKSHINA KANNADA DISTRICT (IN)
- **THAKUR, Pravin Kumar**
560037 BANGALORE (IN)

(74) Representative: **Argyma**
14 Boulevard de Strasbourg
31000 Toulouse (FR)

(54) **AN ELECTRONIC DEVICE COMPRISING A MOTHER BOARD AND A RISER CARD**

(57) A mother board (2) for an electronic device, the mother board comprising at least one central processing unit (21) and a first riser slot (24) and a second riser slot (25), said slots (24, 25) being configured to cooperate with one riser card (5) for connecting two expansion cards to the mother board (21), the first riser slot (24) and the second riser slot (25) being connected by metal traces (L4, L5) to the central processing unit (21), the first riser slot (24) and the second riser slot (25) being spaced apart by a distance (D1) greater than 8 cm.

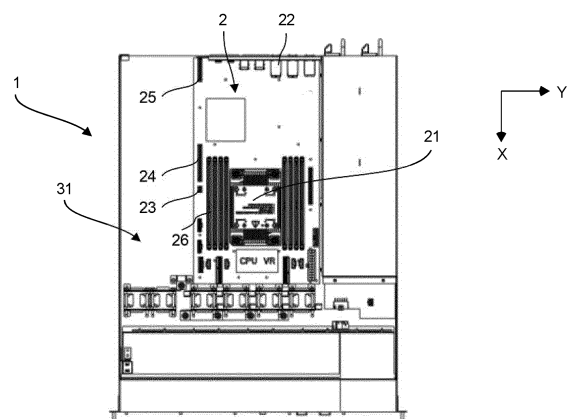


FIG. 7

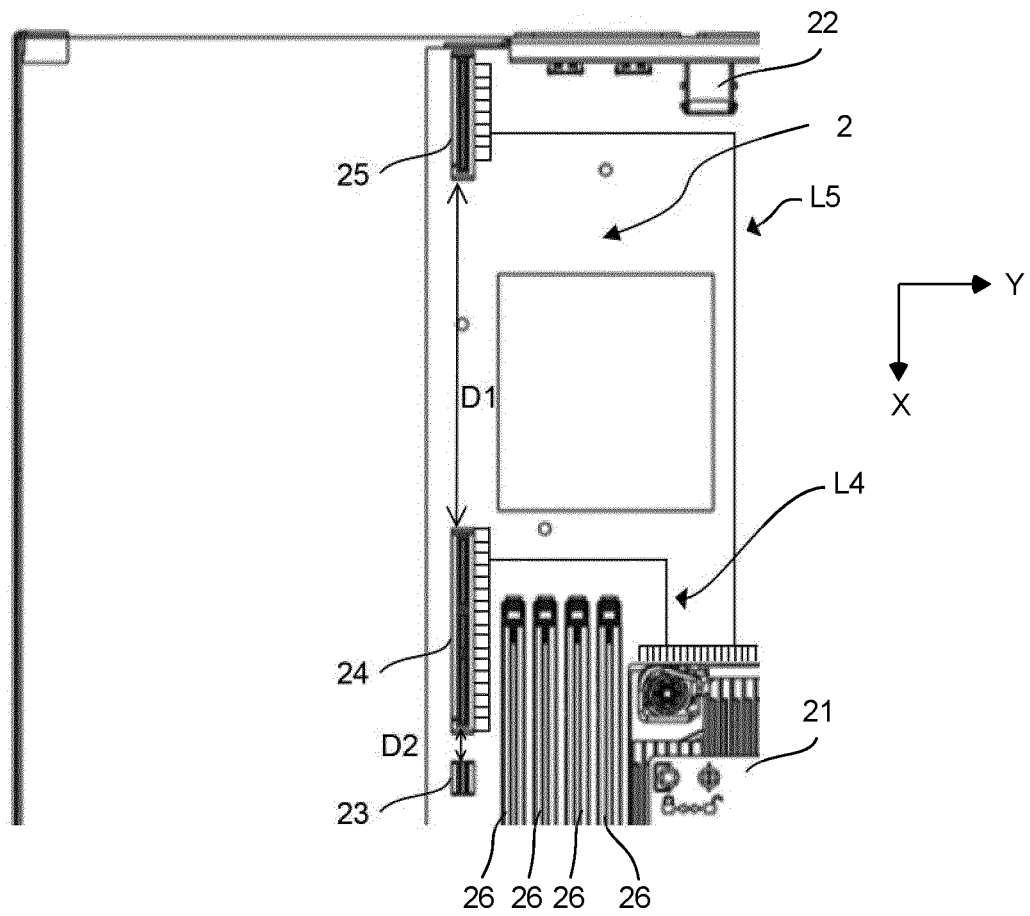


FIG. 8