



EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.05.2022 Bulletin 2022/19

(51) International Patent Classification (IPC):
H05B 47/175 (2020.01)

(21) Application number: **21176698.5**

(52) Cooperative Patent Classification (CPC):
H05B 47/175

(22) Date of filing: **28.05.2021**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventor: **ZHANG, He**
Beijing 100085 (CN)

(74) Representative: **dompatent von Kreisler Selting
Werner -
Partnerschaft von Patent- und Rechtsanwälten
mbB
Deichmannhaus am Dom
Bahnhofsvorplatz 1
50667 Köln (DE)**

(30) Priority: **06.11.2020 CN 202011232873**

(71) Applicant: **Beijing Xiaomi Mobile Software Co.,
Ltd.
Beijing 100085 (CN)**

(54) **CONTROLLABLE SWITCH, DUAL-CONTROL SWITCH AND CONTROL SYSTEM**

(57) A controllable switch, a dual-control switch, and a control system including a controllable switch (10, 20) includes a wireless communication module (11, 21) and a switch component (12, 22). The wireless communication module (11, 21) is coupled to the switch component. The wireless communication module (11, 21) is configured to send a control instruction to the switch component

(12, 22) in response to receiving a switching request. The switch component (12, 22) is configured to switch from a first state to a second state after receiving the control instruction. The first state is one of a turning-on state and a turning-off state, and the second state is the other one of the turning-on state and the turning-off state.

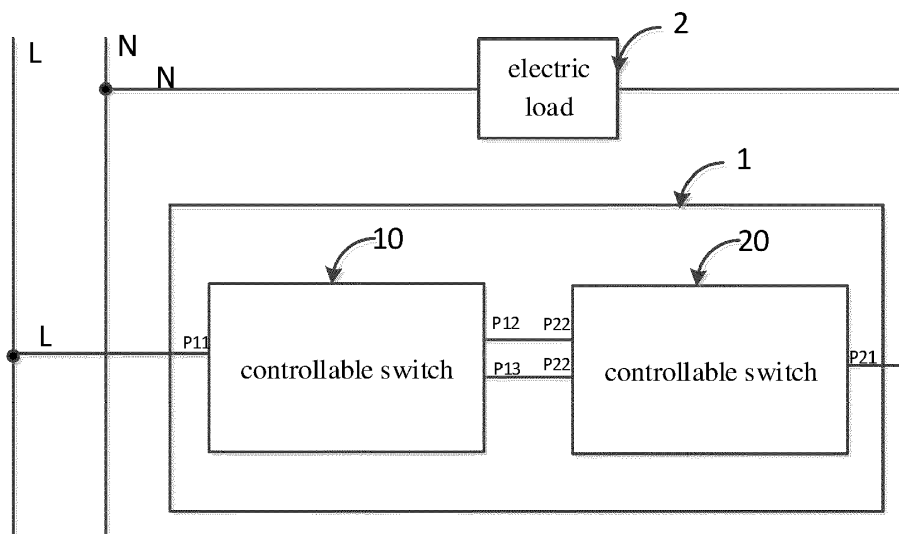


FIG. 1

Description

TECHNICAL FIELD

[0001] The present disclosure relates to the technical field of control technologies, and in particular to, a controllable switch, a dual-control switch and a control system.

BACKGROUND

[0002] As smart homes become more and more popular, traditional mechanical switches have been unable to satisfy functions of smart control homes for people. In related arts, dual-control switches may be used for some electric loads, thus users may operate and control the same electric load to power-on or power off in multiple locations, however the users still require to go to a corresponding position to perform touch operations.

SUMMARY

[0003] The present disclosure provides a controllable switch, a dual-control switch and a control system, to solve disadvantages in related arts.

[0004] In a first aspect, embodiments of the disclosure provide a controllable switch. The controllable switch includes a wireless communication module and a switch component. The wireless communication module is coupled to the switch component. The wireless communication module is configured to send a control instruction (e.g. in form of a control signal) to the switch component in response to receiving a switching request. The switch component is configured to switch from a first state to a second state after receiving the control instruction. The first state is a turning-on state (also referred to as an on state) and the second state is a turning-off state (also referred to as an off state), or the first state is the turning-off state and the second state is the turning-on state.

[0005] Optionally, the switch component comprises at least one of a single-pole double-throw switch and a relay.

[0006] Optionally, a power supply of the wireless communication module includes at least one of a battery power supply and an external power supply.

[0007] Optionally, when the power supply is the external power supply, the controllable switch further includes a first power supply circuit; the first power supply circuit is configured to convert a voltage or a current obtained from a power grid at a first terminal of the controllable switch for supplying power to the wireless communication module in the turning-on state.

[0008] Optionally, the switch component includes a first terminal and a second terminal; the first power supply circuit includes a first terminal, a second terminal and a third terminal; the first terminal of the first power supply circuit is coupled to a first power wire of the power grid, the second terminal of the first power supply circuit is

coupled to the first terminal of the switch component, and the third terminal of the first power supply circuit is coupled to the wireless communication module. The switch component is in the turning-on state when the first terminal and the second terminal of the switch component are connected.

[0009] Optionally, when the power supply is the external power supply, the controllable switch further includes a second power supply circuit; the second power supply circuit is configured to switch a voltage or a current obtained from a power grid at a first terminal of the controllable switch for supplying power to the wireless communication module in the turning-off state.

[0010] Optionally, the switch component includes a first terminal and a third terminal; the second power supply circuit includes a first terminal, a second terminal and a third terminal; the first terminal of the second power supply circuit is coupled to a first power wire of the power grid, the second terminal of the second power supply circuit is coupled to the third terminal of the switch component, and the third terminal of the second power supply circuit is coupled to the wireless communication module. The switch component is in the turning-off state when the first terminal and the third terminal of the switch component are connected.

[0011] Optionally, the wireless communication module includes at least one of a Wi-Fi module, a ZigBee module and a Bluetooth module.

[0012] Optionally, the switch component further includes a button, and the button is configured to switch the controllable switch from the first state to the second state or from the second state to the first state after being triggered to operate.

[0013] In a second aspect, embodiments of the present disclosure provide a dual-control switch. The dual-control switch includes: two controllable switches according to the first aspect embodiments. A first terminal of a first controllable switch is coupled to a first power wire of a power grid. A first terminal of a second controllable switch is coupled to a first terminal of an electric load to be controlled. A second terminal of the first controllable switch is coupled to a second terminal of the second controllable switch. A third terminal of the first controllable switch is coupled to a third terminal of the second controllable switch. In response to receiving a control instruction, the first controllable switch or the second controllable switch is configured to switch from a first state to a second state such that the first terminal of the first controllable switch is connected to or disconnected from the first terminal of the second controllable switch. The control instruction includes at least one of a control instruction received by a wireless communication module of the first controllable switch, a control instruction received by a wireless communication module of the second controllable switch, a button of the first controllable switch being triggered to operate, and a button of the second controllable switch being triggered to operate.

[0014] Optionally, the wireless communication module

of the first controllable switch and the wireless communication module of the second controllable switch are in a paired connection for determining an on-off state of the electric load, wherein the on-off state includes a power-on state or a power-off state.

[0015] In a third aspect, embodiments of the present disclosure provide a control system. The control system includes: the dual-control switch according to the second aspect embodiments and an electric load. The first terminal of the first controllable switch in the dual-control switch is coupled to the first power wire of the power grid; the first terminal of the second controllable switch in the dual-control switch is coupled to a first terminal of the electric load to be controlled; a second terminal of the electric load to be controlled is coupled to a second power wire of the power grid. In response to receiving a control instruction, the first controllable switch or the second controllable switch is configured to switch from the first state to the second state for connecting the electric load to the power grid or disconnecting the electric load from the power grid. The control instruction includes at least one of a control instruction received by the first controllable switch, a control instruction received by the second controllable switch, a button of the first controllable switch being triggered to operate, and a button of the second controllable switch being triggered to operate.

[0016] Optionally, the control system further includes a network device. The network device being paired with at least one of the first controllable switch and the second controllable switch, and configured to send a received switching request to the controllable switch that keeps paired with the network device.

[0017] Optionally, the control system further includes a cloud server. The cloud server maintains a communication link with the network device, and configured to send a switching request received from an electronic device to the network device.

[0018] The technical solution according to the embodiments of the present disclosure may include the following beneficial effects.

[0019] It can be seen from the above-mentioned embodiments that in the embodiments of the present disclosure, the wireless communication module and the switch component are provided in the controllable switch, to enable the wireless communication module and the switch component are connected. Thus, the wireless communication module may send the control instruction to the switch component in response to receiving the switching request, to switch the switch component from the first state to the second state. In other words, in this embodiment, the controllable switch may be controlled in a wireless manner, without users touching the controllable switch, which is beneficial to expand a control range and enhance usage experiences.

[0020] It should be understood that the above general description and the following detailed description are only exemplary and explanatory, and do not limit the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The drawings herein are incorporated into the specification and constitute a portion of the specification and illustrate embodiments in accordance with the disclosure, and the drawings together with the specification are used to explain the principle of the disclosure.

FIG. 1 is a block diagram illustrating a control system according to an embodiment of the present disclosure.

FIG. 2 is a block diagram illustrating a dual-control switch according to an embodiment of the present disclosure.

FIG. 3 is a block diagram illustrating a control system according to another embodiment of the present disclosure.

FIG. 4 is a block diagram illustrating a control system according to still another embodiment of the present disclosure.

DETAILED DESCRIPTION

[0022] Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings. The following description refers to the accompanying drawings in which the same numbers in different drawings represent the same or similar elements unless otherwise represented. The implementations set forth in the following description of embodiments do not represent all implementations consistent with the present disclosure. Instead, they are merely examples of apparatuses consistent with aspects related to the present disclosure as recited in the appended claims.

[0023] In order to solve the above technical problems, embodiments of the present disclosure provide a controllable switch, a dual-control switch and a control system, the idea of which is:

First, by providing a wireless communication module in the controllable switch, non-touch wireless control may be realized on the basis of ensuring touch button control, which is beneficial to expand a control range and enhance usage experiences.

Second, two controllable switches may form the dual-control switch. In response to press of a button of any controllable switch, remote touch button control may be realized. Moreover, the non-touch wireless control may be realized through the wireless communication module of any controllable switch, which may further expand the control range.

Third, when the dual-control switch is applied for the control system, electric loads in the control system may be controlled by remote, buttons, wireless and other control methods.

[0024] Further, when the control system includes a network device, such as a router, a gateway, etc., the control

system may log in to a cloud server through an electronic device, and the cloud server controls the dual-control switch through the network device to achieve an effect of cloud control.

[0025] It should be noted that, considering that the controllable switch is a unit for forming the dual-control switch, and the dual-control switch is a unit for forming the control system, the following will take the control system as a description object, with interspersed descriptions of the dual-control switch and the controllable switch. For the convenience of description, the two controllable switches in the dual-control switch are implemented with the same structure.

[0026] It should also be noted that the controllable switch or the dual-control switch or the control system may include a battery, which may supply power to the wireless communication module in the controllable switch, such that the wireless communication module may maintain a state of being able to communicate or establish a communication link at any time. That is, the wireless communication module may be supplied power by the battery, and/or, the controllable switch may directly take power from a power grid that supplies power to the electric load. Thus, external power supply is realized. Those skilled may select a suitable power supply according to specific scenarios. For convenience of description, the following embodiments will be described by using the external power supply as an example, but which will not constitute a limitation to the embodiments of the present disclosure.

[0027] FIG. 1 is a block diagram illustrating a control system according to an embodiment of the present disclosure. Reference to FIG. 1, the control system includes a dual-control switch 1 and an electric load. The dual-control switch 1 includes two controllable switches, namely, a first controllable switch 10 and a second controllable switch 20.

[0028] A first terminal P11 of the first controllable switch 10 in the dual-control switch 1 is coupled to a first power wire L (such as a fire wire) of the power grid. A second terminal P12 of the first controllable switch 10 is coupled to a second terminal P22 of the second controllable switch 20. A third terminal P13 of the first controllable switch 10 is coupled to a third terminal P23 of the second controllable switch 20. A first terminal P21 of the second controllable switch 20 in the dual-control switch 1 is coupled to a first terminal of the electric load 2 to be controlled. A second terminal of the electric load 2 to be controlled is coupled to a second power wire N (such as a zero wire) of the power grid.

[0029] In response to receiving a control instruction, the first controllable switch 10 or the second controllable switch 20 is configured to switch from the first state to the second state for connecting the electric load 2 to the power grid or disconnecting the electric load 2 from the power grid. An effect of power supply or power off for the electric load 2 is achieved.

[0030] In this embodiment, the control instruction may

include at least one of a control instruction received by the first controllable switch, a control instruction received by the second controllable switch, a button of the first controllable switch being triggered to operate, or a button of the second controllable switch being triggered to operate.

[0031] In this embodiment, the dual-control switch 1 includes the first controllable switch 10 and the second controllable switch 20, and the first controllable switch 10 and the second controllable switch 20 are implemented with the same structure. Taking the first controllable switch 10 as an example and referring to FIG. 2, the first controllable switch 10 includes a wireless communication module 11 and a switch component 12. The wireless communication module 11 is coupled to the switch component 12. The wireless communication module 11 is configured to send a control instruction to the switch component 12 in response to receiving a switching request. The switch component 12 is configured to switch from the first state to the second state after receiving the control instruction. The first state is one of a turning-on state (also referred to as an on state) and a turning-off state (also referred to as an off state), and the second state is the other one of the turning-on state and the turning-off state. That is, the first state may be the turning-on state and the second state may be the turning-off state, or the first state may be the turning-off state and the second state may be the turning-on state.

[0032] The switching request may include the dual-control switch corresponding to the electric load to be controlled, a target state to be switched to, etc., which may be set according to specific scenarios and will not be limited here.

[0033] The wireless communication module 11 may include at least one of a Wi-Fi module, a ZigBee module and a Bluetooth module. Those skilled may select a suitable wireless communication manner according to the specific scenarios, and in a case of being capable of achieving the wireless communication, the corresponding solution will fall within the protection scope of the present disclosure.

[0034] The switch component 12 may be implemented by a single-pole double-throw switch and its controller or implemented by a relay. Those skilled may select a suitable switch component according to the specific scenarios. In a case of being capable of switching between at least two states, the corresponding solution will fall within the protection scope of the present disclosure.

[0035] In an embodiment, when the power supply is the external power supply, the first controllable switch 10 further includes a first power supply circuit 13. The first power supply circuit 13 may be implemented by an AC-DC circuit, or implemented by a current transformer or a voltage transformer. Those skilled may select a suitable manner for taking power according to specific scenarios, and in a case of being capable of obtaining voltage or current from the power grid, the corresponding solution will fall within the protection scope of the present disclosure.

sure. In this embodiment, the first power supply circuit 13 may supply power for the wireless communication module by a manner of obtaining current, and the current for power supply is at a level of milliampere (mA).

[0036] In an embodiment, the first power supply circuit 13 includes a first terminal, a second terminal, and a third terminal, and the switch component 12 includes a first switch-component terminal and a second switch-component terminal. When the first switch-component terminal and the second switch-component terminal of the switch component 12 are connected, the switch component 12 is in the turning-on state. Continuing to refer to FIG. 2, a connection relationship between the first power supply circuit 13 and the switch component 12 is: the first terminal of the first power supply circuit 13 is coupled to a first terminal of the dual-control switch 1, that is, to the first power wire L of the power grid. The second terminal of the first power supply circuit 13 is coupled to the first switch-component terminal of the switch component 12, and the third terminal of the first power supply circuit 13 is coupled to the wireless communication module 11.

[0037] The above-mentioned first power supply circuit 13 may operate as follows: when the switch component 22 of the second controllable switch 20 is in the turning-off state, a path may be formed between the switch component 12 and the switch component 22. At this time, the first power supply circuit 13 may supply power for the wireless communication module 11. When the switch component 22 of the second controllable switch 20 is in the turning-on state, no path may be formed between the switch component 12 and the switch component 22. At this time, the first power supply circuit 13 cannot supply power for the wireless communication module 11, and a local battery may supply power for the wireless communication module during this period. It is understood that an operating time of some electric loads, such as refrigerators, may be much longer than a stop operating time of those same electric loads. Therefore, the first power supply circuit 13 is provided to ensure that the wireless communication module is in an on-off state, which is beneficial to prolong a service time of the battery.

[0038] In an embodiment, when the power supply is the external power supply, the first controllable switch 10 further includes a second power supply circuit 14. The second power supply circuit 14 may be implemented by an AC-DC circuit, or implemented by a current transformer or a voltage transformer. Those skilled may select a suitable manner for taking power according to specific scenarios, and in a case of being capable of obtaining voltage or current from the power grid, the corresponding solution will fall within the protection scope of the present disclosure. In this embodiment, the second power supply circuit 14 may supply power for the wireless communication module by a manner of obtaining voltage, and the voltage for power supply is between 3.3V and 5V.

[0039] In an embodiment, the second power supply circuit includes a first terminal, a second terminal and a third terminal, and the switch component 12 includes a

first switch-component terminal and a third switch-component terminal. When the first switch-component terminal and the third switch-component terminal of the switch component 12 are connected, the switch component 12 is in the turning-off state. Continuing to refer to FIG. 2, a connection relationship between the second power supply circuit 14 and the switch component 12 is: the first terminal of the second power supply circuit 14 is coupled to the first terminal of the dual-control, that is, to the first power wire L of the power grid. The second terminal of the second power supply circuit 14 is coupled to the third switch-component terminal of the switch component 12, and the third terminal of the second power supply circuit 14 is coupled to the wireless communication module 11.

[0040] The above-mentioned second power supply circuit 14 may operate as follows: in a condition that the switch component 12 is in the turning-off state, when the switch component 22 of the second controllable switch 20 is in the turning-off state, the second power supply circuit 14 may obtain a voltage between two terminals of the switch component 12 (that is, a voltage difference between L and N) and convert the voltage to supply power to the wireless communication module 11. When the switch component 22 of the second controllable switch 20 is in the turning-on state, the voltage between two terminals of the switch component 12 drops to 0V, that is, the second power supply circuit 14 cannot obtain the voltage and cannot supply power to the wireless communication module 11, and the local battery may supply power for the wireless communication module during this period. It is understood that a stop operating time of some electric loads, such as electric kettles, may be much longer than an operating time of those same electric loads. Therefore, the second power supply circuit 14 is provided to ensure that the wireless communication module is in an operating state, which is beneficial to prolong a service time of the battery.

[0041] It should be noted that the first controllable switch 10 may be provided with the first power supply circuit 13 and the second power supply circuit 14 at the same time. At this time, the first controllable switch 10 may be applied for the electric loads with different operating times, so that it is not required to provide the battery to avoid a problem of replacing the battery.

[0042] In an embodiment, in the dual-control switch 1, the wireless communication modules in the controllable switch 10 and the controllable switch 20 may respectively communicate with an electronic device. On this basis, when the wireless communication module in the controllable switch 10 or the controllable switch 20 establishes a communication link with the electronic device, the electronic device may communicate with the wireless communication module and send the switching request to the wireless communication module. In practical applications, the wireless communication modules in the controllable switch 10 and the controllable switch 20 may establish the communication link with the electronic device at the same time. At this time, the electronic device

determines the wireless communication module with a higher link signal strength as a main module, and sends the switch request to the main module. In this way, in this embodiment, the dual-control switch 1 may be used to realize remote control for the electric load and expand the control range.

[0043] In one embodiment, in the dual-control switch 1, the wireless communication modules in the controllable switch 10 and the controllable switch 20 will maintain a paired connection for determining the on-off state of the electric load. The on-off state includes a power-on state or a power-off state. For example, when the states of the switch component 12 and the switch component 22 are the same, it may be determined that the on-off state of the electric load is the power-off state; when the states of the switch component 12 and the switch component 22 are different, it may be determined that the on-off state of the electric load is the power-on state. In this way, in the dual-control switch 1 any one of the switch component 12 and the switch component 22 may be adjusted to realize an adjustment of power-on or power-off.

[0044] In an embodiment, the switch component 12 further includes a button. The button is configured to switch the controllable switch from the first state to the second state or from the second state to the first state after being triggered for operating, so that the power-on or power-off of the electric load may be adjusted according to requirements of users.

[0045] In an embodiment, referring to FIG. 3, the control system further includes a network device 3. The network device 3 may maintain paired with at least one of the first controllable switch and the second controllable switch. And the network device 3 may maintain paired with the electronic device 4. In this way, when the electronic device 4 is within the communication range of the network device 3, the two may establish a communication link. At this time, the electronic device 4 may send the switching request to the network device 3, and the network device 3 may send the received switching request to the controllable switch that is paired with the network device 3. The controllable switch may realize switching power-on or power-off of the electric load 2 in response to the above-mentioned switching request. In this way, in this embodiment, it is convenient for the users to control the electric load at any location within the communication range. The communication range may be a local zone such as a home or an office. For example, the users may turn off a TV and a light in a living room with their mobile phones in the bedroom.

[0046] In an embodiment, referring to FIG. 4, the control system further includes a cloud server 5. The cloud server 5 may communicate with the network device 3, and further, communicate with the controllable switch (10 and/or 20) logged in to the cloud server 5. After the user logs in to an application APP through the electronic device, the electric load to be controlled may be selected, and then the electronic device generates the switching request for the electric load and uploads the switching

request to the cloud server 5. The cloud server 5 may query the dual-control switch, and send the switching request to any wireless communication module in the dual-control switch. The controllable switch may realize switching power-on or power-off of the electric load 2 in response to the above-mentioned switching request. In this way, in this embodiment, the electric load may be controlled remotely. For example, the dual-control switch may be controlled by the APP in the office to turn off (forgetting to turn off) electrical equipment, and the dual-control switch may also be controlled by the APP in the office to turn on an air conditioner in advance, which is convenient to enjoy a comfortable temperature when going home.

[0047] It should be noted that when the user uses the electronic device, the electronic device may generate the switching request by text, speech, or keystrokes. Taking the switching request being generated by speech as an example, the electronic device may convert the speech to text content, and then extract keywords from the text content, such as turn off, refrigerator. At this time, it may be obtained that the electric load to be controlled is the refrigerator, and the target state is the turn-off state. After that, the corresponding dual-control switch may be determined according to the refrigerator, and the switching request in a preset format may be generated according to the dual-control switch and the turning-off, so as to facilitate the use of the dual-control switch.

[0048] Other embodiments of the present disclosure are obvious for those skilled in the art after considering the description and practicing the disclosure disclosed herein. This disclosure is intended to cover any variations, uses, or adaptive changes that follow the general principles of this disclosure and include common general knowledge or customary technical means in the technical field not disclosed in this disclosure. The description and examples are to be considered exemplary only, and the true scope of this disclosure is indicated by claims below.

[0049] It should be understood that the present disclosure is not limited to the precise structure that has been described above and shown in the drawings, and various modifications and changes may be made without departing from the scope thereof. The scope of the present disclosure is limited only by the appended claims.

Claims

1. A controllable switch (10, 20), comprising a wireless communication module (11, 21) and a switch component (12, 22) coupled to the wireless communication module (11, 21); the wireless communication module (11, 21) is configured to send a control instruction to the switch component (12, 22) in response to receiving a switching request; the switch component (12, 22) is configured to switch from a first state to a second state after receiving the control instruction; wherein, the first state is a turning-on

state and the second state is a turning-off state, or the first state is the turning-off state and the second state is the turning-on state.

2. The controllable switch (10, 20) according to claim 1, wherein, the switch component (12, 22) comprises at least one of a single-pole double-throw switch and a relay. 5
3. The controllable switch according to claim 1 or 2, wherein, a power supply of the wireless communication module (11, 21) comprises at least one of a battery power supply and an external power supply. 10
4. The controllable switch (10, 20) according to claim 3, wherein, when the power supply is the external power supply, the controllable switch (10, 20) further comprises a first power supply circuit (13, 23) configured to convert a voltage or a current obtained from a power grid at a first terminal of the controllable switch (10, 20) for supplying power to the wireless communication module (11, 21) when the switch component (12, 22) is in the turning-on state. 15 20
5. The controllable switch (10, 20) according to claim 4, wherein, the switch component (12, 22) comprises a first switch-component terminal and a second switch-component terminal; the first power supply circuit (13, 23) comprises a first terminal, a second terminal and a third terminal; the first terminal of the first power supply circuit (13, 23) is coupled to a first power wire of the power grid, the second terminal of the first power supply circuit (13, 23) is coupled to the first switch-component terminal of the switch component (12, 22), and the third terminal of the first power supply circuit (13, 23) is coupled to the wireless communication module (11, 21); the switch component (12, 22) is in the turning-on state when the first switch-component terminal and the second switch-component terminal of the switch component (12, 22) are connected. 25 30 35 40
6. The controllable switch (10, 20) according to any one of claims 3-5, wherein, when the power supply is the external power supply, the controllable switch (10, 20) further comprises a second power supply circuit (14, 24) configured to switch a voltage or a current obtained from a power grid at a first controllable-switch terminal of the controllable switch (10, 20) for supplying power to the wireless communication module (11, 21) when the switch component (12, 22) is in the turning-off state. 45 50
7. The controllable switch (10, 20) according to claim 6, wherein, the switch component (12, 22) comprises a first switch-component terminal and a third switch-component terminal; the second power supply circuit (14, 24) comprises a first terminal, a second terminal 55

and a third terminal; the first terminal of the second power supply circuit (14, 24) is coupled to a first power wire of the power grid, the second terminal of the second power supply circuit (14, 24) is coupled to the third switch-component terminal of the switch component (12, 22), and the third terminal of the second power supply circuit (14, 24) is coupled to the wireless communication module (11, 21); the switch component (12, 22) is in the turning-off state when the first switch-component terminal and the third switch-component terminal of the switch component (12, 22) are connected.

8. The controllable switch (10, 20) according to any one of claims 1-7, wherein the wireless communication module (11, 21) comprises at least one of a Wi-Fi module, a ZigBee module and a Bluetooth module.
9. The controllable switch (10, 20) according to any one of claims 1 to 8, wherein the switch component (12, 22) further comprises a button configured to switch the controllable switch from the first state to the second state or from the second state to the first state after being triggered to operate.
10. A dual-control switch (1), comprising two controllable switches (10, 20) according to any one of claims 1-9, wherein, a first terminal of a first controllable switch (10) is coupled to a first power wire of a power grid; a first terminal of a second controllable switch (20) is coupled to a first terminal of an electric load (2) to be controlled; a second terminal of the first controllable switch (10) is coupled to a second terminal of the second controllable switch (20); a third terminal of the first controllable switch (10) is coupled to a third terminal of the second controllable switch (20); in response to receiving a control instruction, the first controllable switch (10) or the second controllable switch (20) is configured to switch from a first state to a second state, such that the first terminal of the first controllable switch (10) is connected to or disconnected from the first terminal of the second controllable switch (20); the control instruction comprises at least one of a control instruction received by a wireless communication module of the first controllable switch (10), a control instruction received by a wireless communication module of the second controllable switch (20), a button of the first controllable switch (10) being triggered to operate, and a button of the second controllable switch (20) being triggered to operate.
11. The dual-control switch (1) according to claim 10, wherein, the wireless communication module of the first controllable switch (10) and the wireless com-

munication module of the second controllable switch (20) are in a paired connection for determining an on-off state of the electric load, wherein the on-off state comprises a power-on state or a power-off state.

5

- 12.** A control system, comprising the dual-control switch (1) according to claim 10 or 11 and an electric load (2); the first terminal of the first controllable switch (10) in the dual-control switch (1) is coupled to the first power wire of the power grid; the first terminal of the second controllable switch (20) in the dual-control switch (1) is coupled to a first terminal of the electric load (2) to be controlled; a second terminal of the electric load (2) to be controlled is coupled to a second power wire of the power grid; in response to receiving a control instruction, the first controllable switch (10) or the second controllable switch (20) is configured to switch from the first state to the second state for connecting the electric load (2) to the power grid or disconnecting the electric load (2) from the power grid; the control instruction comprises at least one of a control instruction received by the first controllable switch (10), a control instruction received by the second controllable switch (20), a button of the first controllable switch (10) being triggered to operate, and a button of the second controllable switch (20) being triggered to operate.

30

- 13.** The control system according to claim 12, further comprising a network device (3), the network device (3) being paired with at least one of the first controllable switch (10) and the second controllable switch (20), and configured to send a received switching request to the controllable switch that keeps paired with the network device (3).

35

- 14.** The control system according to claim 13, further comprising a cloud server (5), the cloud server (5) is configured to maintain a communication link with the network device (3), and configured to send a switching request received from an electronic device (4) to the network device (3).

40

45

50

55

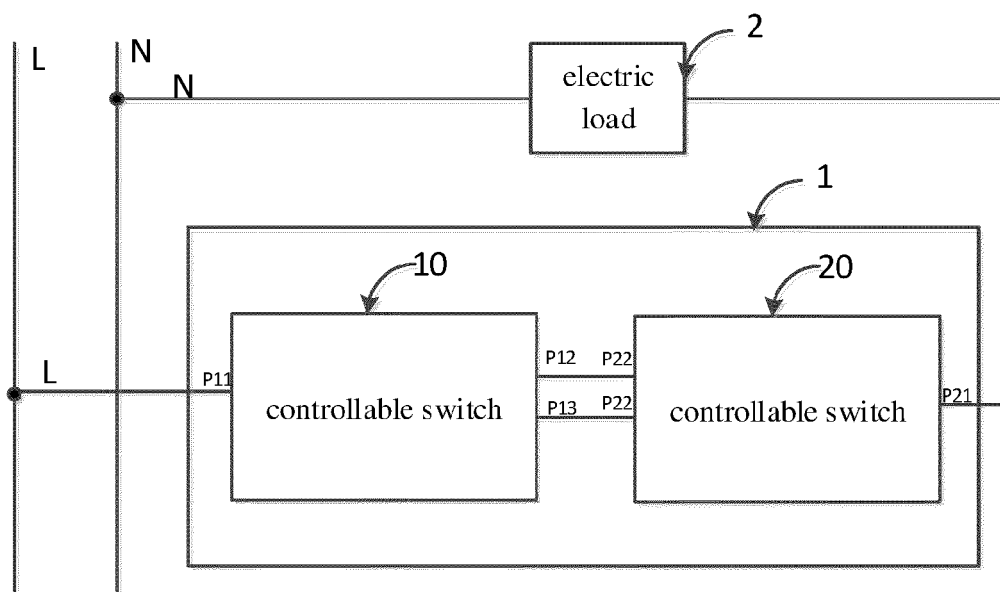


FIG. 1

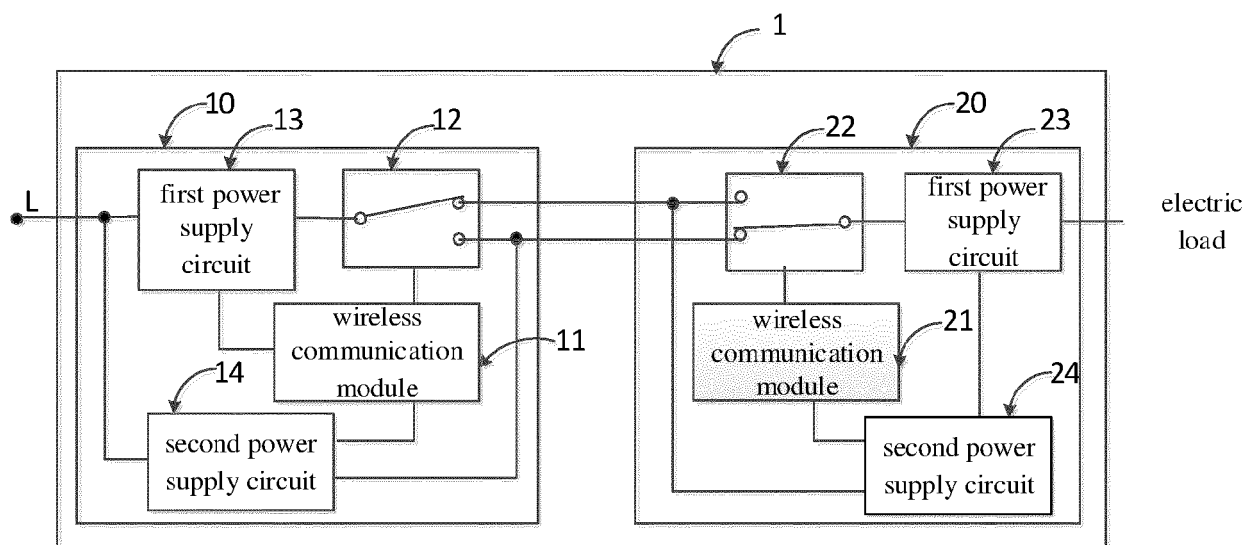


FIG. 2

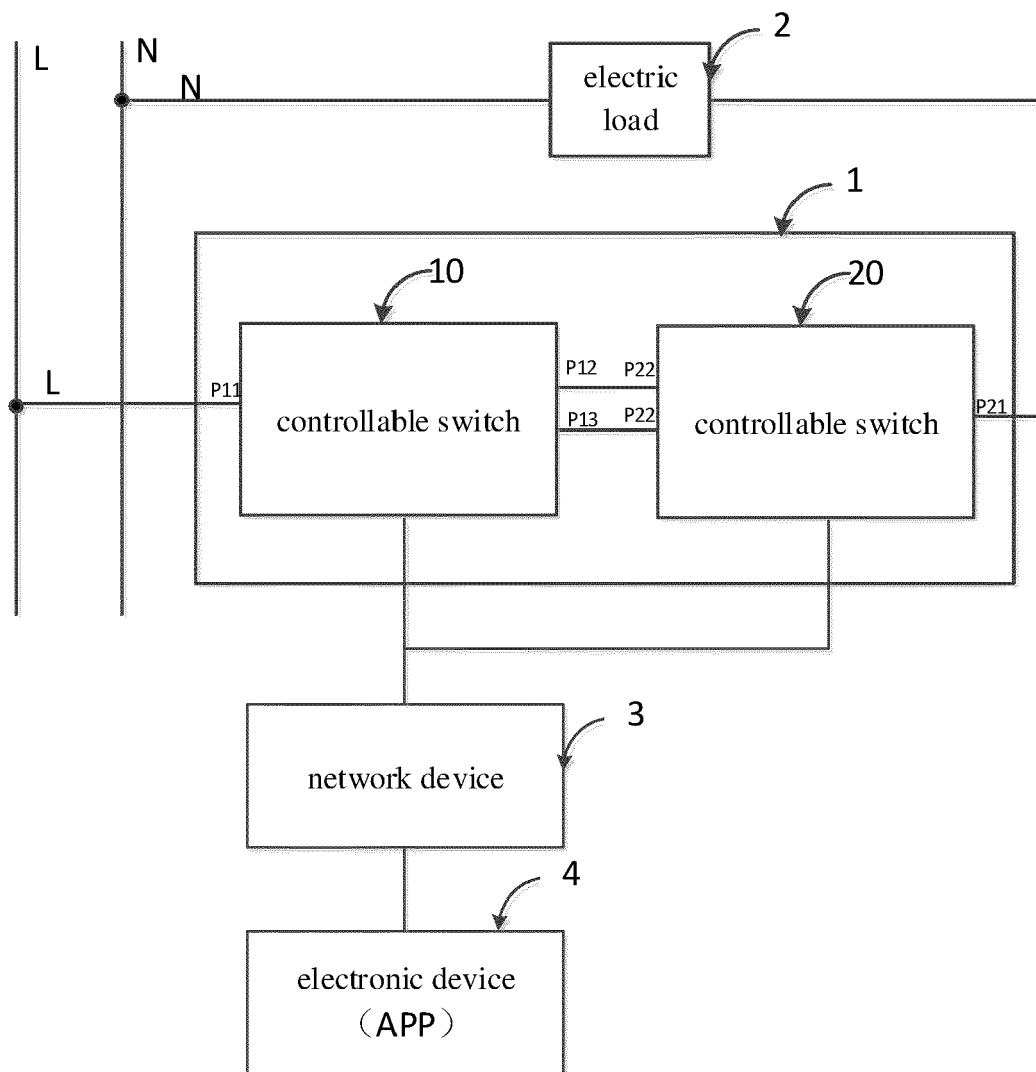


FIG. 3

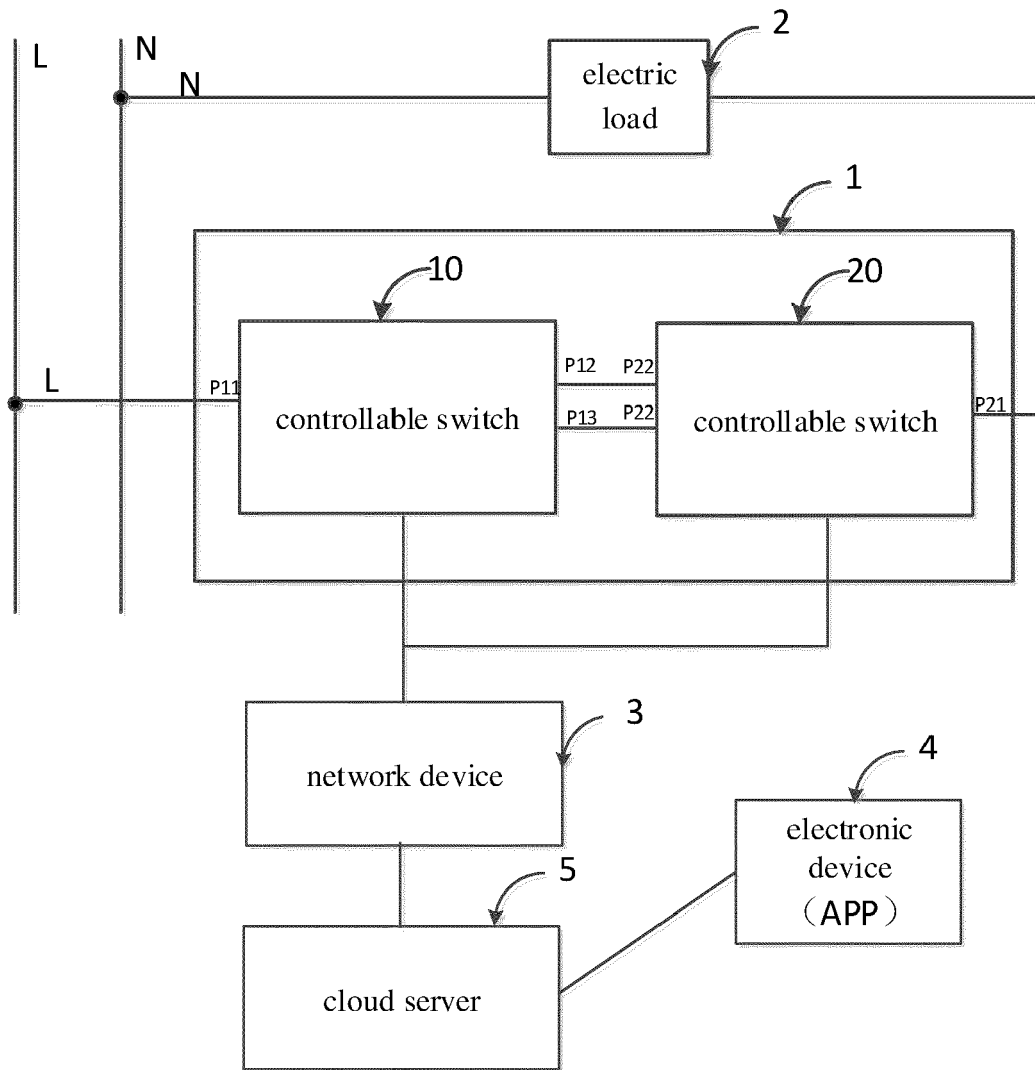


FIG. 4



EUROPEAN SEARCH REPORT

Application Number
EP 21 17 6698

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2017/086281 A1 (AVRAHAM AVRAHAM [IL]) 23 March 2017 (2017-03-23)	1-13	INV. H05B47/175
Y	* page 1, paragraph 2; figures 1-18, 18a * * page 14, paragraph 93 - page 22, paragraph 148 * * page 23, paragraph 200 - page 47, paragraph 355 * * especially Figs. 4, 4a-4e, 5, 13, 13a-13b, 14, 14a-14c15, 15a-15e, 16 *	14	
X	CN 109 254 534 A (GUANGDONG SEYAS INTELLIGENT TECH CO LTD) 22 January 2019 (2019-01-22)	1,2,8-12	
Y A	* the whole document *	13,14 3-7	
X	CN 107 018 610 A (ZHUO XIANGMING; XIAO YINHUA) 4 August 2017 (2017-08-04)	1-9	TECHNICAL FIELDS SEARCHED (IPC) H05B G08B G08C G05B H02J H01H G06Q
A	* the whole document *	10-14	
X	CN 105 739 398 A (HUANG KEBIN) 6 July 2016 (2016-07-06)	1-9	
A	* the whole document *	10-14	
X	CN 110 753 434 A (BEIJING XIAOMI MOBILE SOFTWARE CO LTD) 4 February 2020 (2020-02-04)	1-9	
Y A	* the whole document *	13,14 10-12	
X	CN 204 360 140 U (UNIV CHANGAN) 27 May 2015 (2015-05-27)	1-9	
A	* the whole document *	10-14	
X	CN 110 402 002 A (BEIJING XIAOMI MOBILE SOFTWARE CO LTD) 1 November 2019 (2019-11-01)	1-5,8,9	
A	* the whole document *	6,7, 10-14	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 November 2021	Examiner Brosa, Anna-Maria
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 21 17 6698

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
	& EP 3 772 157 A1 (BEIJING XIAOMI MOBILE SOFTWARE CO LTD [CN]) 3 February 2021 (2021-02-03) * column 1, paragraph 1 * * column 1, paragraph 4 - column 3, paragraph 18 * * column 4, paragraph 22 - column 18, paragraph 126 * -----		
X	CN 206 920 850 U (XIAN HUASHENG TECH CO LTD) 23 January 2018 (2018-01-23)	1-5,8,9	
A	* the whole document *	6,7, 10-14	

X	CN 203 746 689 U (SHENZHEN WESMART ELECTRONIC CO LTD) 30 July 2014 (2014-07-30)	1-5,8,9	
A	* the whole document *	6,7, 10-14	

Y	WO 2017/004681 A1 (KORTEK IND PTY LTD [AU]) 12 January 2017 (2017-01-12)	13,14	TECHNICAL FIELDS SEARCHED (IPC)
	* page 1, paragraph 1; figures 1-8 * * page 1, paragraph 3 - page 14, paragraph 33 * * page 15, paragraph 45 - page 99, paragraph 292 * * especially Figs. 1-4, 8 * -----		
Y	US 2017/155526 A1 (LI JIN-FENG [CN]) 1 June 2017 (2017-06-01)	13,14	
	* page 1, paragraphs 1, 3-5; figures 1, 2 * * page 1, paragraph 12 - page 3, paragraph 37 * -----		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 November 2021	Examiner Brosa, Anna-Maria
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 17 6698

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-11-2021

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017086281 A1	23-03-2017	EP 3243195 A2	15-11-2017
		US 2017086281 A1	23-03-2017
		US 2017265287 A1	14-09-2017
		US 2018092313 A1	05-04-2018
		WO 2016110833 A2	14-07-2016
CN 109254534 A	22-01-2019	NONE	
CN 107018610 A	04-08-2017	NONE	
CN 105739398 A	06-07-2016	NONE	
CN 110753434 A	04-02-2020	NONE	
CN 204360140 U	27-05-2015	NONE	
CN 110402002 A	01-11-2019	CN 110402002 A	01-11-2019
		EP 3772157 A1	03-02-2021
		KR 20210016261 A	15-02-2021
		RU 2724643 C1	25-06-2020
		US 2021035757 A1	04-02-2021
		WO 2021017162 A1	04-02-2021
CN 206920850 U	23-01-2018	NONE	
CN 203746689 U	30-07-2014	NONE	
WO 2017004681 A1	12-01-2017	AU 2016290898 A1	08-03-2018
		US 2018373304 A1	27-12-2018
		WO 2017004681 A1	12-01-2017
US 2017155526 A1	01-06-2017	CN 205429319 U	03-08-2016
		TW M538278 U	11-03-2017
		US 2017155526 A1	01-06-2017

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82