

(19)



(11)

EP 4 001 802 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

25.05.2022 Bulletin 2022/21

(51) International Patent Classification (IPC):

F25C 1/22 ^(2018.01) **F25C 5/04** ^(2006.01)(21) Application number: **21205138.7**

(52) Cooperative Patent Classification (CPC):

F25C 1/22; F25C 5/04; F25C 1/10;
F25C 2305/0221; F25C 2500/08(22) Date of filing: **28.10.2021**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

KH MA MD TN(30) Priority: **12.11.2020 TR 202018084**(71) Applicant: **Arçelik Anonim Sirketi**
34445 Istanbul (TR)

(72) Inventors:


- **CENESIZ, Kaan**
34445 ISTANBUL (TR)
- **KARAAGAC, Emre**
34445 ISTANBUL (TR)
- **YAYLA, Sonat**
34445 ISTANBUL (TR)
- **GUNDUZ, Nihat**
34445 ISTANBUL (TR)
- **PEKER, Gokmen**
34445 ISTANBUL (TR)

(54) **A COOLING APPLIANCE HAVING AN ICE MAKER ASSEMBLY**

(57) The present invention relates to a cooling appliance comprising; an ice maker assembly (1); the ice maker assembly (1) comprising; a frame (2) comprising a support member (3), wherein the support member (3) comprises a body (4) accommodating a first recess (5) and a cap (6) enclosing the first recess (5), wherein the cap (6) comprises a second recess (7) seated on the first

recess (5), forming a conduit (8); an ice mold (9) comprising a plurality of cavities into where the water to be frozen is filled, and a protrusion (10) seated into the conduit (8) and rotatably supporting the ice mold (9) on the frame (2), wherein the protrusion (10) is configured to slide and rotate along the conduit (8) upon rotation of the ice mold (9).

Figure 6

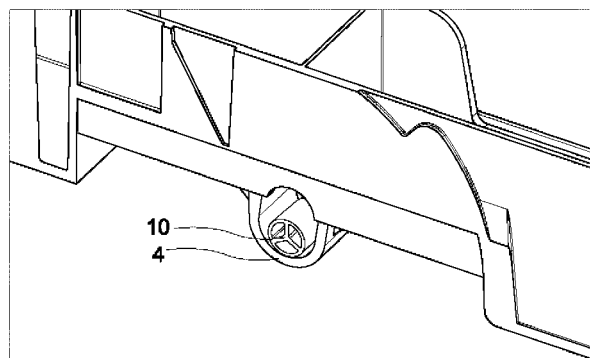**EP 4 001 802 A1**

Description

[0001] The present invention relates to a cooling appliance, in particular to a cooling appliance having an ice maker assembly.

[0002] Most of the modern cooling devices are provided with ice maker assembly. The ice maker assembly can be a manual or an automated system configured to freeze water and supply the user with ice. In manual systems, the user needs to rotate the ice mold in order to free ice produced inside the ice mold on regular intervals. The automated systems work similarly with the difference that the ice maker assembly rotates the ice mold on predetermined time intervals in order to free ice produced inside the ice mold. The ice is then stored inside a container located underneath or in close vicinity of the ice mold. A problem with the conventional automatic ice maker assemblies is the fact that the ice stored inside the container tends to stick to each other and form bridges. Another problem is the fact that the ice is sublimated after a long storage time. In order to overcome this, the cold air coming from the evaporator and the fan has to be directed towards the ice container and to the ice mold.

[0003] A prior art publication in the technical field of the present invention may be referred to as US2014165602A1 among others, the document disclosing a cooling appliance having an ice maker assembly wherein the ice mold is rotatably placed onto the ice maker assembly.

[0004] A prior art publication in the technical field of the present invention may be referred to as US2014165643A1 among others, the document disclosing a cooling appliance having an ice maker assembly wherein the ice mold is rotatably placed onto the ice maker assembly.

[0005] A prior art publication in the technical field of the present invention may be referred to as US2015362242A1 among others, the document disclosing a cooling appliance having an ice maker assembly wherein the rotation of the ice mold is limited by means of a plurality of stoppers.

[0006] An objective of the present invention is to provide an ice maker assembly wherein the ice pieces are completely removed from the ice mold which in turn increases the amount of ice delivered to the user.

[0007] Another advantageous effect provided by means of the invention is that the ice pieces are completely removed from the ice mold, thereby eliminating the possibility of overflow of water.

[0008] The method realized to achieve the aim of the present invention and disclosed in the first claim and the dependent claims comprises a cooling appliance. The cooling appliance comprises an ice maker assembly. The ice maker assembly comprises a frame and an ice mold rotatably placed onto the frame. The ice mold includes plurality of cavities wherein the water to be frozen is filled. The frame comprises a support member wherein the support member comprises a body, and the body accommo-

dates a first recess provided thereon. A cap is provided and placed onto the body. The cap comprises a second recess and wherein the first recess and the second recess face each other upon placing the cap onto the body such that the first recess and the second recess form a conduit. The ice mold is rotatably supported on the frame by means of a protrusion protruding from the ice mold and seating into the conduit. The protrusion is configured to rotate and slide along the conduit upon rotation of the ice mold. During initial position wherein the ice mold rests on the frame, the protrusion is seated at the lower end of the first recess. Upon rotation of the ice mold, the protrusion moves upwards inside the first recess and therefore inside the conduit and towards the second recess. The width of the first recess and the second recess are different. As a result, as the protrusion passes from the first recess into second recess, two embodiments apply. In the first embodiment, the first recess has a smaller width than the second recess. In the second embodiment, the first recess has a bigger width than the second recess. In both cases, as the protrusion slides from the first recess towards the second recess, the protrusion makes a pulsed motion and hits the second recess and the cap which creates an impact. The impact, vibrates the ice mold which in turn helps the release of ice pieces formed inside the ice mold. By means of this, all ice is successfully removed from the ice mold. An advantageous effect provided by this is that the water overflow is prevented by removing all ice pieces from the ice mold. This may otherwise cause the water to cover the ice mold and the frame which will subsequently freeze, causing malfunction of the ice maker assembly.

[0009] In an embodiment of the invention, the conduit comprises a stepped part where the first recess and the second recess adjoin. In the first case, wherein the first recess has a smaller width than the second recess, the side walls of the second recess forms the stepped part. As the ice mold is rotated, the protrusion moves along the first recess and abuts against the side walls of the second recess. After a certain rotation angle of the ice mold, the protrusion jumps over the stepped part and hits the cap. As a result of which an impact occurs. This helps release the ice pieces from the ice mold. In the second case, wherein the first recess has a bigger width than the second recess, the protrusion simply falls from the first recess into the second recess which creates the impact. This helps release the ice pieces from the ice mold. By means of the stepped part, the ice pieces are efficiently removed from the ice mold which helps reduce the aforementioned problems.

[0010] In an embodiment of the invention, the ice mold extends along a direction and the conduit extends in another direction, wherein the extension direction of the conduit is inclined with respect to the extension direction of the ice mold. The inclination facilitates the protrusion to rotate and slide from the first recess towards the second recess.

[0011] In an embodiment of the invention, the conduit

is in oval form. The shape of the conduit facilitates the movement of the protrusion along the conduit.

[0012] In an embodiment of the invention, the protrusion is produced integrally with the ice mold. This helps increase the life time of the ice mold and the protrusion.

[0013] In an embodiment of the invention, the ice mold is rotated by means of a motor provided on the frame. This applies to automatic ice maker assemblies.

[0014] In another embodiment of the invention, the ice mold is rotated by means of a lever provided in close vicinity of the ice maker assembly. This applies to manual ice maker assemblies.

[0015] In another embodiment of the invention, the body comprises a fixing means onto which the cap is placed and fixed on the body. The fixing means provides a rigid assembly.

[0016] In another embodiment of the invention, the body is produced as an integral part of the frame.

[0017] In another embodiment of the invention, the body is placed onto the frame by means of a recess provided thereon. The recess is configured to match the shape of the body such that the relative motion of the body with respect to the frame is prevented.

[0018] By means of the present invention, the ice maker assembly releases all the ice pieces formed inside the ice mold upon its rotation. As a result of which, ice production capacity of the ice maker assembly is improved, meanwhile eliminating the possibility of water overflows.

[0019] The drawings are not meant to delimit the scope of protection as identified in the claims nor should they be referred to alone in an effort to interpret the scope identified in the claims without recourse to the technical disclosure in the description of the present invention.

Figure 1 - is a perspective view of the ice maker assembly

Figure 2 - is a perspective view of the ice mold

Figure 3 - is an exploded view of the ice maker assembly

Figure 4 - is a perspective view of the ice mold

Figure 5 - is a side view of the body and the protrusion along the dashed line A-A in figure 2

Figure 6 - is a perspective view of the body and the protrusion along the dashed line A-A in figure 2

Figure 7 - is a side view of the body and the protrusion along the dashed line A-A in figure 2 wherein the position of the protrusion is shown for different ice mold orientations.

Figure 8 - is a side view of the support member

Figure 9 - is a perspective view of the support member

[0020] The following numerals are assigned to different parts demonstrated in the drawings and referred to in the present detailed description of the invention:

1. Ice maker assembly
2. Frame

3. Support member

4. Body

5. First recess

6. Cap

7. Second recess

8. Conduit

9. Ice mold

10. Protrusion

11. Fixing means

[0021] The present invention relates to a cooling appliance comprising; an ice maker assembly (1); the ice maker assembly (1) comprising; a frame (2) comprising a support member (3), wherein the support member (3) comprises a body (4) accommodating a first recess (5) and a cap (6) enclosing the first recess (5), wherein the cap (6) comprises a second recess (7) seated on the first recess (5), forming a conduit (8); an ice mold (9) comprising a plurality of cavities into where the water to be frozen is filled, and a protrusion (10) seated into the conduit (8) and rotatably supporting the ice mold (9) on the frame (2), wherein the protrusion (10) is configured to slide and rotate along the conduit (8) upon rotation of the ice mold (9).

[0022] In the preferred embodiment of the invention, the width of the first recess (5) and the second recess (7) are different. The ice maker assembly (1) of the cooling appliance comprises the frame (2) onto which the ice mold (9) is rotatably placed. The frame (2) further comprises the support member (3) wherein the support member (3) comprises the body (4) and the cap (6). The body (4) and the cap (6) each comprises the first recess (5) and the second recess (7) respectively. The said recesses (5,7) are configured to face each other, upon placing the cap (6) onto the body (4) and defines the conduit (8). The ice mold (9) comprises cavities wherein the water to be frozen is filled. The ice mold (9) has an elongated form and extends along a direction. The ice mold (9) further comprises the protrusion (10) via which the ice mold (9) is rotatably placed onto the frame (2). The protrusion (10) moves inside the conduit (8) upon rotation of the ice mold (9). The protrusion (10) makes a rotational and sliding movement inside the conduit (8) and moves towards the cap (6). First of all, the protrusion (10) moves along the first recess (5) and then passes to the second recess (7). The first recess (5) and the second recess (7) have different widths. Therefore, as the protrusion (10) passes from the first recess (5) to the second recess (7), two possibilities exist. In the first case, wherein the width of the first recess (5) is greater than the second recess (7), the protrusion (10) abuts against the side walls of the second recess (7). Afterwards, the protrusion (10) rotates around the side walls of the second recess (7) and falls into the second recess (7), the impact of which releases ice pieces formed inside the ice mold (9). In the second case, wherein the width of the second recess (7) is greater than the first recess (5), the protrusion falls into the second recess (7), the impact of which releases ice pieces

es formed inside the ice mold (9). By means of the said recesses (5,7) having different widths, all the ice formed inside the ice mold (9) is removed from the ice mold (9) by the vibration of the impact. Another advantageous effect is that the water overflow from the ice mold (9) due to remaining ice pieces is prevented.

[0023] In the preferred embodiment of the invention, the conduit (8) comprises a stepped part formed by convergence of the first recess (5) and the second recess (7) and that the protrusion (10) is configured to impact the cap (6) by jumping over the stepped part of the conduit (8) upon rotation of the ice mold (9) to facilitate the release of the ice pieces.

[0024] In the preferred embodiment of the invention, the extension direction of the conduit (8) is inclined with respect to the extension direction of the ice mold (9). The ice pieces are released upon rotation of the ice mold (9) and during release, the ice mold (9) faces sideways. By providing the conduit (8) inclined, the impact direction of the protrusion (10) will be perpendicular to the extension direction of the ice mold (9) during release of ice pieces. This helps improve the efficiency of the impact and therefore that of the ice releasing process.

[0025] In the preferred embodiment of the invention, the conduit (8) is in oval shape. The oval shape helps the protrusion (10) to reach the second recess (7) easier, thereby improving the efficiency of the ice release.

[0026] In the preferred embodiment of the invention, the protrusion (10) is integral with the ice mold (9). By providing the protrusion (10) integral with the ice mold (9) helps increase structural strength of the ice maker assembly (2). Another advantageous effect is that the vibration caused by the impact is transferred to the ice mold (9) at a higher rate.

[0027] In the preferred embodiment of the invention, the ice mold (9) is rotated by means of a motor provided on the frame (2). The motor is provided on the frame (2) and is configured to rotate the ice mold (9). This particular embodiment is especially advantageous to be used at automatic ice making assemblies. It is to be understood that same impact to release ice pieces can also be achieved by a lever mechanism, that is manually actuated by a user.

[0028] In the preferred embodiment of the invention, the body (4) comprises at least a fixing means (11) onto which the cap (6) is placed. The body (4) comprises a fixing means (11) preferably in the form of a lug onto which the cap (6) is placed.

[0029] In a preferred embodiment of the invention, the body (4) is integral with the frame (2). This helps increase the life time ice maker assembly (1).

[0030] In another preferred embodiment of the invention, the body (4) is form fittingly placed onto a recess provided on the frame (2) that is configured to eliminate relative motion of the body (4) with respect to the frame (2) upon rotation of the ice mold (9). By providing the body (4) as a separate part, convenience in maintenance of the ice maker assembly is provided for the user. In

such case, the user may simply remove the broken body (4) part and replace it with a new one.

[0031] An advantageous effect provided by means of the invention is that the ice pieces formed inside the ice mold (9) is completely removed.

[0032] Another advantageous effect provided by means of the invention is that the ice is totally removed from ice mold (9) which eliminates the possibility of overflowing upon filling the ice mold (9) with water again.

Claims

1. A cooling appliance comprising an ice maker assembly (1); the ice maker assembly (1) comprising;
 - a frame (2) comprising a support member (3), wherein the support member (3) comprises a body (4) accommodating a first recess (5) and a cap (6) enclosing the first recess (5), wherein the cap (6) comprises a second recess (7) seated on the first recess (5), forming a conduit (8); an ice mold (9) comprising a plurality of cavities into where the water to be frozen is filled, and a protrusion (10) seated into the conduit (8) and rotatably supporting the ice mold (9) on the frame (2), wherein the protrusion (10) is configured to slide and rotate along the conduit (8) upon rotation of the ice mold (9);
 - characterized in that** the width of the first recess (5) and the second recess (7) are different.
2. A cooling appliance according to claim 1, **characterized in that** the conduit (8) comprises a stepped part formed by convergence of the first recess (5) and the second recess (7) and that the protrusion (10) is configured to impact the cap (6) by jumping over the stepped part of the conduit (8) upon rotation of the ice mold (9) to facilitate the release of the ice pieces.
3. A cooling appliance according to any preceeding claim, **characterized in that** the extension direction of the conduit (8) is inclined with respect to the extension direction of the ice mold (9).
4. A cooling appliance according to any preceeding claim, **characterized in that** the conduit (8) is in oval shape.
5. A cooling appliance according to any preceeding claim, **characterized in that** the protrusion (10) is integral with the ice mold (9).
6. A cooling appliance according to any preceeding claim, **characterized in that** the ice mold (9) is rotated by means of a motor provided on the frame (2).

7. A cooling appliance according to any preceeding claim, **characterized in that** the body (4) comprises at least a fixing means (11) onto which the cap (6) is placed. 5
8. A cooling appliance according to any preceeding claim, **characterized in that** the body (4) is integral with the frame (2). 10
9. A cooling appliance according to claims 1 to 6, **characterized in that** the body (4) is form fittingly placed onto a recess provided on the frame (2) that is configured to eliminate relative motion of the body (4) with respect to the frame (2) upon rotation of the ice mold (9). 15

20

25

30

35

40

45

50

55

Figure 1

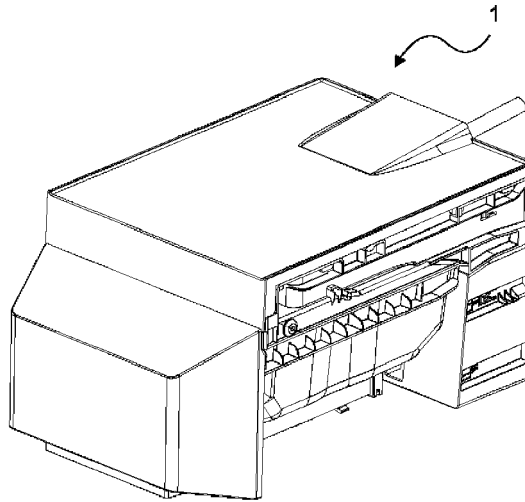


Figure 2

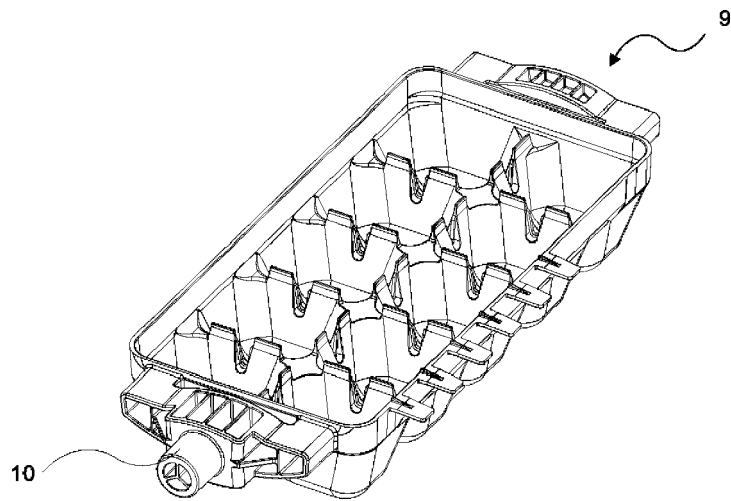


Figure 3

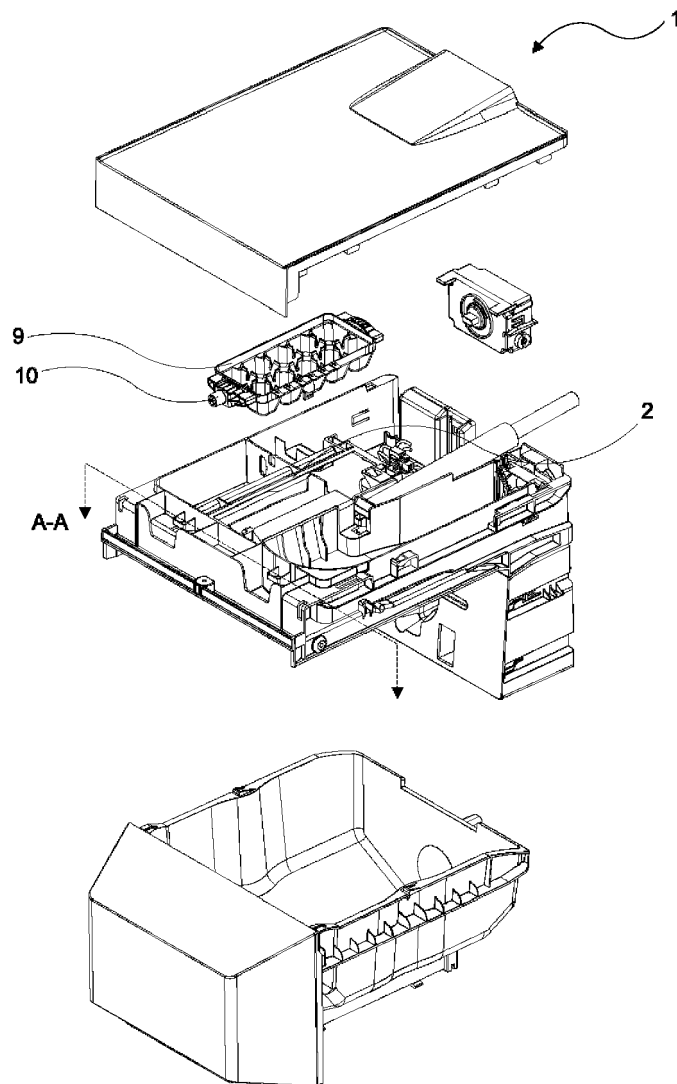


Figure 4

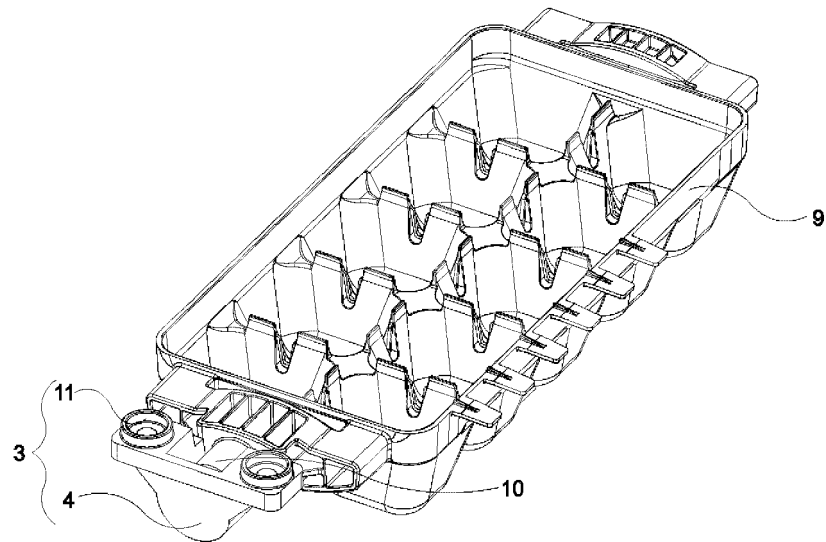


Figure 5

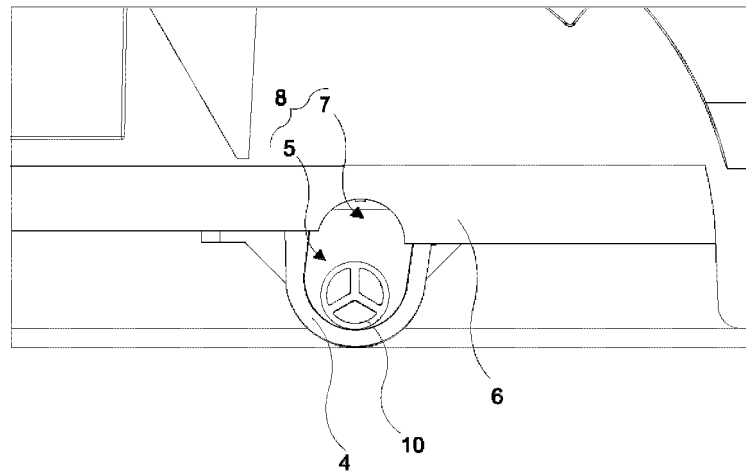


Figure 6

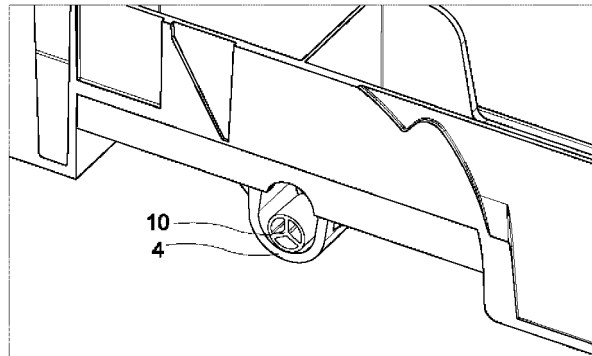


Figure 7

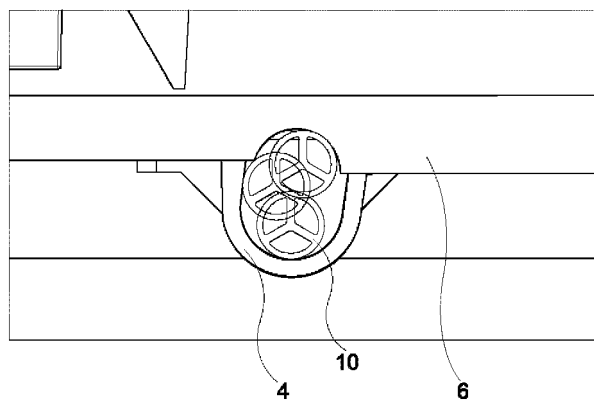


Figure 8


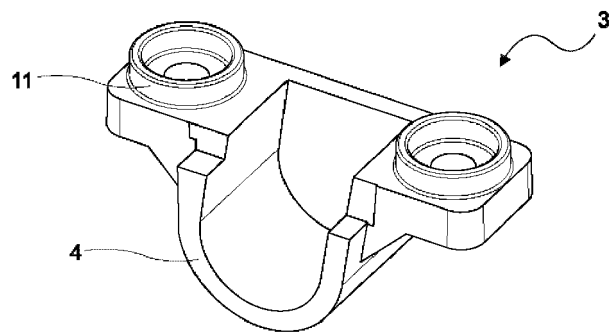


Figure 9



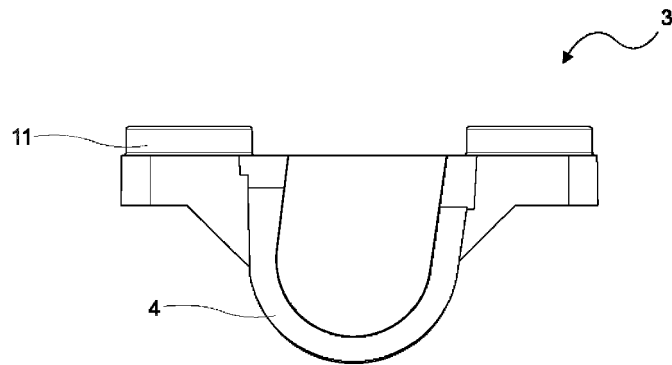

EUROPEAN SEARCH REPORT

Application Number

EP 21 20 5138

5

10

15

20

25

30

35

40

45

50

55

2

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2 969 654 A (HARLE HAROLD P) 31 January 1961 (1961-01-31)	1-3, 5-9	INV. F25C1/22 F25C5/04
Y	* the whole document *	4	
Y	----- KR 2014 0123755 A (WINIAMANDO INC [KR]) 23 October 2014 (2014-10-23) * the whole document *	4	
X,P	----- US 2021/318051 A1 (MITCHELL ALAN JOSEPH [US]) 14 October 2021 (2021-10-14) * the whole document *	1, 2, 5-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			F25C
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 24 March 2022	Examiner Kolev, Ivelin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 20 5138

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-03-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2969654 A	31-01-1961	NONE	
KR 20140123755 A	23-10-2014	NONE	
US 2021318051 A1	14-10-2021	US 2021318051 A1	14-10-2021
		WO 2021208672 A1	21-10-2021

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2014165602 A1 [0003]
- US 2014165643 A1 [0004]
- US 2015362242 A1 [0005]