



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 30

(48) Corrigendum issued on:
21.09.2022 Bulletin 2022/38

(43) Date of publication:
06.07.2022 Bulletin 2022/27

(21) Application number: **20856760.2**

(22) Date of filing: **31.03.2020**

(51) International Patent Classification (IPC):
G06N 3/04 (2006.01) G06N 20/00 (2019.01)
G06N 3/063 (2006.01)

(52) Cooperative Patent Classification (CPC):
G06N 3/04; G06N 3/063; G06N 20/00

(86) International application number:
PCT/CN2020/082610

(87) International publication number:
WO 2021/036255 (04.03.2021 Gazette 2021/09)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(30) Priority: **28.08.2019 CN 201910804618**

(71) Applicant: **Shanghai Cambricon Information Technology Co., Ltd**
Shanghai 201306 (CN)

(72) Inventors:
• **ZHANG, Yao**
Shanghai 201306 (CN)

- **JIANG, Guang**
Shanghai 201306 (CN)
- **ZHANG, Xishan**
Shanghai 201306 (CN)
- **ZHOU, Shiyi**
Shanghai 201306 (CN)
- **HUANG, Di**
Shanghai 201306 (CN)
- **LIU, Chang**
Shanghai 201306 (CN)
- **GUO, Jiaming**
Shanghai 201306 (CN)

(74) Representative: **Boult Wade Tennant LLP**
Salisbury Square House
8 Salisbury Square
London EC4Y 8AP (GB)

(54) **METHOD AND APPARATUS FOR PROCESSING DATA, AND RELATED PRODUCT**

(57) Embodiments of the present disclosure relate to a method and an apparatus for processing data, and related products. The embodiments of the present disclosure relate to a board card, which includes a storage component, an interface apparatus, a control component, and an artificial intelligence chip. The artificial intelligence chip is connected to the storage component, the control component, and the interface apparatus respectively. The storage component is used to store data, the interface apparatus is used to realize data transmission between the artificial intelligence chip and an external device; and the control component is used to monitor a state of the artificial intelligence chip. The board card may be used to perform artificial intelligence computations.

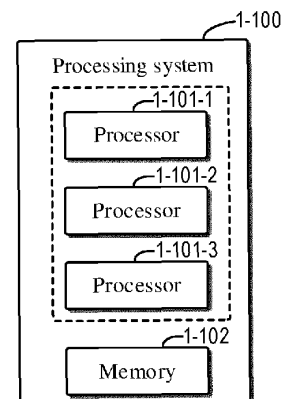


FIGURE 1-1