



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
10.08.2022 Bulletin 2022/32

(51) International Patent Classification (IPC):
E04B 2/74 (2006.01)

(21) Application number: **21156147.7**

(52) Cooperative Patent Classification (CPC):
E04B 2/7407; E04B 2002/7498

(22) Date of filing: **09.02.2021**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **CHEN, Jui-Ping**
110 Taipei City (TW)
- **YAI, Yu-Ying**
110 Taipei City (TW)
- **HSING, Yu-Tung**
110 Taipei City (TW)
- **HUANG, Pei-Yi**
110 Taipei City (TW)

(71) Applicant: **Miniwiz Co., Ltd.**
Taipei City 110 (TW)

(74) Representative: **Lang, Christian**
LangPatent Anwaltskanzlei IP Law Firm
Ingolstädter Straße 5
80807 München (DE)

(72) Inventors:
• **HUANG, Chian-Chi**
110 Taipei City (TW)
• **LIU, Tzu-Wei**
110 Taipei City (TW)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **BUILDING ASSEMBLY**

(57) Disclosed herein is a building assembly (100) for assembling building panels. The building assembly (100) includes a supporting member (110), a pair of a first sealing members (120), an elastically deformable gasket (130), and a second sealing member (140). The supporting member (110) has a base (111), a channel (112) disposed at the center of the base (111), and a pair of rails (114) independently disposed next to the channel (112). The pair of a first sealing members (120) independently includes a first base portion (121) and two retention tongues (122a, 122b) independently extending outwardly from the first base portion (121). The elastically deformable gasket (130) has a U- or V-shaped space (132) in cross section and two flanges (134) independently extending laterally from one edge of the U- or V-shaped space (132). The second sealing member (140) has a second base portion (1411) and a rib (142) disposed at the center of the second base portion (140). Further, the pair of the first sealing members (120) are configured to engage with the supporting member (110), the elastically deformable gasket (130) is configured to be snap-fitted into the channel (112) of the supporting member (110), the second sealing member (140) is configured to engage with the elastically deformable gasket (130) via press-fitting the rib into the U- or V-shaped space of the elastically deformable gasket (130); and the engagement of the pair of the first sealing members (120) with the supporting member (110) creates a pair of pock-

ets (115) independently for receiving a construction panel therein.

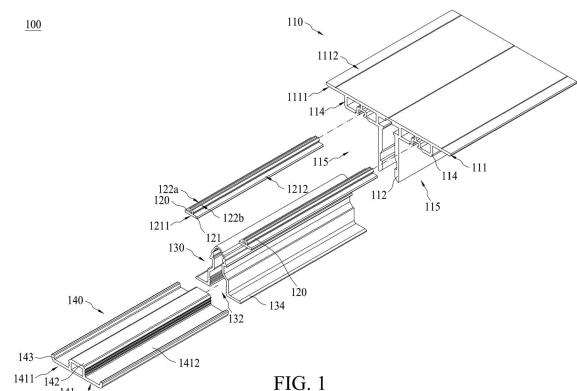


FIG. 1

Description

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

[0001] The present invention relates to a building assembly, particularly to sealed building assembly for use in the construction of chambers, such as germ-free chambers or chambers in which a slight negative or positive pressure is generally present.

2. DESCRIPTION OF RELATED ART

[0002] It is known for construction panels to be assembled by a variety of methods and assemblies. U.S. Publication No. 2015/0376899 illustrates one such method and assembly. However, a need exists for an improved assembling system for constructing chambers suitable for medical use, such as germ-free chambers and chambers having slightly negative pressure therein.

[0003] The present disclosure aims to provide a building assembly that may be easily and economically manufactured, and also easy to assemble, disassemble, or reassemble, further, the connected walls are air-sealed therebetween.

SUMMARY

[0004] The object of the present disclosure is to provide a building assembly for use in the construction of chambers, e.g., germ-free chambers or chambers in which a slight negative or positive pressure is generally present. The chambers can be easily assembled, disassembled and/or reassembled in case of an emergency.

[0005] Accordingly, the first aspect of the present disclosure is directed to a building assembly, which includes:

a supporting member comprising a base having a front and rear sides, a channel disposed on the front side of the base at the center thereof, and a pair of rails independently extending parallel and adjacent to the channel at its left and right sides;

a pair of a first sealing members independently comprising a first base portion having a front and rear sides, and two retention tongues independently extending outwardly from the rear side of the first base portion along the entire longitudinal length thereof; an elastically deformable gasket having a U- or V-shaped space in cross section and two flanges independently extending laterally from one edge of the U- or V-shaped space; and

a second sealing member comprising a second base portion having a front and rear sides, and a rib disposed on the rear side of the second base portion at the center along the longitudinal length thereof; wherein,

the pair of the first sealing members are configured to engage with the supporting member via press-fitting the two retention tongues of each of the first sealing member into each of the rails of the supporting member;

the elastically deformable gasket is configured to be snap-fitted into the channel of the supporting member;

the second sealing member is configured to engage with the elastically deformable gasket via press-fitting the rib into the U- or V-shaped space of the elastically deformable gasket; and

the engagement of the pair of the sealing members with the supporting member creates a pair of pockets independently for receiving a construction panel therein.

[0006] According to preferred embodiments of the present disclosure, the second sealing member further includes first and second extensions respectively extending upwardly away from the rear side of the second base portion along the entire longitudinal length thereof.

[0007] According to alternative embodiments of the present disclosure, the supporting member further comprises a rectangular conduit formed on the rear side of the base.

[0008] According to preferred embodiments of the present disclosure, the first sealing member, the elastically deformable gasket and the second sealing member are independently made of a resilient material selected from the group consisting of polypropylene (PP), neoprene, thermoplastic elastomer (TPE), and a combination thereof.

[0009] Examples of the TPE suitable for use in the present disclosure include, but are not limited to, thermoplastic styrene (TPS), thermoplastic vulcanizate (TPV), thermoplastic polyurethane (TPU), thermoplastic polyether ester (TPEE), thermoplastic polyamide (TPA), and the like. Preferably, the first sealing member and the second sealing member are respectively made of TPV, while the elastically deformable gasket is made of PP.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The disclosure will become more fully understood from the detailed description and the drawings given herein below for illustration only, and thus does not limit the disclosure, wherein:

FIG 1 is an exploded view of a building assembly 100 in accordance with one preferred embodiment of the present disclosure;

FIG 2 is a perspective view of the building assembly 100 of FIG 1 after assembling;

FIG 3 is a sectional view of an assembly including two wall panels 380 assembled with the aid of the building assembly of FIG 1; and

FIG 4 is a perspective view of a building assembly

400 for assembling wall panels in the presence of a construction beam **450** in according to an alternative embodiment of the present disclosure.

DETAILED DESCRIPTION

[0011] Detailed descriptions and technical contents of the present disclosure are illustrated below in conjunction with the accompanying drawings. However, it is to be understood that the descriptions and the accompanying drawings disclosed herein are merely illustrative and exemplary and not intended to limit the scope of the present disclosure.

1. The present building assembly

[0012] Referring more particularly to FIGs 1 to 3, in which FIG 1 is an exploded view of the present building assembly **100**; FIG 2 is a perspective view of the building assembly **100** of FIG 1 after assembling; FIG 3 is a sectional view of an assembly including two wall panels **380** assembled with the aid of the building assembly of FIG 1.

[0013] The building assembly **100** in this embodiment comprises a supporting member **110**, a pair of a first sealing members **120**, an elastically deformable gasket **130**, and a second sealing member **140**. The supporting member **110** includes in its structure, a base **111** having a front side **1111** and a rear side **1112**; a channel **112** formed at the center of the front side **1111** and extends longitudinally along the entire length of the base **111**; and two rails **114** respectively running parallel adjacent to the channel **112** at its left and right sides and extends longitudinally along the entire length of the base **111**.

[0014] A pair of a first sealing members **120** are provided for engaging the two rails **114**, respectively. Each sealing member **120** comprises a base portion **121** having a front and rear sides **1211**, **1212**; and two mirror-image retention tongues **122a**, **122b** independently extending outwardly from the rear side **1212** of the base portion **121** along the entire longitudinal length thereof. During assembly, each sealing member **120** is press-fitted or snap-fitted into one of the two rails **120** of the supporting member **110** to provide a sealed surface, and also creates a pocket **115** for subsequently holding a construction panel (not depicted in FIGs 1 and 2) and the like therein. Specifically, the pocket **115** refers to the space collectively defined by one of the rails **114** and one of the channel walls. Accordingly, two construction panels **380** (e.g., wall panels or ceiling panels) may be respectively placed into the two pockets **115** and held against the two rails **114** and the channel **112** (FIG 3).

[0015] To help holding the two construction panels **380** in the two pockets **115**, an elastically deformable gasket **130** may be subsequently press-fitted or snap-fitted into the channel **112** of the supporting member **110**. The elastically deformable gasket **130** has a U- or V-shaped space **132** in cross section, and two flanges **134** independently extending laterally from one edge of the U- or V-shaped

space **132**. Once the elastically deformable gasket **130** is press-fitted into the channel **112**, the two flanges **134** will be pressed against the two construction panels **380** respectively held in the two pockets **115** (FIG 3). Finally, to complete the assembling, a second sealing member **140** is press-fitted or snap-fitted into the U- or V-shaped space **132**, so as to hold the elastically deformable gasket **130** in place while creating a tight-seal therebetween. Structurally, the second sealing member **140** comprises a second base portion **141**, a rib **142**, and two extensions **143**. The second base portion **141** has a front side **1411** and a rear side **1412**. The rib **142** is formed on the rear side **1412** of the second base portion **141** at its center and extends along the entire longitudinal length thereof. Additionally or alternatively, the rib **142** may be hollow inside. In this embodiment, the rib **142** is hollow and rectangular in cross section and is sized to fit into the U- or V-shaped space **132** of the elastically deformable gasket **130**. Two extensions **143** independently extend perpendicularly away from the rear side **1412** of the second base portion **141**, and are configured to further hold the elastically deformable gasket **130** in place via clinging on to the respective edges of the two flanges **134**.

[0016] Note that in the present disclosure, the first sealing members **120**, the elastically deformable gasket **130**, as well as the second sealing member **140** may be independently made of a resilient or elastic material, such as polypropylene (PP), neoprene, thermoplastic elastomer (TPE), and the like. Examples of TPE material suitable for use in the present disclosure include, but are not limited to, thermoplastic styrene (TPS), thermoplastic vulcanizate (TPV), thermoplastic polyurethane (TPU), thermoplastic polyether ester (TPEE), thermoplastic polyamide (TPA) and the like. According to preferred embodiment, the first sealing members **120** and the second sealing member **140** are respectively made of TPV, while the elastically deformable gasket **130** is made of PP.

2. Alternative design of the present building assembly for use in the presence of a construction beam

[0017] Reference is now made to FIG 4, which is an alternative design of the present building assembly **400** suitable for use in the case when a construction beam is present. The components of the building assembly **400** in this embodiment are in general same as those in the building assembly **100** depicted in FIG 1, except the supporting member **410** in this embodiment is structurally different from that in FIG 1.

[0018] As most of the components and parts in the building assembly **400** are same as those in the building assembly **100**, thus the same components and parts are denoted by the common numbering elements. For example, the supporting member in FIG 1 is **110**, while in FIG 4 is **410**; the elastically deformable gasket in FIG 1 is **130**, while in FIG 4 is **430** and so on.

[0019] The supporting member **410** in this embodiment differs from that in FIG 1 in that it further includes a struc-

ture for receiving a building beam (e.g., a ceiling beam) therein. As depicted in FIG 4, the supporting member 410 further includes a rectangular conduit 470 formed on the rear side 4112 of the base 411, in which the rectangular conduit 470 is sized to receive a building beam 450 therein.

[0020] In order to assemble a germ-free chamber or a chamber having a slight negative pressure, the supporting member 410 may be first threadedly secured to the beam 450 by screws 460 or any suitable nut-bolt structure, then the pair of the first sealing members 420 are snap-fitted into the two rails 414 thereby forming two pockets 415 for respectively receiving two wall panels 480 therein. Note that the two pockets 415 are not visible from FIG 4, as they are occupied by the two wall panels 480. Then, the elastically deformable gasket 430, which has a U-shaped in cross section, is snap-fitted into the channel 412, followed by snap-fitting the second sealing member 440 into the U-shaped space of the elastically deformable gasket 430, thereby completing the assembly of two wall panels 480 using the building assembly 400. Additional wall panels, ceiling panels or any desired panels (e.g., panels that contain profile of sockets, air conduits and etc.) may be added next to the two assembled panels 480 using the building assembly 100 described above.

[0021] Each of the components discussed above in FIGs 1 to 4 may be manufactured by methods such as casting, stamping, injection molding, extrusion molding and the like, as would be apparent to a skilled artisan; preferably, by extrusion molding. Additionally or alternatively, each of the components discussed above in FIGs 1 to 4 may be milled, sanded or likewise manufactured for a smooth or coarse surface finish. Additionally or alternatively, except for the indicated parts (e.g., the retention tongues, the elastically deformable gasket, and the rib) each of the components discussed above in FIGs 1 to 4 may be made of a plastic, ceramic, metal and other equivalent material, as would be apparent to a skilled artisan.

[0022] It will be understood that the above description of embodiments is given by way of example only and that various modifications may be made by those with ordinary skill in the art. The above specification, examples and data provide a complete description of the structure and use of exemplary embodiments of the invention. Although various embodiments of the invention have been described above with a certain degree of particularity, or with reference to one or more individual embodiments, those with ordinary skill in the art could make numerous alterations to the disclosed embodiments without departing from the spirit or scope of the present disclosure.

Claims

1. A building assembly (100) comprising,
a supporting member (110) comprising a base (111)

having a front and rear sides (1111, 1112), a channel (112) disposed on the front side (1111) of the base (111) at the center thereof, and a pair of rails (114) independently disposed next to the channel (112), in which the channel (112), and the pair of rails 114 independently extends along the entire longitudinal length of the base (111);

a pair of a first sealing members (120) independently comprising a first base portion (121) having a front and rear sides (1211, 1212), and two retention tongues (122a, 122b) independently extending outwardly from the rear side (1212) of the first base portion (121) along the entire longitudinal length thereof; an elastically deformable gasket (130) having a U- or V-shaped space (132) in cross section and two flanges (134) independently extending laterally from one edge of the U- or V-shaped space (132); and a second sealing member (140) comprising a second base portion (141) having a front and rear sides (1411, 1412), and a rib (142) disposed on the rear side (1412) of the second base portion (141) at the center along the longitudinal length thereof;

wherein,

the pair of the first sealing members (120) are configured to engage with the supporting member (110) via press-fitting the two retention tongues (122a, 122b) of each first sealing member (120) into each of the pair of rails (114) of the supporting member (110);

the elastically deformable gasket (130) is configured to be snap-fitted into the channel (112) of the supporting member (110);

the second sealing member (140) is configured to engage with the elastically deformable gasket (130) via press-fitting the rib (142) into the U- or V-shaped space (132) of the elastically deformable gasket (130); and

the engagement of the pair of the first sealing members (120) with the supporting member (110) creates a pair of pockets (115) independently for receiving a construction panel therein.

2. The building assembly of claim 1, wherein the second sealing member (140) further comprises a first and second extensions (143) respectively extending upwardly away from the rear side (1412) of the second base portion (141) along the entire longitudinal length thereof.
3. The building assembly of claim 1, wherein the first sealing member (120), the elastically deformable gasket (130) and the second sealing member (140) are independently made of a resilient material selected from the group consisting of polypropylene (PP), neoprene, thermoplastic elastomer (TPE), and a combination thereof.
4. The building assembly of claim 3, wherein the TPE

is selected from the group consisting of thermoplastic styrene (TPS), thermoplastic vulcanizate (TPV), thermoplastic polyurethane (TPU), thermoplastic polyether ester (TPEE), and thermoplastic polyamide (TPA).

5. The building assembly of claim 4, wherein the first sealing member (120) and the second sealing member (140) are respectively made of TPV, while the elastically deformable gasket is made of PP.
6. The building assembly of claim 1, wherein the supporting member (110) further comprises a rectangular conduit (470) formed on the rear side of the base.
7. The building assembly of claim 6, wherein the second sealing member (140) further comprises a first and second extensions (143) respectively extending upwardly away from the rear side (1412) of the second base portion (141) along the entire longitudinal length thereof.
8. The building assembly of claim 6, wherein the first sealing member (120), the elastically deformable gasket (130) and the second sealing member (140) are independently made of a resilient material selected from the group consisting of PP, neoprene, and TPE.
9. The building assembly of claim 8, wherein the TPE is selected from the group consisting of TPS, TPV, TPU, TPEE, TPA, and a combination thereof.
10. The building assembly of claim 9, wherein the first sealing member and the second sealing member are respectively made of TPV, while the elastically deformable gasket is made of PP.

Amended claims in accordance with Rule 137(2) EPC.

1. A building assembly (100) comprising,
a supporting member (110) comprising a base (111) having a front and rear sides (1111, 1112), a channel (112) disposed on the front side (1111) of the base (111) at the center thereof, and a pair of rails (114) independently disposed next to the channel (112), in which the channel (112), and the pair of rails (114) independently extends along the entire longitudinal length of the base (111);
a pair of a first sealing members (120) independently comprising a first base portion (121) having a front and rear sides (1211, 1212), and two retention tongues (122a, 122b) independently extending outwardly from the rear side (1212) of

the first base portion (121) along the entire longitudinal length thereof; an elastically deformable gasket (130) having a U- or V-shaped space (132) in cross section and two flanges (134) independently extending laterally from one edge of the U- or V-shaped space (132); and a second sealing member (140) comprising a second base portion (141) having a front and rear sides (1411, 1412), and a rib (142) disposed on the rear side (1412) of the second base portion (141) at the center along the longitudinal length thereof;
wherein,
the pair of the first sealing members (120) are configured to engage with the supporting member (110) via press-fitting the two retention tongues (122a, 122b) of each first sealing member (120) into each of the pair of rails (114) of the supporting member (110), thereby creating a pair of pockets (115) independently for receiving each a construction panel therein;
the elastically deformable gasket (130) is configured to be snap-fitted into the channel (112) of the supporting member (110) to help holding the two construction panels in the pair of pockets (115); and
the second sealing member (140) is configured to engage with the elastically deformable gasket (130) via press-fitting the rib (142) into the U- or V-shaped space (132) of the elastically deformable gasket (130) so as to hold the elastically deformable gasket (130) in place while creating a tight-seal therebetween.

2. The building assembly of claim 1, wherein the second sealing member (140) further comprises a first and second extensions (143) respectively extending upwardly away from the rear side (1412) of the second base portion (141) along the entire longitudinal length thereof.
3. The building assembly of claim 1, wherein the first sealing member (120), the elastically deformable gasket (130) and the second sealing member (140) are independently made of a resilient material selected from the group consisting of polypropylene (PP), neoprene, thermoplastic elastomer (TPE), and a combination thereof.
4. The building assembly of claim 3, wherein the TPE is selected from the group consisting of thermoplastic styrene (TPS), thermoplastic vulcanizate (TPV), thermoplastic polyurethane (TPU), thermoplastic polyether ester (TPEE), and thermoplastic polyamide (TPA).
5. The building assembly of claim 4, wherein the first sealing member (120) and the second sealing mem-

ber (140) are respectively made of TPV, while the elastically deformable gasket is made of PP.

6. The building assembly of claim 1, wherein the supporting member (110) further comprises a rectangular conduit (470) formed on the rear side of the base. 5
7. The building assembly of claim 6, wherein the second sealing member (140) further comprises a first and second extensions (143) respectively extending upwardly away from the rear side (1412) of the second base portion (141) along the entire longitudinal length thereof. 10
8. The building assembly of claim 6, wherein the first sealing member (120), the elastically deformable gasket (130) and the second sealing member (140) are independently made of a resilient material selected from the group consisting of PP, neoprene, and TPE. 15 20
9. The building assembly of claim 8, wherein the TPE is selected from the group consisting of TPS, TPV, TPU, TPEE, TPA, and a combination thereof. 25
10. The building assembly of claim 9, wherein the first sealing member and the second sealing member are respectively made of TPV, while the elastically deformable gasket is made of PP. 30

35

40


45


50

55

60

65

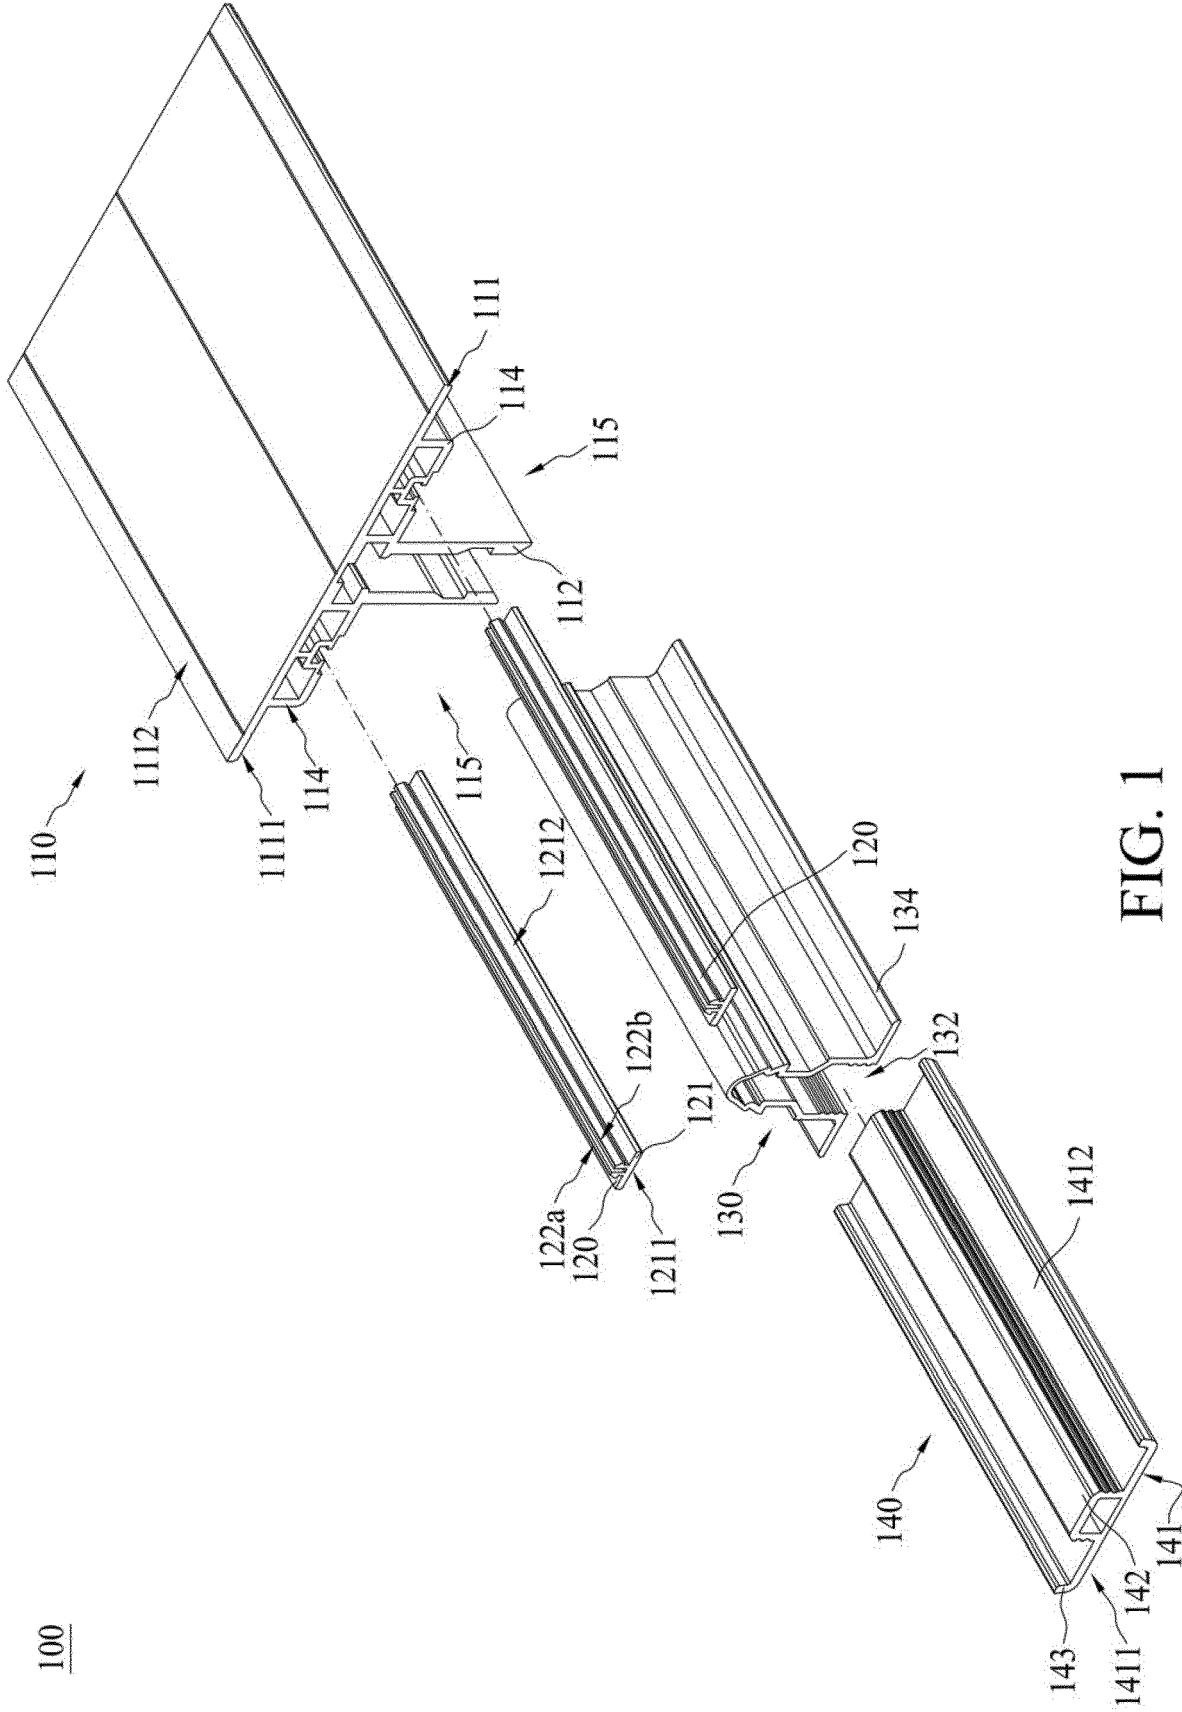

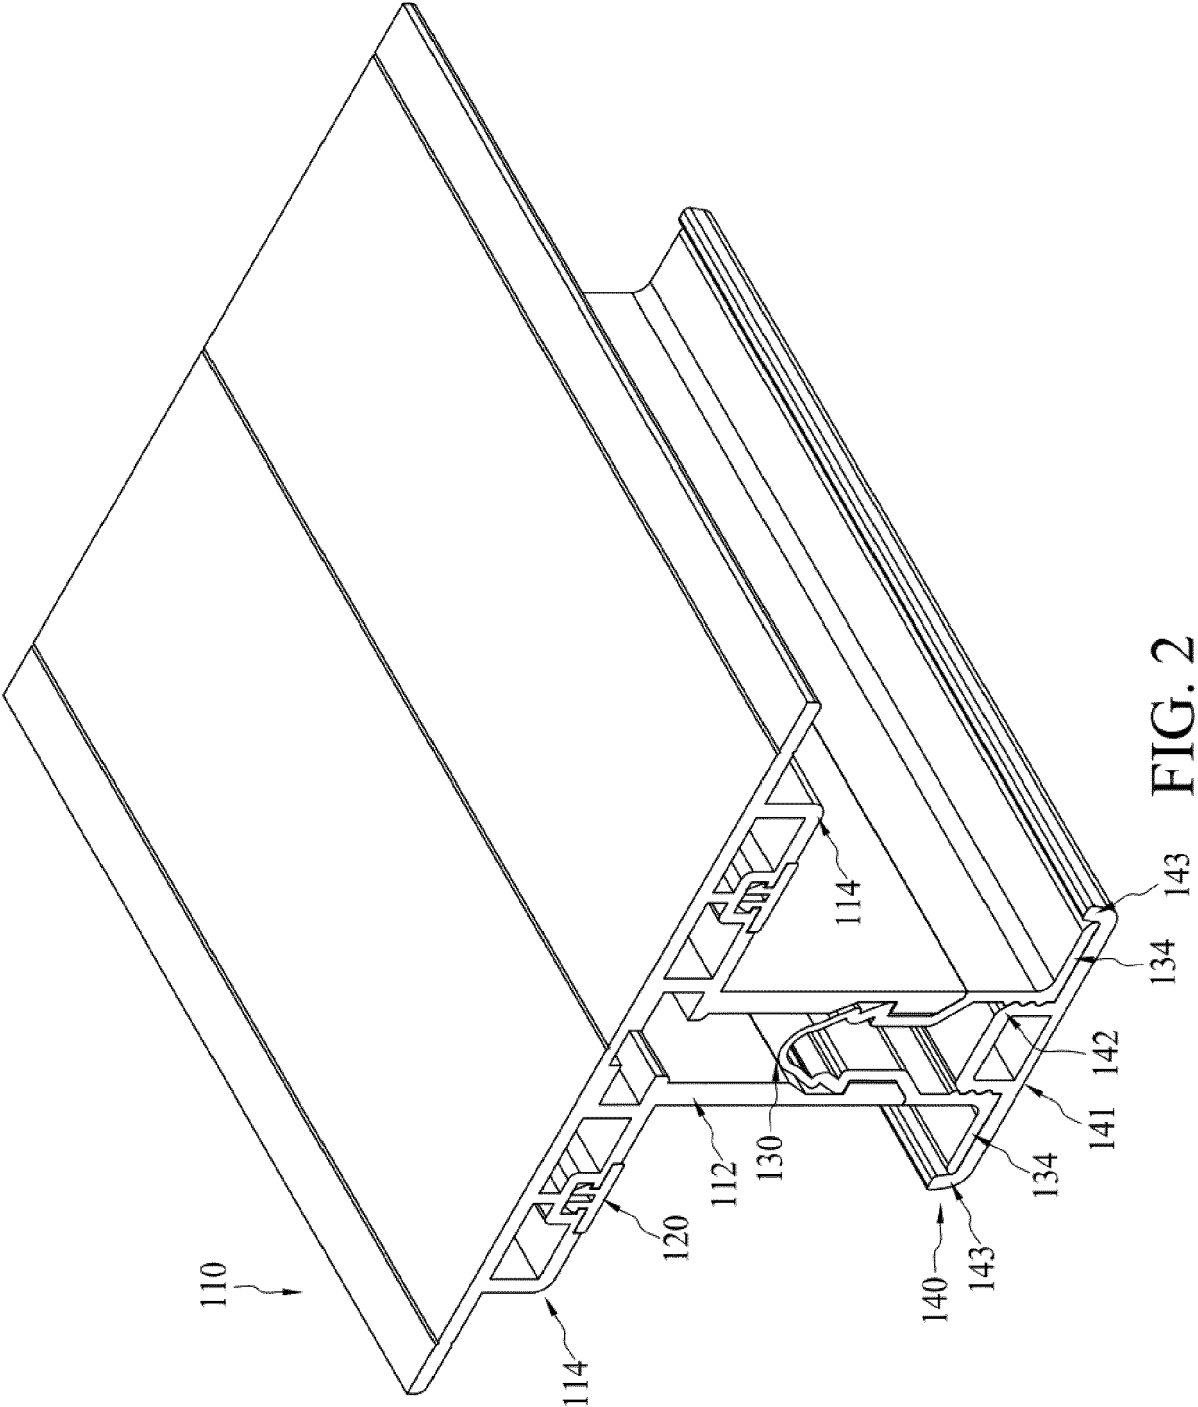

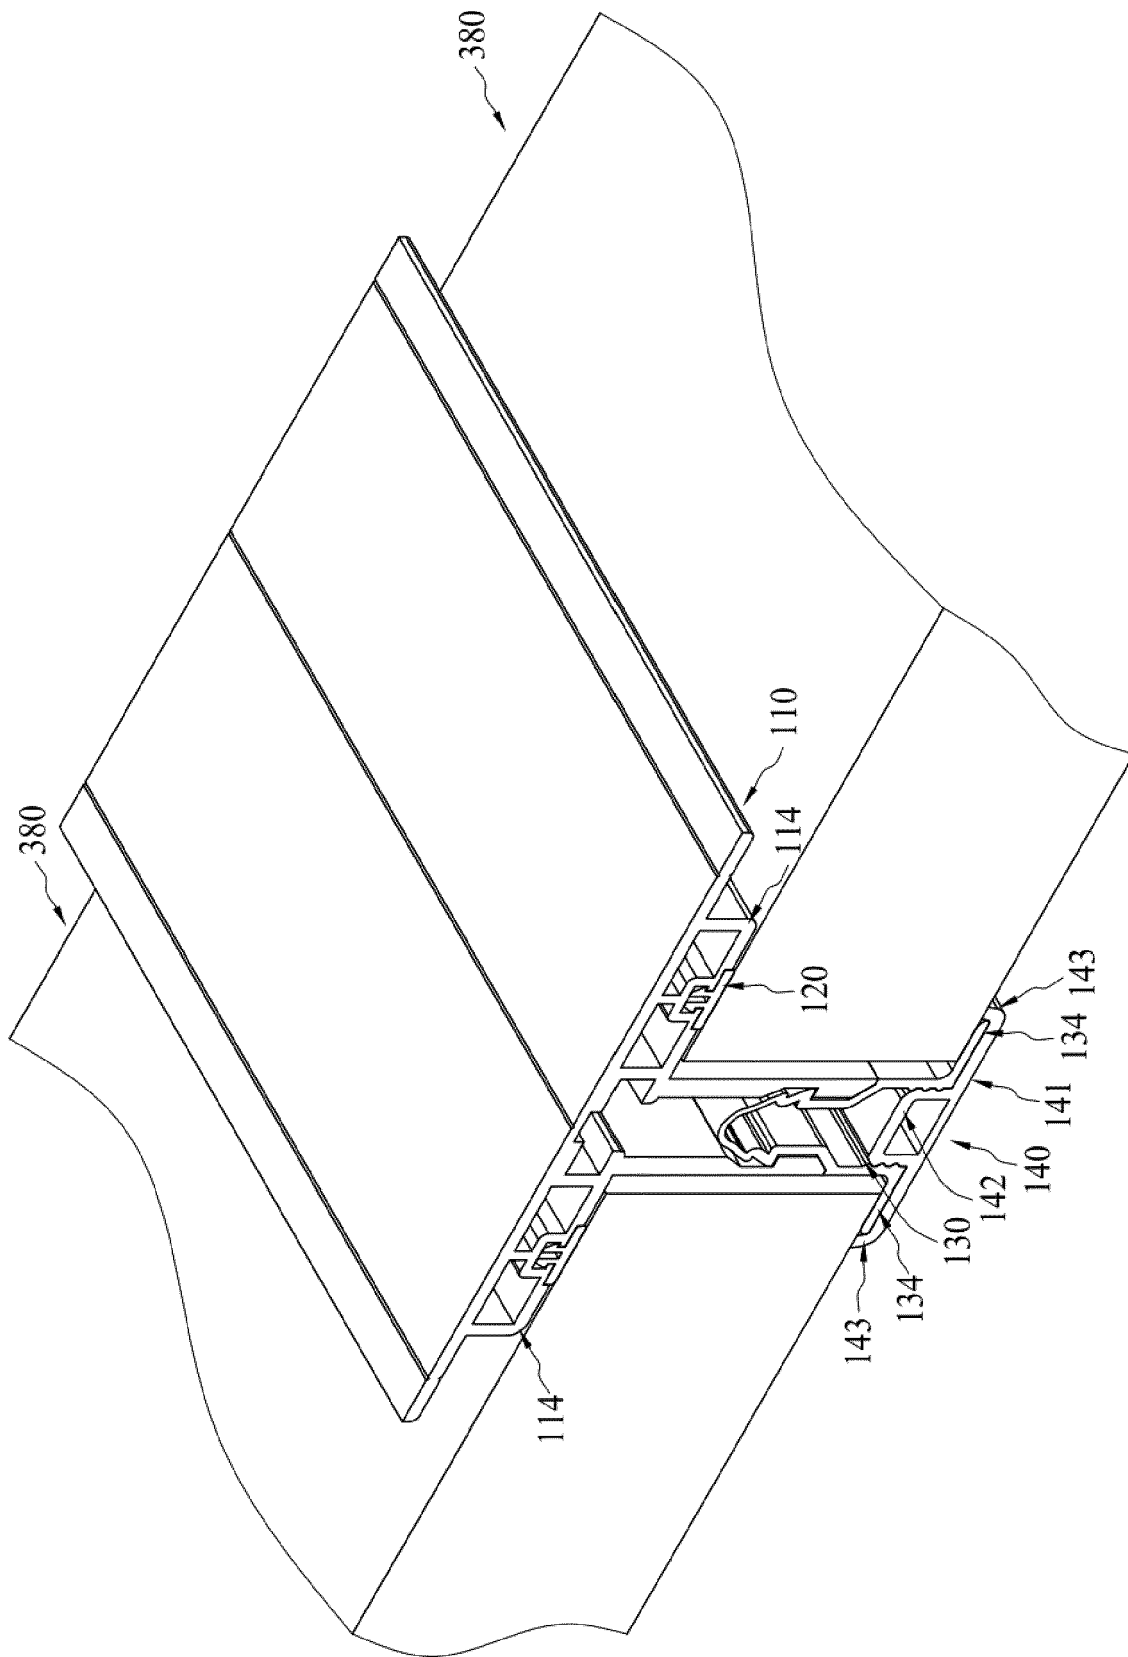


FIG. 3

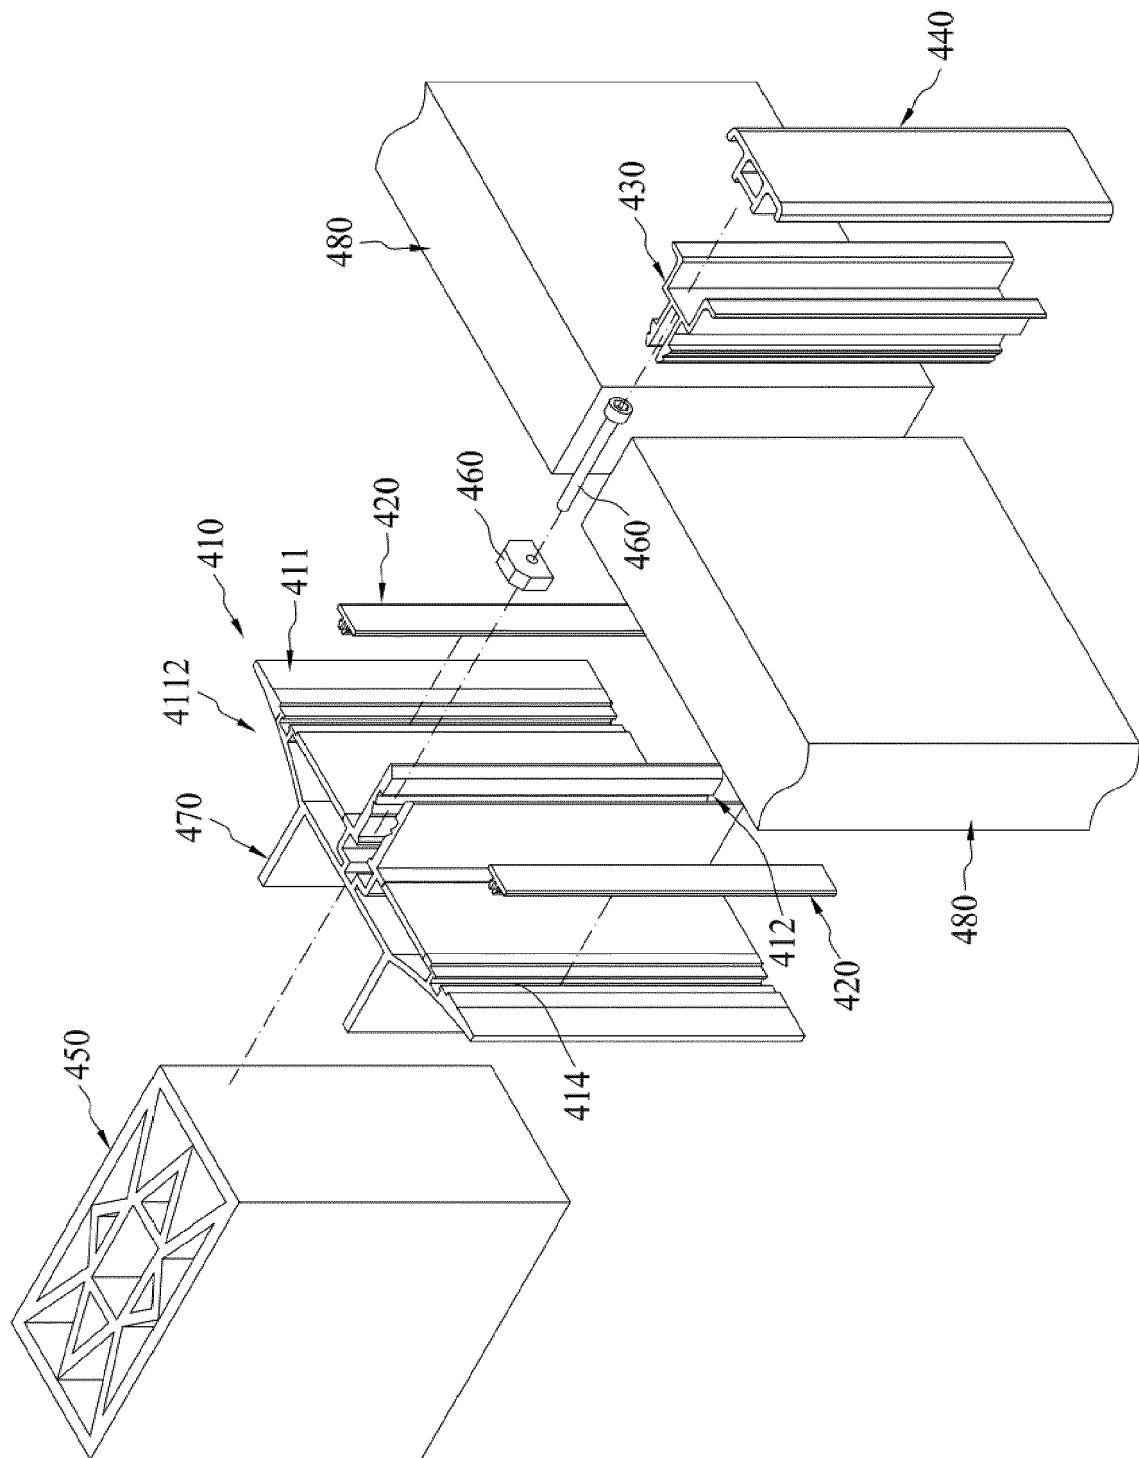


FIG. 4



EUROPEAN SEARCH REPORT

 Application Number
 EP 21 15 6147

5

10

15

20

25

30

35

40

45

50

55

3

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2012/172539 A1 (POLYGAL PLASTICS IND LTD [IL]; ROTER GILAD [IL]; BELKIN SASHA [IL]) 20 December 2012 (2012-12-20) * abstract; figure 3 *	1-10	INV. E04B2/74
A	SG 1020 1808 742P A (GAT SDN BHD [MY]) 28 May 2020 (2020-05-28) * abstract; figures 1,2,13 *	1-10	
A	US 5 228 254 A (HONEYCUTT JR JAMES R [US]) 20 July 1993 (1993-07-20) * abstract; figure 5 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			E04B E04D
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 30 July 2021	Examiner Couprie, Brice
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 15 6147

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-07-2021

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012172539 A1	20-12-2012	EP 2718515 A1 WO 2012172539 A1	16-04-2014 20-12-2012
-----	-----	-----	-----
SG 10201808742P A	28-05-2020	NONE	
-----	-----	-----	-----
US 5228254 A	20-07-1993	NONE	
-----	-----	-----	-----

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20150376899 A [0002]