



(11) **EP 4 055 070 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 10

(48) Corrigendum issued on:
31.07.2024 Bulletin 2024/31

(45) Date of publication and mention
of the grant of the patent:
06.12.2023 Bulletin 2023/49

(21) Application number: **20819927.3**

(22) Date of filing: **04.11.2020**

(51) International Patent Classification (IPC):
C08F 210/16 ^(2006.01) **C08F 4/659** ^(2006.01)
C08F 4/64 ^(2006.01) **C08F 4/6592** ^(2006.01)

(52) Cooperative Patent Classification (CPC):
(C-Sets available)
C08F 210/16; C08F 4/65912; C08F 4/65916

(86) International application number:
PCT/US2020/058855

(87) International publication number:
WO 2021/091994 (14.05.2021 Gazette 2021/19)

(Cont.)

(54) **BIMODAL CATALYST SYSTEMS**
BIMODALE KATALYSATORSYSTEME
SYSTÈMES DE CATALYSEURS BIMODAUX

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.11.2019 US 201962930450 P**

(43) Date of publication of application:
14.09.2022 Bulletin 2022/37

(73) Proprietor: **Dow Global Technologies LLC**
Midland, MI 48674 (US)

(72) Inventors:
• **YOUNG, Andrew J.**
Lake Jackson, Texas 77566 (US)
• **KUHLMAN, Roger L.**
Lake Jackson, Texas 77566 (US)
• **PADILLA-ACEVEDO, Angela I.**
Lake Jackson, Texas 77566 (US)

• **SZUL, John F.**
Charleston, West Virginia 25303 (US)

(74) Representative: **Boult Wade Tennant LLP**
Salisbury Square House
8 Salisbury Square
London EC4Y 8AP (GB)

(56) References cited:
WO-A1-2018/022588 WO-A1-2018/191000
WO-A2-2009/064404 WO-A2-2013/070601

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 4 055 070 B9

(52) Cooperative Patent Classification (CPC): (Cont.)

C-Sets

C08F 210/16, C08F 4/64193, C08F 4/65925;

C08F 210/16, C08F 4/65904;

C08F 210/16, C08F 210/14, C08F 2500/04,

C08F 2500/12

Description

Field of Disclosure

[0001] Embodiments of the present disclosure are directed towards bimodal catalyst systems, more specifically, bimodal catalyst systems that may be utilized to make bimodal polyethylene compositions comprising a high molecular weight polyethylene component and a low molecular weight polyethylene component in a single gas-phase reactor.

Background


[0002] Polymers may be utilized for a number of products including as films, fibers, nonwoven and/or woven fabrics, extruded articles, and/or molded articles, among others. Polymers can be made by reacting one or more types of monomer in a polymerization reaction in the presence of a polymerization catalyst.

[0003] WO2013/070601 A2 relates to methods of preparing a catalyst system comprising a spray-dried activator and polymerization processes employing these catalyst systems. WO2018/022588 A1 relates to multimodal elastomers produced by olefin polymerization with a mixed catalyst system, specifically, a constrained geometry catalyst and a biphenyl phenol catalyst.

Summary

[0004] The present disclosure provides various embodiments, including:

[0005] A bimodal polymerization catalyst system comprising: a metallocene olefin polymerization catalyst; and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I:

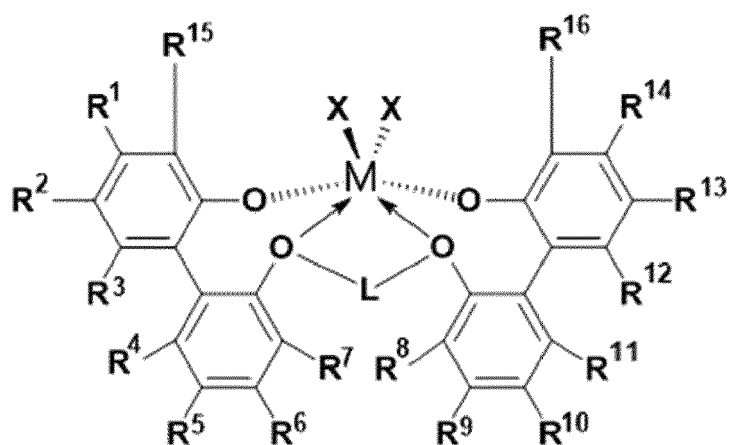

(Formula I)

wherein each of R^7 and R^8 is independently a C_1 to C_{20} alkyl, aryl or aralkyl, halogen, or a hydrogen; wherein each of R^5 and R^{10} is independently a C_1 to C_{20} alkyl, aryl, aralkyl, halogen, an alkyl- or aryl-substituted silyl, or a hydrogen; wherein each of R^2 and R^{13} is independently a C_1 to C_{20} alkyl, aryl or aralkyl or a hydrogen; wherein each of R^{15} and R^{16} is independently a 2,7-disubstituted carbazol-9-yl;

wherein L is a saturated C_2 - C_3 alkyl that forms a 2-carbon bridge or 3-carbon bridge between the two oxygen atoms to which L is bonded; wherein each X is independently halogen, a hydrogen, a (C_1-C_{20}) alkyl, a (C_7-C_{20}) aralkyl, a (C_1-C_6) alkyl-substituted (C_6-C_{12}) aryl, or a (C_1-C_6) alkyl-substituted benzyl, $-CH_2Si(R^C)_3$, where R^C is C_1 - C_{12} hydrocarbon; wherein each of R^1 , R^3 , R^4 , R^6 , R^9 , R^{11} , R^{12} , and R^{14} is independently a hydrogen; and wherein M is a heteroatom selected from a group consisting of Zr and Hf;


[0006] A method of making a bimodal polyethylene composition comprising a high molecular weight polyethylene component and a low molecular weight polyethylene component, wherein the high and low molecular weight polyethylene components are made together in a single gas-phase reactor via a polymerization process employing the bimodal polymerization catalyst system, wherein the bimodal polyethylene composition has a value of the weight average molecular weight (M_w) to number average molecular weight (M_n) ratio (M_w/M_n) that is greater than 5.00; a value of a z-average molecular weight (M_z) to weight average molecular weight (M_w) ratio (M_z/M_w) that is less than the M_w/M_n ; or

both the Mw/Mn greater than 5.00 and a Mz/Mw less than the Mw/Mn; and

[0007] A method of making the bimodal polymerization catalyst system, the method comprising making the biphenylphenol polymerization catalyst by contacting, under activating conditions, the biphenylphenol polymerization precatalyst of Formula I with an activator, as detailed herein.

Detailed Description

[0008] The bimodal polymerization catalyst system comprising: a metallocene olefin polymerization catalyst; and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I:

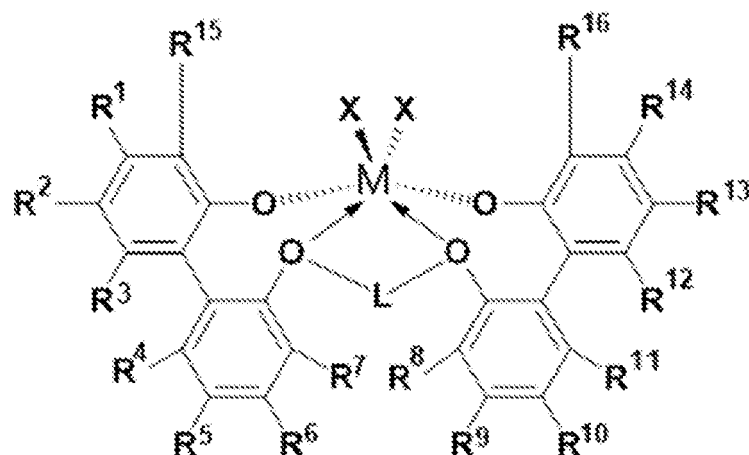

(Formula I)

[0009] wherein each of R⁷ and R⁸ is independently a C₁ to C₂₀ alkyl, aryl or aralkyl, halogen, or a hydrogen; wherein each of R⁵ and R¹⁰ is independently a C₁ to C₂₀ alkyl, aryl, aralkyl, halogen, an alkyl-or aryl-substituted silyl, or a hydrogen; wherein each of R² and R¹³ is independently a C₁ to C₂₀ alkyl, aryl or aralkyl or a hydrogen; wherein each of R¹⁵ and R¹⁶ is independently a 2,7-disubstituted carbazol-9-yl; wherein L is a saturated C₂-C₃ alkyl that forms a 2-carbon bridge or 3-carbon bridge between the two oxygen atoms to which L is bonded; wherein each X is independently halogen, a hydrogen, a (C₁-C₂₀)alkyl, a (C₇-C₂₀)aralkyl, a (C₁-C₆)alkyl-substituted (C₆-C₁₂)aryl, or a (C₁-C₆)alkyl-substituted benzyl, -CH₂Si(R^C)₃, where R^C is C₁-C₁₂ hydrocarbon; wherein each of R¹, R³, R⁴, R⁶, R⁹, R¹¹, R¹², and R¹⁴ is independently a hydrogen; and wherein M is a heteroatom selected from a group consisting of Zr and Hf.

[0010] The biphenylphenol polymerization precatalyst represented by the Formula I (i.e., the biphenylphenol polymerization precatalyst), as described herein, may be utilized to make biphenylphenol polymerization catalysts. For instance, the biphenylphenol polymerization precatalyst represent by the Formula I may be contacted, under activating conditions, with an activator so as to activate the biphenylphenol polymerization precatalyst represent by the Formula I, thereby making the biphenylphenol polymerization catalyst.

[0011] As mentioned, each of R⁷ and R⁸ as shown in Formula I, can independently be a C₁ to C₂₀ alkyl, aryl or aralkyl, halogen, or a hydrogen. One or more embodiments provide that each of R⁷ and R⁸ is a C₁ alkyl, e.g. methyl.

[0012] As used herein, an "alkyl" includes linear, branched and cyclic paraffin radicals that are deficient by one hydrogen. Thus, for example, a CH₃ group ("methyl") and a CH₃CH₂ group ("ethyl") are examples of alkyls.

[0013] As used herein, "aryl" includes phenyl, naphthyl, pyridyl and other radicals whose molecules have the ring structure characteristic of benzene, naphthylene, phenanthrene, anthracene, etc. It is understood that an "aryl" can be a C₆ to C₂₀ aryl. For example, a C₆H₅ - aromatic structure is a "phenyl", a C₆H₄- aromatic structure is a "phenylene". As used herein, an "aralkyl", which can also be called an "arylalkyl", is an alkyl having an aryl pendant therefrom. It is understood that an "aralkyl" can be a C₇ to C₂₀ aralkyl. An "alkylaryl" is an aryl having one or more alkyls pendant therefrom. As used herein, a "hydrocarbyl" includes aliphatic, cyclic, olefinic, acetylenic and aromatic radicals (i.e., hydrocarbon radicals) comprising hydrogen and carbon that are deficient by one hydrogen.

[0014] As mentioned, each of R⁵ and R¹⁰ as shown in Formula I, can independently be a C₁ to C₂₀ alkyl, aryl, aralkyl, halogen, an alkyl-or aryl-substituted silyl, or a hydrogen. For instance, one or more embodiments provide that R⁵ and R¹⁰ is a di-alkyl or tri-alkyl substituted silyl. One or more embodiments provide that each of R⁵ and R¹⁰ is an octyl dimethyl silyl.

[0015] As mentioned, each of R⁴ and R¹¹ as shown in Formula I, can independently be a hydrogen or a halide such as fluorine. For instance, one or more embodiments provide that each of R⁴ and R¹¹ is a hydrogen.

[0016] As mentioned, each of R^2 and R^{13} as shown in Formula I, can independently be a C_1 to C_{20} alkyl, aryl or aralkyl or a hydrogen. One or more embodiments provide that each of R^2 and R^{13} is a C_3 - C_4 alkyl such as n-butyl, t-butyl, or 2-methyl-pentyl. One or more embodiments provide that each of R^2 and R^{13} is a 1,1,3,3-tetramethylbutyl.

[0017] As mentioned, each of R^{15} and R^{16} as shown in Formula I, can be a 2,7-disubstituted carbazol-9-yl. For instance, one or more embodiments provide that each of R^{15} and R^{16} is a 2,7-disubstituted carbazol-9-yl selected from a group consisting of a 2,7-di-t-butylcarbazol-9-yl, a 2,7-diethylcarbazol-9-yl, a 2,7-dimethylcarbazol-9-yl, and a 2,7-bis(diisopropyl(n-octyl)silyl)-carbazol-9-yl.

[0018] As mentioned, L, as shown in Formula I, can be a saturated C_2 - C_3 alkyl that forms a 2-carbon or 3-carbon bridge between the two oxygen atoms to which L is bonded. For instance, one or more embodiments provide that L is a saturated C_3 alkyl that forms a bridge between the two oxygen atoms to which L is bonded. The term "saturated" means lacking carbon - carbon double bonds, carbon - carbon triple bonds, and (in heteroatom - containing groups) carbon - nitrogen, carbon - phosphorous, and carbon - silicon double or triple bonds.

[0019] As mentioned, each X, as shown in Formula I, can independently be a halogen, a hydrogen, a (C_1-C_{20}) alkyl, a (C_7-C_{20}) aralkyl, a (C_1-C_6) alkyl-substituted (C_6-C_{12}) aryl, or a (C_1-C_6) alkyl-substituted benzyl, $-CH_2Si(R^C)_3$, where R^C is C_1 - C_{12} hydrocarbon. For instance, one or more embodiments provide that each X is a C_1 alkyl.

[0020] As mentioned, M, as shown in Formula I, is a heteroatom such as a metal atom. In some embodiments, M can be selected from a group consisting of Zr and Hf. One or more embodiments provide that M is zirconium. One or more embodiments provide that M is hafnium.

[0021] Each of the R groups (R^1 - R^{16}) and the X's of Formula I, as described herein, can independently be substituted or unsubstituted. For instance, in some embodiments, each of the X's of Formula I can independently be a (C_1-C_6) alkyl-substituted (C_6-C_{12}) aryl, or a (C_1-C_6) alkyl-substituted benzyl. As used herein, "substituted" indicates that the group following that term possesses at least one moiety in place of one or more hydrogens in any position, the moieties selected from such groups as halogen radicals, hydroxyl groups, carbonyl groups, carboxyl groups, amine groups, phosphine groups, alkoxy groups, phenyl groups, naphthyl groups, C_1 to C_{20} alkyl groups, C_2 to C_{10} alkenyl groups, and combinations thereof. Being "disubstituted" refers to the presence of two or more substituent groups in any position, the moieties selected from such groups as halogen radicals, hydroxyl groups, carbonyl groups, carboxyl groups, amine groups, phosphine groups, alkoxy groups, phenyl groups, naphthyl groups, C_1 to C_{20} alkyl groups, C_2 to C_{10} alkenyl groups, and combinations thereof.

[0022] The metallocene olefin polymerization catalyst and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst herein can be made utilizing reactants mentioned herein. The metallocene olefin polymerization catalyst and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst herein can be made by a number of processes, e.g. with conventional solvents, reaction conditions, reaction times, and isolation procedures, utilized for making known catalysts such as known metallocene olefin polymerization catalysts.

[0023] One or more embodiments provide a polymerization catalyst, namely a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I. The biphenylphenol polymerization catalyst can be made by contacting, under activating conditions, the biphenylphenol polymerization precatalysts and an activator to provide the biphenylphenol polymerization catalyst, e.g. an activated biphenylphenol polymerization precatalyst. Activating conditions are well known in the art.

[0024] As used herein, "activator" refers to any compound or combination of compounds, supported, or unsupported, which can activate a complex or a catalyst component, such as by creating a cationic species of the catalyst component. For example, this can include the abstraction of at least one leaving group, e.g., the "X" group described herein, from the metal center of the complex/catalyst component, e.g. the metal complex of Formula I. As used herein, "leaving group" refers to one or more chemical moieties bound to a metal atom and that can be abstracted by an activator, thus producing a species active towards olefin polymerization.

[0025] The activator can include a Lewis acid or a non-coordinating ionic activator or ionizing activator, or any other compound including Lewis bases, aluminum alkyls, and/or conventional-type co-catalysts. In addition to methylaluminoxane ("MAO") and modified methylaluminoxane ("MMAO") mentioned above, illustrative activators can include, but are not limited to, aluminoxane or modified aluminoxane, and/or ionizing compounds, neutral or ionic, such as Dimethylanilinium tetrakis(pentafluorophenyl)borate, Triphenylcarbenium tetrakis(pentafluorophenyl)borate, Dimethylanilinium tetrakis(3,5-(CF_3)₂phenyl)borate, Triphenylcarbenium tetrakis(3,5-(CF_3)₂phenyl)borate, Dimethylanilinium tetrakis(perfluoronaphthyl)borate, Triphenylcarbenium tetrakis(perfluoronaphthyl)borate, Dimethylanilinium tetrakis(pentafluorophenyl)aluminate, Triphenylcarbenium tetrakis(pentafluorophenyl)aluminate, Dimethylanilinium tetrakis(perfluoronaphthyl)aluminate, Triphenylcarbenium tetrakis(perfluoronaphthyl)aluminate, a tris(perfluorophenyl)boron, a tris(perfluoronaphthyl)boron, tris(perfluorophenyl)aluminum, a tris(perfluoronaphthyl)aluminum or any combinations thereof.

[0026] Aluminoxanes can be described as oligomeric aluminum compounds having - $Al(R)-O-$ subunits, where R is an alkyl group. Examples of aluminoxanes include, but are not limited to, methylaluminoxane ("MAO"), modified methylaluminoxane ("MMAO"), ethylaluminoxane, isobutylaluminoxane, or a combination thereof. Aluminoxanes can be pro-

duced by the hydrolysis of the respective trialkylaluminum compound. MMAO can be produced by the hydrolysis of trimethylaluminum and a higher trialkylaluminum, such as triisobutylaluminum. There are a variety of known methods for preparing aluminosiloxane and modified aluminosiloxanes. The aluminosiloxane can include a modified methyl aluminosiloxane ("MMAO") type 3A (commercially available from Akzo Chemicals, Inc. under the trade name Modified Methylaluminosiloxane type 3A, discussed in U.S. Patent No. 5,041,584). A source of MAO can be a solution having from about 1 wt. % to about a 50 wt. % MAO, for example. Commercially available MAO solutions can include the 10 wt. % and 30 wt. % MAO solutions available from Albemarle Corporation, of Baton Rouge, La.

[0027] One or more organo-aluminum compounds, such as one or more alkylaluminum compound, can be used in conjunction with the aluminosiloxanes. Examples of alkylaluminum compounds include, but are not limited to, diethylaluminum ethoxide, diethylaluminum chloride, diisobutylaluminum hydride, and combinations thereof. Examples of other alkylaluminum compounds, e.g., trialkylaluminum compounds include, but are not limited to, trimethylaluminum, triethylaluminum ("TEAL"), triisobutylaluminum ("TiBAI"), tri-n-hexylaluminum, tri-n-octylaluminum, tripropylaluminum, tributylaluminum, and combinations thereof.

[0028] The metallocene olefin polymerization catalyst can be any metallocene olefin polymerization catalyst. In one or more embodiments, the metallocene olefin polymerization catalyst is selected from the group consisting of: (pentamethylcyclopentadienyl)(propylcyclopentadienyl)MX₂, (tetramethylcyclopentadienyl)(propylcyclopentadienyl)MX₂, (tetramethylcyclopentadienyl)(butylcyclopentadienyl)MX₂, Me₂Si(indenyl)₂MX₂, Me₂Si(tetrahydroindenyl)₂MX₂, (n-propylcyclopentadienyl)₂MX₂, (n-butylcyclopentadienyl)₂MX₂, (1-methyl, 3-butylcyclopentadienyl)₂MX₂, HN(CH₂CH₂N(2,4,6-Me₃phenyl))₂MX₂, HN(CH₂CH₂N(2,3,4,5,6-Me₅phenyl))₂MX₂, (propylcyclopentadienyl)(tetramethylcyclopentadienyl)MX₂, (butylcyclopentadienyl)₂MX₂, (propylcyclopentadienyl)₂MX₂, and mixtures thereof, where M is Zr or Hf, and X is selected from F, Cl, Br, I, Me, benzyl, CH₂SiMe₃, and C₁ to C₅ alkyls or alkenyls. In one or more embodiments the metallocene olefin polymerization catalyst is selected from the group consisting of bis(indenyl)zirconium dichloride, (pentamethylcyclopentadienyl)(n-propylcyclopentadienyl)zirconium dichloride, or (tetramethylcyclopentadienyl)(n-propylcyclopentadienyl)zirconium dichloride.

[0029] The bimodal polymerization catalyst system comprising a metallocene olefin polymerization catalyst; and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst, can be utilized to make a polymer. For instance, the bimodal polymerization catalyst system and an olefin can be contacted under polymerization conditions to make a polymer, e.g., a polyolefin polymer.

[0030] As used herein a "polymer" has two or more of the same or different polymer units derived from one or more different monomers, e.g., homopolymers, copolymers, terpolymers, etc. A "homopolymer" is a polymer having polymer units that are the same. A "copolymer" is a polymer having two or more polymer units that are different from each other. A "terpolymer" is a polymer having three polymer units that are different from each other. "Different" in reference to polymer units indicates that the polymer units differ from each other by at least one atom or are different isomerically. Accordingly, the definition of copolymer, as used herein, includes terpolymers and the like. As used herein a "polymerization process" is a process that is utilized to make a polymer.

[0031] Embodiments provide that the polymer can be a polyolefin polymer. As used herein an "olefin," which may be referred to as an "alkene," refers to a linear, branched, or cyclic compound including carbon and hydrogen and having at least one double bond. As used herein, when a polymer or copolymer is referred to as comprising, e.g., being made from, an olefin, the olefin present in such polymer or copolymer is the polymerized form of the olefin. For example, when a copolymer is said to have an ethylene content of 1 wt% to 99 wt%, it is understood that the polymer unit in the copolymer is derived from ethylene in the polymerization reaction and the derived units are present at 1 wt% to 99 wt%, based upon the total weight of the polymer. A higher α -olefin refers to an α -olefin having 3 or more carbon atoms.

[0032] Polyolefins include polymers made from olefin monomers such as ethylene, i.e., polyethylene, and linear or branched higher alpha-olefin monomers containing 3 to 20 carbon atoms. Examples of higher alpha-olefin monomers include, but are not limited to, propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-octene, and 3,5,5-trimethyl-1-hexene. Examples of polyolefins include ethylene-based polymers, having at least 50 wt % ethylene, including ethylene-1-butene, ethylene-1-hexene, and ethylene-1-octene copolymers, among others. Other olefins that may be utilized include ethylenically unsaturated monomers, diolefins having 4 to 18 carbon atoms, conjugated or nonconjugated dienes, polyenes, vinyl monomers and cyclic olefins, for example. Examples of the monomers may include, but are not limited to, norbornene, norbornadiene, isobutylene, isoprene, vinylbenzocyclobutane, styrenes, alkyl substituted styrene, ethylidene norbornene, dicyclopentadiene and cyclopentene. In a number of embodiments, a copolymer of ethylene can be produced, where with ethylene, a comonomer having at least one alpha-olefin having from 4 to 15 carbon atoms, preferably from 4 to 12 carbon atoms, and most preferably from 4 to 8 carbon atoms, is polymerized, e.g., in a gas phase polymerization process. In another embodiment, ethylene and/or propylene can be polymerized with at least two different comonomers, optionally one of which may be a diene, to make a terpolymer.

[0033] One or more embodiments provide that the polymer can include from 1 to 100 wt % of units derived from ethylene based on a total weight of the polymer. All individual values and subranges from 1 to 100 wt % are included; for example, the polymer can include from a lower limit of 1, 5, 10, or 50 wt % of units derived from ethylene to an upper

limit of 100, 95, 90, 85, or 75 wt % of units derived from ethylene based on the total weight of the polymer.

[0034] As mentioned, surprisingly, the bimodal polymerization catalyst system including a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I can help to provide polymers via a polymerization process in a single gas-phase reactor. In one or more embodiments, the resultant polymers can have at least a high molecular weight polyethylene component and a low molecular weight polyethylene component, as detailed herein. In one or more embodiments the resultant polymer can be a bimodal polymer such as a bimodal polyethylene composition comprising a high molecular weight polyethylene component and a low molecular weight polyethylene component, wherein the high and low molecular weight polyethylene components are formed together in a single gas-phase reactor via a polymerization process employing the bimodal polymerization catalyst system. Having a high molecular weight polyethylene component and a low molecular weight polyethylene component is desirable in some applications.

[0035] Surprisingly, the bimodal polymerization catalyst system including a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I of the disclosure can produce bimodal polymers including high molecular weight polyethylene components that have a lower molecular weight as compared to high molecular weight components in bimodal polymers formed with other (non-inventive) polymerization catalysts at similar polymerization conditions, as detailed herein. High molecular weight polyethylene components having a lower molecular weight than other high molecular weight polyethylene components are desirable in some applications.

[0036] Embodiments provide that the polymer can have an overall Mn (number average molecular weight) from 8,000 to 50,000. All individual values and subranges from 8,000 to 50,000 are included; for example, the polymer can have an overall Mn from a lower limit of 8,000; 10,000; or 12,000; to an upper limit of 50,000; 40,000; or 35,000. In some embodiments the overall Mn can be in a range from 12,170 to 30,958.

[0037] Embodiments provide that the polymer can have an overall Mw (weight average molecular weight) from 50,000 to 1,000,000. All individual values and subranges from 100,000 to 1,000,000 are included; for example, the polymer can have an overall Mw from a lower limit of 50,000; 100,000; or 200,000; to an upper limit of 1,000,000; 800,000; or 600,000. In some embodiments the overall Mw can be in a range from 218,937 to 529,748.

[0038] Embodiments provide that the polymer can have an overall Mz (z-average molecular weight) from 200,000 to 10,000,000. All individual values and subranges from 200,000 to 10,000,000 are included; for example, the polymer can have an overall Mz from a lower limit of 200,000; 700,000; or 900,000; to an upper limit of 10,000,000; 5,000,000; or 3,000,000. In some embodiments the overall Mz can be in a range from 945,368 to 2,645,720.

[0039] Embodiments provide that the polymer can have an overall Mz to Mw ratio in a range of from 2.00 to 20.00. All individual values and subranges from 2.00 to 20.00 are included; for example, the polymer can have an overall Mz to Mw ratio from a lower limit of 2.00; 3.00; or 4.00 to an upper limit of 20.00, 15.00, or 10.00. In some embodiments, the polymer can have an overall Mz to Mw ratio of 4.32 to 8.21.

[0040] In some embodiments, the polymer can have a value of Mw to Mn ratio that is greater than 5.00. For instance, embodiments provide that the polymer can have an overall Mw to Mn ratio in a range of from 5.00 to 75.00. All individual values and subranges from 5.00 to 75.00 are included; for example, the polymer can have a Mw to Mn ratio from a lower limit of 5.00; 6.00; or 7.00 to an upper limit of 75.00, 60.00, or 50.00. In some embodiments, the polymer can have an overall Mw to Mn ratio of 8.95 to 43.53.

[0041] Embodiments provide that the polymer can have an overall Mz to Mw ratio that is less than an overall Mw to Mn ratio of the polymer.

[0042] Embodiments provide that the polymer can have a melt index (I_{21}) as measured by ASTM D1238 (at 190 °C, 21 kg load) in the range from 0.001 dg/1 min to 1000 dg/1 min. All individual values and subranges from 0.001 dg/1 min to 1000 dg/1 min are included. For instance, the polymers can have a melt index (I_{21}) from 1.49 dg/1 min to 7.93 dg/1 min.

[0043] Embodiments provide that the polymer can have a density of from 0.890 g/cm³ to 0.970 g/cm³. All individual values and subranges from 0.890 to 0.970 g/cm³ are included; for example, the polymer can have a density from a lower limit of 0.890, 0.900, 0.910, 0.920, or 0.940 g/cm³ to an upper limit of 0.970, 0.960, or 0.950 g/cm³. Density can be determined in accordance with ASTM D-792-13, *Standard Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement*, Method B (for testing solid plastics in liquids other than water, e.g., in liquid 2-propanol). Report results in units of grams per cubic centimeter (g/cm³).

[0044] Gel permeation chromatography (GPC) Test Method: Weight-Average Molecular Weight Test Method: determine M_w , number-average molecular weight (M_n), and M_w/M_n using chromatograms obtained on a High Temperature Gel Permeation Chromatography instrument (HTGPC, Polymer Laboratories). The HTGPC is equipped with transfer lines, a differential refractive index detector (DRI), and three Polymer Laboratories PLgel 10 μ m Mixed-B columns, all contained in an oven maintained at 160 °C. Method uses a solvent composed of BHT-treated TCB at nominal flow rate of 1.0 milliliter per minute (mL/min.) and a nominal injection volume of 300 microliters (μ L). Prepare the solvent by dissolving 6 grams of butylated hydroxytoluene (BHT, antioxidant) in 4 liters (L) of reagent grade 1,2,4-trichlorobenzene (TCB), and filtering the resulting solution through a 0.1 micrometer (μ m) Teflon filter to give the solvent. Degas the


solvent with an inline degasser before it enters the HTGPC instrument. Calibrate the columns with a series of monodispersed polystyrene (PS) standards. Separately, prepare known concentrations of test polymer dissolved in solvent by heating known amounts thereof in known volumes of solvent at 160 °C. with continuous shaking for 2 hours to give solutions. (Measure all quantities gravimetrically.) Target solution concentrations, *c*, of test polymer of from 0.5 to 2.0 milligrams polymer per milliliter solution (mg/mL), with lower concentrations, *c*, being used for higher molecular weight polymers. Prior to running each sample, purge the DRI detector. Then increase flow rate in the apparatus to 1.0 mL/min/, and allow the DRI detector to stabilize for 8 hours before injecting the first sample. Calculate *M_w* and *M_n* using universal calibration relationships with the column calibrations. Calculate MW at each elution volume with following equation:

$$\log M_X = \frac{\log(K_X/K_{PS})}{a_X + 1} + \frac{a_{PS} + 1}{a_X + 1} \log M_{PS}$$

, where subscript "X" stands for the test sample, subscript "PS" stands for PS standards, $a_{PS}=0.67$, $K_{PS}=0.000175$, and a_X and K_X are obtained from published literature. For polyethylenes, $a_X/K_X = 0.695/0.000579$. For polypropylenes $a_X/K_X = 0.705/0.0002288$. At each point in the resulting chromatogram, calculate concentration, *c*, from a baseline-subtracted DRI signal, I_{DRI} , using the following equation: $c = K_{DRI} I_{DRI} / (dn/dc)$, wherein K_{DRI} is a constant determined by calibrating the DRI, / indicates division, and dn/dc is the refractive index increment for the polymer. For polyethylene, $dn/dc = 0.109$. Calculate mass recovery of polymer from the ratio of the integrated area of the chromatogram of concentration chromatography over elution volume and the injection mass which is equal to the pre-determined concentration multiplied by injection loop volume. Report all molecular weights in grams per mole (g/mol) unless otherwise noted. Further details regarding methods of determining *M_w*, *M_n*, MWD are described in US 2006/0173123 page 24-25, paragraphs [0334] to [0341]. Plot of $dW/d\log(MW)$ on the y-axis versus $\log(MW)$ on the x-axis to give a GPC chromatogram, wherein $\log(MW)$ and $dW/d\log(MW)$ are as defined above.

[0045] The polymer can be utilized for a number of articles such as films, fibers, nonwoven and/or woven fabrics, extruded articles, and/or molded articles, among others.

[0046] Provided is bimodal polymerization catalyst system comprising: a metallocene olefin polymerization catalyst; and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I:

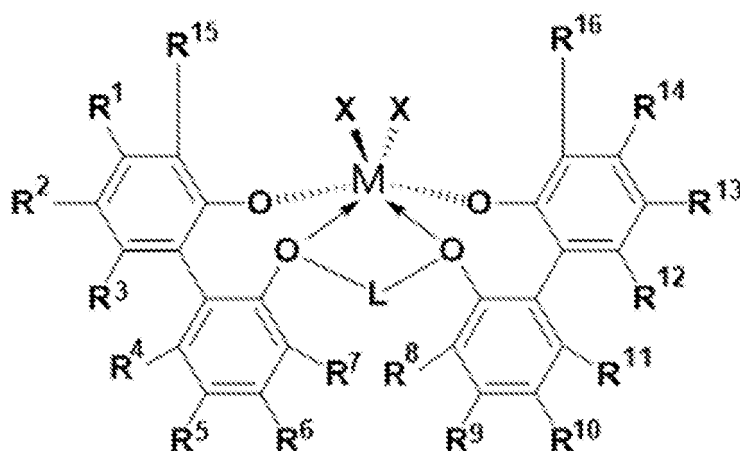

(Formula I)

wherein each of R^7 and R^8 is independently a C_1 to C_{20} alkyl, aryl or aralkyl, halogen, or a hydrogen; wherein each of R^5 and R^{10} is independently a C_1 to C_{20} alkyl, aryl, aralkyl, halogen, an alkyl-or aryl-substituted silyl, or a hydrogen; wherein each of R^2 and R^{13} is independently a C_1 to C_{20} alkyl, aryl or aralkyl or a hydrogen; wherein each of R^{15} and R^{16} is independently a 2,7-disubstituted carbazol-9-yl; wherein L is a saturated C_2 - C_3 alkyl that forms a 2-carbon bridge or 3-carbon bridge between the two oxygen atoms to which L is bonded; wherein each X is independently a halogen, a hydrogen, a (C_1-C_{20}) alkyl, a (C_7-C_{20}) aralkyl, a (C_1-C_6) alkyl-substituted (C_6-C_{12}) aryl, or a (C_1-C_6) alkyl-substituted benzyl, $-CH_2Si(R^C)_3$, where R^C is C_1 - C_{12} hydrocarbon; wherein each of R^1 , R^3 , R^4 , R^6 , R^9 , R^{11} , R^{12} , and R^{14} is independently a hydrogen; and wherein M is a heteroatom selected from a group consisting of Zr and Hf.

[0047] The metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, as well as other components discussed herein such as the activator, may be utilized with a support. A "support", which may also be referred to as a "carrier", refers to any support

material, including a porous support material, such as talc, inorganic oxides, and inorganic chlorides.

[0048] The metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, as well as other components discussed herein, can be supported on the same or separate supports, or one or more of the components may be used in an unsupported form. Utilizing the support may be accomplished by any technique used in the art. One or more embodiments provide that a spray dry process is utilized. Spray dry processes are well known in the art. The support may be functionalized.

[0049] The support may be a porous support material, for example, talc, an inorganic oxide, or an inorganic chloride. Other support materials include resinous support materials, e.g., polystyrene, functionalized or crosslinked organic supports, such as polystyrene divinyl benzene polyolefins or polymeric compounds, zeolites, clays, or any other organic or inorganic support material and the like, or mixtures thereof.

[0050] Support materials include inorganic oxides that include Group 2, 3, 4, 5, 13 or 14 metal oxides. Some preferred supports include silica, fumed silica, alumina, silica-alumina, and mixtures thereof. Some other supports include magnesia, titania, zirconia, magnesium chloride, montmorillonite, phyllosilicate, zeolites, talc, clays) and the like. Also, combinations of these support materials may be used, for example, silica-chromium, silica-alumina, silica-titania and the like. Additional support materials may include porous acrylic polymers, nanocomposites, aerogels, spherulites, and polymeric beads.

[0051] An example of a support is fumed silica available under the trade name Cabosil™ TS- 610, or other TS- or TG-series supports, available from Cabot Corporation. Fumed silica is typically a silica with particles 7 to 30 nanometers in size that has been treated with dimethylsilyldichloride such that a majority of the surface hydroxyl groups are capped. That is, in some instances, a silica support can support a metallocene olefin polymerization catalyst, a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, or a combination the metallocene olefin polymerization catalyst and the biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I. The silica support can be present in conventional amounts such as those described in WO 2019190897.

[0052] The support material may have a surface area in the range of from about 10 to about 700 m²/g, pore volume in the range of from about 0.1 to about 4.0 g/cm³ and average particle size in the range of from about 5 to about 500 μm. More preferably, the surface area of the support material is in the range of from about 50 to about 500 m²/g, pore volume of from about 0.5 to about 3.5 g/cm³ and average particle size of from about 10 to about 200 μm. Most preferably the surface area of the support material is in the range is from about 100 to about 400 m²/g, pore volume from about 0.8 to about 3.0 g/cm³ and average particle size is from about 5 to about 100 μm. The average pore size of the carrier typically has pore size in the range of from 10 to 1000A, preferably 50 to about 500A, and most preferably 75 to about 350A.

[0053] The metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, as well as other components discussed herein such as the activator, may be slurried. Slurries are well known in the art. The slurry may include the metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, an activator, and a support, for instance.

[0054] A molar ratio of metal in the activator to metal in a metallocene olefin polymerization catalyst or the biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I in the slurry may be 1000:1 to 0.5:1, 300:1 to 1:1, or 150:1 to 1:1. One or more diluents, e.g., fluids, can be used to facilitate the combination of any two or more components in the slurry. For example, the metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I, and the activator can be combined together in the presence of toluene or another non-reactive hydrocarbon or hydrocarbon mixture. In addition to toluene, other suitable diluents can include, but are not limited to, ethylbenzene, xylene, pentane, hexane, heptane, octane, other hydrocarbons, or any combination thereof. The support, either dry or mixed with toluene can then be added to the mixture or the metal-ligand complex /activator can be added to the support. The slurry may be fed to the reactor for the polymerization process, and/or the slurry may be dried, e.g., spray-dried, prior to being fed to the reactor for the polymerization process.

[0055] The polymerization process may be a suspension polymerization process, and/or a gas phase polymerization process. The polymerization process may utilize using known equipment and reaction conditions, e.g., known polymerization conditions. The polymerization process is not limited to any specific type of polymerization system. As an example, polymerization temperatures may range from about 0 °C to about 300 °C at atmospheric, sub-atmospheric, or super-atmospheric pressures. In particular, slurry or solution polymerization systems may employ sub-atmospheric, or alternatively, super-atmospheric pressures, and temperatures in the range of about 40 °C to about 300 °C. Embodiments provide a method of making a polyolefin polymer the method comprising: contacting, under polymerization conditions, an olefin with the bimodal polymerization catalyst system, as described herein, to polymerize the olefin, thereby making a polyolefin polymer.

[0056] One or more embodiments provide that the polymers may be formed via a gas phase polymerization system, at super-atmospheric pressures in the range from 0.07 to 68.9 bar, from 3.45 to 27.6 bar, or from 6.89 to 24.1 bar, and

a temperature in the range from 30 °C to 130°C, from 65°C to 110°C, from 75°C to 120°C, or from 80°C to 120°C. For one or more embodiments, operating temperatures may be less than 112 °C. Stirred and/or fluidized bed gas phase polymerization systems may be utilized.

[0057] Generally, a conventional gas phase fluidized bed polymerization process can be conducted by passing a stream containing one or more olefin monomers continuously through a fluidized bed reactor under reaction conditions and in the presence of a catalytic composition, e.g., a composition including the bimodal polymerization catalyst system (a metallocene olefin polymerization catalyst and a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I) and the activator, at a velocity sufficient to maintain a bed of solid particles in a suspended state. A stream comprising unreacted monomer can be continuously withdrawn from the reactor, compressed, cooled, optionally partially or fully condensed, and recycled back to the reactor. Product, i.e., polymer, can be withdrawn from the reactor and replacement monomer can be added to the recycle stream. Gases inert to the catalytic composition and reactants may also be present in the gas stream. The polymerization system may include a single reactor or two or more reactors in series, for example.

[0058] Feed streams for the polymerization process may include olefin monomer, non-olefinic gas such as nitrogen and/or hydrogen, and may further include one or more non-reactive alkanes that may be condensable in the polymerization process and used for removing the heat of reaction. Illustrative non-reactive alkanes include, but are not limited to, propane, butane, isobutane, pentane, isopentane, hexane, isomers thereof and derivatives thereof. Feeds may enter the reactor at a single or multiple and different locations.


[0059] For the polymerization process, polymerization catalyst (a metallocene olefin polymerization catalyst and/or a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I) may be continuously fed to the reactor. A gas that is inert to the polymerization catalyst, such as nitrogen or argon, can be used to carry the polymerization catalyst into the reactor bed. In one embodiment, the polymerization catalyst can be provided as a slurry in mineral oil or liquid hydrocarbon or mixture such, as for example, propane, butane, isopentane, hexane, heptane or octane. The slurry may be delivered to the reactor with a carrier fluid, such as, for example, nitrogen or argon or a liquid such as for example isopentane or other C₃ to C₈ alkanes.

[0060] For the polymerization process, hydrogen may be utilized at a gas mole ratio of hydrogen to ethylene in the reactor that can be in a range of about 0.0 to 1.0, in a range of 0.01 to 0.7, in a range of 0.03 to 0.5, in a range of 0.005 to 0.3, or in a range in a range of 0.0017 to 0.0068. A number of embodiments utilize hydrogen gas.

EXAMPLES


[0061] Bimodal polymerization catalyst systems including biphenylphenol polymerization catalysts made from the biphenylphenol polymerization precatalyst of Formula (I) and comparative bimodal polymerization catalyst systems including comparative catalysts (other than those made from bimodal polymerization precatalyst of Formula (I)) were prepared as follows.

[0062] Biphenylphenol polymerization precatalyst of Formula (i) was prepared as follows. In a glove box, a 16 oz oven-dried glass jar was charged with hafnium chloride [HfCl₄] (12.07 g, 37.7 mmol; available from Strem Chemical) and toluene (300 mL; available from Fisher Scientific) and a magnetic stir bar. The contents of the jar were cooled to approximately -30 degrees Celsius (°C). The methylmagnesium bromide (56.6 mL of 2.6M solution in diethyl ether, 147 mmol; available from Millipore Sigma) was added and the solution was stirred for 15 minutes at -30 °C. The jar was charged with a ligand of Formula A (56.00 g, 35.9 mmol). The ligand of Formula A was prepared as described in WO 2017/058,981. The contents of the vial were allowed to stir for 3 hours as the solution gradually warmed to room temperature. The mixture was filtered and the solvent was removed in vacuo from the filtrate to obtain a gray powder (45 g, 71.0% yield). The presence of the biphenylphenol polymerization precatalyst of Formula (i) was confirmed by ¹H NMR analysis. ¹H NMR (400 MHz, Benzene-*d*₆) δ 8.19 (d, 2H), 8.01 (s, 2H), 7.99 (d, 2H), 7.89 (d, 2H), 7.74 (s, 2H), 7.64 (d, 2H), 7.55 (s, 2H), 7.51 (dd, 2H), 7.31 (dd, 2H), 7.06 (m, 2H), 3.68 (m, 2H), 3.42 (m, 2H), 1.79 (d, 2H), 1.67 (d, 2H), 1.60 (s, 18H), 1.47 (s, 6H), 1.42 (s, 6H), 1.35 (s, 6H), 1.33-1.25 (m, 26H), 1.25 (s, 18H), 0.93 (t, 6H), 0.92 (s, 18H), 0.59 (m, 4H), 0.10 (s, 6H), 0.07 (s, 6H), -0.82 (s, 6H)..

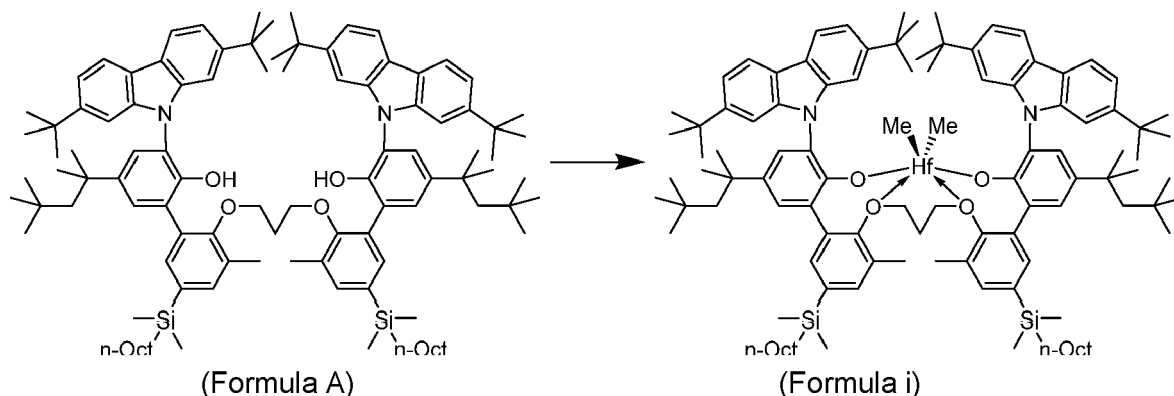


[0063] As used herein, "Me" refers to methyl, "n-Oct" refers to $n\text{-C}_8\text{H}_{17}$, and "n-Pr" refers to $n\text{-C}_3\text{H}_7$.

[0064] Biphenylphenol polymerization precatalyst of Formula (ii) was prepared using the same components and methodology as biphenylphenol polymerization precatalyst of Formula (i), but with the use of zirconium chloride [ZrCl_4] (15.0 g, 64.1 mmol) instead of hafnium chloride (99.9 g; 92.9% yield). The presence of biphenylphenol polymerization precatalyst of Formula (ii) was confirmed by ^1H NMR analysis. ^1H NMR (400 MHz, Benzene- d_6) δ 8.19 (d, 2H), 8.01 (s, 2H), 7.99 (d, 2H), 7.87 (d, 2H), 7.79 (d, 2H), 7.65 (d, 2H), 7.57 (d, 2H), 7.51 (dd, 2H), 7.30 (dd, 2H), 7.04 (m, 2H), 3.57 (m, 2H), 3.43 (m, 2H), 1.79 (d, 2H), 1.67 (d, 2H), 1.60 (s, 18H), 1.46 (s, 6H), 1.42 (s, 6H), 1.35 (s, 6H), 1.34 - 1.25 (m, 26H), 1.25 (s, 18H), 0.94 (t, 6H), 0.93 (s, 18H), 0.60 (m, 4H), 0.11 (s, 6H), 0.08 (s, 6H), -0.63 (s, 6H).

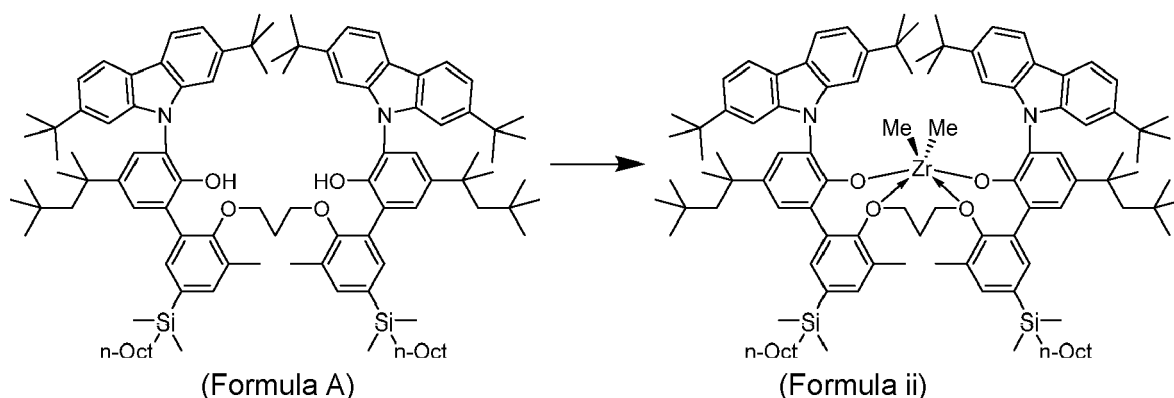


[0065] In various embodiments, the catalysts made from the precatalyst of Formula (i) and/or (ii) can be employed in the bimodal polymerization catalyst systems herein to make a high molecular weight polyethylene component in the bimodal polyethylene composition.

[0066] Polymerization precatalyst of Formula (iii) was prepared according to the method found in Huang, Rubin et al, Macromolecules (Washington, DC, United States), 41(3), 579-590; 2008.

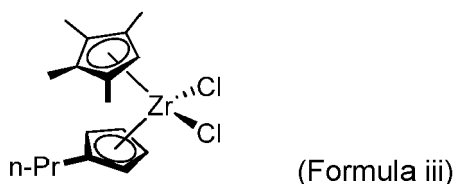


[0067] Comparative polymerization precatalyst of Formula (iv) can be prepared according to the method found in PCT Int. Appl. WO 2009/064404 (A2).

[0068] In various embodiments, the metallocene olefin polymerization precatalyst of Formula (iii) and/or Formula (iv) can be employed in the bimodal polymerization catalyst systems herein to make a low molecular weight polyethylene component in a bimodal polyethylene composition.



(Formula iv)

[0069] Comparative polymerization precatalyst of Formula (v) can be prepared according to the method found in PCT Int. Appl. WO 2009/064404 (A2). In various embodiments, the comparative polymerization precatalyst of Formula (v) can be employed in a bimodal polymerization catalyst system to make a comparative high molecular weight polyethylene component in a comparative bimodal polyethylene composition.

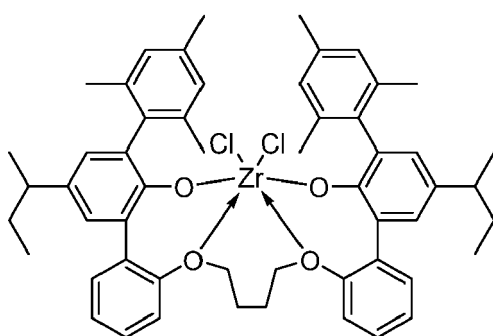

(Formula v)

[0070] The precatalysts of Formulas (i) and (ii) were activated as follows to make the activated biphenylphenol polymerization catalysts included in the bimodal polymerization catalyst systems of Examples 1-4 (EX1-4).

[0071] Example 1 employs a bimodal polymerization catalyst system A (including the precatalyst of Formula (ii) and the precatalyst of Formula (iii)) which was prepared as follows.

[0072] A trim solution of the precatalyst of Formula (ii) was prepared as follows. In a 1L cylinder measured 698 g of a solution of precatalyst of Formula (ii) (1.00 weight percent in methylcyclohexane, 539 ppm Zr). Connected the 1L cylinder to a 3785.41 cubic centimeter (cc)(28 gallon) cylinder, filled with about 8.60 kilograms (18.96 pounds) purified isopentane to produce a final concentration of 0.075 weight percent. Pressurized and purged cylinder three times with nitrogen. That is, in various embodiments, part or all of a catalyst system (e.g., the metallocene and/or the biphenylphenol polymerization precatalyst) is provided as a trim solution. For example, a portion of the metallocene catalyst may be provided as a trim solution. Alternatively, a portion of the biphenylphenol polymerization precatalyst may be provided as a trim solution.

[0073] A spray dried formulation of precatalyst of Formula (iii) was prepared as described in WO 2019190897 to make the activated and supported catalyst. The final spray-dried catalyst composition had a zirconium loading of 0.18 wt%, an aluminum loading of 16.7 wt%, and 2.5 wt% residual toluene.

[0074] For Example 1 the bimodal polymerization catalyst system A was employed as using the polymerization procedure described herein at a trim catalyst concentration of 0.075 weight percent based on a total weight of precatalyst of formula (ii), a spray dried catalyst feed rate of 26.6 cc/hour (hr), a trim catalyst feed rate of 24.9 cc/hr, an ethylene partial pressure of about 4.24 kilograms per square centimeter (60.3 Pounds per square inch absolute (PSIA)), a C_6/C_2 mole ratio of 0.0028, H_2/C_2 mole ratio of 0.0018, and isopentane concentration of 12.3 mole percent. Example 1 yielded a bimodal polyethylene composition at a production rate of about 11.89 kilograms/hour (26.2 pounds/hour) and a productivity of about 2515 kilograms polymer/kilograms catalyst (2515 pounds polymer/pounds catalyst).

[0075] Example 2 employs a bimodal polymerization catalyst system B (including the precatalyst of Formula (ii) and the precatalyst of Formula (iii)) which was prepared using the same methodology as the bimodal catalyst system A, but employed a spray dried formulation of precatalyst of Formula (iii) which had a composition of zirconium loading of 0.11 wt%, an aluminum loading of 16.9 wt%, and 2.1 wt% residual toluene, a spray dried catalyst feed rate of 65.9 cc/hr, a trim catalyst feed rate of 21.2 cc/hr, an ethylene partial pressure of 61.1 PSIA, a C_6/C_2 mole ratio of 0.0017, H_2/C_2 mole ratio of 0.0018, and isopentane concentration of 12.5 mole percent. Example 2 yielded a bimodal polyethylene composition at a production rate of about 8.84 kilograms/hour (19.5 pounds/hour) and a productivity of about 6667 kilograms

polymer/kilograms catalyst (6667 pounds polymer/pounds catalyst).

[0076] Example 3 employed a bimodal polymerization catalyst system C (including a precatalyst of Formula (iii) and a spray dried catalyst of a mixture of Formula (ii) and Formula (iii)) present at the ratio in Table 1 which was prepared as follows.

[0077] A trim solution of the precatalyst of Formula (iii) was prepared using the same methodology as the trim solution of Example 1, but with the precatalyst of Formula (iii) instead of the precatalyst of Formula (ii) to produce a final concentration of 0.04 weight percent.

[0078] A spray dried catalyst made from the precatalyst of Formula (iii) and the precatalyst of Formula (ii), is formed as described in WO 2019190897 to make the activated spray-dried catalyst. In the formulation the precatalyst of Formula (ii) and the precatalyst of Formula (iii) are present in the mole ratio of 0.7:20, respectively. The final spray-dried catalyst composition had a zirconium loading of 0.19 wt%, an aluminum loading of 16.7 wt%, and 3.2 wt% residual toluene.

[0079] The bimodal polymerization catalyst system C was employed as using the polymerization procedure described herein at a trim catalyst concentration of 0.04 weight percent, a spray dried catalyst feed rate of 38.0 cc/hr, a trim catalyst feed rate of 106.0 cc/hr, an ethylene partial pressure of 35.0 PSIA, a C_6/C_2 mole ratio of 0.00097, H_2/C_2 mole ratio of 0.00174, and isopentane concentration of 13.9 mole percent.. Example 3 yielded a bimodal polyethylene composition at a production rate of about 7.71 kilograms/hour (17.0 pounds/hour) and a productivity of about 1296 kilograms polymer/kilograms catalyst (1296 pounds polymer/pounds catalyst).

[0080] Example 4 employed a bimodal polymerization catalyst system D (including the precatalyst of Formula (i) and the precatalyst of Formula (iii)) which was prepared as follows.

[0081] A trim solution of the precatalyst of Formula (i) was prepared as follows. In a 1L cylinder, measured 350 g of a solution of precatalyst of Formula (i) (1.01 weight percent in methylcyclohexane, 1008 ppm Hf). Connected the 1L cylinder to a 3785.41 cc (28 gallon) cylinder, filled with about 8.39 kilograms (18.5 pounds) purified isopentane to produce a final concentration of 0.04 weight percent. Pressurized and purged cylinder three times with nitrogen.

[0082] A spray dried formulation of precatalyst of Formula (iii) was prepared as described in WO 2019190897 to make the activated catalyst. The final spray-dried catalyst composition had a zirconium loading of 0.18 wt%, an aluminum loading of 16.7 wt%, and 2.5 wt% residual toluene.

[0083] The bimodal polymerization catalyst system D was employed as using the polymerization procedure described herein at a trim catalyst concentration of 0.04 weight percent, a spray dried catalyst feed rate of 24.0 cc/hr, a trim catalyst feed rate of 30.8 cc/hr, an ethylene partial pressure of 100.1 PSIA, a C_6/C_2 mole ratio of 0, H_2/C_2 mole ratio of 0.0022, and isopentane concentration of 9.1 mole percent. Example 4 yielded a bimodal polyethylene composition at a production rate of about 12.25 kilograms/hour (27.0 pounds/hour) and a productivity of about 2911 kilograms polymer/kilograms catalyst (2911 pounds polymer/pounds catalyst).

[0084] Comparative Example 1 employed a comparative bimodal polymerization catalyst system E (including catalysts made from precatalysts of Formula (iv) and Formula (v)) which was prepared as follows. The supported formulation of precatalyst of Formula (iv) and precatalyst of Formula (v) can be prepared according to the method found in PCT Int. Appl. WO 2009/064404 (A2). The bimodal polymerization catalyst system E was employed using the polymerization procedure found in PCT Int. Appl. WO 2009/064404 (A2).

[0085] Ethylene/1-hexene copolymerizations were conducted for each of Examples 1-4 using a gas phase fluidized bed copolymerization of ethylene and 1-hexene to produce an ethylene/1-hexene copolymer. A gas phase fluidized bed reactor was used which had a 0.35 m internal diameter and 2.3 m bed height and a fluidized bed composed of polymer granules. Fluidization gas was passed through the bed at a velocity of about 1.7 to 2.1 ft/s. The fluidization gas exited the top of the reactor and passed through a recycle gas compressor and heat exchanger before re-entering the reactor below a distribution grid. A constant fluidized bed temperature was maintained by continuously adjusting the temperature of the water on the shell side of the shell-and-tube heat exchanger. Gaseous feed streams of ethylene, nitrogen and hydrogen together with 1-hexene comonomer were introduced into a recycle gas line. The reactor was operated at a total pressure of about 2413 kilopascals (kPa) gauge and vented to a flare to control the total pressure. Individual flow rates of ethylene, nitrogen, hydrogen and 1-hexene were adjusted to maintain gas composition targets. Ethylene partial pressure, C_6/C_2 mol ratio, H_2/C_2 mol ratio and isopentane concentration were each set to the value in the examples. Concentrations of all gases were measured using an on-line gas chromatograph. The fluidized bed was maintained at constant height by withdrawing a portion of the bed at a rate equal to the rate of formation of particulate product. The slurry catalyst (spray dried precatalyst/catalyst as specified in Table 1) was fed to a catalyst injection tube where it was contacted inline with the trim solution (Trim precatalyst/catalyst as specified in Table 1) before being sprayed into the fluidized bed with isopentane and nitrogen carriers. The feed rate of slurry catalyst was adjusted to maintain the desired production rate and the feed rate of trim solution was adjusted to obtain the desired final resin flow Index in the resulting bimodal polymer. Product was removed semi-continuously via a series of valves into a fixed volume chamber. A nitrogen purge removed a significant portion of entrained and dissolved hydrocarbons in the fixed volume chamber. After purging, the product was discharged from the fixed volume chamber into a fiber pack for collection. The product was further treated with a small stream of humidified nitrogen to deactivate any trace quantities of residual catalyst and cocatalyst.

[0086] The results for EX1-4 and CE1 are shown in Tables 1 and 2 and described herein.

[0087] Mn (number average molecular weight) and Mw (weight average molecular weight), z-average molecular weight (Mz) were determined by gel permeation chromatography (GPC), as is known in the art.

[0088] Productivity (kilograms polymer/kilograms catalyst) was determined as the ratio of polymer produced to the amount of catalyst and activator added to the reactor.

Table 1

	CS	Trim precatlyst Formula	Spray dried precatlyst Formula	Formulated catalyst Mol Ratio	Mn (g/mol)	Mw (g/mol)	Mz (g/mol)
EX1	A	li	iii	100% iii	22,684	238,625	1,523,950
EX2	B	li	iii	100% iii	24,454	218,937	945,368
EX3	C	iii	ii/iii	0.7:20 (ii/iii)	30,958	309,716	2,543,935
EX4	D	I	iii	100% iii	12,170	529,748	2,645,720
CE1	E	None	iv/v	99.6:0.4 (iv:v)	28,242	125,147	769,345

Table 2

	CS	Mz to Mw ratio	Mw to Mn Ratio	Density (g/cm ³)	I21 (dg/min)
EX1	A	6.39	10.52	0.945	6.64
EX2	B	4.32	8.95	0.946	756
EX3	C	8.21	10.00	0.949	7.93
EX4	D	4.99	43.53	0.954	1.49
CE1	E	4.43	6.15	0.938	28.25


[0089] As detailed in Tables 1 and 2, EX1-4 provide for bimodal polymerization catalyst system and resultant bimodal polymers having suitable properties. For instance, the bimodal polymerization catalyst systems of the disclosure produce bimodal polymers having high molecular weight components which have an improved (i.e., lower) molecular weight than high molecular weight components of bimodal polymers produced from comparative catalysts at similar conditions, for instance, as evidence by the polymer having an improved Mz to Mw ratio (i.e., a Mw to Mn ratio of greater than 5.00 and a value of Mz to Mw ratio that is less than a value of a Mw/Mn ratio). Namely, the biphenylphenol polymerization precatlyst of Formula I (such as the precatlyst of Formula (i) and/or (ii)) can be employed in bimodal polymerization catalyst system that lead to production of the desired high molecular weight component which has an improved (i.e., lower) molecular weight than bimodal polymers produced from comparative catalysts at similar conditions. Without wishing to be bound by theory, it has been suggested that a high molecular weight component with a value of Mw of less than 700,000 may improve the resin properties for certain applications. Notably, the improved Mw can be realized both when a biphenylphenol polymerization catalyst made from biphenylphenol polymerization precatlyst of Formula I is employed as a trim catalyst (EX1, EX2, EX4) in a bimodal catalyst system and when the catalyst made from the biphenylphenol polymerization precatlyst of Formula I is employed as a spray dried catalyst (EX3) in a bimodal catalyst system.

Claims

1. A bimodal polymerization catalyst system comprising:

a metallocene olefin polymerization catalyst; and

a biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatlyst of Formula I:

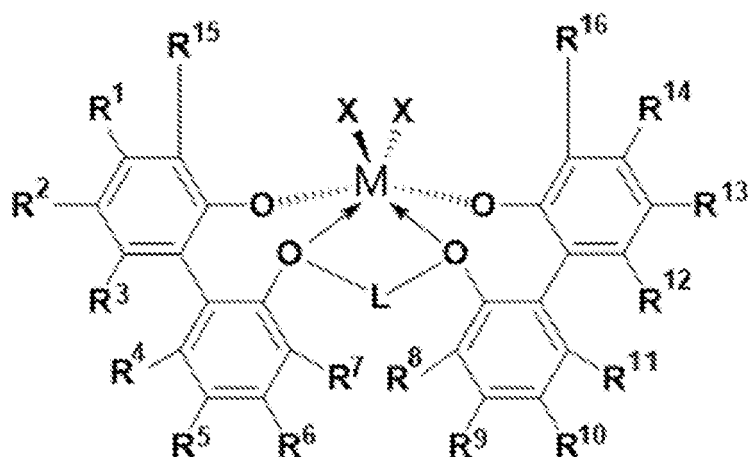

(Formula I)

wherein each of R^7 and R^8 is independently a C_1 to C_{20} alkyl, aryl or aralkyl, halogen, or a hydrogen;
 wherein each of R^5 and R^{10} is independently a C_1 to C_{20} alkyl, aryl, aralkyl, halogen, an alkyl- or aryl-substituted silyl, or a hydrogen;
 wherein each of R^2 and R^{13} is independently a C_1 to C_{20} alkyl, aryl or aralkyl or a hydrogen;
 wherein each of R^{15} and R^{16} is independently a 2,7-disubstituted carbazol-9-yl;
 wherein L is a saturated C_2 - C_3 alkyl that forms a 2-carbon bridge or 3-carbon bridge between the two oxygen atoms to which L is bonded;
 wherein each X is independently halogen, a hydrogen, a $(C_1$ - $C_{20})$ alkyl, a $(C_7$ - $C_{20})$ aralkyl, a $(C_1$ - $C_6)$ alkyl-substituted $(C_6$ - $C_{12})$ aryl, or a $(C_1$ - $C_6)$ alkyl-substituted benzyl, $-CH_2Si(R^C)_3$, where R^C is C_1 - C_{12} hydrocarbon;
 wherein each of R^1 , R^3 , R^4 , R^6 , R^9 , R^{11} , R^{12} , and R^{14} is independently a hydrogen; and
 wherein M is a heteroatom selected from a group consisting of Zr and Hf.

2. The bimodal polymerization catalyst system of claim 1, wherein each of R^7 and R^8 is a C_1 alkyl.
3. The bimodal polymerization catalyst system of claim 1 or 2, wherein each of R^5 and R^{10} is a di-alkyl or tri-alkyl substituted silyl.
4. The bimodal polymerization catalyst system of any one of claims 1-3, wherein each R^2 and R^{13} is a 1,1,3,3-tetramethylbutyl.
5. The bimodal polymerization catalyst system of any one of claims 1-4, wherein each of R^{15} and R^{16} is a 2,7-di-*t*-butylcarbazol-9-yl.
6. The bimodal polymerization catalyst system of any one of claims 1-5, wherein L is a saturated C_3 alkyl.
7. The bimodal polymerization catalyst system of any one of claims 1-6, wherein each X is a C_1 alkyl.
8. The bimodal polymerization catalyst system of any one of claims 1-7, wherein M is Zr.
9. The bimodal polymerization catalyst system of any one of claims 1-7, wherein M is Hf.
10. The bimodal polymerization catalyst system of any one of claims 1-9, wherein the metallocene olefin polymerization catalyst is made from a metallocene precatalyst selected from the group consisting of:

(pentamethylcyclopentadienyl)(propylcyclopentadienyl) MX_2 , (tetramethylcyclopentadienyl)(propylcyclopentadienyl) MX_2 , (tetramethylcyclopentadienyl)(butylcyclopentadienyl) MX_2 , (methylcyclopentadienyl)(1,3-dimethyl-tetrahydroindenyl) MX_2 , (cyclopentadienyl)(1,3-dimethyl-tetrahydroindenyl) MX_2 , (cyclopentadienyl)(4,7-dimethylindenyl) MX_2 , (cyclopentadienyl)(1,5-dimethylindenyl) MX_2 , (cyclopentadienyl)(1,4-dimethylindenyl) MX_2 ,

$\text{Me}_2\text{Si}(\text{indenyl})_2\text{MX}_2$,
 $\text{Me}_2\text{Si}(\text{tetrahydroindenyl})_2\text{MX}_2$,
 $(n\text{-propyl cyclopentadienyl})_2\text{MX}_2$,
 $(n\text{-butyl cyclopentadienyl})_2\text{MX}_2$,
 $(1\text{-methyl, 3-butyl cyclopentadienyl})_2\text{MX}_2$,
 $\text{HN}(\text{CH}_2\text{CH}_2\text{N}(2,4,6\text{-Me}_3\text{phenyl}))_2\text{MX}_2$,
 $\text{HN}(\text{CH}_2\text{CH}_2\text{N}(2,3,4,5,6\text{-Me}_5\text{phenyl}))_2\text{MX}_2$,
 $(\text{butyl cyclopentadienyl})_2\text{MX}_2$,
 $(\text{propyl cyclopentadienyl})_2\text{MX}_2$, and mixtures thereof,

wherein M is Zr or Hf, and X is selected from F, Cl, Br, I, Me, benzyl, CH_2SiMe_3 , and C_1 to C_5 alkyls or alkenyls.

11. The bimodal polymerization catalyst system of any one of claims 1-10, further comprising a silica support, which supports: (a) the metallocene olefin polymerization catalyst but not the biphenylphenol polymerization catalyst made from biphenylphenol polymerization precatalyst of Formula I, (b) the biphenylphenol polymerization catalyst made from the biphenylphenol polymerization precatalyst of Formula I, but not the metallocene olefin polymerization catalyst, or (c) a combination the metallocene olefin polymerization catalyst and the biphenylphenol polymerization catalyst made from a biphenylphenol polymerization precatalyst of Formula I.

12. A method of making a bimodal polyethylene composition comprising a high molecular weight polyethylene component and a low molecular weight polyethylene component, wherein the high and low molecular weight polyethylene components are made together in a single gas-phase reactor via a polymerization process employing the bimodal polymerization catalyst system of claim 1, wherein the bimodal polyethylene composition has a value of the weight average molecular weight (Mw) to number average molecular weight (Mn) ratio (Mw/Mn) that is greater than 5.00; a value of an z-average molecular weight (Mz) to weight average molecular weight (Mw) ratio (Mz/Mw) that is less than the Mw/Mn; or both the Mw/Mn greater than 5.00 and a Mz/Mw less than the Mw/Mn.

13. The method of claim 12, further comprising:

forming a trim solution including at least the metallocene olefin polymerization catalyst, the biphenylphenol polymerization precatalyst of Formula I, or the biphenylphenol polymerization catalyst made from the biphenylphenol polymerization precatalyst of Formula I; and
 adding the trim solution to the single reactor to make at least a part of the bimodal polymerization catalyst system.


14. A method of making the bimodal polymerization catalyst system of any one of claims 1 to 11, the method comprising making the biphenylphenol polymerization catalyst by contacting, under activating conditions, the biphenylphenol polymerization precatalyst of Formula I with an activator.

15. The method of claim 14, wherein the activator is spray-dried on a silica support and the method comprises making the biphenylphenol polymerization catalyst by contacting, under activating conditions, the biphenylphenol polymerization precatalyst of Formula I with the supported spray-dried activator.

Patentansprüche

1. Katalysatorsystem für bimodale Polymerisation, umfassend:

einen Metallocenolefinpolymerisationskatalysator, und
 einen Biphenylphenolpolymerisationskatalysator, der aus einem Biphenylphenolpolymerisationsvorkatalysator von Formel I hergestellt wird:

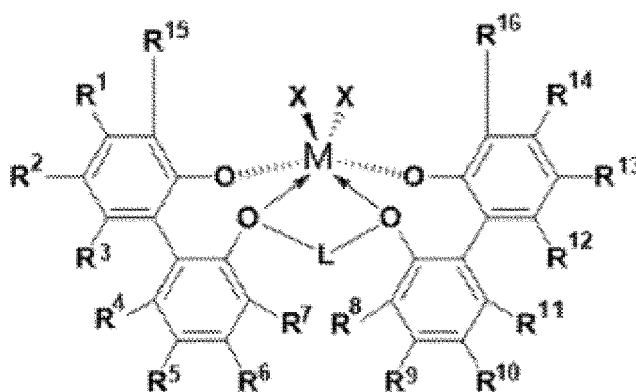

(Formel I)

wobei jedes von R⁷ und R⁸ unabhängig ein C₁- bis C₂₀-Alkyl, -Aryl oder -Aralkyl, -Halogen oder ein Wasserstoff ist;

wobei jedes von R⁵ und R¹⁰ unabhängig ein C₁- bis C₂₀-Alkyl, -Aryl, -Aralkyl, -Halogen, ein Alkyl- oder Aryl-substituiertes Silyl oder ein Wasserstoff ist;

wobei jedes von R² und R¹³ unabhängig ein C₁- bis C₂₀-Alkyl, -Aryl oder -Aralkyl oder ein Wasserstoff ist;

wobei jedes von R¹⁵ und R¹⁶ unabhängig ein 2,7-disubstituiertes Carbazol-9-yl ist;

wobei L ein gesättigtes C₂-C₃-Alkyl ist, das eine 2-Kohlenstoff-Brücke oder eine 3-Kohlenstoff-Brücke zwischen den zwei Sauerstoffatomen ausbildet, an die L gebunden ist;

wobei jedes X unabhängig Halogen, ein Wasserstoff, ein (C₁-C₂₀)Alkyl, ein (C₇-C₂₀)Aralkyl, ein (C₁-C₆)Alkyl-substituiertes (C₆-C₁₂)Aryl oder ein (C₁-C₆)Alkyl-substituiertes Benzyl, -CH₂Si(R^C)₃ ist, wobei R^C C₁-C₁₂-Kohlenwasserstoff ist;

wobei jedes von R¹, R³, R⁴, R⁶, R⁹, R¹¹, R¹², und R¹⁴ unabhängig ein Wasserstoff ist; und

wobei M ein Heteroatom ist, das aus einer Gruppe ausgewählt ist, bestehend aus Zr und Hf.

2. Katalysatorsystem für bimodale Polymerisation nach Anspruch 1, wobei jedes von R⁷ und R⁸ C₁-Alkyl ist.
3. Katalysatorsystem für bimodale Polymerisation nach Anspruch 1 oder 2, wobei jedes von R⁵ und R¹⁰ ein di-Alkyl- oder ein tri-Alkyl-substituiertes Silyl ist.
4. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 3, wobei jedes R² und R¹³ ein 1,1,3,3-Tetramethylbutyl ist.
5. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 4, wobei jedes von R¹⁵ und R¹⁶ ein 2,7-di-t-Butylcarbazol-9-yl ist.
6. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 5, wobei L ein gesättigtes C₃-Alkyl ist.
7. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 6, wobei jedes X ein C₁-Alkyl ist.
8. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 7, wobei M Zr ist.
9. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 7, wobei M Hf ist.
10. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 9, wobei der Metallocenolefinpolymerisationskatalysator aus einem Metallocenvorkatalysator hergestellt wird, der aus der Gruppe ausgewählt ist, bestehend aus:

(Pentamethylcyclopentadienyl)(propylcyclopentadienyl)MX₂,

(Tetramethylcyclopentadienyl)(propylcyclopentadienyl)MX₂,

(Tetramethylcyclopentadienyl)(butylcyclopentadienyl)MX₂,

(Methylcyclopentadienyl)(1,3-dimethyl-tetrahydroindenyl)MX₂,
 (Cyclopentadienyl)(1,3-dimethyl-tetrahydroindenyl)MX₂,
 (Cyclopentadienyl)(4,7-dimethylindenyl)MX₂,
 (Cyclopentadienyl)(1,5-dimethylindenyl)MX₂,
 (Cyclopentadienyl)(1,4-dimethylindenyl)MX₂,
 Me₂Si(indenyl)₂MX₂,
 Me₂Si(tetrahydroindenyl)₂MX₂,
 (n-Propylcyclopentadienyl)₂MX₂,
 (n-Butylcyclopentadienyl)₂MX₂,
 (1-Methyl, 3-Butylcyclopentadienyl)₂MX₂,
 HN(CH₂CH₂N(2,4,6-Me₃phenyl))₂MX₂,
 HN(CH₂CH₂N(2,3,4,5,6-Me₅phenyl))₂MX₂,
 (Butylcyclopentadienyl)₂MX₂,
 (Propylcyclopentadienyl)₂MX₂ und Mischungen davon,
 wobei M Zr oder Hf ist und X aus F, Cl, Br, I, Me, Benzyl, CH₂SiMe₃ und C₁- bis C₅-Alkylen oder Alkenylen
 ausgewählt ist.

11. Katalysatorsystem für bimodale Polymerisation nach einem der Ansprüche 1 bis 10, ferner umfassend einen Siliciumdioxidträger, der trägt: (a) den Metallocenolefinpolymerisationskatalysator, aber nicht den Biphenylphenolpolymerisationskatalysator, der aus dem Biphenylphenolpolymerisationsvorkatalysator der Formel I hergestellt wird, (b) den Biphenylphenolpolymerisationskatalysator, der aus dem Biphenylphenolpolymerisationsvorkatalysator der Formel I hergestellt wird, aber nicht der Metallocenolefinpolymerisationskatalysator, oder (c) eine Kombination des Metallocenolefinpolymerisationskatalysators und des Biphenylphenolpolymerisationskatalysators, der aus einem Biphenylphenolpolymerisationsvorkatalysator der Formel I hergestellt wird.

12. Verfahren zum Herstellen einer Zusammensetzung eines bimodalen Polyethylens, umfassend eine Polyethylenkomponente mit hohem Molekulargewicht und eine Polyethylenkomponente mit niedrigem Molekulargewicht, wobei die Polyethylenkomponenten mit hohem und niedrigem Molekulargewicht in einem einzigen Gasphasenreaktor über einen Polymerisationsprozess zusammen hergestellt werden, der das Katalysatorsystem für bimodale Polymerisation nach Anspruch 1 einsetzt, wobei die Zusammensetzung des bimodalen Polyethylens einen Wert des Verhältnisses (Mw/Mn) von gewichtsmittlerem Molekulargewicht (Mw) zu zahlenmittlerem Molekulargewicht (Mn), das über 5,00 liegt, einen Wert eines Verhältnisses (Mz/Mw) von z-mittlerem Molekulargewicht (Mz) zu gewichtsmittlerem Molekulargewicht (Mw), das kleiner als das Mw/Mn ist; oder sowohl das Mw/Mn, das über 5,00 liegt, als auch ein Mz/Mw aufweist, das kleiner als das Mw/Mn ist.

13. Verfahren nach Anspruch 12, ferner umfassend:

Ausbilden einer Trimmlösung, die mindestens den Metallocenolefinpolymerisationskatalysator, den Biphenylphenolpolymerisationsvorkatalysator der Formel I oder den Biphenylphenolpolymerisationskatalysator einschließt, der aus dem Biphenylphenolpolymerisationsvorkatalysator der Formel I hergestellt wird, und Hinzufügen der Trimmlösung zu dem einzelnen Reaktor, um mindestens einen Teil des Katalysatorsystems für bimodale Polymerisation herzustellen.


14. Verfahren zum Herstellen des Katalysatorsystems für bimodale Polymerisation nach einem der Ansprüche 1 bis 11, das Verfahren umfassend das Herstellen des Biphenylphenolpolymerisationskatalysators durch Inkontaktbringen, unter Aktivierungsbedingungen, des Biphenylphenolpolymerisationsvorkatalysators der Formel I mit einem Aktivator.

15. Verfahren nach Anspruch 14, wobei der Aktivator auf einem Siliciumdioxidträger sprühgetrocknet wird und das Verfahren das Herstellen des Biphenylphenolpolymerisationskatalysators durch Inkontaktbringen, unter Aktivierungsbedingungen, des Biphenylphenolpolymerisationsvorkatalysators der Formel I mit dem getragenen sprühgetrockneten Aktivator umfasst.

Revendications

1. Système de catalyseur de polymérisation bimodale comprenant :

un catalyseur de polymérisation d'oléfine métallocène ; et
 un catalyseur de polymérisation biphénylphénol constitué d'un précatalyseur de polymérisation biphénylphénol
 de Formule I :

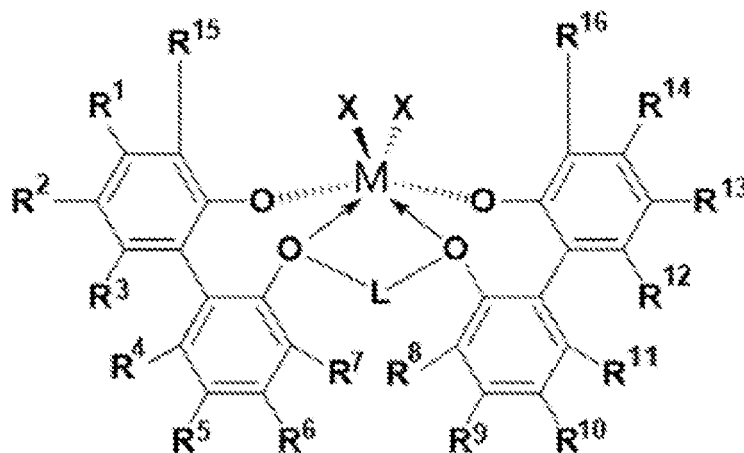

(Formule I)

dans lequel chacun de R⁷ et R⁸ est indépendamment un alkyle, aryle ou aralkyle en C₁ à C₂₀, halogène, ou un hydrogène ;
 dans lequel chacun de R⁵ et R¹⁰ est indépendamment un alkyle, aryle, aralkyle en C₁ à C₂₀, halogène, un silyle substitué par alkyle ou aryle, ou un hydrogène ;
 dans lequel chacun de R² et R¹³ est indépendamment un alkyle, aryle ou aralkyle en C₁ à C₂₀ ou un hydrogène ;
 dans lequel chacun de R¹⁵ et R¹⁶ est indépendamment un carbazol-9-yle 2,7-disubstitué ;
 dans lequel L est un alkyle en C₂-C₃ saturé qui forme un pont à 2 carbones ou un pont à 3 carbones entre les deux atomes d'oxygène auxquels L est lié ;
 dans lequel chaque X est indépendamment halogène, un hydrogène, un alkyle en C₁-C₂₀, un aralkyle en C₇-C₂₀, un aryle en C₆-C₁₂ substitué par alkyle en C₁-C₆, ou un benzyle substitué par alkyle en C₁-C₆, -CH₂Si(R^C)₃, où R^C est hydrocarbure en C₁-C₁₂ ;
 dans lequel chacun de R¹, R³, R⁴, R⁶, R⁹, R¹¹, R¹², et R¹⁴ est indépendamment un hydrogène ; et
 dans lequel M est un hétéroatome choisi dans un groupe constitué de Zr et Hf.

2. Système de catalyseur de polymérisation bimodale selon la revendication 1, dans lequel chacun de R⁷ et R⁸ est un alkyle en C₁.
3. Système de catalyseur de polymérisation bimodale selon la revendication 1 ou 2, dans lequel chacun de R⁵ et R¹⁰ est un silyle substitué par di-alkyle ou tri-alkyle.
4. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 3, dans lequel chacun de R² et R¹³ est un 1,1,3,3-tétraméthylbutyle.
5. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 4, dans lequel chacun de R¹⁵ et R¹⁶ est un 2,7-di-t-butylcarbazol-9-yle.
6. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 5, dans lequel L est un alkyle en C₃ saturé.
7. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 6, dans lequel chaque X est un alkyle en C₁.
8. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 7, dans lequel M est Zr.

9. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 7, dans lequel M est Hf.

10. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 9, dans lequel le catalyseur de polymérisation d'oléfine métallocène est constitué d'un précatalyseur métallocène choisi dans le groupe constitué de :

(pentaméthylcyclopentadiényl)(propylcyclopentadiényl)MX₂,
 (tétraméthylcyclopentadiényl)(propylcyclopentadiényl)MX₂,
 (tétraméthylcyclopentadiényl)(butylcyclopentadiényl)MX₂,
 (méthylcyclopentadiényl)(1,3-diméthyl-tétrahydroindényl)MX₂,
 (cyclopentadiényl)(1,3-diméthyl-tétrahydroindényl)MX₂,
 (cyclopentadiényl)(4,7-diméthylindényl)MX₂,
 (cyclopentadiényl)(1,5-diméthylindényl)MX₂,
 (cyclopentadiényl)(1,4-diméthylindényl)MX₂,
 Me₂Si(indényl)₂MX₂,
 Me₂Si(tétrahydroindényl)₂MX₂,
 (n-propyl cyclopentadiényl)₂MX₂,
 (n-butyl cyclopentadiényl)₂MX₂,
 (1-méthyl, 3-butyl cyclopentadiényl)₂MX₂,
 HN(CH₂CH₂N(2,4,6-Me₃phényl))₂MX₂,
 HN(CH₂CH₂N(2,3,4,5,6-Me₅phényl))₂MX₂,
 (butyl cyclopentadiényl)₂MX₂,
 (propyl cyclopentadiényl)₂MX₂, et mélanges de ceux-ci,
 dans lequel M est Zr ou Hf, et X est choisi parmi F, Cl, Br, I, Me, benzyle, CH₂SiMe₃, et alkyles ou alcényles en C₁ à C₅.

11. Système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 10, comprenant en outre un support de silice, qui supporte : (a) le catalyseur de polymérisation d'oléfine métallocène mais pas le catalyseur de polymérisation biphénylphénol constitué du précatalyseur de polymérisation biphénylphénol de Formule I, (b) le catalyseur de polymérisation biphénylphénol constitué du précatalyseur de polymérisation biphénylphénol de Formule I, mais pas le catalyseur de polymérisation d'oléfine métallocène, ou (c) une combinaison du catalyseur de polymérisation d'oléfine métallocène et du catalyseur de polymérisation biphénylphénol constitué d'un précatalyseur de polymérisation biphénylphénol de Formule I.

12. Procédé de fabrication d'une composition de polyéthylène bimodal comprenant un composant polyéthylène à masse moléculaire élevée et un composant polyéthylène à faible masse moléculaire, dans lequel les composants polyéthylène à masse moléculaire élevée et à faible masse moléculaire sont fabriqués ensemble dans un réacteur à phase gazeuse unique par l'intermédiaire d'un processus de polymérisation employant le système de catalyseur de polymérisation bimodale selon la revendication 1, dans lequel la composition de polyéthylène bimodal a une valeur du rapport de la masse moléculaire moyenne en poids (Mw) à la masse moléculaire moyenne en nombre (Mn) (Mw/Mn) qui est supérieure à 5,00 ; une valeur d'un rapport de la masse moléculaire moyenne en z (Mz) à la masse moléculaire moyenne en poids (Mw) (Mz/Mw) qui est inférieure à Mw/Mn ; ou à la fois Mw/Mn supérieur à 5,00 et Mz/Mw inférieur à Mw/Mn.

13. Procédé selon la revendication 12, comprenant en outre :

la formation d'une solution d'ajustement comportant au moins le catalyseur de polymérisation d'oléfine métallocène, le précatalyseur de polymérisation biphénylphénol de Formule I, ou le catalyseur de polymérisation biphénylphénol constitué du précatalyseur de polymérisation biphénylphénol de Formule I ; et l'ajout de la solution d'ajustement au réacteur unique pour fabriquer au moins une partie du système de catalyseur de polymérisation bimodale.

14. Procédé de fabrication du système de catalyseur de polymérisation bimodale selon l'une quelconque des revendications 1 à 11, le procédé comprenant la fabrication du catalyseur de polymérisation biphénylphénol par mise en contact, dans des conditions d'activation, du précatalyseur de polymérisation biphénylphénol de Formule I avec un activateur.

- 15.** Procédé selon la revendication 14, dans lequel l'activateur est séché par pulvérisation sur un support de silice et le procédé comprend la fabrication du catalyseur de polymérisation biphénylphénol par mise en contact, dans des conditions d'activation, du précatalyseur de polymérisation biphénylphénol de Formule I avec l'activateur supporté séché par pulvérisation.

5

10

15

20

25

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2013070601 A2 [0003]
- WO 2018022588 A1 [0003]
- US 5041584 A [0026]
- US 20060173123 A [0044]
- WO 2019190897 A [0051] [0073] [0078] [0082]
- WO 2017058981 A [0062]
- WO 2009064404 A [0067] [0069] [0084]

Non-patent literature cited in the description

- HUANG ; RUBIN et al. *Macromolecules (Washington, DC, United States)*, 2008, vol. 41 (3), 579-590 [0066]