



**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**08.02.2023 Bulletin 2023/06**

(51) International Patent Classification (IPC):  
**B25B 27/18** (1968.09) **B25B 15/00** (1968.09)  
**B25B 27/02** (1968.09) **B25B 27/04** (1968.09)

(21) Application number: **22195634.5**

(52) Cooperative Patent Classification (CPC):  
**B25B 27/04; B25B 27/023; B25B 27/18;**  
**B25B 15/005; B25B 15/008**

(22) Date of filing: **25.07.2019**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(30) Priority: **21.08.2018 US 201816107842**  
**19.09.2018 US 201862733507 P**  
**23.01.2019 US 201916255341**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**19852303.7 / 3 814 060**

(71) Applicant: **Grip Holdings LLC**  
**Brandon, FL 33510 (US)**

(72) Inventors:  
• **KUKUCKA, Paul**  
**Brandon, 33509 (US)**  
• **KUKUCKA, Thomas Stefan**  
**Brandon, 33509 (US)**

(74) Representative: **Loo, Chi Ching et al**  
**Albright IP Limited**  
**County House**  
**Bayshill Road**  
**Cheltenham, Gloucestershire GL50 3BA (GB)**

Remarks:

This application was filed on 14.09.2022 as a  
divisional application to the application mentioned  
under INID code 62.

(54) **FASTENER EXTRACTOR DEVICE**

(57) A fastener extractor device for removing seized fasteners and aiding in disengaging the extractor device from said seized fastener afterwards. The extractor device includes a shank body, a drive head, a torque-tool body, a tubular sleeve, an external thread, and an internal thread. The torque-tool body includes a plurality of laterally-bracing sidewalls and an at least one engagement feature. The engagement feature is integrated into a specific sidewall to bite into a sized fastener. The drive head is terminally and concentrically connected to the shank body to receive an external torque tool. The torque-tool body is terminally and concentrically connected to the shank body, opposite the drive head. The tubular sleeve is slidably engaged along the shank body through the internal thread and the external thread to physically disengage the torque-tool body from a seized fastener.

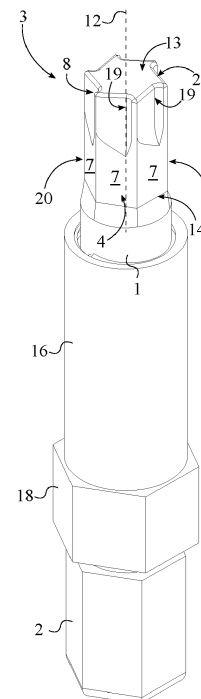


FIG. 1

## Description

### FIELD OF THE INVENTION

**[0001]** The present invention generally relates to various tools designed for extracting or removing fasteners, in particular bolts and nuts. More specifically, the present invention discloses a combination of anti-slip threaded extractors, designed to remove damaged fasteners.

### BACKGROUND OF THE INVENTION

**[0002]** Hex bolts, nuts, screws, and other similar threaded devices are used to secure and hold multiple components together by being engaged to a complimentary thread, known as a female thread. The general structure of these types of fasteners is a cylindrical shaft with an external thread and a head at one end of the shaft. The external thread engages a complimentary female thread tapped into a hole or a nut and secures the fastener in place, fastening the associated components together. The head receives an external torque force and is the means by which the fastener is turned, or driven, into the female threading. The head is shaped specifically to allow an external tool like a wrench to apply a torque to the fastener in order to rotate the fastener and engage the complimentary female threading to a certain degree. This type of fastener is simple, extremely effective, cheap, and highly popular in modern construction.

**[0003]** One of the most common problems in using these types of fasteners, whether male or female, is the tool slipping in the head portion, or slipping on the head portion. This is generally caused by either a worn fastener or tool, corrosion, overtightening, or damage to the head portion of the fastener. Various methods may be used to remove a fastener, some more aggressive than others. Once a fastener head is damaged, a more aggressive method must be implemented to remove a seized fastener. Drilling out the fastener is a common method used by some users to dislodge the fastener. While this method can prove to be effective in some scenarios there is a high risk of damaging the internal threads of the hole. The present invention is an extractor removal system that virtually eliminates the chance of slippage. The design uses a series of integrated splines that bite into the head of the fastener and allow for efficient torque transfer between the extractor bit and the head portion of the fastener. Another common issue when using traditional bolt extractors is that material from the fastener or the actual fastener remains attached to the extractor tool. The present invention allows users to dislodge any remaining material and or the fastener from the extracting tool.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### **[0004]**

FIG. 1 is a perspective view of the present invention.

FIG. 2 is a perspective view of the present invention in an exploded state.

FIG. 3 is an enlarged view of a torque-tool body of the present invention.

FIG. 4 is a top view of a shank body, a drive head, and the torque-tool body of the present invention.

FIG. 5 is a perspective view of an alternative embodiment of the present invention, depicting the shank body, the drive head, and the torque-tool body.

FIG. 6 is a top view of the shank body, the drive head, and the torque-tool body of the alternative embodiment of the present invention.

FIG. 7 is a perspective view of an alternative embodiment of the present invention, depicting the shank body, the drive head, and the torque-tool body.

FIG. 8 is a perspective view of an alternative embodiment of the present invention.

### DETAIL DESCRIPTIONS OF THE INVENTION

**[0005]** All illustrations of the drawings are for the purpose of describing selected versions of the present invention and are not intended to limit the scope of the present invention.

**[0006]** The present invention generally related to extracting tools and extracting tool accessories. More specifically the present invention discloses various extractor bits, including both male and female embodiments. Removing damaged fasteners from an extractor tool can prove to be a difficult task. The present invention aims to solve this issue by disclosing a release sleeve integrated into an extractor tool, specifically designed to assist users with removing any pieces of broken fastener which may have been wedged onto the extractor tool.

**[0007]** Referring to FIG. 1 and FIG. 2, the present invention comprises a shank body 1, a drive head 2, a torque-tool body 3, an external thread 15, a tubular sleeve 16, an internal thread 17, and a nut 18. The shank body 1 and the drive head 2 allow the present invention to be attached to an external torque tool and, thus, allow torque force to be applied to the socket fastener through the torque-tool body 3 for extraction, similar to traditional designs. External torque tools include, but are not limited to, electric drills, torque wrenches, pneumatic drills, socket screw drivers, and other similar torque tools. The drive head 2 acts as the engagement element for an external torque tool. Specifically, the drive head 2 is a nut-shaped element and is terminally and concentrically connected to the shank body 1. The preferred profile of the drive head 2 is a hexagonal profile although alternative geometries may also be utilized. For example, in one embodiment, the drive head 2 has a square profile. In another embodiment of the present invention, the bottom portion of the drive head 2 is dome-shaped. Specifically, the bottom portion is portion of the drive head 2 that is located opposite the shank body 1, across the drive head 2. The dome-shaped designed yields a striking surface where impact force is applied to forcibly insert the torque-

tool body **3** into the object to be extracted. The striking surface is not limited to being dome-shaped.

[0008] The torque-tool body **3** is a shank which engages a seized socket fastener, such as a socket screw, a socket bolt, or into a specific sized drilled hole within a broken stud or any threaded shank in order to apply a torque force to dislodge said seized fastener. The torque-tool body **3** is positioned opposite the drive head **2**, along the shank body **1**. Referring to FIG. **3**, the torque-tool body **3** comprises a plurality of laterally-bracing sidewalls **4**, an at least one engagement feature **8**, a first base **13**, and a second base **14**. In general, the torque-tool body **3** is a prism composed of a strong metal that is terminally and concentrically connected to the shank body **1**. Each of the plurality of laterally-bracing sidewalls **4** engage within and grip a socket fastener in order to efficiently transfer torque from an external torque tool to a socket fastener. The plurality of laterally-bracing sidewalls **4** is radially positioned about a rotation axis **12** of the torque-tool body **3** to yield a geometric profile complimentary to that of a socket fastener. The number within the plurality of laterally-bracing sidewalls **4** is subject to change to compliment the shape and profile of a variety of socket fasteners. In one embodiment of the present invention, the number within the plurality of laterally-bracing sidewalls **4** is six and the resulting geometric profile of the torque-tool body **3** is a hexagon. In an alternative embodiment of the present invention, the number within the plurality of laterally-bracing sidewalls **4** is four and the resulting geometric profile of the torque-tool body **3** is a square.

[0009] The first base **13** and the second base **14** are positioned opposite to each other along the plurality of laterally-bracing sidewalls **4**; wherein the shank body **1** is adjacently connected to the second base **14**, opposite the first base **13**. Additionally, the first base **13** and second base **14** are oriented perpendicular to each of the plurality of laterally-bracing sidewalls **4** and thus enclose/complete the prism shape of the torque-tool body **3**. More specifically, it is preferred that the first base **13** comprises a first base **13** surface, wherein the first base **13** surface is flat and is oriented perpendicular to the each of the plurality of laterally-bracing sidewalls **4**. It is also preferred that a lateral edge between the first base **13** and each of the plurality of laterally-bracing sidewalls **4** is chamfered. Further, the first base **13** may be cone shaped to yield a point, similar to a tool punch. When impact force is applied to the drive head **2**, the engagement feature **8** is designed to cut into the sidewall of the object to be removed. The engagement feature **8** increases the friction/connection between the plurality of laterally-bracing sidewalls **4** and a socket fastener to prevent relative slippage. Thus, the engagement feature **8** is integrated into a specific sidewall from the plurality of laterally-bracing sidewalls **4**; wherein the specific sidewall denotes any from the plurality of laterally-bracing sidewalls **4**.

[0010] The tubular sleeve **16** is an elongated tubular

structure with an internal diameter complimentary to the external diameter of the shank body **1**. The tubular sleeve **16**, the internal thread **17**, the external thread **15**, and the nut **18** act as a dislodging mechanism for removing any excess material and or a socket fastener from the torque-tool body **3**. The preferred tubular sleeve **16** design includes a diameter step-up along the tubular sleeve **16** at a first end of the tubular sleeve **16**, wherein the first end of the tubular sleeve is positioned adjacent to the torque-tool body **3**. This provides additional engagement surface in between the tubular sleeve **16** and the foreign object affixed to the torque-tool body **3**. In general, the tubular sleeve **16** translates along the shank body **1** in order to press against a socket fastener on the torque-tool body **3** until said socket fastener, i.e. foreign object, is dislodged. Specifically, the external thread **15** extends along the shank body **1** in between the torque-tool body **3** and the drive head **2**. Additionally, the external thread **15** is laterally connected to the shank body **1**. The internal thread **17** is designed complimentary to the external thread **15** for an interlocking fit. The internal thread **17** is positioned within the tubular sleeve **16** and extends along the tubular sleeve **16**. Additionally, the internal thread **17** laterally traverses into the tubular sleeve **16**. For operation, the shank body **1** is concentrically positioned within the tubular sleeve **16** with the internal thread **17** being mechanically engaged to the external thread **15**. This allows the tubular sleeve **16** to slide along the shank body **1** when the shank body **1** and the tubular sleeve **16** are spun relative to each other. After the torque-tool body **3** is used to remove a seized socket fastener, the user may need to remove the socket fastener from the torque-tool body **3**. For this, the user simply spins the tubular sleeve **16** about the shank body **1** to slide the tubular sleeve **16** towards the torque-tool body **3** until the tubular sleeve **16** presses against the socket fastener to dislodge the socket fastener. Rotating the tubular sleeve **16** may be done with the user's hands, but in cases where additional leverage is necessary the user may use two external torque tools, such as wrenches. One wrench is mechanically engaged to shank body **1** through the drive head **2** and the other wrench is mechanically engaged to the tubular sleeve **16** through the nut **18**. For this, the nut **18** is terminally and concentrically connected to the tubular sleeve **16**. Similar to the tubular sleeve **16**, the shank body **1** is also positioned within the nut **18**. The preferred shaped of the nut **18** is a hex, although alternative geometries may also be used. The size, length, and material composition of the tubular sleeve **16** and the nut **18** are subject to change to meet the needs and preferences of the user.

[0011] In one embodiment of the present invention, referring to FIG. **3** and FIG. **4**, the engagement feature **8** is an engagement cavity. For reference, each of the plurality of laterally-bracing sidewalls **4** comprises a first lateral edge **5**, a second lateral edge **6**, and a bracing surface **7**. The bracing surface **7** physically presses against a socket fastener, specifically against a lateral sidewall

of a head portion from the socket fastener. The first lateral edge **5** and the second lateral edge **6** are positioned opposite to each other across the bracing surface **7**. When viewed from either the top perspective or the bottom perspective, the first lateral edge **5** and the second lateral edge **6** from each of the plurality of laterally-bracing sidewalls **4** make up the corners of the torque-tool body **3**. The engagement cavity traverses normal and into the bracing surface **7** of the specific sidewall and creates an additional gripping point/tooth on the bracing surface **7**. The gripping point is created by the engagement cavity and the bracing surface **7**. In one embodiment of the present invention, the engagement cavity extends into the torque-tool body **3** from the first base **13** towards the second base **14**. This ensures that the additional gripping point extends along the length of the torque-tool body **3** for maximum grip engagement. In another embodiment of the present invention, the engagement cavity tapers from the first base **13** towards the second base **14** as seen in FIG. 3. To further ensure maximum grip engagement, it is preferred that an entire cross-section **9** of the engagement cavity is oriented parallel to the first base **13** and the second base **14**.

**[0012]** In one embodiment of the present invention, the entire cross-section **9** of the engagement cavity is a partially-circular profile. Additionally, the partially-circular profile is concave along a direction from the first lateral edge **5** of the specific sidewall to the second lateral edge **6** of the specific sidewall. The partially-circular profile ensures that there are little to no high stress points in the torque-tool body **3**, thus increasing the overall longevity of the tool. In a separate embodiment of the present invention, the entire cross-section **9** of the engagement cavity is a triangular profile. Additionally, the triangular profile is concave along a direction from the first lateral edge **5** of the specific sidewall to the second lateral edge **6** of the specific sidewall. Alternative profiles may be used for the engagement cavity including, but not limited to, a semi-square profile, a semi-rectangular profile, and a semi-oval profile. It is preferred that the internal corners of triangular, square, semi square type profiles have a radius for additional strength.

**[0013]** Referring to FIG. 4, in one embodiment of the present invention, the entire cross-section **9** of the engagement cavity comprises a curved portion **10** and a straight portion **11**. The resulting gripping point is uniquely shaped in order to form a sharp engagement tooth that digs into a corner(s) of the socket fastener, allowing material from the internal sides of the fastener socket into the engagement cavity and thus yielding a superior grip over traditional tools which are simply designed to push material away. This is especially true for worn or damaged fastener sockets. The curved portion **10** is a partially circular curve that is positioned adjacent to the first lateral edge **5** of the specific sidewall. The straight position is positioned adjacent to the curved portion **10**, opposite the first lateral edge **5** of the specific sidewall. The straight portion **11** guides a portion of the socket fastener to press

against the formed engagement tooth. As such, the straight portion **11** extends from the curved portion **10** to the second lateral edge **6** of the specific sidewall. Specifically, the straight portion **11** starts at the curved portion **10** and ends at the second lateral edge **6** of the specific sidewall. This embodiment may be implemented in a clock-wise configuration or a counter clock-wise configuration by flipping the positioning of the curved portion **10** with the straight portion **11**.

**[0014]** In another embodiment of the present invention, the engagement cavity is centrally position on the bracing surface **7** of the specific sidewall. In particular, the engagement cavity is positioned offset from the first lateral edge **5** of the specific sidewall by a first distance and offset from the second lateral edge **6** of the specific sidewall by a second distance; wherein the first distance equals the second distance. In an alternative embodiment, the first distance may not be equal to the second distance. This positions the engagement cavity to engage the internal lateral sidewall of the socket fastener for the most efficient transfer of torque with the least possibility of slippage. Additionally, this embodiment may be used to rotate the socket fastener in either the clockwise or the counter-clockwise direction.

**[0015]** Referring to FIG. 5, FIG. 6, and FIG. 7, in one embodiment of the present invention, the engagement feature **8** is an engagement protrusion. The engagement protrusion is material extruding from the torque-tool body **3** that creates an additional gripping element to the specific sidewall. Specifically, the engagement protrusion is laterally connected to the bracing surface **7** of the specific sidewall. Additionally, the engagement protrusion extends from the first base **13** to the second base **14** to ensure the additional gripping element extends along the length of the torque-tool body **3** and allows the present invention to engage the socket fastener at an increased depth, thus maximizing the torque applied to the socket fastener. Furthermore, it is preferred that the engagement protrusion is centrally positioned in between the first lateral edge **5** of the specific sidewall and the second lateral edge **6** of the specific sidewall to allow for this embodiment to be used as a clock-wise and counter clock-wise tool. To ensure consistent grip along the torque-tool body **3**, an entire cross-section **19** of the engagement protrusion is parallel to the first base **13** and the second base **14**.

**[0016]** Referring to FIG. 6, in one embodiment of the present invention, the entire cross-section **19** of the engagement protrusion is a partially-circular profile. Specifically, the partially circular profile of the engagement protrusion is convex along a direction from the first lateral edge **5** of the specific sidewall to the second lateral edge **6** of the specific sidewall. This is especially useful for extremely worn and stripped socket fasteners as the tool-receiving cavity of the socket fastener enlarges when worn or stripped. The engagement protrusion extends out of the bracing surface **7** of the specific sidewall to press against and engage the worn sides of the socket

fastener.

**[0017]** Referring to FIG. 4 and FIG. 6 in the preferred embodiment of the present invention, the at least one engagement feature 8 comprises a plurality of engagement features 8. For this, the plurality of engagement features 8 is radially positioned about the rotation axis 12 with each of the plurality of engagement features 8 being integrated into a corresponding sidewall from the plurality of laterally-bracing sidewalls 4 as seen in FIG. 3. This configuration yields an additional gripping features on each of the plurality of laterally bracing sidewalls that ensure that a significant grip is created in between the present invention and a socket fastener.

**[0018]** Referring to FIG. 7, in one embodiment of the present invention, the torque-tool body 3 is tapered from the second base 14 towards the first base 13. This allows the present invention to be used on socket fasteners of different sizes. The degree of taper is subject to change to meet the needs and preferences of the user. In one embodiment of the present invention, the torque-tool body 3 may be connected to various implements including, but not limited to, impact tools, hydraulic screws, wrench sockets, and screwdrivers.

**[0019]** In one embodiment, referring to FIG. 8, the present invention is implemented in a double-ended configuration. In this embodiment, the at least one shank body 1 comprises a first shank body 22 and a second shank body 23; the at least one torque-tool body 3 comprises a first torque-tool body 24 and a second torque-tool body 25; and the at least one external thread 15 comprises a first external thread 26 and a second external thread 27. This embodiment provides a dual sided version for the present invention, wherein the two sides may be differently designed and or oriented for increased versatility; specifically, this allows the present invention to be utilized for clockwise rotation and counter-clockwise rotation. The first shank body 22 and the second shank body 23 are positioned opposite to each other across the drive head 2. The first torque-tool body 24 is terminally and concentrically connected to the first shank body 22, opposite the drive head 2. The first external thread 26 extends along the first shank body 22, in between the first torque-tool body 24 and the drive head 2; additionally, the first external thread 26 is laterally connected to the first shank body 22. This outlines a single engagement side of the present invention. Mirroring this, the second torque-tool body 25 is terminally and concentrically connected to the second shank body 23, opposite the drive head 2. The second external thread 27 extends along the second shank body 23, in between the second torque-tool body 25 and the drive head 2; additionally, the second external thread 27 is laterally connected to the second shank body 23. In this embodiment, the type of engagement feature(s) of the first torque-tool body may vary from the type of engagement feature(s) of the second torque-tool body to yield a two-in-one tool.

**[0020]** Although the invention has been explained in relation to its preferred embodiment, it is to be understood

that many other possible modifications and variations can be made without departing from the spirit and scope of the invention as hereinafter claimed.

# 5 ORIGINAL PARENT CLAIMS FORMING PART OF THE DESCRIPTION AS PREFERRED EMBODIMENTS OF THE DIVISIONAL APPLICATION ONLY

## **[0021]**

### 1. A fastener extractor device comprising:

an at least one shank body;  
a drive head;  
an at least one torque-tool body;  
an at least one external thread;  
the torque-tool body comprises a plurality of laterally-bracing sidewalls and an at least one engagement feature;  
the plurality of laterally-bracing sidewalls being radially positioned about a rotation axis of the torque-tool body;  
the engagement feature being integrated into a specific sidewall from the plurality of laterally-bracing sidewalls;  
the drive head being terminally and concentrically connected to the shank body;  
the torque-tool body being positioned opposite to the drive head, along the shank body;  
the torque-tool body being terminally and concentrically connected to the shank body;  
the external thread extending along the shank body, in between the torque-tool body and the drive head; and  
the external thread being laterally connected to the shank body.

### 2. The fastener extractor device as claimed in claim 1 comprising:

a tubular sleeve;  
an internal thread;  
the internal thread being positioned within the tubular sleeve;  
the internal thread extending along the tubular sleeve;  
the internal thread traversing into the tubular sleeve;  
the shank body being concentrically positioned within the tubular sleeve; and  
the internal thread being mechanically engaged to the external thread.

### 3. The fastener extractor device as claimed in claim 2 comprising:

a nut;  
the nut being terminally and concentrically con-

nected to the tubular sleeve; and  
the shank body being positioned within the nut.

4. The fastener extractor device as claimed in claim 1 comprising:

the at least one engagement feature comprises a plurality of engagement features;  
the plurality of engagement features being radially positioned about the rotation axis of the torque-tool body; and  
each of the plurality of engagement features being integrated into a corresponding sidewall from the plurality of laterally-bracing sidewalls.

5. The fastener extractor device as claimed in claim 1 comprising:

wherein the engagement feature is an engagement cavity;  
the torque-tool body further comprises a first base and a second base;  
each of the plurality of laterally-bracing sidewalls comprises a first lateral edge, a second lateral edge, and a bracing surface;  
the first lateral edge and the second lateral edge being positioned opposite to each other across the bracing surface;  
the shank body being adjacently connected to the second base, opposite to the first base; and  
the engagement cavity traversing normal and into the bracing surface of the specific sidewall.

6. The fastener extractor device as claimed in claim 5, wherein an entire cross-section of the engagement cavity is parallel to the first base and the second base.

7. The fastener extractor device as claimed in claim 5 comprising:

an entire cross-section of the engagement cavity comprises a curved portion and a straight portion;  
the curved portion being positioned adjacent to the first lateral edge of the specific sidewall;  
the straight portion being positioned adjacent to the curved portion, opposite the first lateral edge of the specific sidewall; and  
the straight portion extending from the curved portion to the second lateral edge of the specific sidewall.

8. The fastener extractor device as claimed in claim 1 comprising:

wherein the engagement feature is an engagement protrusion;

the torque-tool body further comprises a first base and a second base;  
each of the plurality of laterally-bracing sidewalls comprises a first lateral edge, a second lateral edge, and a bracing surface;  
the first lateral edge of the specific sidewall and the second lateral edge of the specific sidewall being positioned opposite to each other across the bracing surface;  
the shank body being adjacently connected to the second base, opposite to the first base;  
the engagement protrusion being laterally connected to the bracing surface of the specific sidewall;  
the engagement protrusion extending from the first base to the second base; and  
the engagement protrusion being centrally positioned in between the first lateral edge of the specific sidewall and the second lateral edge of the specific sidewall.

9. The fastener extractor device as claimed in claim 8, wherein an entire cross-section of the engagement protrusion is parallel to the first base and the second base.

10. The fastener extractor device as claimed in claim 8 comprising:

an entire cross-section of the engagement protrusion being a partially-circular profile; and  
the partially-circular profile being convex along a direction from the first lateral edge of the specific sidewall to the second lateral edge of the specific sidewall.

11. The fastener extractor device as claimed in claim 1 comprising:

the torque-tool body further comprises a first base and a second base;  
the shank body being adjacently connected to the second base, opposite to the first base; and  
the torque-tool body tapering from the second base towards the first base.

12. The fastener extractor device as claimed in claim 5, wherein a lateral edge between the first base and each of the plurality of laterally-bracing sidewalls is chamfered.

13. The fastener extractor device as claimed in claim 1 comprising:

the at least one shank body comprises a first shank body and a second shank body;  
the at least one torque-tool body comprises a first torque-tool body and a second torque-tool

body;  
 the at least one external thread comprises a first external thread and a second external thread;  
 the first shank body and the second shank body being positioned opposite to each other across the drive head;  
 the first torque-tool body being terminally and concentrically connected to the first shank body, opposite the drive head;  
 the first external thread extending along the first shank body, in between the first torque-tool body and the drive head;  
 the first external thread being laterally connected to the first shank body;  
 the second torque-tool body being terminally and concentrically connected to the second shank body, opposite the drive head;  
 the second external thread extending along the second shank body, in between the second torque-tool body and the drive head; and  
 the second external thread being laterally connected to the second shank body.

## Claims

### 1. A fastener extractor device comprising:

an at least one shank body (1);  
 an at least one torque-tool body (3);  
 the torque-tool body (3) being terminally and concentrically connected to the shank body (1);  
**characterized in that:**

the torque-tool body (3) comprises a plurality of laterally-bracing sidewalls (4) and an at least one engagement feature (8);  
 the plurality of laterally-bracing sidewalls (4) is radially positioned about a rotation axis (12) of the torque-tool body (3);  
 each of the plurality of laterally-bracing sidewalls (4) comprising a first lateral edge (5), a second lateral edge (6), and a bracing surface (7);  
 the first lateral edge (5) and the second lateral edge (6) being positioned opposite to each other across the bracing surface (7);  
 the engagement feature (8) is integrated into a specific sidewall (20) from the plurality of laterally-bracing sidewalls (4);  
 the at least one engagement feature (8) is an engagement cavity; and  
 the engagement cavity partially traversing normal and into the bracing surface (7) of the specific sidewall (20) such that a flat portion is formed on the bracing surface (7) of the specific sidewall and such that at least one engagement tooth is formed on the

bracing surface (7) of the specific sidewall.

### 2. The fastener extractor device as claimed in claim 1 comprising:

an entire cross-section (9) of the engagement cavity comprising a concave portion (10) and a straight portion (11);  
 the concave portion (10) being positioned adjacent to the first lateral edge (5) of the specific sidewall (20);  
 the straight portion (11) being positioned adjacent to the concave portion (10), opposite the first lateral edge (5) of the specific sidewall (20); and  
 the straight portion (11) extending from the concave portion (10) to the second lateral edge (6) of the specific sidewall (22).

### 3. The fastener extractor device as claimed in claim 1 comprising:

the length of the flat portion of the bracing surface (7) being less than a length of the at least one engagement cavity.

### 4. The fastener extractor device as claimed in claim 1 comprising:

a width of the flat portion of the bracing surface (7) extending along the rotation axis (12).

### 5. The fastener extractor device as claimed in claim 1 comprising:

the at least one engagement feature (8) comprises a plurality of engagement features (8);  
 the plurality of engagement features (8) being radially positioned about the rotation axis (12) of the torque-tool body (3); and  
 each of the plurality of engagement features (8) being integrated into a corresponding sidewall from the plurality of laterally-bracing sidewalls (4).

### 6. The fastener extractor device as claimed in claim 1 comprising:

the torque-tool body (3) comprising a first base (13) and a second base (14);  
 the first base (13) and the second base (14) each being oriented perpendicular to each of the plurality of laterally-bracing sidewalls (4); and  
 the shank body (1) being adjacently connected to the second base (14), opposite to the first base (13).

### 7. The fastener extractor device as claimed in claim 5, wherein the torque-tool body (3) is tapered from the second base (14) toward the first base (13).

8. The fastener extractor device as claimed in claim 1 comprising:

a drive head (2);  
the drive head (2) being terminally and concentrically connected to the shank body (1); and  
the torque-tool body (3) being positioned opposite to the drive head (2), along the shank body (1).

9. The fastener extractor device as claimed in claim 7 comprising:

at least one external thread (15);  
the external thread (15) extending along the shank body (1), in between the torque-tool body (3) and the drive head (2); and  
the external thread (15) being laterally connected to the shank body (1).

10. The fastener extractor device as claimed in claim 8 comprising:

a tubular sleeve (16);  
an internal thread (17);  
the internal thread (17) extending along the tubular sleeve (16);  
the internal thread (17) traversing into the tubular sleeve (16);  
the shank body (1) being concentrically positioned within the tubular sleeve (16); and  
the internal thread (17) being mechanically engaged to the external thread (15).

11. The fastener extractor device as claimed in claim 1 comprising:

a nut (18);  
the nut (18) being terminally and concentrically connected to the tubular sleeve; and  
the shank body (1) being positioned within the nut (18).

12. The fastener extractor device as claimed in claim 5, wherein a lateral edge (21) between the first base (13) and each of the plurality of laterally-bracing side-walls (4) is chamfered.

13. The fastener extractor device as claimed in claim 8 comprising:

the at least one shank body (1) comprising a first shank body (22) and a second shank body (23);  
the at least one torque-tool body (3) comprising a first torque-tool body (24) and a second torque-tool body (25);  
the at least one external thread (15) comprising a first external thread (26) and a second external

thread (27);

the first shank body (22) and the second shank body (23) being positioned opposite to each other across the drive head (2);

the first torque-tool body (24) being terminally and concentrically connected to the first shank body (22), opposite the drive head (2);

the first external thread (26) extending along the first shank body (22), in between the first torque-tool body (24) and the drive head (2);

the first external thread (26) being laterally connected to the first shank body (22);

the second torque-tool body (25) being terminally and concentrically connected to the second shank body (23), opposite the drive head (2);

the second external thread (27) extending along the second shank body (23), in between the second torque-tool body (25) and the drive head (2); and

the second external thread (27) being laterally connected to the second shank body (23).



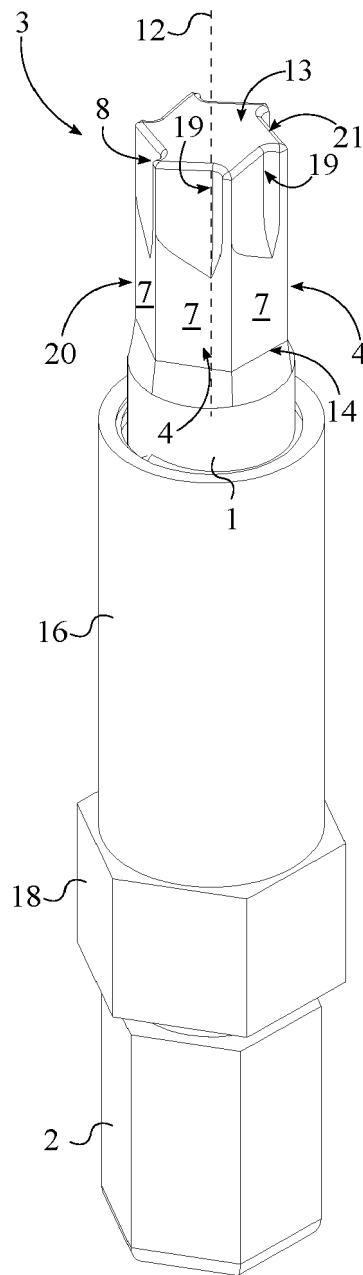


FIG. 1

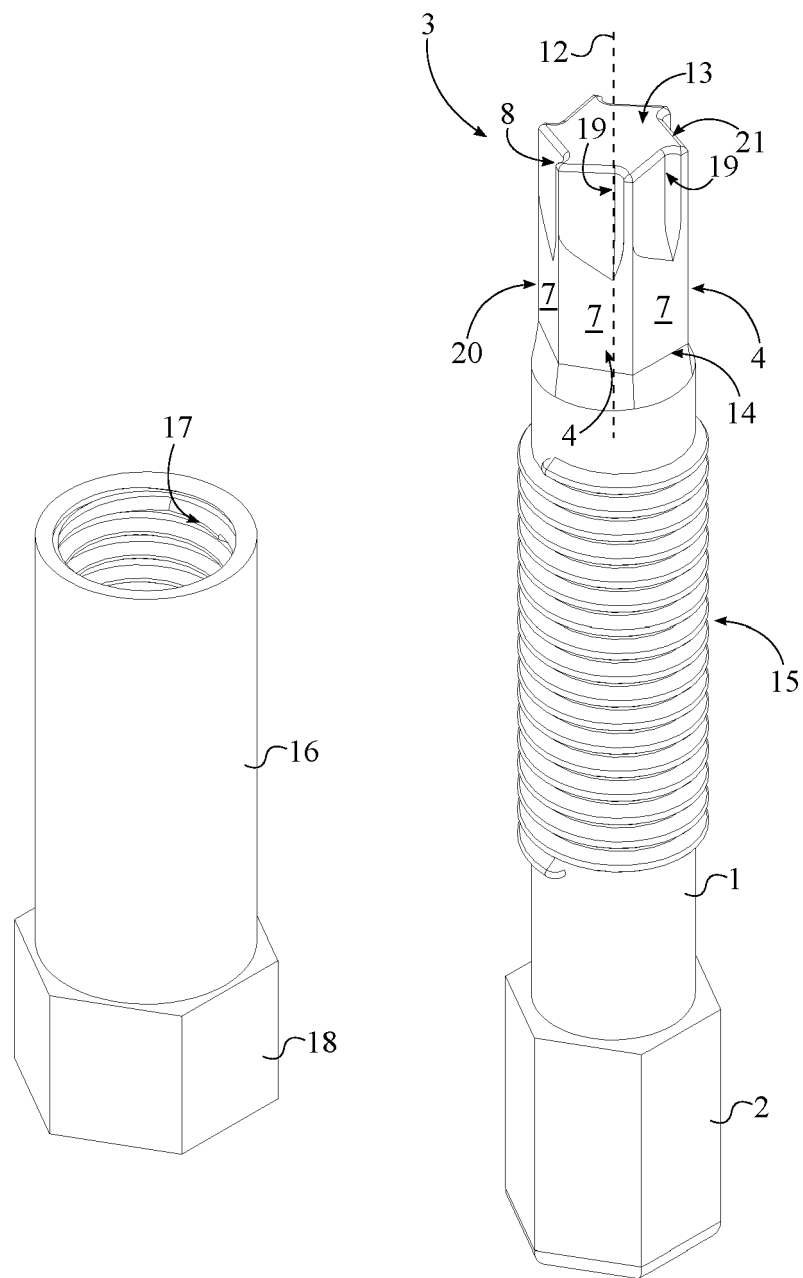


FIG. 2

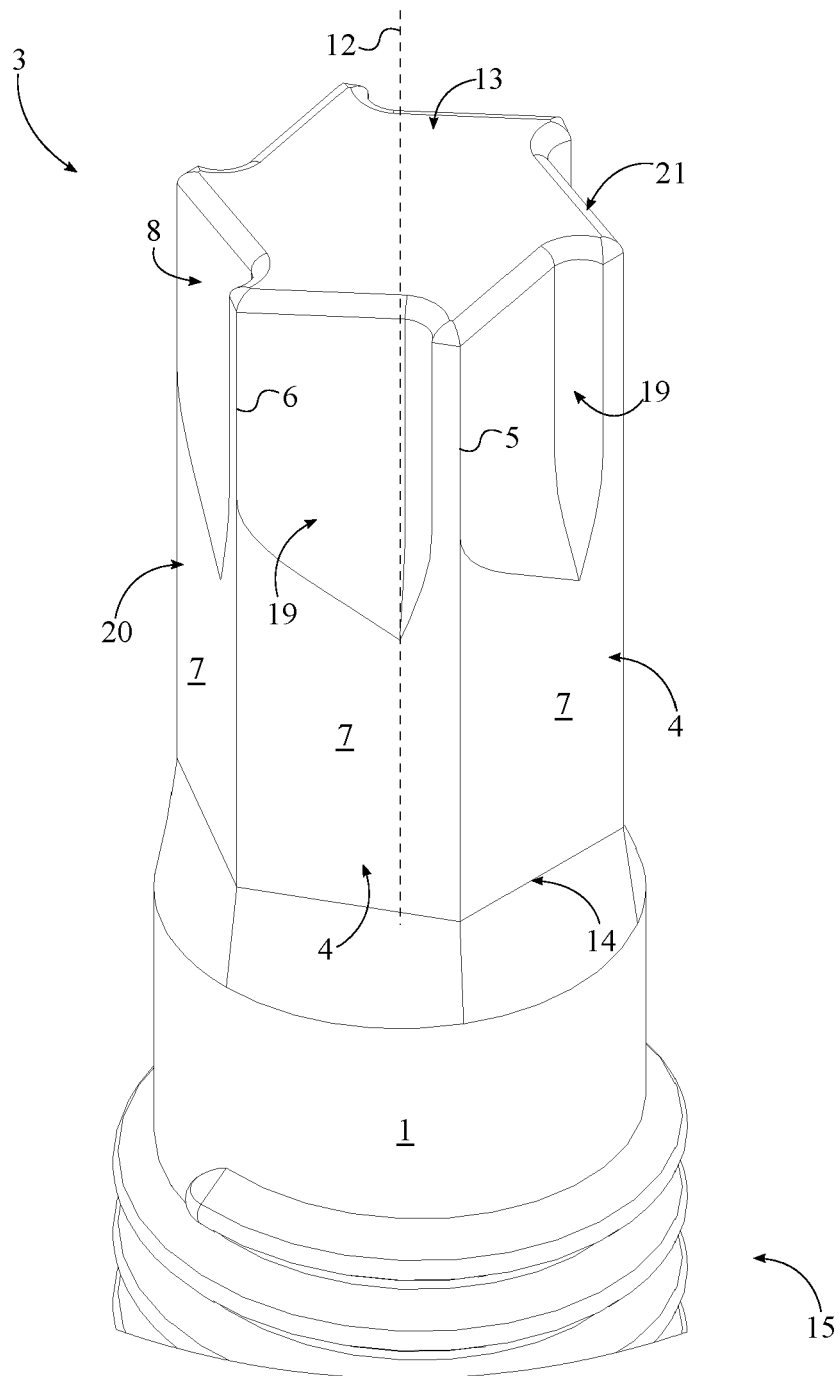


FIG. 3

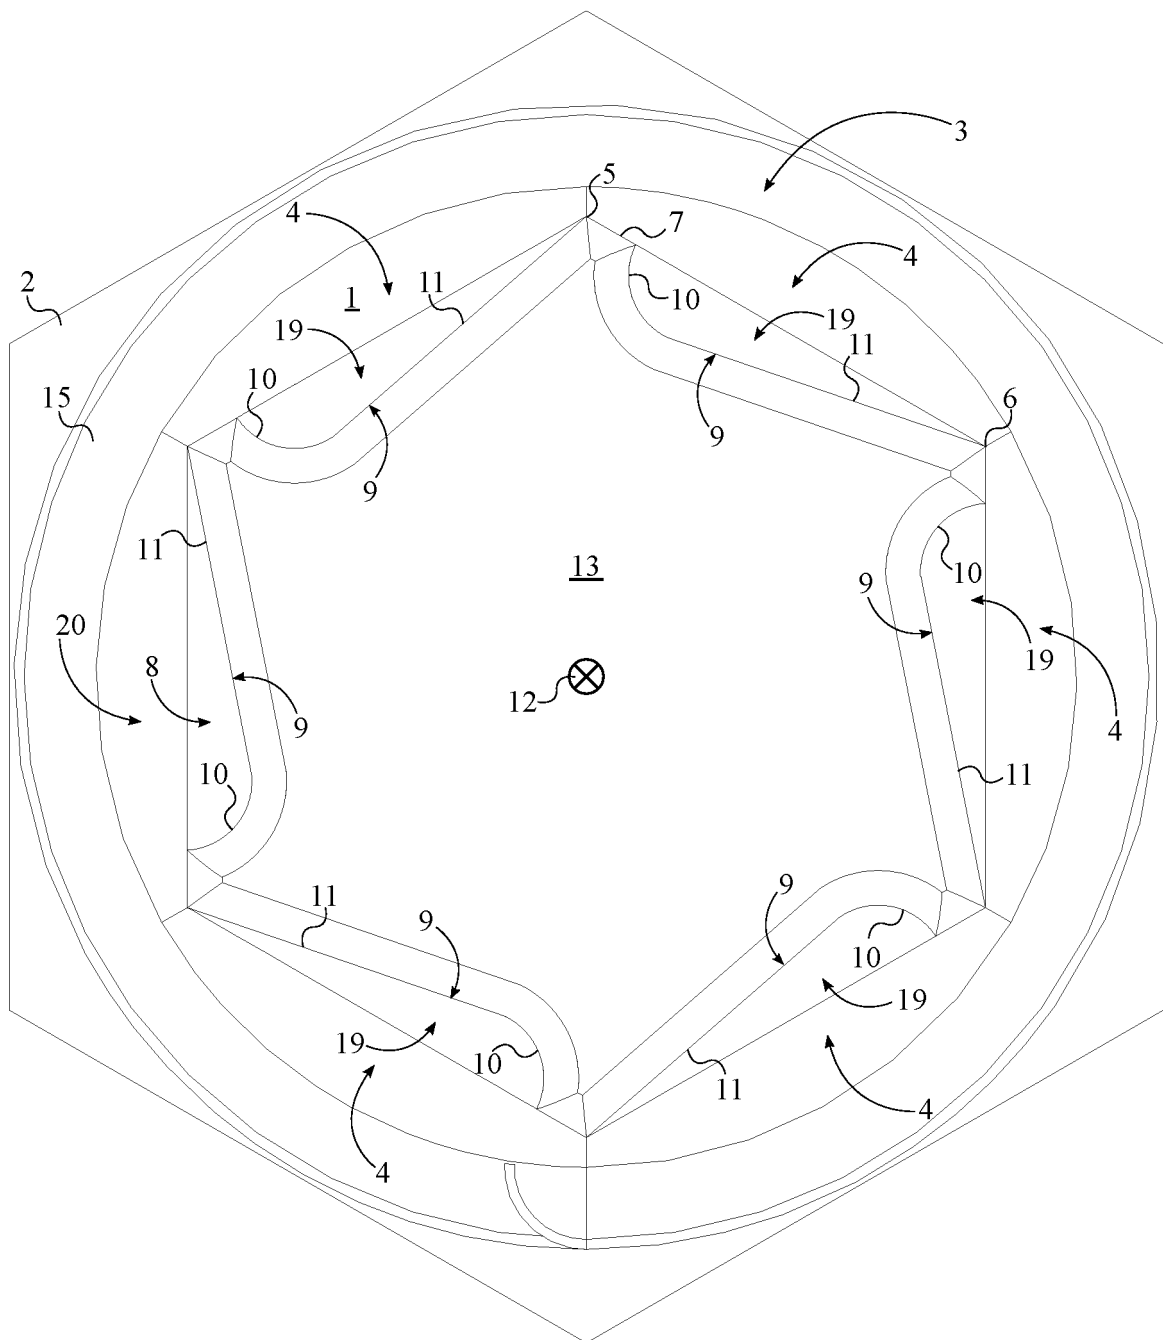


FIG. 4

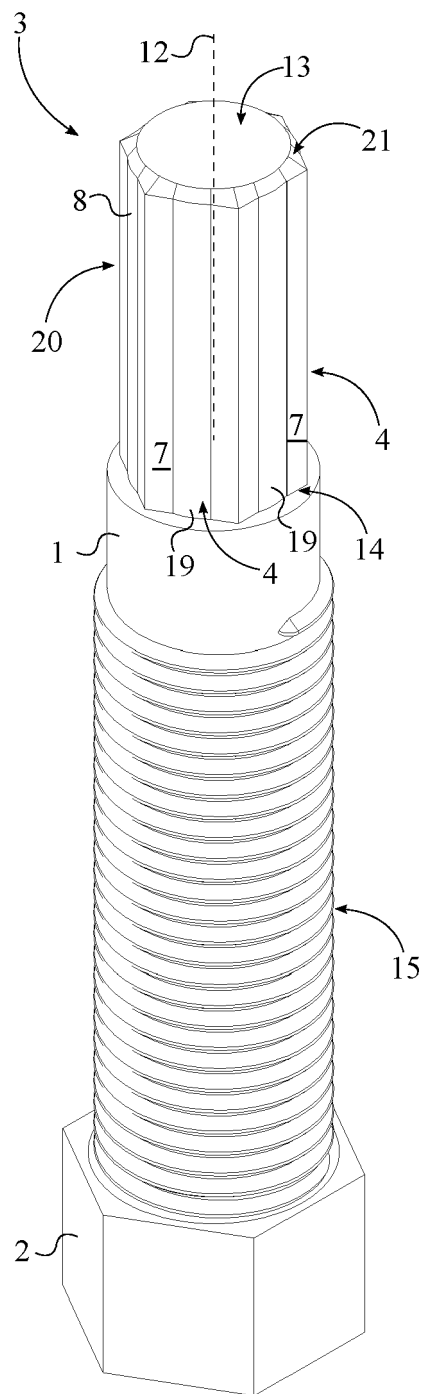


FIG. 5

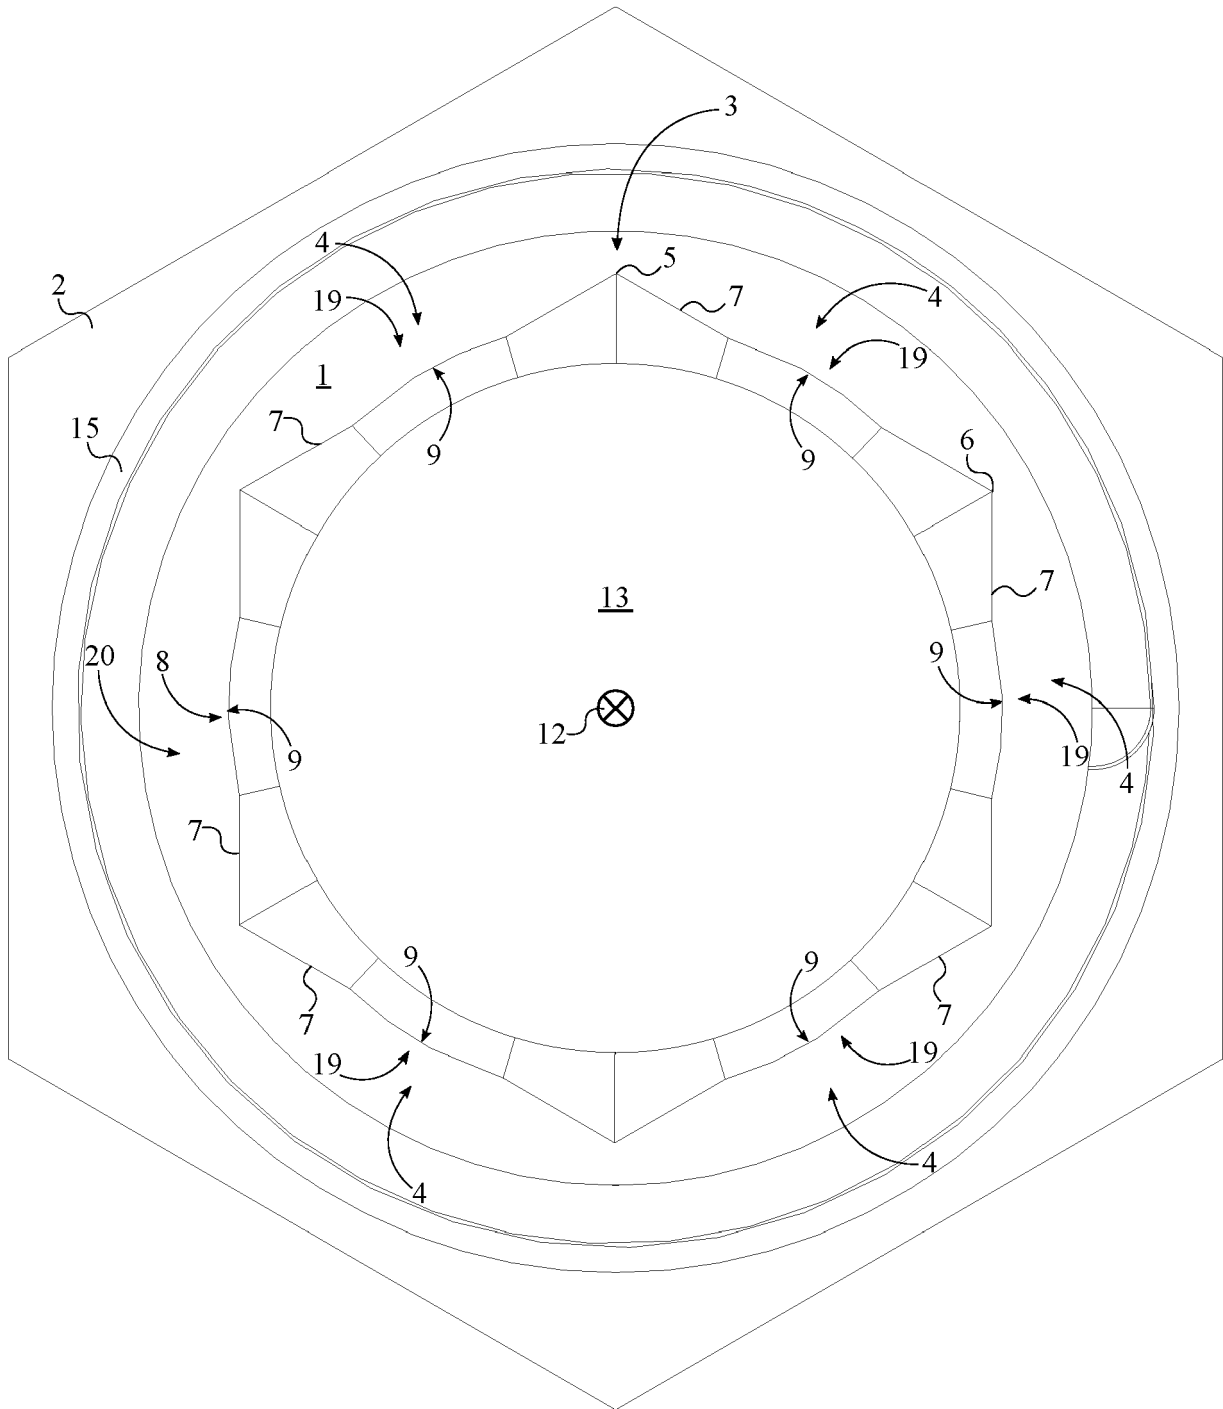


FIG. 6

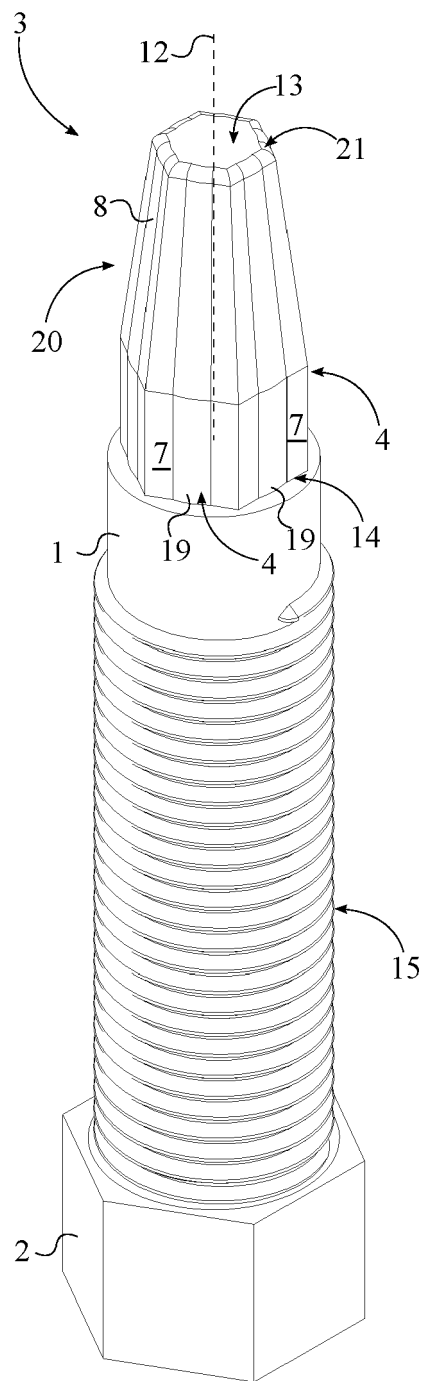


FIG. 7

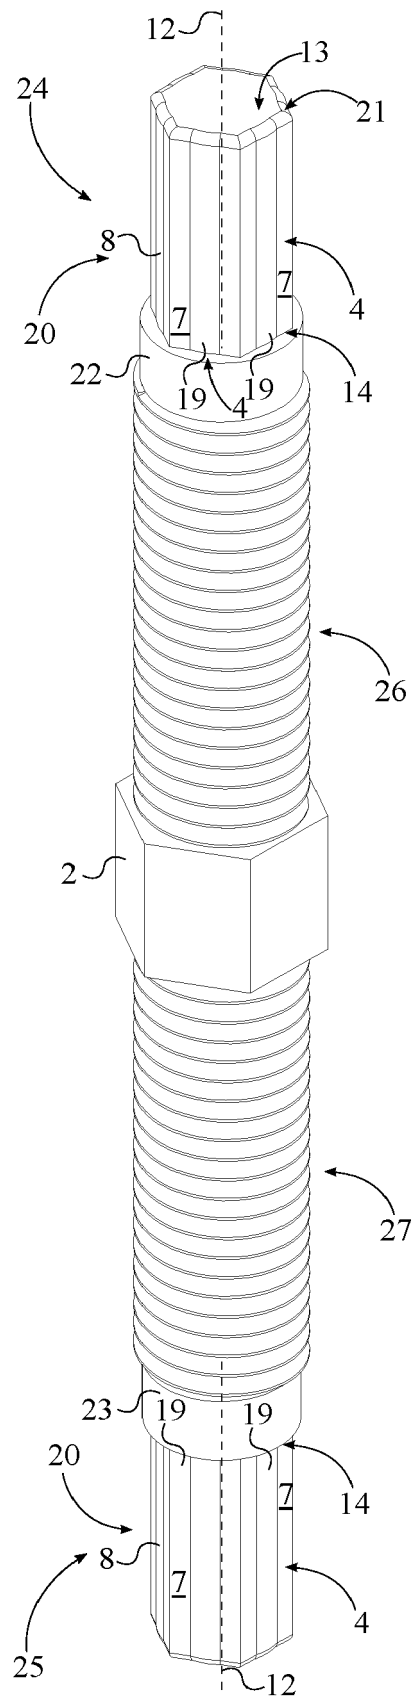


FIG. 8





## EUROPEAN SEARCH REPORT

Application Number

EP 22 19 5634

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

| DOCUMENTS CONSIDERED TO BE RELEVANT                                                                                                                                                                                                                    |                                                                                                                    |                                                                                                                                                                                                                                                                                       |                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Category                                                                                                                                                                                                                                               | Citation of document with indication, where appropriate, of relevant passages                                      | Relevant to claim                                                                                                                                                                                                                                                                     | CLASSIFICATION OF THE APPLICATION (IPC)                  |
| A                                                                                                                                                                                                                                                      | US 2015/314429 A1 (DOROSLOVAC ROBERT S [US]) 5 November 2015 (2015-11-05)<br>* abstract; figure 6 *<br>-----       | 1-13                                                                                                                                                                                                                                                                                  | INV.<br>B25B27/18<br>B25B15/00<br>B25B27/02<br>B25B27/04 |
| A                                                                                                                                                                                                                                                      | US 2017/312897 A1 (DOROSLOVAC ROBERT S [US] ET AL) 2 November 2017 (2017-11-02)<br>* abstract; figure 1 *<br>----- | 1-13                                                                                                                                                                                                                                                                                  |                                                          |
| A                                                                                                                                                                                                                                                      | US 2017/246733 A1 (SHEHAB KAREEM GAMAL [US]) 31 August 2017 (2017-08-31)<br>* abstract; figure 1A *<br>-----       | 9,10                                                                                                                                                                                                                                                                                  |                                                          |
| A                                                                                                                                                                                                                                                      | EP 0 930 132 A2 (EAZYPOWER CORP [US]) 21 July 1999 (1999-07-21)<br>* abstract; figures 1-13 *<br>-----             | 1-13                                                                                                                                                                                                                                                                                  |                                                          |
|                                                                                                                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                                                                                                       | TECHNICAL FIELDS SEARCHED (IPC)                          |
|                                                                                                                                                                                                                                                        |                                                                                                                    |                                                                                                                                                                                                                                                                                       | B25B                                                     |
| The present search report has been drawn up for all claims                                                                                                                                                                                             |                                                                                                                    |                                                                                                                                                                                                                                                                                       |                                                          |
| Place of search<br><b>The Hague</b>                                                                                                                                                                                                                    |                                                                                                                    | Date of completion of the search<br><b>22 December 2022</b>                                                                                                                                                                                                                           | Examiner<br><b>Pothmann, Johannes</b>                    |
| CATEGORY OF CITED DOCUMENTS<br>X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |                                                                                                                    | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>.....<br>& : member of the same patent family, corresponding document |                                                          |

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 19 5634

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-12-2022

10

15

20

25

30

35

40

45

50

55

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| <b>US 2015314429 A1</b>                   | <b>05-11-2015</b>   | <b>NONE</b>                |                     |
| <b>US 2017312897 A1</b>                   | <b>02-11-2017</b>   | <b>NONE</b>                |                     |
| <b>US 2017246733 A1</b>                   | <b>31-08-2017</b>   | <b>CN 107127372 A</b>      | <b>05-09-2017</b>   |
|                                           |                     | <b>US 2017246733 A1</b>    | <b>31-08-2017</b>   |
|                                           |                     | <b>US 2020139526 A1</b>    | <b>07-05-2020</b>   |
| <b>EP 0930132 A2</b>                      | <b>21-07-1999</b>   | <b>AR 014291 A1</b>        | <b>07-02-2001</b>   |
|                                           |                     | <b>AT 360506 T</b>         | <b>15-05-2007</b>   |
|                                           |                     | <b>AU 749361 B2</b>        | <b>27-06-2002</b>   |
|                                           |                     | <b>BR 9900044 A</b>        | <b>22-02-2000</b>   |
|                                           |                     | <b>CA 2258440 A1</b>       | <b>14-07-1999</b>   |
|                                           |                     | <b>CO 4810325 A1</b>       | <b>30-06-1999</b>   |
|                                           |                     | <b>CR 5954 A</b>           | <b>30-11-2000</b>   |
|                                           |                     | <b>DE 69935876 T2</b>      | <b>17-01-2008</b>   |
|                                           |                     | <b>EP 0930132 A2</b>       | <b>21-07-1999</b>   |
|                                           |                     | <b>ES 2286870 T3</b>       | <b>01-12-2007</b>   |
|                                           |                     | <b>IL 128011 A</b>         | <b>26-08-2001</b>   |
|                                           |                     | <b>NZ 333720 A</b>         | <b>27-10-2000</b>   |
|                                           |                     | <b>PL 330810 A1</b>        | <b>19-07-1999</b>   |
|                                           |                     | <b>RU 2225786 C2</b>       | <b>20-03-2004</b>   |
|                                           |                     | <b>TW 378169 B</b>         | <b>01-01-2000</b>   |
|                                           |                     | <b>US 6047620 A</b>        | <b>11-04-2000</b>   |
|                                           |                     | <b>ZA 99195 B</b>          | <b>12-07-1999</b>   |