

(19)



(11)

EP 4 142 411 A8

(12)

CORRECTED EUROPEAN PATENT APPLICATION

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 54

(51) International Patent Classification (IPC):
H04W 72/21 (2023.01)

(52) Cooperative Patent Classification (CPC):
H04L 5/0053; H04L 1/18; H04L 5/0091;
H04W 72/21; H04L 1/0072

(48) Corrigendum issued on:
09.04.2025 Bulletin 2025/15

(43) Date of publication:
01.03.2023 Bulletin 2023/09

(21) Application number: **22201403.7**

(22) Date of filing: **18.12.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(72) Inventors:
 • **GAO, Xuejuan**
Beijing, 100085 (CN)
 • **TONY, Ekpenyong**
Beijing, 100085 (CN)

(30) Priority: **12.01.2018 CN 201810032483**

(74) Representative: **Cabinet Nony**
11 rue Saint-Georges
75009 Paris (FR)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
18899538.5 / 3 740 018

Remarks:
 This application was filed on 13-10-2022 as a divisional application to the application mentioned under INID code 62.

(71) Applicant: **Datang Mobile Communications Equipment Co., Ltd.**
Beijing 100085 (CN)

(54) **TRANSMISSION METHOD, TERMINAL, AND BASE STATION**

(57) Disclosed are a transmission method, a terminal, and a base station, for use in resolving the technical problem in the prior art that a base station cannot perform accurate uplink scheduling for a scheduling request (SR) of a terminal due to that there is no explicit solution for how to distinguish which SR in a plurality of SR configuration is transmitted simultaneously with other UCIs. In the transmission method for distinguishing a plurality of

SR configurations provided by embodiments of the present invention, the terminal cascades an M-bit SR with a first UCI and simultaneously transmits same, and M-bit SR information is used for indicating SR states of the plurality of SR configurations of the terminal, thereby ensuring that a base station performs correct uplink scheduling on the terminal.

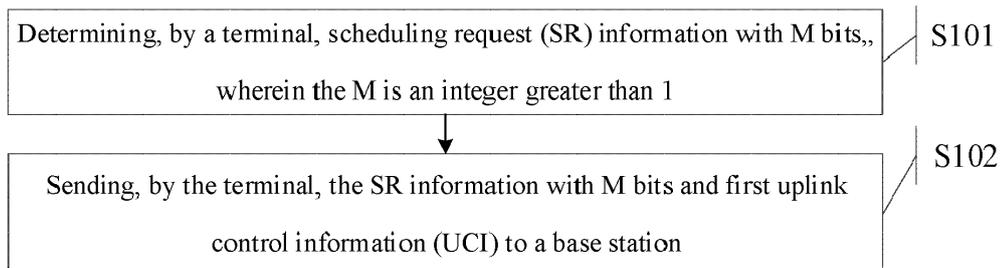


Fig. 1

EP 4 142 411 A8