



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) International Patent Classification (IPC):
B62J 6/023 ^(2020.01) **B60Q 1/12** ^(2006.01)
B60Q 1/115 ^(2006.01) **F21S 41/675** ^(2018.01)
F21S 41/63 ^(2018.01)

(48) Corrigendum issued on:
10.05.2023 Bulletin 2023/19

(52) Cooperative Patent Classification (CPC):
B60Q 1/122; B60Q 1/115; B60Q 1/12; B62J 6/023;
B62J 6/026; B62J 6/027; F21S 41/635;
F21S 41/675; B60Q 2300/134; B60Q 2300/136;
B60Q 2300/322; F21W 2107/17

(43) Date of publication:
22.03.2023 Bulletin 2023/12

(21) Application number: **22191803.0**

(22) Date of filing: **23.08.2022**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **WANG, CHENG**
TAIPEI CITY 106 (TW)
• **ZHANG, WEN-HONG**
ZHUNAN TOWNSHIP, MIAOLI COUNTY 35057
(TW)

(30) Priority: **17.09.2021 TW 110134728**

(74) Representative: **Durán-Corretjer, S.L.P.**
Còrsega, 329
(Paseo de Gracia/Diagonal)
08037 Barcelona (ES)

(71) Applicant: **Chian Yih Optotech Co., Ltd.**
Miaoli County 35057 (TW)

(54) **ADAPTIVE ILLUMINATING HEADLIGHT**

(57) An adaptive illuminating headlight (D1, D2, D3) is provided. The adaptive illuminating headlight (D1, D2, D3) includes a stator structure (1), a rotor structure (2), a driver (3), a light emitting unit (4), an optical assembly (5), and a control unit (6), and is installed on a vehicle (V) for use. The rotor structure (2) is configured to rotate relative to the stator structure (1) and has a carrying surface (201). The driver (3) is arranged between the stator structure (1) and the rotor structure (2) to drive the rotor structure (2). The light emitting unit (4) is arranged on the carrying surface (201) to emit an illumination light beam. The optical assembly (5) is configured to allow the illumination light beam to project outwardly so as to produce an illumination pattern (P). The control unit (6) is configured to control the driver (3) to operate according to a posture change of a vehicle body, such that the light emitting unit (4) is driven by the rotor structure (2) to rotate through a predetermined angle.

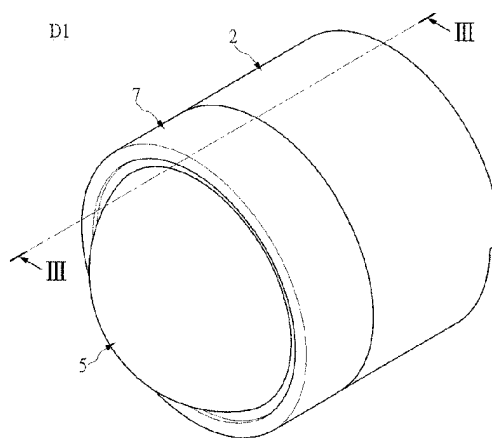


FIG. 2