



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.04.2023 Bulletin 2023/15

(51) International Patent Classification (IPC):
B28B 3/02 (2006.01) **B28B 5/02** (2006.01)
B30B 5/06 (2006.01) **B30B 11/02** (2006.01)

(21) Application number: **22211947.1**

(52) Cooperative Patent Classification (CPC):
B28B 3/024; B28B 5/021; B30B 5/06; B30B 11/02

(22) Date of filing: **10.11.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
• **STEFANI, FRANCO**
41049 SASSUOLO (IT)
• **GOZZI, FRANCO**
41043 FORMIGINE (IT)

(30) Priority: **16.11.2015 IT UB20155626**
08.04.2016 IT UA20162412

(74) Representative: **Casadei, Giovanni**
Bugnion S.p.A.
Via Vellani Marchi, 20
41124 Modena (IT)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
16804906.2 / 3 377 284

(71) Applicant: **System Ceramics S.p.A.**
41042 Fiorano Modenese MO (IT)

Remarks:
This application was filed on 07-12-2022 as a divisional application to the application mentioned under INID code 62.

(54) **A FORMING ELEMENT FOR CERAMIC ARTICLES**

(57) A pressing device, comprising:
a lower punch (10), provided with a pressing surface (10a) facing upwards; an upper punch (11), provided with a pressing surface (11a), facing downwards; at least one of the two punches is movable nearingly and distancingly relative to the other in order to perform pressing of a layer (L) of a ceramic material;
a first movable belt (2) comprising an active portion (3) arranged at least partially between the upper punch (11)

and the lower punch (10);
a second movable belt (4) comprising an active portion (5) arranged at least partially between the first movable belt (2) and the upper punch (13);
a shaped profile (6), which is so structured as to at least partially delimit a pressing chamber, which is detachably associated to the lower punch (10) or to the upper punch (11) in a projecting manner.

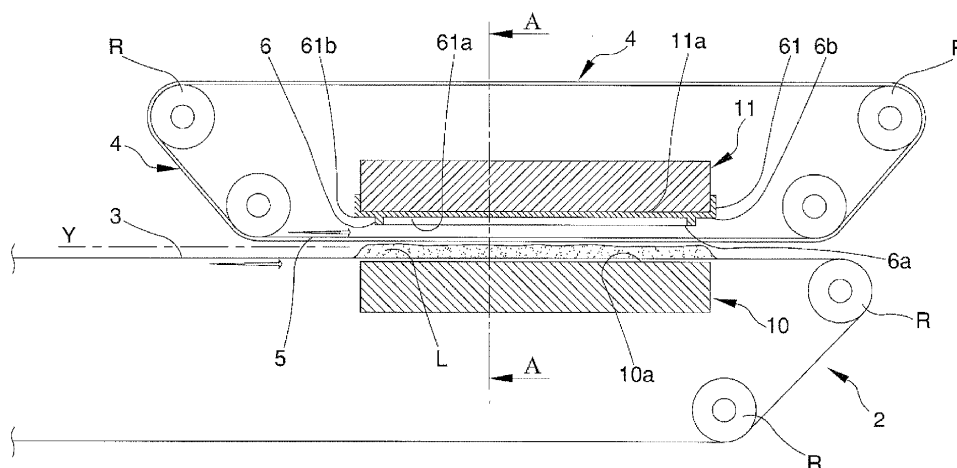


Fig. 1

Description

[0001] The present invention relates to a forming element for pressing ceramic products, in particular slabs, tiles and the like.

[0002] The invention relates in particular to a device for pressing ceramic products, invented by the same applicant and known in the sector from publication EP 150480, in which the power material to be pressed is arranged in the form of a layer on a rest plane constituted by the upper face of a continuous conveyor belt which is supported slidably on a pressing member or lower punch. The pressing is carried out with a pressing member or upper punch by means of interposing a continuous belt, loop-closed, the external surface whereof is facing towards the continuous conveyor belt.

[0003] With the aim of perimetally limiting a pressing zone, the upper punch is provided with a frame that projects downwards. Beyond perimetally delimiting the pressing zone, the forming frame also has the task of generating, following the pressing, an edge of the final pressed product characterised by a greater compaction or density than the internal zones. The device at present available, while being effective and giving a good performance, can be improved in flexibility with respect to a format change of the products to be pressed. In the presently available device, in fact, the format change of the ceramic product requires changing the upper punch with a punch provided with a frame conformed for carrying out the pressing in the new format. This represents a drawback from the point of view of both the working times, as the replacement of the upper punch requires a not-inconsiderable amount of time, and from the point of view of costs, as the upper punch provided with the forming frame is a rather expensive element.

[0004] The aim of the present invention is to provide a forming element for pressing ceramic products that enables obviating the drawbacks of the currently available devices.

[0005] An advantage of the forming element according to the present invention is to enable a format change in significantly shorter times than with the devices at present available.

[0006] A further advantage of the forming element according to the present invention is to reduce the costs necessary for enabling a format change of the products to be pressed.

[0007] Further characteristics and advantages of the present invention will become more apparent in the following detailed description of an embodiment of the present invention, illustrated by way of non-limiting example in the attached figures, in which:

- figure 1 illustrates a schematic and vertical elevation view of a pressing device adopting a forming element according to the present invention;
- figure 1a illustrates a schematic and vertical elevation view of the device according to the present in-

vention, in a further embodiment thereof;

- figure 2 illustrates a zone of the device of figure 1 in larger scale;
- figure 3 shows the zone in figure 2 in a pressing step;
- figure 4 shows a section view according to plane A-A of figure 1;
- figure 5 shows the device of figure 4 in a pressing step;
- figure 6 is an axonometric view of the forming element according to the present invention;
- figure 7 is a second possible embodiment of the forming element according to the present invention, viewed in a section plane perpendicular to the forward direction (Y).
- figure 8 is a further possible embodiment of the forming element according to the present invention, viewed in a section plane perpendicular to the forward direction (Y).

[0008] The pressing device depicted in the figures comprises a lower punch (10), provided with a pressing surface (10a) facing upwards, and an upper punch (11) provided with a pressing surface (11a) facing downwards. The two punches are part of a press, not illustrated in detail, by which press they are activated reciprocally nearingly and distancingly so as to carry out the pressing of a deposited load (L) of a layer of ceramic material.

[0009] The pressing device further comprises a first movable belt (2), which has an active portion (3) provided with a rest surface facing upwards. The active portion (3) is at least partially arranged between the upper punch (11) and the lower punch (10). The first movable belt (2) is thus arranged with the active portion (3) thereof above the lower punch (10) and below the upper punch (11). The active portion (3) of the first belt (2) is mobile along a forward direction (Y) for feeding the layers (L) of material to be pressed into the space comprised between the two punches (10, 11). The loads (L) to be pressed are deposited on the first belt (2) upstream of the two punches, using known means to the expert in the sector and not illustrated in detail. The first belt (2) is activated by means of rollers (R) arranged in relation to the pathway to be following, in a known way in the sector. The rollers have been only schematically represented in the figures.

[0010] The pressing device preferably comprises a second movable belt (4) provided with an active portion (5) arranged at least partially between the first movable belt (2) and the upper punch (11). The active portion (5) of the second movable belt (4) is mobile along the forward direction (Y) in agreement with the active portion (3) of the first belt (2). At least for a portion arranged at the punches (10, 11), and partially upstream and downstream thereof, the two active portions (3, 5) are both parallel to the forward direction (Y). The second belt (4) is also activated by means of rollers (R) arranged in relation to the pathway to be followed, in a known way in the sector. The rollers have been only schematically represented in the figures. The second belt (4) can be made

up of distinct portions connected to one another. The distinct portions can be identical or different to one another. For example, the second belt (4) can be made up of three distinct portions (not illustrated).

[0011] During the feeding of a load (L) to the press (10, 11), the movable belts (2, 4) move at a same velocity. The alignment and synchrony between the movable belts (2, 4) can be obtained in a known way via a retroactive control. During this step the punches (10, 11) are separated by a greater distance to allow inlet of the load (L) into the space comprised between the punches. In this configuration the active portions (3, 5) are parallel to one another and are separated by a distance which enables infeed of the load (L), the thickness of which measured perpendicularly to the rest surface of the lower active portion (3) is smaller than the distance separating the active portions (3, 5).

[0012] The pressing device comprises a shaped profile (6), structured for at least partially delimiting a pressing chamber. The shaped profile (6) can be arranged projecting from the pressing surface (10a) of the lower punch (10) or from the pressing surface (11a) of the upper punch (11). In the first case, the shaped profile (6) can be interposed between the active portion (3) of the first movable belt (2) and the lower punch (10). In the second case, the shaped profile (6) can be interposed between the active portion (5) of the second movable belt (4) and the upper punch (11).

[0013] In a preferred embodiment, the shaped profile (6) protrudes downwards with respect to the pressing surface (11a) of the upper punch (11). The shaped profile (6) can be interposed between the upper punch (11) and the active portion (5) of the second belt (4). In this way, the shaped profile (6) does not enter into contact with the load (L), while always staying clean. The second belt (4), at the end of the pressing step, is advanced without jolts due to a pre-tensioning, so as to distance the part of the active portion (5) which entered into contact with the load (L), in order for it to be cleaned. At the same time a consecutive portion of the second belt (4), which has already undergone the cleaning operations, takes the place of the preceding portion below the shaped profile (6) according to an advancement cycle synchronised with the belt (2).

[0014] As can easily be observed in figure 3, and as is known to the expert in the sector, the shaped profile (6) produces, during the pressing step, a greater compaction of the load (L) in the zone (Lb) underlying the shaped profile (6). This is because during the pressing step the distance between the lower surface of the shaped profile (6) and the pressing surface (10a) of the lower punch (10) is smaller than the distance between the pressing surfaces (10a, 11a) of the two punches (10, 11) in the whole zone where the shaped profile (6) is not present. In substance the material pressed by the shaped profile (6) acquires a greater density, preventing formation and propagation of cracks.

[0015] The shaped profile (6) overall delimits the bor-

der of the product, tile or slab, which will be obtained at the end of the production cycle. The zone of the border of the product, pressed by the shaped profile (6), has a greater density and a greater compaction. This facilitates the detaching of the material externally of the border zone, i.e. the material that has not been pressed by the shaped profile (6). The detaching of the external material carried out in a known way by means of appropriate devices which trim the edge of the product.

[0016] The shaped profile (6) is preferably in the shape of a frame which defines a closed border on a plane parallel to the pressing surfaces (10a, 11a) of the punches (10, 11). For example the shaped profile (6) can define a rectangular or square border, but can also be polygonal, or an open border or only some sides of the border.

[0017] While in machines at present available the shaped profile (6) is solidly constrained to the pressing surface (11a) of the upper punch (11), the shaped profile (6) of the invention is detachably associated to the upper punch (11). This leads to the very significant advantage of maintaining the same upper punch (11) for obtaining products having different formats, while replacing only the shaped profile (6). As will be easily understandable, the change operation of the shaped profile (6) is considerably more rapid and more economical with respect to a punch change operation. In the embodiment described and represented, the shaped profile (6) is associated to the upper punch (11), but alternatively it might be associated to the lower punch (10).

[0018] As it is visible in figure 6, in a preferred embodiment the shaped profile (6) has, on a section plane perpendicular to the pressing surfaces (10a, 11a), a rectangular or square section. Sections of different shape are also possible. The shape and size of the surface of the shaped profile (6) facing downwards, and therefore destined to enter into contact with the second belt (4) for pressing the load (L), influence the degree of compaction and density reached by the material to be pressed at the end of the pressing step. The choice of a flexible and elastically deformable material for the realisation of the shaped profile (6) enables exerting a pressure that is substantially uniform in the zone underlying the shaped profile (6).

[0019] The shaped profile (6) is overall tangent to a front plane (6a) that during the pressing step is parallel to the pressing surface (11a) of the upper punch (11) and to the pressing surface (10a) of the lower punch (10). In other terms, the front plane (6a) of the shaped profile (6) is tangent to the external surface of the shaped profile (6) in the more downwards-projecting zones, i.e. in the zones destined to enter into contact first with the active portion (5) of the second belt (4) during the pressing step. In a case where the shaped profile (6) is associated to the lower punch (10), the front plane (6a) of the shaped profile (6) is tangent to the external surface of the shaped profile (6) in the more upwards-projecting zones, i.e. in the zones destined to enter into contact first with the active portion (3) of the first belt (2) during the pressing

step. The shaped profile (6) projects from a base plane (6b) that overall during the pressing step is parallel to the pressing surface (11a) of the upper punch (11) and to the pressing surface (10a) of the lower punch (10).

[0020] In a possible embodiment, the shaped profile (6) is associated with a support (61), which is removably associable to the upper punch (11). The support (61) overall defines the base plane (6b) of the shaped profile (6) and extends internally and externally of the border delimited by the shaped profile (6). In a first embodiment, an inner part (61a) of the support (61), delimited within the shaped profile (61), is located at a same distance from the front plane (6a), at which distance the outer part of the support (61b) is also located, i.e. the part which remains external of the shaped profile (61). In an alternative embodiment, the inner part (61a) is located at a shorter distance from the front plane (6a) compared to the outer part (61b). In other terms, in this alternative embodiment the inner part (61a) is less contained internally of the shaped profile (6) with respect to the first embodiment. This enables giving, to the part of the load (L) that remains external of the shaped profile (6), a compaction and a density that are lower than the part delimited internally of the shaped profile (6).

[0021] In a possible alternative embodiment, shown in figure 7, one or more layers of covering (62) are associated to the support (61), for example by gluing. The shaped profile (6) is associated to the covering layer (62) (or the most external between the covering layers), for example by gluing. Both the frame (6) and the covering layer (62) enter into contact with the load (L).

[0022] The embodiment comprising the covering layer (62) can be obtained in the following way.

[0023] The covering layer (62) can be associated to the support (61) for example by gluing, with the aid of a punch (S) for maintaining the planarity of the support (61).

[0024] Thereafter it is possible to apply the shaped profile (6) by interposing a layer of glue between the profile and the covering layer (62).

[0025] At this point, the group formed by the support (61), the shaped profile (6) and the covering layer (62) can be pressed, preferably by laying a temporary plate (B) in the zone delimited by the shaped profile (6). The temporary plate (B) and the two punches (S) for carrying out the pressing are schematically represented in figure 7 in a broken line.

[0026] In a further alternative embodiment, shown in figure 8, the shaped profile (6) is applied to the support (61), to which one or more covering layers (62) are associated. At least a covering layer (62) overlaps, at least partially, the shaped profile (6), so that the shaped profile (6) is comprised between the support (61) and the covering layer (62). In particular, a central portion of the covering layer (62) is associated, for example by gluing, to the support (61), while a peripheral portion of the covering layer (62) is associated to the shaped profile (6). In this embodiment it is the covering layer (62) that enters into contact with the load (L).

[0027] In the zone located in proximity of the internal edge of the shaped profile (6), the covering layer (62), assumes a partially curved or rounded configuration. In this way, the shaped profile (6) exerts its pressing action without presenting live edges, or in any case with limited radii of curvature, in contact with the load (L).

[0028] The embodiment comprising the covering layer (62) can be obtained in the following way.

[0029] The covering layer (62) can be associated to the support (61) in a central zone, for example by gluing, while maintaining a peripheral zone of the covering layer (62) dissociated from the support (61).

[0030] Thereafter it is possible to insert the shaped profile (6) between the support (61) and the peripheral zone of the covering layer (62), interposing a layer of glue both in the interface between the shaped profile (6) and the support (61), and in the interface between the shaped profile (6) and the covering layer (62).

[0031] At this point, the group formed by the support (61), the shaped profile (6) and the covering layer (62) can be pressed, preferably by laying a temporary plate (B) in the zone delimited by the shaped profile (6). The temporary plate (B) and the two punches (S) for carrying out the pressing are schematically represented in figure 7 in a broken line.

[0032] Both the shaped profile (6) and the support (61) are preferably made of a flexible material, for example of a type usable for realising conveyor belts or the like. The support (61) can for example be in the form of a flexible carpet to which the shaped profile (6) is applied. The support (61) and the shaped profile (6) can be obtained in a known way by gluing and/or welding of a plurality of sheets of a material suitable for the purpose.

[0033] The fixing of the support (61) to the upper punch (11) can be done by means of devices of various nature within the scope of a technical expert in the sector. For example, the support (61) can be detachably constrained to lateral surfaces of the upper punch (11) by means of removable devices positioned along peripheral or border zones of the support (61). The flexibility of the support (61) facilitates the mounting and demounting operations. The flexibility of the support (61) further means that during the feeding step of the load (L) and in the positions of the punches (10, 11) in which the shaped profile (6) is not pressed in contact with the second belt (4) and/or the load (L) (figure 2), the support (61) can take on a bellied configuration and be partially detached from the pressing surface (11a) of the upper punch (11).

[0034] In the pressing position and in the positions close to the pressing position (figure 3), the shaped profile (6) is pressed in contact with the active portion (5) of the second belt (4) which in turn deforms assuming overall the shape of the shaped profile (6).

[0035] In a particularly advantageous embodiment (figures 4 and 5) the second movable belt (4) is provided with two protruding edges (4a), that in the active portion (5) are directed towards the active portion (3) of the first movable belt (2) and are parallel to a forward direction

(Y). The protruding edges (4a) are located outside the shaped profile (6), as shown in figures 4 and 5. In other terms, on a section plane perpendicular to the forward direction (Y), the shaped profile (6) is comprised between the protruding edges (4a). The function of the protruding edges (4a) is to laterally contain the load (L) so that, during the pressing step, it does not escape laterally to the first belt (2). The protruding edges (4a) preferably have, on a section plane perpendicular to the forward direction (Y), a section having a tapered shape with an apex directed downwards.

[0036] The forming element of the present invention attains all the set aims.

[0037] The use of a shaped profile (6) detachably associated to the upper punch (11) enables realising format changes in significantly shorter times with respect to the devices at present available; it is in fact sufficient to replace the shaped profile (6) instead of the whole punch, as is instead necessary with the devices at present available. The possibility of replacing only the shaped profile (6) further enables reducing the overall costs necessary for enabling a format change request, as it avoids the need to have available an equal number of punches.

Claims

1. A forming element for ceramic articles, suitable for a pressing device comprising an upper punch (11) and a lower punch (12), comprising a shaped profile (6) which is so structured as to at least partially delimit a pressing chamber, **characterized in that** the shaped profile (6) is associated with a support (61), which is removably associable to an upper punch (11) or a lower punch (10) of a pressing device.
2. A forming element according to claim 1, comprising a covering layer (62) associated to the support (61), which is at least partially overlapped on the shaped profile (6).
3. A forming element according to claim 1 or 2, wherein the shaped profile (6) is in the form of a frame.
4. A forming element according to one of the preceding claims, wherein the shaped profile (6) is made of at least partially flexible and elastically deformable material.
5. A forming element according to one of the preceding claims, wherein the shaped profile (6) is overall tangent to a front plane (6a) that during the pressing step is parallel to a pressing surface (11a) of the upper punch (11) and to a pressing surface (10a) of the lower punch (10).
6. A forming element according one of the preceding claims, wherein the support (61) overall defines a

base plane (6b) of the shaped profile (6) and extends internally and externally of the border delimited by the shaped profile (6).

7. A forming element according to claim 5, wherein an inner part (61a) of the support (61), delimited within the shaped profile (6), is located at a shorter distance from the front plane (6a) compared to an outer part (61b) of the support (61).
8. A forming element according to one of the preceding claims, wherein one or more layers of covering (62) are associated to the support (61), the shaped profile (6) being associated to the covering layer (62).
9. A forming element according to claim 8, wherein at least a covering layer (62) overlaps, at least partially, the shaped profile (6), so that the shaped profile (6) is comprised between the support (61) and the covering layer (62).
10. A forming element according to one of the preceding claims, wherein the support (61) can be detachably constrained to lateral surfaces of the upper punch (11) by means of removable devices positioned along peripheral or border zones of the support (61).

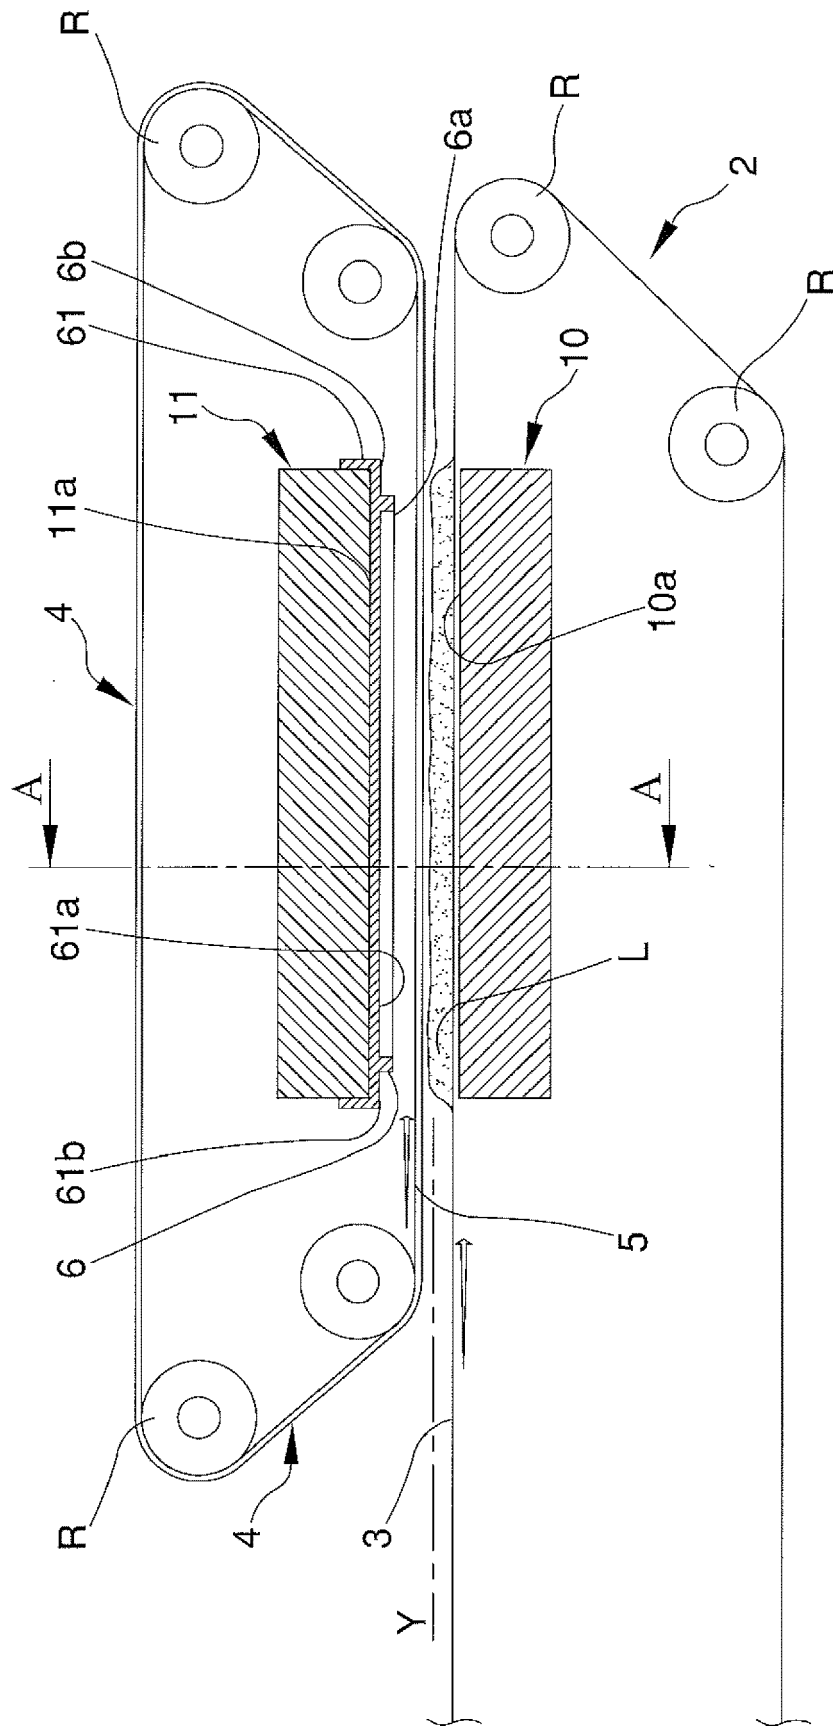


Fig.1

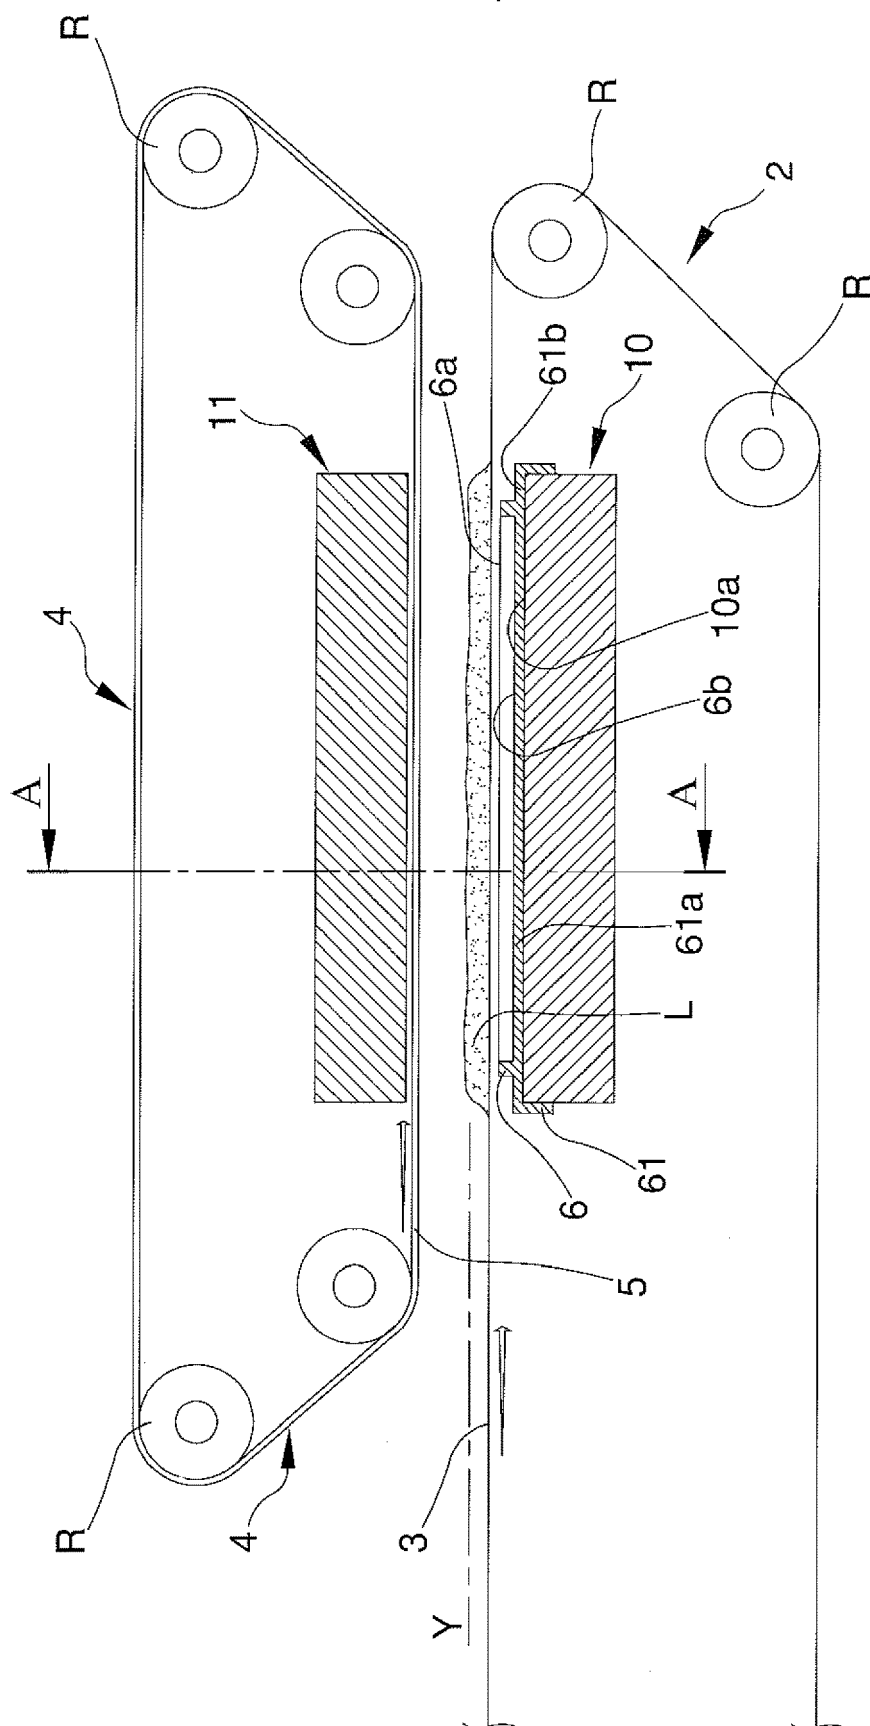


Fig. 1a

Fig. 2

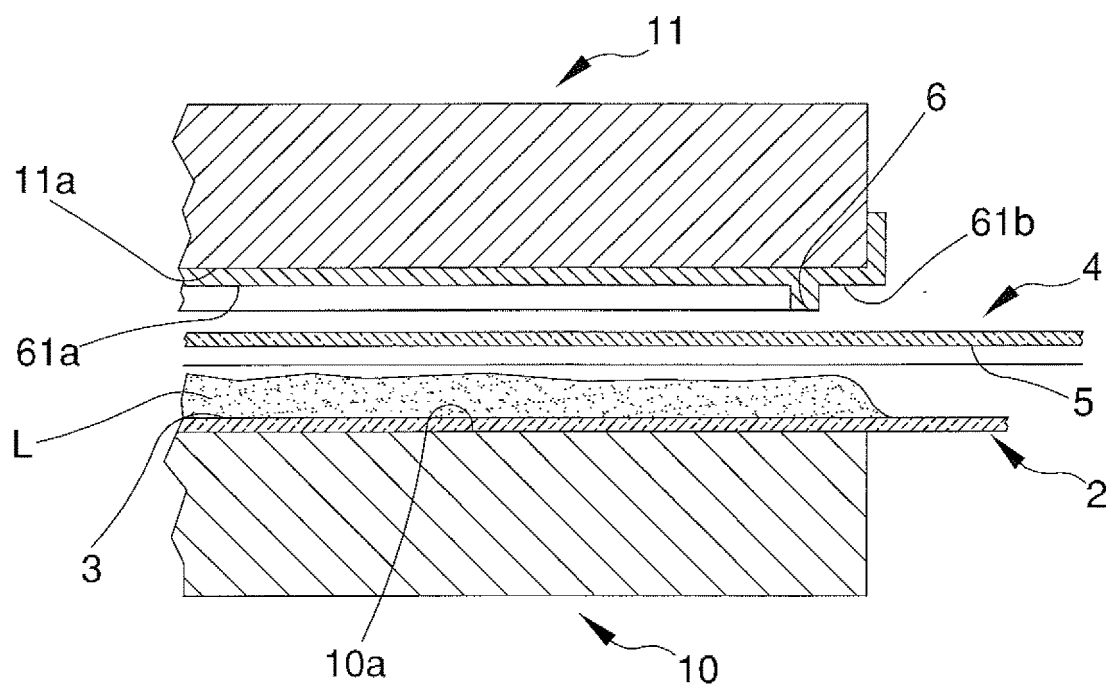


Fig. 3

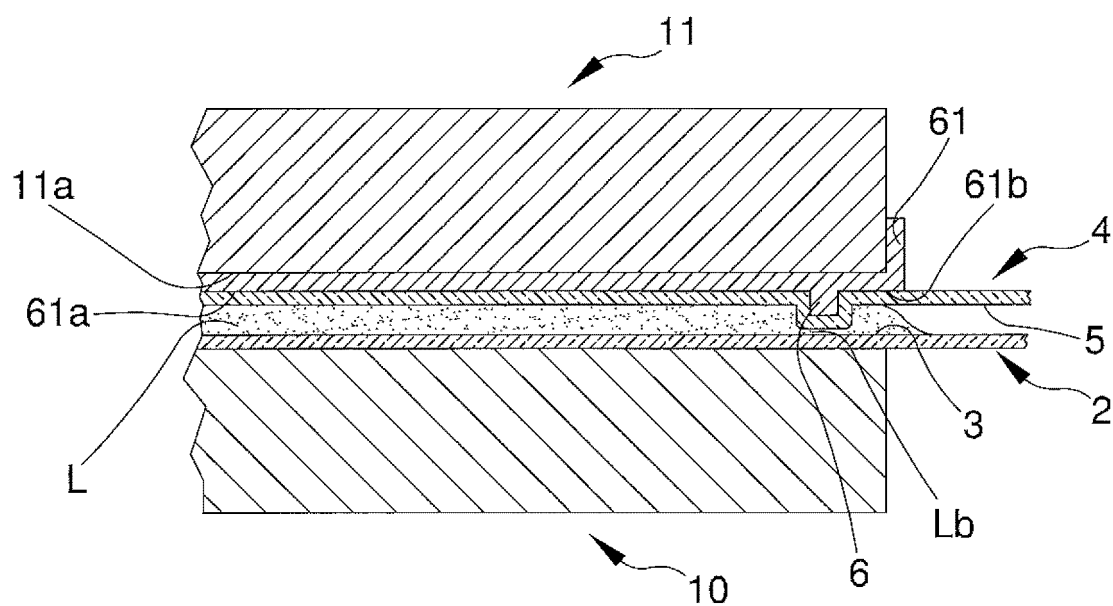


Fig. 4

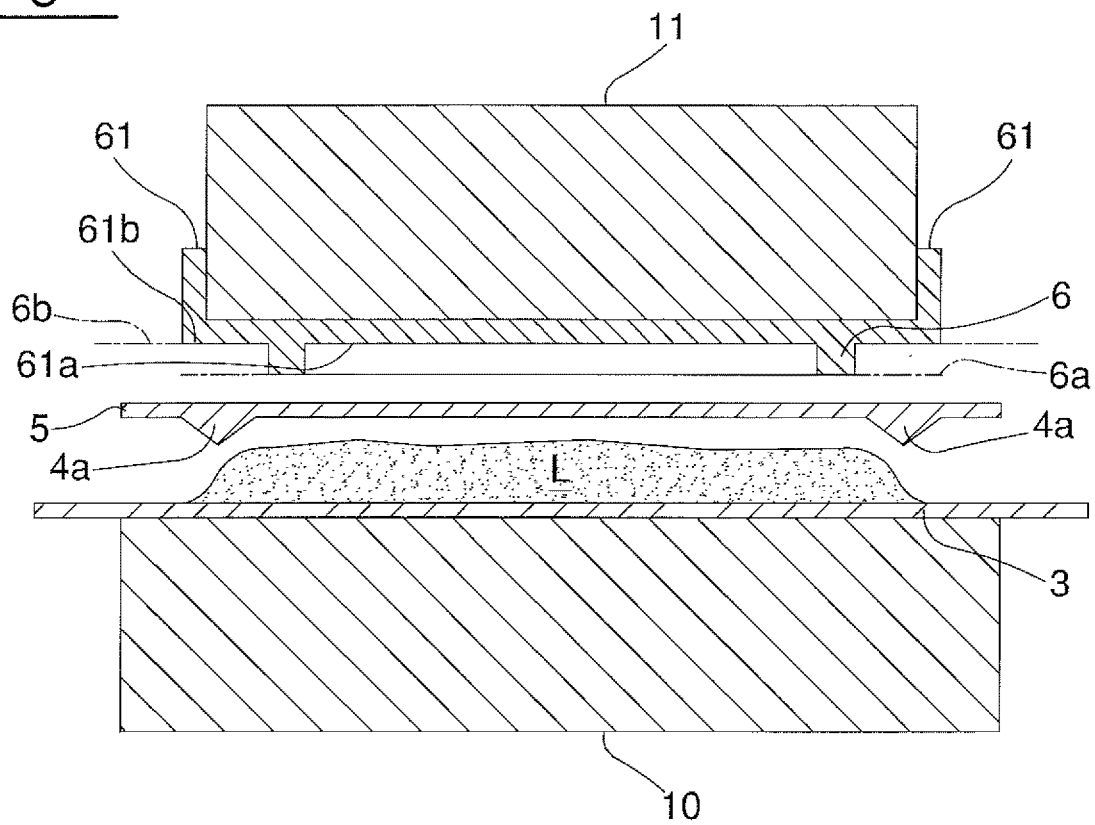
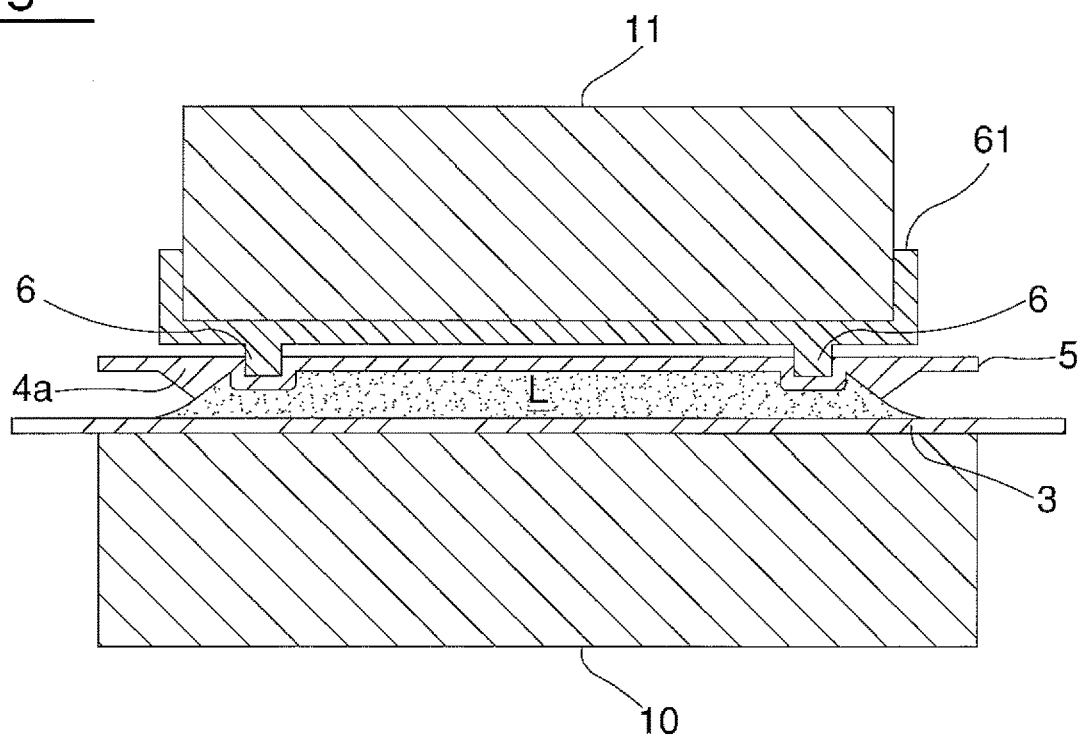


Fig. 5



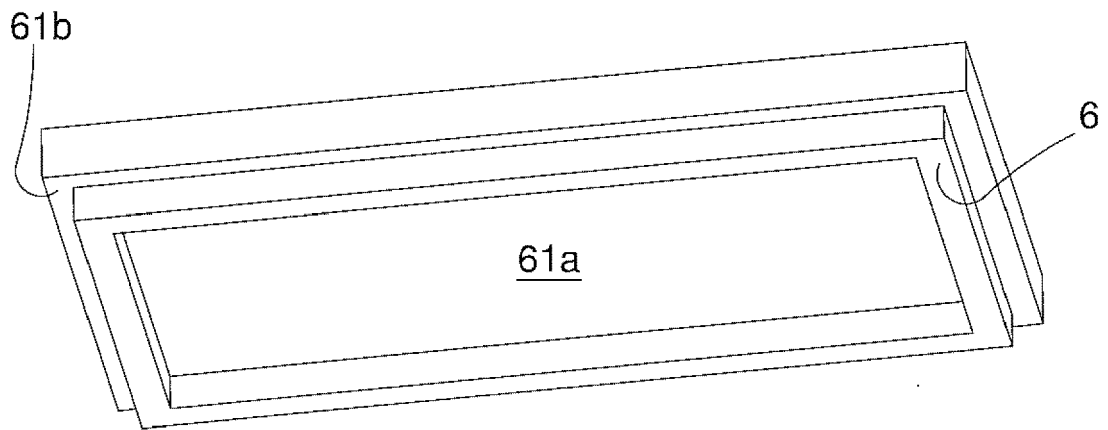


Fig. 6

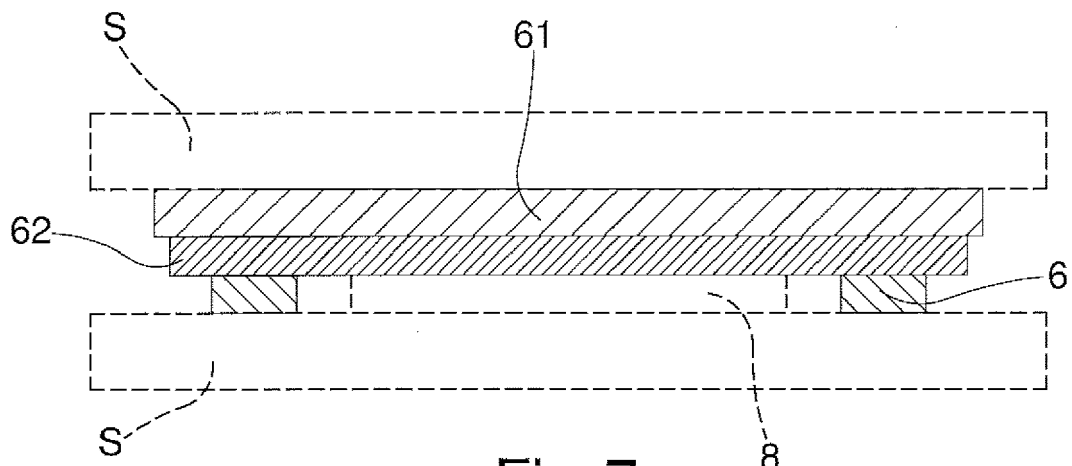


Fig. 7

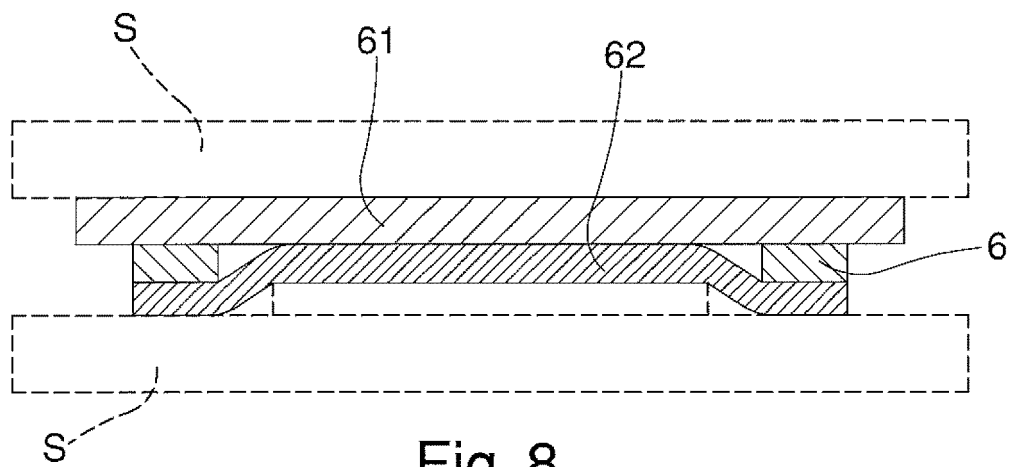


Fig. 8



EUROPEAN SEARCH REPORT

Application Number

EP 22 21 1947

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03:82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 500 480 A2 (SYSTEM SPA [IT]) 26 January 2005 (2005-01-26)	1, 3-7, 10	INV.
A	* figures 1-3 * * paragraphs [0014] - [0019], [0022], [0024] *	9	B28B3/02 B28B5/02 B30B5/06 B30B11/02
X	EP 1 136 211 A1 (RONFLETTE SA [LU]) 26 September 2001 (2001-09-26) * figures 1-3 * * paragraphs [0009] - [0016] *	1-6, 8	
X	EP 0 793 565 A1 (CAMORANI CARLO ANTONIO [IT]; ALGERI MARIS [IT]) 10 September 1997 (1997-09-10) * figures 39,40 * * paragraph [0113] *	1, 3, 5, 10	
			TECHNICAL FIELDS SEARCHED (IPC)
			B28B B30B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 28 February 2023	Examiner Voltz, Eric
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 21 1947

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-02-2023

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1500480 A2	26-01-2005	AT 390259 T	15-04-2008
		DE 602004012670 T2	09-04-2009
		EP 1500480 A2	26-01-2005
		ES 2300703 T3	16-06-2008
		PT 1500480 E	08-05-2008
EP 1136211 A1	26-09-2001	DE 60011221 T2	04-08-2005
		EP 1136211 A1	26-09-2001
		ES 2219254 T3	01-12-2004
		PT 1136211 E	30-09-2004
EP 0793565 A1	10-09-1997	AU 4174396 A	17-06-1996
		BR 9509806 A	21-10-1997
		CN 1173154 A	11-02-1998
		EP 0793565 A1	10-09-1997
		IT MO940159 A1	22-05-1996
		WO 9615888 A1	30-05-1996

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 150480 A [0002]