



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.06.2023 Bulletin 2023/24

(51) International Patent Classification (IPC):
H04R 25/00 ^(2006.01) **H01R 13/627** ^(2006.01)

(21) Application number: **23153281.3**

(52) Cooperative Patent Classification (CPC):
H01R 13/6278; H04R 25/607; H04R 2225/0213; H04R 2225/57

(22) Date of filing: **30.01.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **Nielsen, Henrik**
2750 Ballerup (DK)
- **Hansen, Finn**
2750 Ballerup (DK)
- **Teglbjærg, Thomas Stubbe**
2750 Ballerup (DK)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
15153165.4 / 3 051 842

(71) Applicant: **GN Hearing A/S**
2750 Ballerup (DK)

(74) Representative: **GN Store Nord A/S**
Lautrupbjerg 7
2750 Ballerup (DK)

(72) Inventors:
• **Johansen, Jan**
2750 Ballerup (DK)

Remarks:

This application was filed on 25.01.2023 as a divisional application to the application mentioned under INID code 62.

(54) **HEARING AID DEVICE**

(57) A hearing aid device, comprising a hearing aid housing (1) surrounding an inner space; a sound emitter (2) sized for being arranged in an ear canal of a human being; a conductor (3) configured for transmitting output sound or an output electrical signal to the sound emitter (2); a connector plug (4) arranged on an end of the conductor (3); a recess (16) at an outer surface of the connector plug (4); a frame structure (7) arranged in the inner space of the hearing aid housing (1); a microphone for converting sound into an audio input signal, the microphone being mounted to the frame structure (7); a signal processing unit configured for providing an audio output signal based on the audio input signal, the signal process-

ing unit being mounted to the frame structure (7); a connector socket (15) arranged in the frame structure (7), where the hearing aid housing (1) comprises a passage located in front of the connector socket (15), where the connector plug (4) is configured for insertion through the passage of the hearing aid housing (1) for connection to the connector socket (15); and a locking plug (6) configured for being inserted from outside of the hearing aid housing (1) so that a first part of the locking plug (6) extends through a housing opening at the hearing aid housing (1) and engages with the recess (16) to lock the connector plug (4) relative to the connector socket (15) in the frame structure (7).

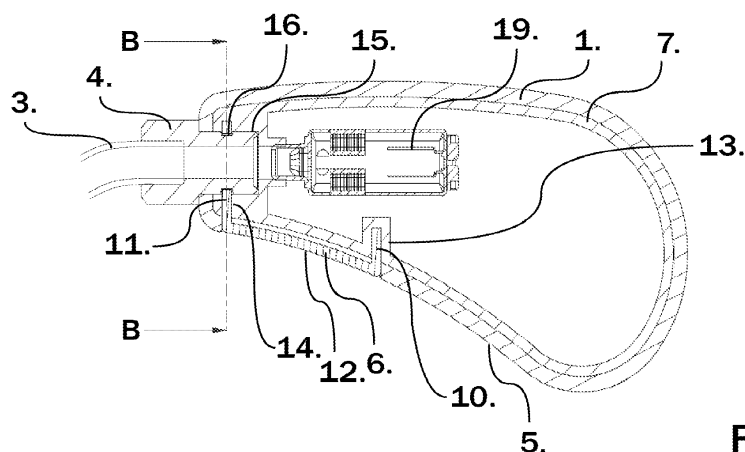


Fig. 2

Description

FIELD

[0001] The present disclosure relates to the field of hearing aid devices.

BACKGROUND

[0002] A hearing aid device may include a hearing aid housing, a microphone for converting sound into an audio input signal, and a signal processing unit adapted for processing the audio input signal into an audio output signal. A hearing aid may also include a sound emitter sized for being arranged in the ear canal of a human being. In some cases, the sound emitter (ear plug) may be arranged on one end of a conductor adapted for transmitting sound or electrical signal to the sound emitter.

[0003] Hearing aid devices of the above mentioned kind have been disclosed in US patent application publication nos. 2014079262 and no. 2009304216, and in US patent no. 8385573,

SUMMARY

[0004] When assembling hearing aid devices, it is desirable that each component be produced with very fine tolerances in order to provide the best fit between the individual components. This is, for example, due to the importance of avoiding that badly interconnected or assembled components may give rise to undesirable noises reducing the quality of the sound heard by the person wearing the hearing aid device. On the other hand such high requirements to the quality of the components may increase the production costs significantly and therefore it is a constantly recurring challenge to design hearing aid devices providing the best possible sound quality per production cost unit.

[0005] Based on this, it is an object to propose a hearing aid device with the option of reducing the requirements to the production tolerances but at the same time providing a good fit between the separate components.

[0006] According to one or more embodiments described herein, this is achieved by having the hearing aid housing the frame structure and the locking plug mutually adapted so that at least a part of said locking plug locking the connector plug in the socket, also interlocks the frame structure and the hearing aid housing in its inserted position.

[0007] Thereby the connector plug, the hearing aid housing and the frame are mutually interconnected by a single component providing the option of concentrating the required fine production tolerances in this component and in the areas of the other components (the frame and the hearing aid housing) abutting the locking plug. This further provides the option of producing other parts of these components with relatively rough tolerances and at the same time keeping a good fit between the compo-

nents.

[0008] This advantage may be achieved with hearing aid devices (e.g. the so called RITE "Receiver In The Ear" or the RIC "Receiver In Canal" type hearing aid device) where the sound emitter comprises a receiver configured for receiving said audio output signal from said signal processing unit, and the connector socket comprises conductor comprises electrical wiring configured for conducting said audio output signal to the receiver, as well as with hearing aid devices (e.g. the so called BTE "Behind The Ear" type hearing aid) where a receiver, configured for receiving said audio output signal from said signal processing unit, is arranged in the inner space in the hearing aid housing and connected to said connector socket and producing an output sound signal through the connector socket to said conductor comprising a tube configured for conducting said output sound signal from the connector socket and to the sound emitter.

[0009] In an embodiment the locking plug has the shape of a "U" comprising a first leg and a second leg and an intermediate section connecting the first and the second leg. In this relation the first leg may form the above mentioned first part of the locking plug locking the connector plug in the socket, and the second leg may interlock the frame structure and the housing.

[0010] In order to provide easy removal of the locking plug from the hearing aid device the locking plug comprises a surface being visible from outside the hearing aid housing when it is inserted in the hearing aid housing, and the colour of said surface on the locking plug differs from the colour of the hearing aid housing.

[0011] In this relation the hearing aid housing may comprise a concave surface, and the hearing aid housing and the locking plug being configured so that the visible surface on the locking plug is flush with said concave surface on the hearing aid housing. As the wearer normally carries the hearing aid so that the concave side of the hearing aid housing faces the his ear, then this embodiment, and especially if the visible surface is completely surrounded by the concave surface, provides the option of wearing the hearing aid housing so that the visible surface on the locking plug is not visible for others. The skilled person will in this relation easily recognize that the principle of having the visible surface of the locking plug completely surrounded by the concave surface of the hearing aid housing can be used in relation to most other BTE type hearing aids independently of the above mentioned embodiments.

[0012] The hearing aid may further comprise two locking plugs of the above mentioned kind being shaped substantially identical so that the two locking plugs are interchangeable. In this relation the visible surface on the locking plugs may be different, e.g. having different respective identification features. For example, colors such as red and green or different ornamentation such as an "L" and an "R" shaped ornamentation, would enable the user to easily identify the hearing aid housing that is to be

placed behind his left or right ear. As another example of identification feature, the locking plugs may have different respective textures or surface finishes. In further example, the visible parts of the locking plugs may have different respective shapes. The skilled person will in this relation easily recognize that the principle of having locking plugs with different visible surfaces can be used in relation to most other BTE type hearing aids independently of the above mentioned embodiments.

[0013] In a further embodiment the locking plug is configured so that the part that mutually interlocks said frame structure and said housing, comprises two resilient legs extending on opposite sides of the connector plug in its locked position in the connector socket.

[0014] In this relation the resilient legs and/or the connector plug may advantageously comprise oblique surfaces arranged so that the resilient legs are forced away from each other if the locking plug is mounted in the hearing aid housing when the connector plug is inserted into the connector socket.

[0015] A hearing aid device includes: a hearing aid housing surrounding an inner space; a frame structure arranged in the inner space of the hearing aid housing, the frame structure configured for mounting at least a microphone for converting sound into an audio input signal, and a signal processing unit configured for providing an audio output signal based on the audio input signal; a sound emitter sized for being arranged in an ear canal of a human being; a conductor configured for transmitting output sound or an output electrical signal to the sound emitter, wherein the sound emitter is arranged on a first end of the conductor; a connector socket arranged in the frame structure, wherein the hearing aid housing comprises a passage located in front of the connector socket; a connector plug arranged on a second end of the conductor, the connector plug being configured for insertion through the passage of the hearing aid housing for connection to the connector socket, a recess at an outer surface of the connector plug; and a locking plug configured for being inserted from outside of the hearing aid housing so that a first part of the locking plug extends through a housing opening at the hearing aid housing, and engages with the recess to lock the connector plug relative to the connector socket.

[0016] Optionally, the conductor is configured to transmit the output electrical signal, not the output sound, and wherein the sound emitter comprises a receiver configured for receiving the output electrical signal transmitted via wiring in the conductor.

[0017] Optionally, the conductor is configured to transmit the output sound, not the output electrical signal; wherein the hearing aid further comprises a receiver arranged in the hearing aid housing, the receiver configured to provide the output sound to the conductor for transmission to the sound emitter through the conductor.

[0018] Optionally, the locking plug has a U-shape, and comprises a first leg, a second leg, and an intermediate section connecting the first leg and the second leg,

wherein the first leg comprises the first part of the locking plug, and wherein the second leg is configured to interlock the frame structure and the hearing aid housing relative to each other.

[0019] Optionally, the locking plug comprises an exterior surface visible from outside the hearing aid housing when the locking plug is inserted in the hearing aid housing, and wherein the exterior surface of the locking plug has a color that is different from a color of the hearing aid housing.

[0020] Optionally, the hearing aid housing comprises a concave surface, and the exterior surface of the locking plug is flush with the concave surface of the hearing aid housing when the locking plug is inserted in the hearing aid housing.

[0021] Optionally, the exterior surface of the locking plug is surrounded by the concave surface of the hearing aid housing.

[0022] Optionally, the hearing aid device further include an additional locking plug, wherein the locking plug and the additional locking plug are interchangeable, and have different respective identification features.

[0023] Optionally, the first part of the locking plug comprises two resilient legs extending on opposite sides of the connector plug when the connector plug is connected to the connector socket.

[0024] Optionally, the resilient legs are displaceable away from each other when the locking plug is being mounted to the hearing aid housing.

[0025] Optionally, when the locking plug is inserted from the outside of the hearing aid housing, the first part of the locking plug also extends through an opening at the frame structure.

[0026] Optionally, the connector plug is also configured to lock the frame structure relative to the hearing aid housing.

[0027] Other features, embodiments, and advantageous will be described below in the detailed description.

DESCRIPTION OF THE FIGURES

[0028]

Figure 1 shows a hearing aid device according to some embodiments.

Figure 2 shows a cross section along the line A - A shown in fig. 2a of a part of the hearing aid device shown in figure 1 in one embodiment.

Figure 2a is a front view of the hearing aid device part shown in figure 2.

Figure 2b is a cross section along the line B - B shown in fig. 2

Figure 3 shows a cross section along the line A - A shown in fig. 3a of a part of the hearing aid device

shown in figure 1 in an alternative embodiment.

Figure 3a is a front view of the hearing aid device part shown in figure 3.

Figure 3b is a cross section along the line B - B shown in figure 2 or 3.

DETAIL DESCRIPTION

[0029] Various embodiments are described hereinafter with reference to the figures. Like reference numerals refer to like elements throughout. Like elements will, thus, not be described in detail with respect to the description of each figure. It should also be noted that the figures are only intended to facilitate the description of the embodiments. They are not intended as an exhaustive description of the claimed invention or as a limitation on the scope of the claimed invention. In addition, an illustrated embodiment needs not have all the aspects or advantages shown. An aspect or an advantage described in conjunction with a particular embodiment is not necessarily limited to that embodiment and can be practiced in any other embodiments even if not so illustrated, or if not so explicitly described.

[0030] Thus, figure 1 shows a hearing aid device of the BTE (Behind The Ear) or the RITE (Receiver In The Ear) type. The hearing aid device has a hearing aid housing 1 and a separate sound emitter 2 connected to the hearing aid housing via a conductor 3 being releasably plugged into the hearing aid housing 1 via a connector plug 4. In order to keep the connector plug 4 attached to the hearing aid housing 1 a locking plug 6 is inserted into the hearing aid housing through an opening arranged in a concave surface 5 on the outside of the hearing aid housing 1.

[0031] As will be described in more detail below the hearing aid housing encloses a frame structure 7 providing a secure support for mounting various functional components of hearing aid devices, such as a microphone arranged for converting exterior sound into an audio input signal and a signal processing unit 8 configured for processing the audio input signal according to a hearing loss of a user of the hearing device into an audio output signal. As it is evident for the skilled person that these and other functional components may be mounted to the frame 7 in many different ways and positions, then most of these components are not shown in these drawings.

[0032] In the BTE embodiment shown on figures 2, 2a and 2b the hearing aid housing 1 also encloses a receiver 19 configured for converting the audio output signal from the signal processing unit (not shown in this drawing) into an output sound, and the conductor 3 is a tube configured for transmitting the output sound to the sound emitter 2 (not shown in this drawing).

[0033] In the RITE embodiment shown on figure 3, 3a and 3b, the receiver (not shown) configured for converting the audio output signal (output electrical signal) from

the signal processing unit 8 into an output sound is arranged in the sound emitter 2 shown on figure 1, and the conductor 3 is in this embodiment configured for transmitting, e.g. with electrical wiring 9, the audio output signal (output electrical signal) to the receiver arranged in the sound emitter 2.

[0034] In these embodiments the locking plug 6, both in the BTE and the RITE version shown in figures 2, 2a, 2b and figures 3, 3a, 3b respectively, has a U-shaped configuration with a first leg 10 and a second leg 11 and an intermediate portion extending between the first leg 10 and the second leg 11 and the intermediate portion forms the visible surface 12 on the locking plug 6.

[0035] This provides the option of providing different ornamentation or colouring on the visible surface 12 on the intermediate portion of the locking plug 6 in order e.g., to show information, such as a left/right indication, to the user. Due to the fact that the visible surface 12 on the locking plug 6 is arranged on the concave surface or side 5 of the hearing aid housing 1, then this information will be concealed for others, due to the fact that the concave surface or side 5 most often faces the ear of the user carrying the hearing aid housing behind the ear.

[0036] As shown especially on figures 2 and 3 the first leg 10 extends into a first slot 13 in the frame structure 7 and the second leg 11 extends into a second slot 14 in the frame structure 7 so that the intermediate portion is held in a fixed position extending between the two slots. Due to the locking plug 6 being fixed with respect to the frame structure 7, and the intermediate portion fitting snugly into an opening in the hearing aid housing 1, then the hearing aid housing 1 is thereby fixed by the locking plug 6 with respect to the frame structure 7.

[0037] As mentioned above the connector plug 4 is inserted into the hearing aid housing 1 where it is connected to the connector socket 15. In order to fix the connector plug 4 in the connector socket 15 the free end of the second leg 11 on the locking plug 6 is formed by two resilient legs 17, 18 that extends via the second slot 14 into the connector socket 15 formed in the frame structure 7, and so that each resilient leg 17, 18 engages with a recess 16 on opposite sides of the connector plug 4 and thereby locks the connector plug 4 in its inserted position in the connector socket 15.

[0038] In the above embodiments, both the first leg 10 and the second leg 11 of the locking plug 6 are inserted into respective openings at the frame structure 7. In other embodiments, only one of the legs 10, 11 is inserted into an opening at the frame structure 7. For example, in other embodiments, the first leg 10 may be inserted through a housing opening at the hearing aid housing to reach the connector plug 4. In such case, the frame structure 7 does not have an opening for allowing the first leg 10 to extend therethrough.

[0039] Also, in other embodiments, the locking plug 6 may not include the second leg 11.

[0040] Embodiments of the invention are disclosed in the following list of enumerated items:

1. A hearing aid device, comprising:

a hearing aid housing surrounding an inner space;
 a frame structure arranged in the inner space of the hearing aid housing, the frame structure configured for mounting at least a microphone for converting sound into an audio input signal, and a signal processing unit configured for providing an audio output signal based on the audio input signal;
 a sound emitter sized for being arranged in an ear canal of a human being;
 a conductor configured for transmitting output sound or an output electrical signal to the sound emitter, wherein the sound emitter is arranged on a first end of the conductor;
 a connector socket arranged in the frame structure, wherein the hearing aid housing comprises a passage located in front of the connector socket;
 a connector plug arranged on a second end of the conductor, the connector plug being configured for insertion through the passage of the hearing aid housing for connection to the connector socket;
 a recess at an outer surface of the connector plug; and
 a locking plug configured for being inserted from outside of the hearing aid housing so that a first part of the locking plug extends through a housing opening at the hearing aid housing, and engages with the recess to lock the connector plug relative to the connector socket.

2. The hearing aid device according to item 1, wherein the conductor is configured to transmit the output electrical signal, not the output sound, and wherein the sound emitter comprises a receiver configured for receiving the output electrical signal transmitted via wiring in the conductor.

3. The hearing aid device according to item 1, wherein the conductor is configured to transmit the output sound, not the output electrical signal; wherein the hearing aid further comprises a receiver arranged in the hearing aid housing, the receiver configured to provide the output sound to the conductor for transmission to the sound emitter through the conductor.

4. The hearing aid device according to item 1, wherein the locking plug has a U-shape, and comprises a first leg, a second leg, and an intermediate section connecting the first leg and the second leg, wherein the first leg comprises the first part of the locking plug, and wherein the second leg is configured to interlock the frame structure and the hearing aid

housing relative to each other.

5. The hearing aid device according to item 1, wherein the locking plug comprises an exterior surface visible from outside the hearing aid housing when the locking plug is inserted in the hearing aid housing, and wherein the exterior surface of the locking plug has a color that is different from a color of the hearing aid housing.

6. The hearing aid device according to item 5, wherein the hearing aid housing comprises a concave surface, and the exterior surface of the locking plug is flush with the concave surface of the hearing aid housing when the locking plug is inserted in the hearing aid housing.

7. The hearing aid device according to item 6, wherein the exterior surface of the locking plug is surrounded by the concave surface of the hearing aid housing.

8. The hearing aid device according to item 5, further comprising an additional locking plug, wherein the locking plug and the additional locking plug are interchangeable, and have different respective identification features.

9. The hearing aid device according to item 1, wherein the first part of the locking plug comprises two resilient legs extending on opposite sides of the connector plug when the connector plug is connected to the connector socket.

10. The hearing aid device according item 9, wherein the resilient legs are displaceable away from each other when the locking plug is being mounted to the hearing aid housing.

11. The hearing aid device according to item 1, wherein when the locking plug is inserted from the outside of the hearing aid housing, the first part of the locking plug also extends through an opening at the frame structure.

12. The hearing aid device according to item 1, wherein the connector plug is also configured to lock the frame structure relative to the hearing aid housing.

[0041] Although some embodiments have been described and shown in detail, the claimed invention is not restricted to them, but may also be embodied in other ways within the scope of the subject matter defined in the following claims. In particular, it is to be understood that other embodiments may be utilized and structural and functional modifications may be made without departing from the scope of the claimed invention. As an example of this it will be apparent to the skilled person

that the claimed invention may also be used in relation to hearing aids having other or different functional components arranged in the hearing aid housing 1 or the sound emitter 2 than what has been mentioned above.

[0042] In device claims enumerating several features, several of these features can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims or described in different embodiments does not indicate that a combination of these measures cannot be used to advantage.

[0043] It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

[0044] Although particular features have been shown and described, it will be understood that they are not intended to limit the claimed invention, and it will be made obvious to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the claimed invention. The specification and drawings are, accordingly to be regarded in an illustrative rather than restrictive sense. The claimed invention is intended to cover all alternatives, modifications and equivalents.

Claims

1. A hearing aid device, comprising:

a hearing aid housing (1) surrounding an inner space;
 a sound emitter (2) sized for being arranged in an ear canal of a human being;
 a conductor (3) configured for transmitting output sound or an output electrical signal to the sound emitter (2);
 a connector plug (4) arranged on an end of the conductor (3);
 a recess (16) at an outer surface of the connector plug (4);
 a frame structure (7) arranged in the inner space of the hearing aid housing (1);
 a microphone for converting sound into an audio input signal, the microphone being mounted to the frame structure (7);
 a signal processing unit configured for providing an audio output signal based on the audio input signal, the signal processing unit being mounted to the frame structure (7);
 a connector socket (15) arranged in the frame structure (7), where the hearing aid housing (1) comprises a passage located in front of the connector socket (15), where the connector plug (4) is configured for insertion through the passage

of the hearing aid housing (1) for connection to the connector socket (15); and

a locking plug (6) configured for being inserted from outside of the hearing aid housing (1) so that a first part of the locking plug (6) extends through a housing opening at the hearing aid housing (1) and engages with the recess (16) to lock the connector plug (4) relative to the connector socket (15) in the frame structure (7).

2. The hearing aid device according to claim 1, wherein the conductor (3) is configured to transmit the output electrical signal, not the output sound, and wherein the sound emitter comprises a receiver (19) configured for receiving the output electrical signal transmitted via wiring in the conductor (3).
3. The hearing aid device according to claim 1, wherein the conductor (3) is configured to transmit the output sound, not the output electrical signal; wherein the hearing aid further comprises a receiver (19) arranged in the hearing aid housing, the receiver (19) configured to provide the output sound to the conductor for transmission to the sound emitter (2) through the conductor (3).
4. The hearing aid device according to claim 1, wherein the locking plug (6) has a U-shape, and comprises a first leg (11), a second leg (10), and an intermediate section (12) connecting the first leg (11) and the second leg (10), wherein the first leg (11) comprises the first part of the locking plug (6), and wherein the second leg (10) is configured to interlock the frame structure (7) and the hearing aid housing (1) relative to each other.
5. The hearing aid device according to claim 1, wherein the locking plug (6) comprises an exterior surface visible from outside the hearing aid housing (1) when the locking plug (6) is inserted in the hearing aid housing (1), and wherein the exterior surface of the locking plug (6) has a color that is different from a color of the hearing aid housing (1).
6. The hearing aid device according to claim 5, wherein the hearing aid housing (1) comprises a concave surface, and the exterior surface of the locking plug (6) is flush with the concave surface of the hearing aid housing (1) when the locking plug is inserted in the hearing aid housing.
7. The hearing aid device according to claim (6), wherein the exterior surface of the locking plug (6) is surrounded by the concave surface of the hearing aid housing (1).
8. The hearing aid device according to claim 5, further comprising an additional locking plug (6), wherein

the locking plug 6 and the additional locking plug (6) are interchangeable, and have different respective identification features.

9. The hearing aid device according to claim 1, wherein the first part (11) of the locking plug (6) comprises two resilient legs (17, 18) extending on opposite sides of the connector plug (4) when the connector plug (4) is connected to the connector socket (15). 5 10
10. The hearing aid device according claim 9, wherein the resilient legs (17, 18) are displaceable away from each other when the locking plug (6) is being mounted to the hearing aid housing (1). 15
11. The hearing aid device according to claim 1, wherein when the locking plug (6) is inserted from the outside of the hearing aid housing (1), the first part (11) of the locking plug (6) also extends through an opening at the frame structure (7). 20

25

30

35

40

45

50

55

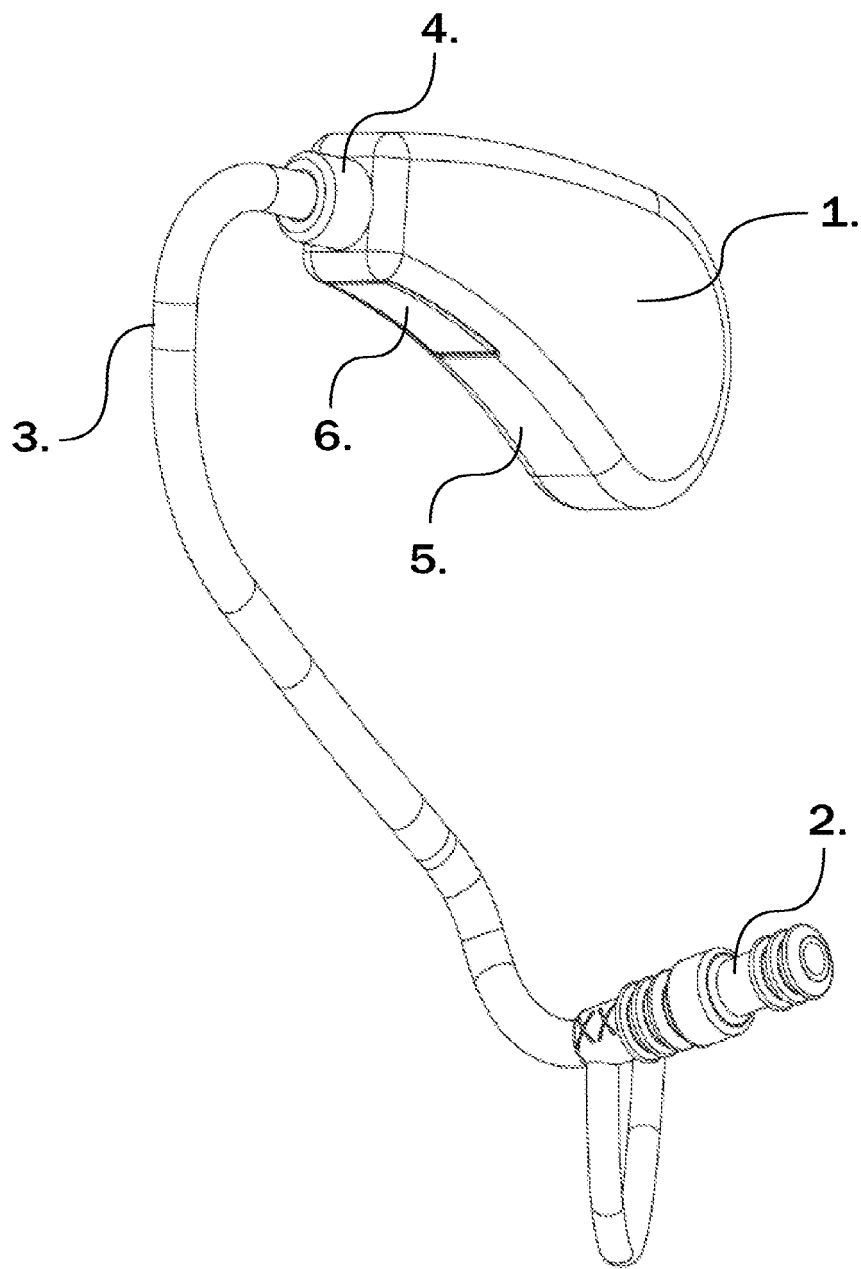


Fig. 1

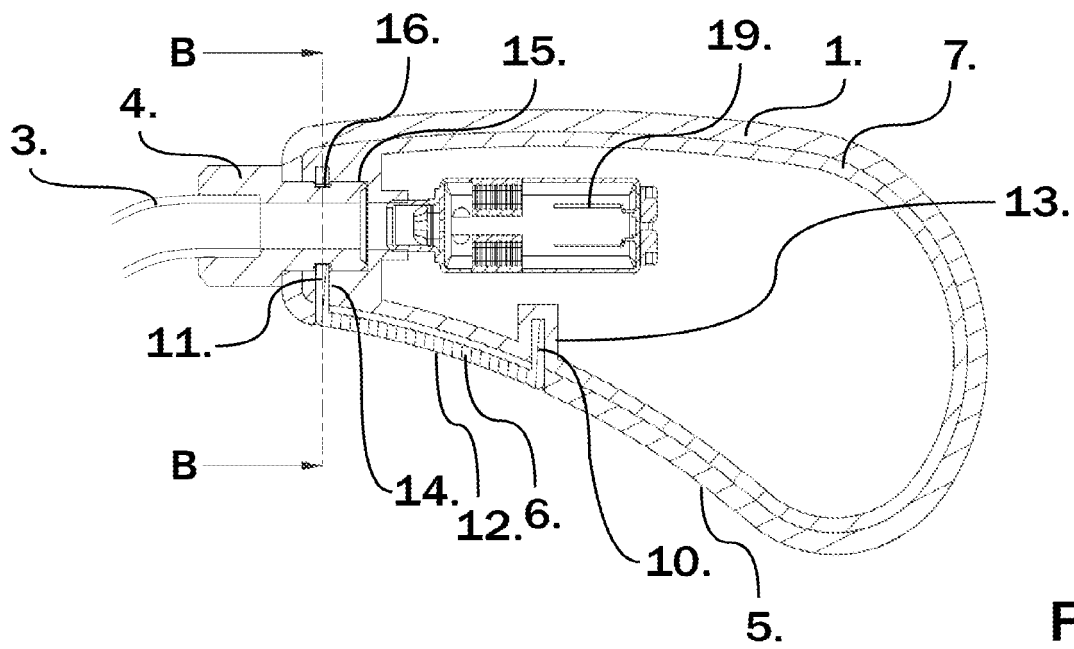


Fig. 2

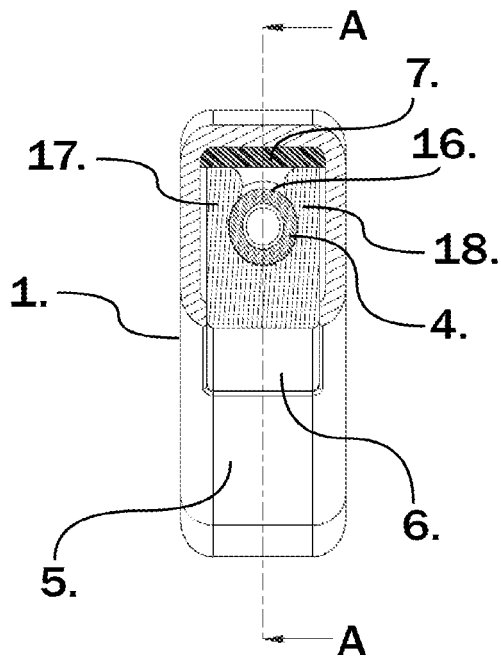


Fig. 2b




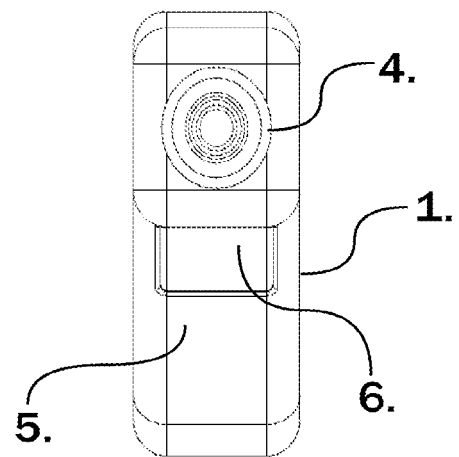


Fig 2a

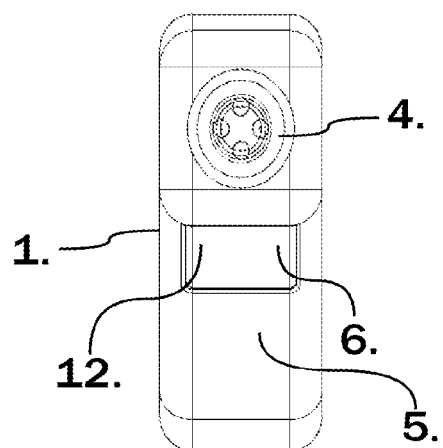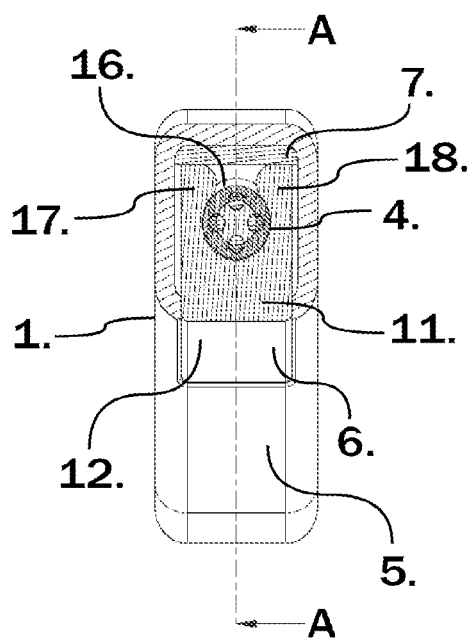

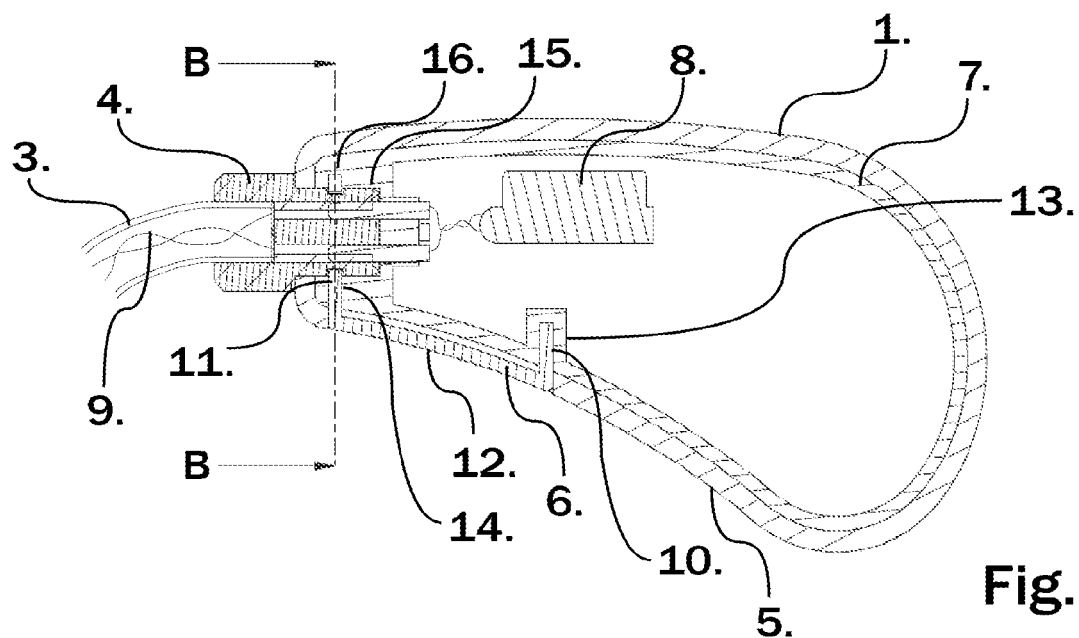

EUROPEAN SEARCH REPORT

Application Number

EP 23 15 3281

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2009/074218 A1 (HIGGINS SIDNEY A [US]) 19 March 2009 (2009-03-19)	1-3, 5-11	INV. H04R25/00 H01R13/627
Y	* paragraphs [0001] - [0005], [0016] - [0024]; figures 1, 2A, 2B, 4 *	4	
Y	EP 2 107 830 A2 (STARKEY LAB INC [US]) 7 October 2009 (2009-10-07)	4	
A	* paragraphs [0016] - [0021]; figures 1A, 3, 5 *	8-11	
A	US 2013/004005 A1 (BARTH JOACHIM ROLAND [DE] ET AL) 3 January 2013 (2013-01-03) * paragraphs [0011], [0054] - [0056], [0059] *	1, 11	
A	US 2008/260193 A1 (WESTERMANN SOREN ERIK [DK] ET AL) 23 October 2008 (2008-10-23) * paragraphs [0011], [0027]; figure 1 *	3	
A, D	US 2009/304216 A1 (HANSEN CASPER HOJSTED [DK]) 10 December 2009 (2009-12-10) * paragraph [0070] - paragraph [0071]; figure 5 *	9, 10	TECHNICAL FIELDS SEARCHED (IPC)
A	US 2008/212813 A1 (KRAL HOLGER [DE] ET AL) 4 September 2008 (2008-09-04) * paragraph [0011]; figure 2 *	4, 11	H04R H01R
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 9 May 2023	Examiner Fobel, Oliver
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 23 15 3281

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-05-2023

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2009074218 A1	19-03-2009	CA	2639617 A1		19-03-2009	
		DK	2040343 T3		30-11-2015	
		EP	2040343 A1		25-03-2009	
		US	2009074218 A1		19-03-2009	
		US	2013230197 A1		05-09-2013	
		US	2015163601 A1		11-06-2015	

EP 2107830 A2	07-10-2009	AU	2009201227 A1		15-10-2009	
		DK	2107830 T3		28-07-2014	
		EP	2107830 A2		07-10-2009	
		US	2009245525 A1		01-10-2009	

US 2013004005 A1	03-01-2013	DK	2540098 T3		14-01-2019	
		DK	2560411 T3		15-05-2017	
		EP	2540098 A1		02-01-2013	
		EP	2560411 A2		20-02-2013	
		US	2013004005 A1		03-01-2013	
		US	2020021925 A1		16-01-2020	
		WO	2011101041 A1		25-08-2011	

US 2008260193 A1	23-10-2008	AU	2006303652 A1		26-04-2007	
		CA	2625024 A1		26-04-2007	
		CN	101263738 A		10-09-2008	
		DK	1854333 T3		21-08-2017	
		EP	1854333 A1		14-11-2007	
		JP	4829974 B2		07-12-2011	
		JP	2009512373 A		19-03-2009	
		US	2008260193 A1		23-10-2008	
		WO	2007045254 A1		26-04-2007	

US 2009304216 A1	10-12-2009	AT	504169 T		15-04-2011	
		AU	2008213485 A1		14-08-2008	
		CA	2677684 A1		14-08-2008	
		CN	101611638 A		23-12-2009	
		DK	2119312 T3		06-06-2011	
		EP	2119312 A1		18-11-2009	
		JP	2010518662 A		27-05-2010	
		US	2009304216 A1		10-12-2009	
		WO	2008095489 A1		14-08-2008	
		WO	2008095505 A1		14-08-2008	

US 2008212813 A1	04-09-2008	DE	102007010011 A1		11-09-2008	
		DK	1965605 T3		11-04-2016	
		EP	1965605 A2		03-09-2008	
		US	2008212813 A1		04-09-2008	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2014079262 [0003]
- US 2009304216 A [0003]
- US 8385573 B [0003]