

(19)



(11)

**EP 4 219 332 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**28.08.2024 Bulletin 2024/35**

(51) International Patent Classification (IPC):  
**B65D 47/08** <sup>(2006.01)</sup> **B65D 51/24** <sup>(2006.01)</sup>  
**B65D 55/02** <sup>(2006.01)</sup>

(21) Application number: **20800225.3**

(52) Cooperative Patent Classification (CPC):  
**B65D 51/248; B65D 47/0809; B65D 55/024;**  
**B65D 2251/1008**

(22) Date of filing: **24.09.2020**

(86) International application number:  
**PCT/ES2020/070572**

(87) International publication number:  
**WO 2022/064080 (31.03.2022 Gazette 2022/13)**

(54) **SAFETY LID FOR BOTTLES**

SICHERHEITSDECKEL FÜR FLASCHEN

BOUCHON DE SÉCURITÉ POUR DES BOUTEILLES

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**02.08.2023 Bulletin 2023/31**

(73) Proprietor: **Betapack, S.A.U.**  
**20305 Irun (Guipúzcoa) (ES)**

(72) Inventor: **BERROA GARCÍA, Francisco, Javier**  
**20305 IRUN (Guipúzcoa) (ES)**

(74) Representative: **Herrero & Asociados, S.L.**  
**Edificio Aqua - Agustín de Foxá, 4-10**  
**28036 Madrid (ES)**

(56) References cited:  
**WO-A1-2019/110853 US-A- 5 875 907**  
**US-A1- 2005 173 368 US-S- D 877 616**

**EP 4 219 332 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### OBJECT OF THE INVENTION

**[0001]** The present invention is fitted within the technical field of closures with a discharge device that have articulated or hinged closures, as well as that belonging to installations of closures with outer protective caps similar to lids or with two or more conjugated closures, combined with auxiliary devices for purposes other than closing, and it refers in particular to a safety lid for bottles equipped with elements that visually show a first opening of the cap.

**[0002]** The lid comprises a pouring element assembled with a hinged closure cap, the closure cap being able to be placed in an open position and a closed position. The lid also incorporates, as already indicated, a first opening indicator system consisting of elements indicating that the lid has been opened at least once, which consisting of a frangible flange molded into the front face of the cap, identifiable by the user quickly and without visual effort.

### BACKGROUND OF THE INVENTION

**[0003]** It is common to use lids to close bottles. One type of these lids is formed by a pouring element assembled with a hinged closure cap that is coupled to the neck of the bottle and a closure cap that serves to close the bottle. This pouring element and the closure cap are hinged to each other by means of a hinge, so that the user can open and close the bottle with one hand by hinging the cap backwards from the pouring element to open the bottle and articulating the cap forward to close the bottle again. This type of lids serves so that the user can easily open and close the bottle several times without the possibility of the lid being lost, since the pouring element remains permanently attached to the neck of the bottle. These lids also work in the event that it is not attached to the neck.

**[0004]** It is usual that, when using this type of lids, the user drinks directly from the bottle, but the closure cap hinged to the pouring element can be uncomfortable to do so. This is because the lid does not comprise any means to retain the closure cap in its open position.

**[0005]** Various lids of this type are known in the current state of the art. For example, the international PCT application with publication number WO2019110853, owned by this same applicant, discloses all features of the preamble of claim 1, and refers to a cap for bottles, which comprises a pouring element attached to a hinged closure cap, allowing the closure cap to be placed in an open position and in a closed position, characterized in that in said closing the cap comprises a protrusion in its part closest to the pouring element and which comes into contact with the pouring element in the open position of the closure cap.

**[0006]** In the same sense, document US2010065589 describes a closure body having a closure platform with

a dispensing orifice. A lower peripheral skirt is dependent on the closure platform and is configured to be mounted on a container. A closure cap has a top wall and a wall flange that depends on the top wall. A hinge structure joins the wall flange to the lower peripheral skirt. A closure recess is defined within the lower peripheral skirt. A protrusion of the latch is located on the flange of the cap wall and is respectively positioned over the recess of the latch when the closure cap is in a closed position. The latch protrusion and latch recess define mating formations that fit together and engage to secure the cap to the closure body when the closure cap is in an open position.

**[0007]** On the other hand, different lids with opening indicators formed by a base adapted to be coupled to the neck of a container and a cap attached to said base by means of a hinge and opening indicators are also known in the current state of the art. These opening indicators are detachable joints that are attached to the base and the cap and are provided with a tear zone that breaks up, falls off or changes position after the first opening of the cap. With these indicators the aim is to obtain a visible and unequivocal proof that the container has not been opened prior to its purchase by the consumer.

**[0008]** As an example of the state of the art, reference document ES2084159 can be mentioned, in which a tamper-evident closure for a container is defined, comprising an annular closure ring that has a closure cap and an annular seal band releasably attached to the cap by frangible means. Furthermore, it comprises a plurality of flexible projections on the band, extending circumferentially inward, and interference means associated therewith that cooperate with them to break up the frangible means during removal of the closure from the container.

**[0009]** In this case, it is observed that the closure has, as in most closures of this type of the state of the art, frangible means formed by a plurality of joining flanges between the cap and the annular band, which are capable of being broken up upon a first container opening.

**[0010]** However, this type of lids, as is the case with the majority existing in the state of the art, has certain drawbacks, due to the fact that these joining flanges must have a small section in order to be able to yield easily and quickly upon the opening of the container, which generates a complicated or impossible detection thereof to perform a visual check of the inviolability of the closure. Furthermore, precisely due to this reduced section of the flanges, the existence of a plurality of said flanges is necessary so that at the same time they are capable of ensuring resistance of the lid closure against manipulations and pressures, both internal and external.

**[0011]** Document US2005173368 concerns a closure comprising a base portion and a cap forming portion including a top articulated to a ring through a hinge. The strap enables the cap forming portion to be molded in closing position of the top, tamperproof means being provided between the ring and the top. When the cover is closed, the sensitive zones of the cap are either located in a sealed closed space, or capable of being in contact

with a liquid (in solution or spray) and capable of being treated so as to eliminate said liquid, so as to sanitize the closure. Furthermore, the tamperproof means are deformed and ruptured when the top is first opened such that the resulting free ends are sufficiently spaced apart from each other, thus easily revealing to a user whether it has been tampered with.

[0012] Therefore, there is a need to have a bottle lid that allows the closure cap to be placed in its open position in a stable manner and with the widest possible opening angle and that also includes handling indicators that offer a clear view of whether they have been or not tampered with, while ensuring a closing resistance prior to the first opening.

## DESCRIPTION OF THE INVENTION

[0013] The object of the invention consists of a safety lid for bottles comprising a pouring element assembled with an articulated closure cap, the closure cap being able to be placed in an open position and a closed position. Said closure cap comprises a protrusion in its part closest to the pouring element, which protrusion contacts the pouring element in the open position of the closure cap.

[0014] The presence of this protrusion allows a cap opening of even more than 180°. In addition, the protrusion also provides information for the user that it has been placed in its open or closed position, as it causes an acoustic signal, such as a click, when the cap is placed in either of these positions. Furthermore, the protrusion prevents the closure cap from unintentionally returning to its closed position, keeping the closure cap stably in its open position.

[0015] The lid also incorporates a first opening indicator system consisting of elements indicating that the lid has been previously opened, located at the front to be more easily visible by the user and thus to be able to identify more quickly if the lid has been previously manipulated. In the embodiment of the invention, the indicator element is formed by a breakable and deformable flange.

[0016] In the usual state of the art these indicator elements are not usually located in the front part of the cap, since it is the sector to which the user approaches his mouth to drink the liquid contained in the bottle, and therefore any tab, bridge or similar element could interfere with the spill or rub against the user's anatomy, with consequent discomfort. There is even the possibility that they could become detached and enter the user's mouth or get lost in the natural environment. Thus, the opening indicators are generally located on lateral areas, which, on the other hand, makes it difficult to see them.

[0017] The safety lid object of the invention makes it possible to locate the visible opening indicator on the front, thanks in part to the specific geometry of the pouring element. Likewise, said opening indicator comprises, as already mentioned, a flange molded into the front face

of the lid and which in its sealed arrangement and prior to the first opening of the lid is in a horizontal position.

[0018] After opening the closure cap, which is performed in a single movement by the user and using a single hand, the flange breaks and deforms, which remains embedded in the spout without protruding, avoiding risks mentioned above. The cross section and profile of the flange are very precise in terms of cross section, angle and length, so that they deform when opened. Likewise, the resistance that the user shall overcome for the first opening of the lid can still be achieved with the single movement indicated since in this flange the break is produced by a combination of bending and traction (stretching) forces, while standard bridges break only by stretching.

[0019] When the cap is closed again on the spout after the first opening, the deformed flange has a different arrangement than it had in the sealed arrangement, generating a hollow surface that allows a quick and easy opening that an opening has occurred, contrary to what happens with elements such as vertical frangible bridges or even if there is a deformation, in which the two sections overlap without creating an opening, which makes visibility almost impossible as the stretch is produced only vertically.

[0020] The safety lid for bottles thus described supposes a solution that allows solving the aforementioned issues in a simple and economical way, giving rise to a lid that allows an easy and clear visualization of a previous opening without involving a discomfort for the user from the point of view of comfort and effort of opening and closing.

## DESCRIPTION OF THE DRAWINGS

[0021] To complement the description that is being made and in order to help a better understanding of the features of the invention, according to a preferred example of practical embodiment thereof, a set of drawings is attached as an integral part of said description, wherein, for illustrative and non-limiting purposes, the following has been represented:

Figure 1.- Shows a perspective view of the lid in the closed position and prior to its first opening.

Figure 2.- Shows a front top perspective view of the lid in a completely open position.

Figure 3.- Shows a front view of the lid of figure 2

Figure 4.- Shows a rear view of the lid of figure 2.

Figure 5.- Shows a left side view of the lid of figure 2.

Figure 6.- Shows a rear bottom perspective view of the lid of figure 2.

Figure 7.- Shows a perspective view of the lid in the closed position after a first opening thereof.

## PREFERRED EMBODIMENT OF THE INVENTION

**[0022]** A detailed explanation of a preferred embodiment of the object of the present invention is provided below, with the aid of the aforementioned figures.

**[0023]** The safety lid for bottles that is described is made up of a pouring element (1) that can be coupled to the neck of a bottle, and a closure cap (2) attached to the pouring element (1) through a rear hinge (3).

**[0024]** In this way, the pouring element (1) is coupled to the neck of the bottle by means of a thread, draw cord or similar element that allows it not to separate from the bottle during normal use. By virtue of the hinge (3), the closure cap (2) can be arranged in a closed position as shown in Figures 1 and 7 or in an open position as represented in Figures 2-6. Said hinge (3) is formed, according to the embodiment shown, by two parallel arms (4) that extend between the pouring element (1) and the closure cap (2) and delimit a space between them.

**[0025]** The lid for bottles also comprises a protrusion (5) located in the closure cap (2) in its part closest to the pouring element (1), the flexible protrusion (5) contacting the pouring element (1) in the open position of the closure cap (2). This protrusion (5), which is housed in the space delimited between the arms (4) of the hinge (3), is intended to provide the user with an indication that the closure cap (2) has been placed in its open or closed position, since it generates an acoustic information signal by means of a click. For this, the protrusion (5) is made of a flexible plastic material. Furthermore, the protrusion (5), which is preferably semicircular in shape, acts as a stop for retention of the closure cap (2) in its open position, preventing its collapse and accidental closing.

**[0026]** The pouring element (1) comprises a central mouthpiece (6) for pouring the liquid housed in the bottle, as well as to allow the user to drink directly from the bottle through said mouthpiece (6). The pouring element (1) further comprises two lateral flanges (7) that extend from the hinge (3) towards an opposite front face of the cap, in which a free space is delimited between both flanges (7). These flanges (7) are intended to facilitate manual manipulation of the cap, as will be explained later (7), as well as to act as a support area for the lips in case the user drinks through the mouthpiece (6).

**[0027]** For its part, the closure cap (2) comprises a cantilevered cover (8) that allows a manual opening of the cap, below which reinforcement ribs (9) are located. The closure cap (2) also comprises a rear cavity (10) next to the protrusion (5), to prevent the closure cap (2) from abutting the pouring element (1) before reaching the open position.

**[0028]** The lid for bottles also includes a first opening indicator element located in its front area delimited between both flanges (7). As can be seen in the attached figures, said indicator consists of a flange, which when

the lid is sealed (that is, it has not been opened for the first time) is kept in an essentially horizontal position. The flange has a first sector (12) attached to the pouring element (1), a second sector (13) attached to the closure cap (2), and a breakable central sector (14) that allows the separation of the flange into two halves when the cap is first opened.

**[0029]** When the flange is separated by its breakable central sector (14), the first sector (12) remains attached to the pouring element (1) and slightly deforms, while the second sector (13) also remains attached to the closure cap (2) and is also slightly deformed.

**[0030]** From the closed position of the lid shown in figure 1, when a user wishes to open the lid according to the present invention, he shall move the closure cap (2) from its closed position to its open position. To do this, he shall push up the cantilevered cover (8), so that the closure cap (2) rotates around the hinge (4) until the protrusion (5) abuts the pouring element (1). Upon abutting, the protrusion (5) flexes and provides an acoustic signal by clicking, to inform the user that it has reached the open position shown in Figures 2 to 6. In this open position, preferably with an opening degree greater than 180°, it shall remain stable due to the presence of the protrusion (5), facilitating the pouring of the liquid contained in the bottle or drink directly from the bottle.

**[0031]** The thrust of the cantilevered cover (8) of the closure cap (2) exerts a traction on the flange of the first opening indicator element that causes the breakage of the breakable central sector (14), leaving the flange separated in the first sector (12), which remains attached to the pouring element (1), and the second sector (13), which remains attached to the closure cap (2).

**[0032]** As already mentioned, both sectors (12, 13) slightly deform when separated, due to bending, which also causes them to deform in opposite directions, which also positions them so that they do not interfere at any time in the pouring of the liquid, either to another container or for direct consumption through the mouthpiece (6).

**[0033]** To close the cap, the user pushes the closure cap (2) upwards so that it rotates around the hinge (3) again, overcoming the resistance of the protrusion (5) against the pouring element (1) and causing the closure cap (2) to couple again on the pouring element (1) in its closed position, as seen in figure 7.

**[0034]** In this closed position, the prior deformation of both sectors of the flange causes it to have a different arrangement than the one it had in the initial sealed arrangement, thus generating a discontinuity (15) on the front face of the lid which is a clear indication that it has already been previously opened.

## Claims

1. Safety lid for bottles, which comprises:

- a pouring element (1) attachable to the neck of a bottle,
  - a closure cap (2) attached to the pouring element (1) through a rear hinge (3), the closure cap (2) being able to be placed in an open position and a closed position,
  - a flexible protrusion (5), located in the closure cap (2) in its part closest to the pouring element (1), the flexible protrusion (5) contacting the pouring element (1) in the open position of the closure cap (2), and
  - two lateral flanges (7) located on the pouring element (1), which protrude from said pouring element (1) and extend from the hinge (3) towards an opposite front face,
- to delimit a free space between both flanges (7) on the front face of the cap,
- the lid being **characterized in that** it comprises a space opening indicator element located in the space delimited between both flanges (7), which consists of a flange that when the lid is sealed is kept in an essentially horizontal position, the flange in turn comprising:
- a first sector (12) attached to the pouring element (1),
  - a second sector (13) attached to the closure cap (2), and
  - a breakable central sector (14) that allows a break and separation of the flange when a first opening of the lid occurs, and a subsequent deformation by bending of the first sector (12) and the second sector (13) of said flange.
2. Safety lid according to claim 1, wherein the hinge (3) comprises two parallel arms (4) that extend between the pouring element (1) and the closure cap (2) and delimit a space between both in which the protrusion (5) is located.
  3. Safety lid according to any of the preceding claims, wherein the closure cap (2) comprises:
    - a cantilevered cover (8) for manual opening of the cap,
    - reinforcement ribs (9) below the cantilevered cover (8), and
    - a rear cavity (10) next to the protrusion (5), to prevent the closure cap (2) from abutting the pouring element (1) before reaching the open position.
  4. Safety lid according to any of the preceding claims wherein the pouring element (1) comprises a central mouthpiece (6) for pouring the liquid contained in the bottle.

## Patentansprüche

1. Sicherheitsverschluss für Flaschen, welcher umfasst:

- ein Ausgießelement (1), anbringbar an den Hals einer Flasche,
- eine Verschlusskappe (2), angebracht an das Ausgießelement (1) über ein hinteres Scharnier (3), wobei die Verschlusskappe (2) in eine offene Position und eine geschlossene Position positionierbar ist,
- ein elastischer Vorsprung (5), befindlich in der Verschlusskappe (2) in deren dem Ausgießelement (1) am nächsten liegenden Teil, wobei der elastische Vorsprung (5) das Ausgießelement (1) in der offenen Position der Verschlusskappe (2) berührt, und
- zwei laterale Flansche (7), befindlich auf dem Ausgießelement (1), die von diesem Ausgießelement (1) hinausragen und sich von dem Scharnier (3) aus in Richtung einer gegenüberliegenden Vorderseite erstrecken, um einen freien Raum zwischen den beiden Flanschen (7) auf der Vorderseite der Kappe zu begrenzen,

wobei der Verschluss **dadurch gekennzeichnet ist, dass** er ein erstes Öffnungsanzeigeelement umfasst, das sich in dem zwischen den beiden Flanschen (7) begrenzten Raum befindet, welches aus einem Flansch besteht, welcher, wenn der Verschluss verschlossen ist, in einer im Wesentlichen horizontalen Position gehalten wird, wobei der Flansch wiederum umfasst:

- einen ersten Sektor (12), der an dem Ausgießelement (1) angebracht ist,
- einen zweiten Sektor (13), der an der Verschlusskappe (2) angebracht ist, und
- einen zerbrechbaren zentralen Sektor (14), der ein Brechen und Trennen des Flansches ermöglicht, wenn eine erste Öffnung des Verschlusses erfolgt, und eine anschließende Verformung durch Biegen des ersten Sektors (12) und des zweiten Sektors (13) dieses Flansches.

2. Sicherheitsverschluss gemäß Anspruch 1, wobei das Scharnier (3) zwei parallele Arme (4) umfasst, die sich zwischen dem Ausgießelement (1) und der Verschlusskappe (2) erstrecken und einen Raum zwischen beiden begrenzen, in dem sich der Vorsprung (5) befindet.
3. Sicherheitsverschluss gemäß einem der vorhergehenden Ansprüche, wobei die Verschlusskappe (2) umfasst:

- eine freitragende Abdeckung (8) zum manuel-

len Öffnen der Kappe,

- Verstärkungsrippen (9) unterhalb der freitragenden Abdeckung (8), und
- einen hinteren Hohlraum (10) neben dem Vorsprung (5), um die Verschlusskappe (2) am Anstoßen an das Ausgießelement (1) zu hindern, bevor sie die offene Position erreicht.

4. Sicherheitsverschluss gemäß einem der vorhergehenden Ansprüche, wobei das Ausgießelement (1) ein zentrales Mundstück (6) umfasst zum Ausgießen der in der Flasche enthaltenen Flüssigkeit.

## Revendications

1. Bouchon de sécurité pour bouteilles, qui comprend :

- un élément de versement (1) pouvant être fixé au col d'une bouteille,
- un capuchon de fermeture (2) fixé à l'élément de versement (1) par l'intermédiaire d'une charnière (3) arrière, le capuchon de fermeture (2) étant apte à être placé dans une position ouverte et une position fermée,
- une saillie flexible (5), située dans le capuchon de fermeture (2) dans sa partie la plus proche de l'élément de versement (1), la saillie flexible (5) étant en contact avec l'élément de versement (1) dans la position ouverte du capuchon de fermeture (2), et
- deux rebords (7) latéraux situés sur l'élément de versement (1), qui font saillie dudit élément de versement (1) et s'étendent à partir de la charnière (3) en direction d'une face avant opposée, pour délimiter un espace libre entre les deux rebords (7) sur la face avant du capuchon, le bouchon étant **caractérisé en ce qu'il** comprend un premier élément indicateur d'ouverture situé dans l'espace délimité entre les deux rebords (7), qui est constitué d'un rebord qui lorsque le bouchon est scellé est maintenu dans une position essentiellement horizontale, le rebord comprenant à son tour :

- un premier secteur (12) fixé à l'élément de versement (1),
- un deuxième secteur (13) fixé au capuchon de fermeture (2), et
- un secteur central (14) frangible qui permet une cassure et séparation du rebord lorsqu'une première ouverture du bouchon se produit, et une déformation subséquente par flexion du premier secteur (12) et du deuxième secteur (13) dudit rebord.


2. Bouchon de sécurité selon la revendication 1, dans lequel la charnière (3) comprend deux bras (4) pa-

rallèles qui s'étendent entre l'élément de versement (1) et le capuchon de fermeture (2) et délimitent un espace entre les deux dans lequel la saillie (5) est située.


3. Bouchon de sécurité selon l'une quelconque des revendications précédentes, dans lequel le capuchon de fermeture (2) comprend :

- un couvercle en porte-à-faux (8) pour l'ouverture manuelle du capuchon,
- des nervures de renforcement (9) au-dessous du couvercle en porte-à-faux (8), et
- une cavité arrière (10) à côté de la saillie (5), pour empêcher le capuchon de fermeture (2) d'être en butée contre l'élément de versement (1) avant l'atteinte de la position ouverte.

4. Bouchon de sécurité selon l'une quelconque des revendications précédentes dans lequel l'élément de versement (1) comprend une embouchure centrale (6) pour verser le liquide contenu dans la bouteille.

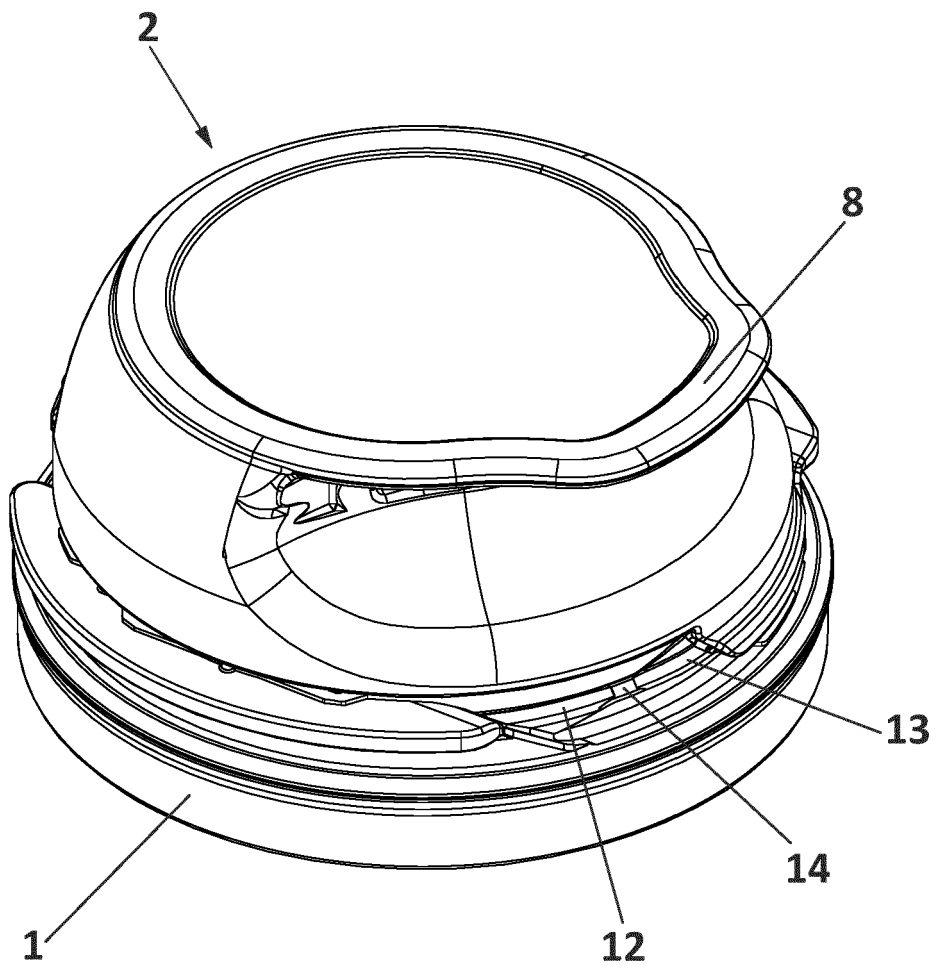


**FIG. 1**

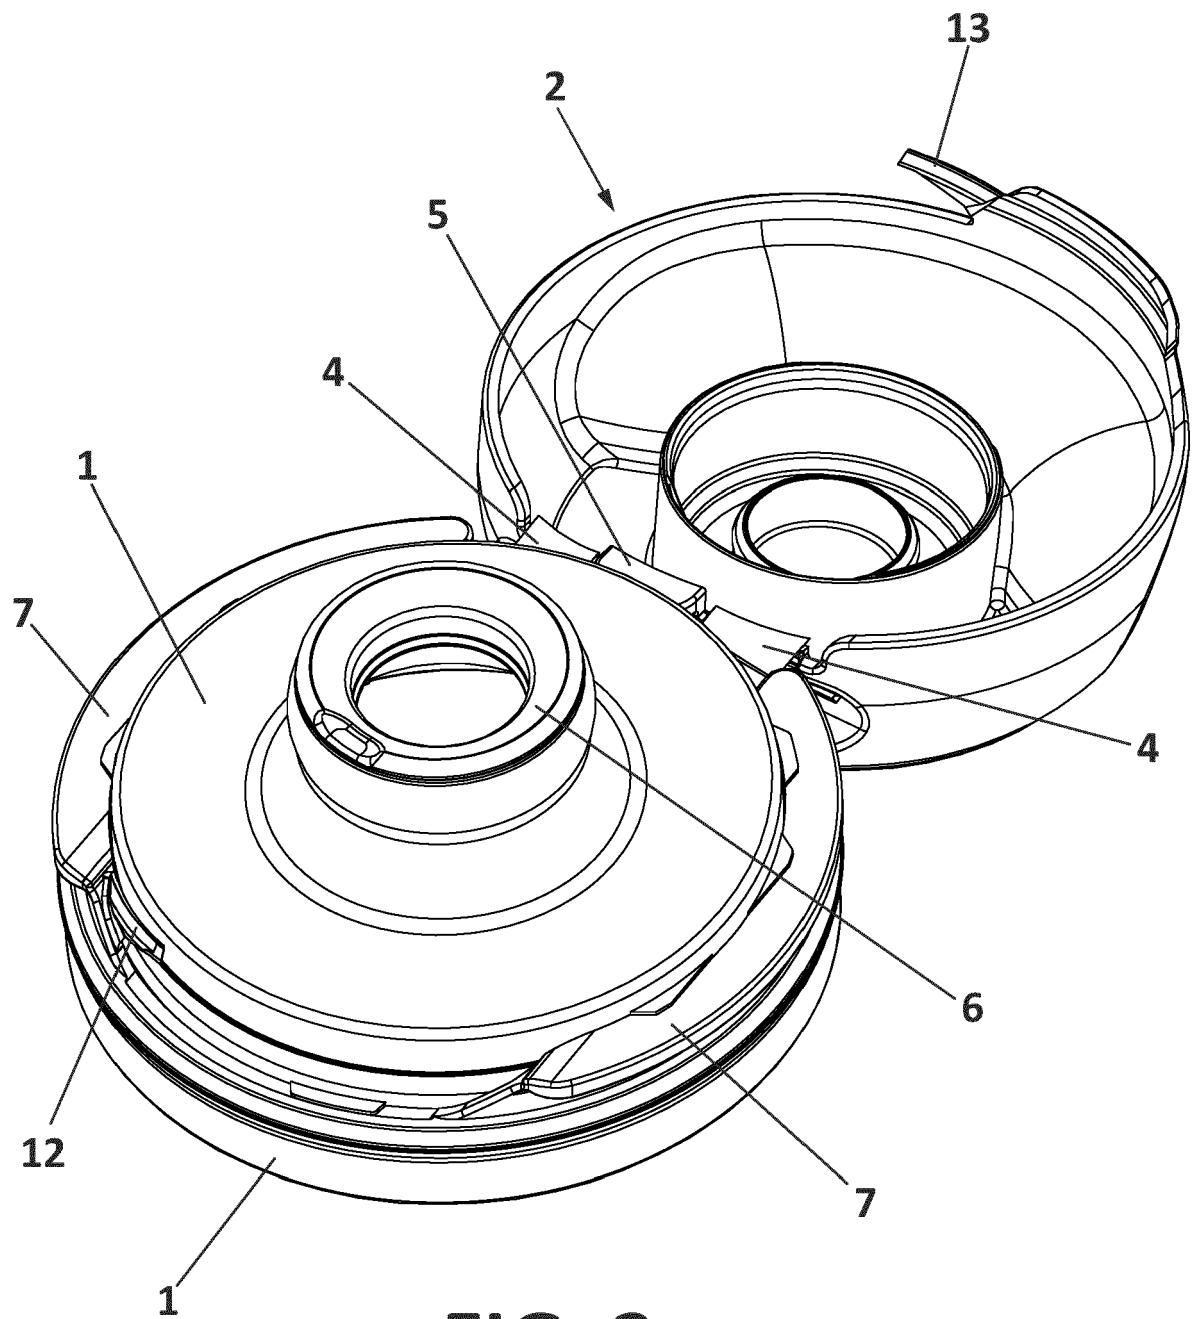


**FIG. 2**



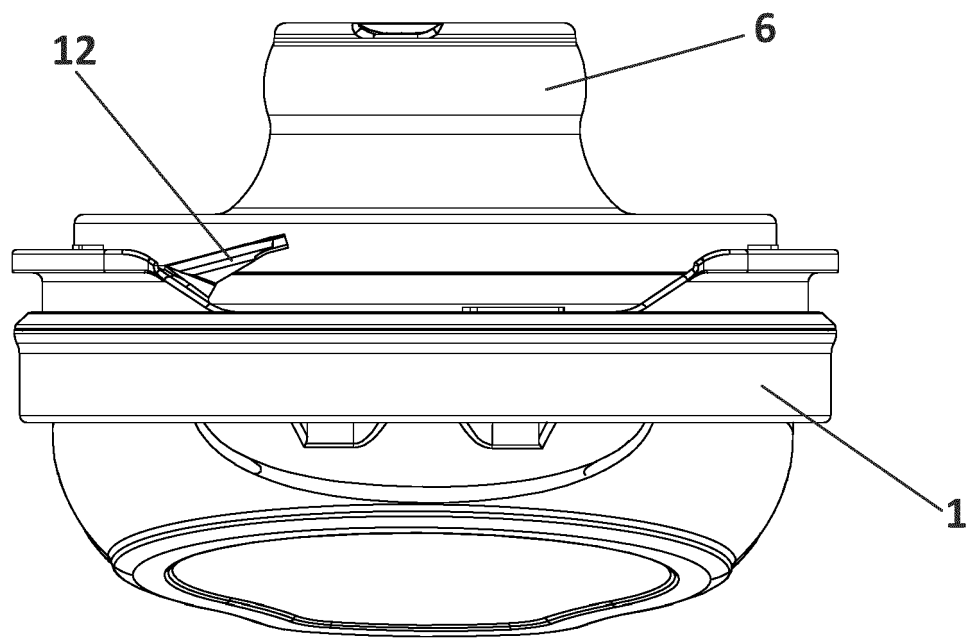

**FIG. 3**

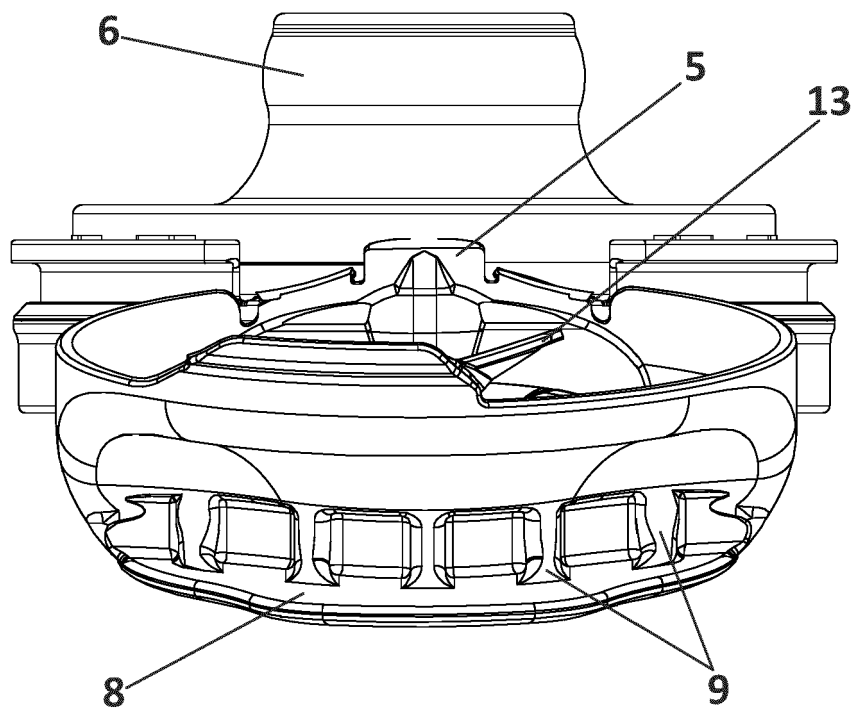

**FIG. 4**



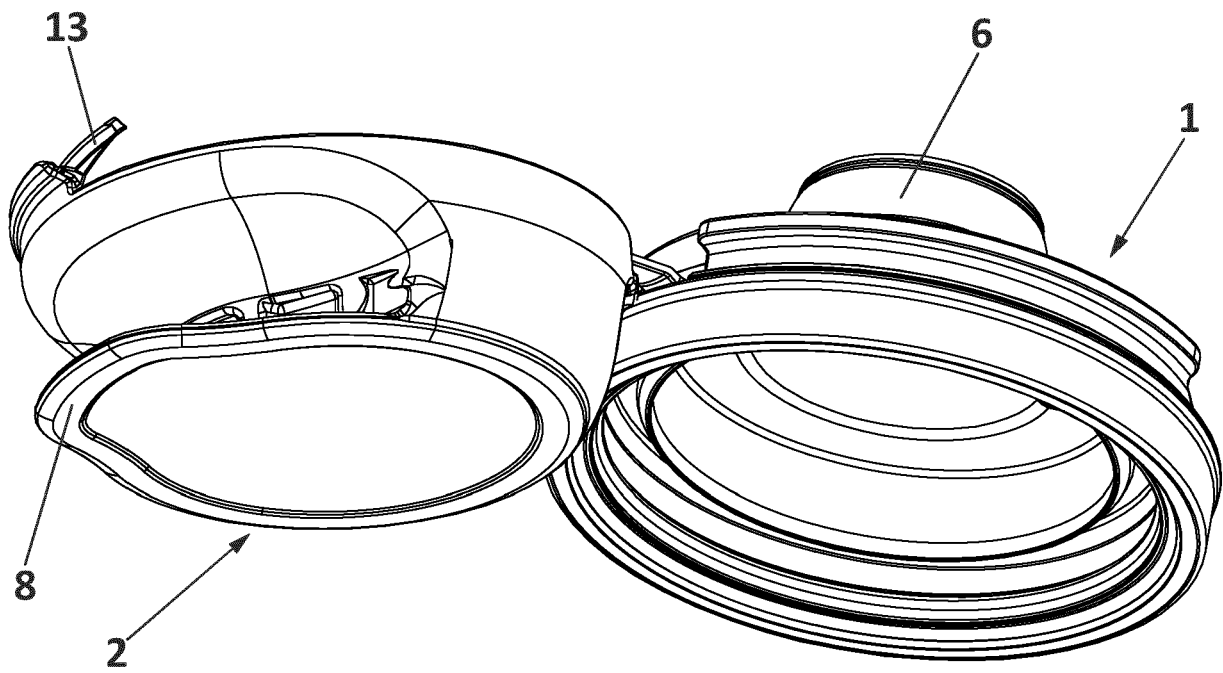


FIG. 6

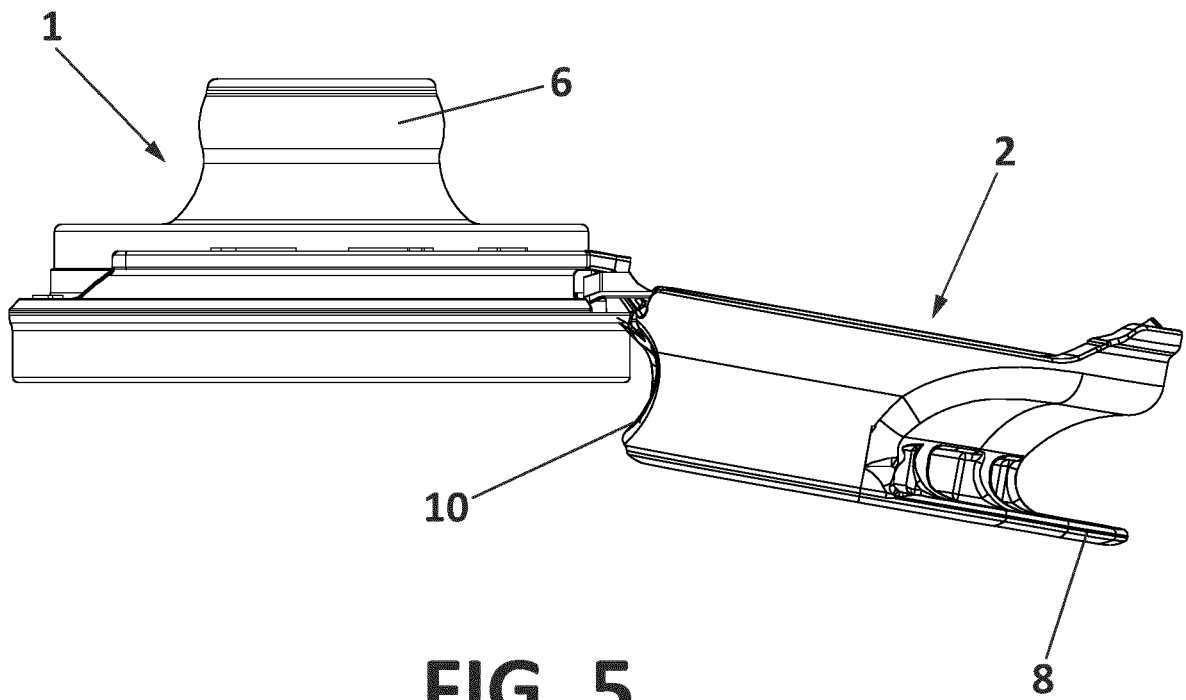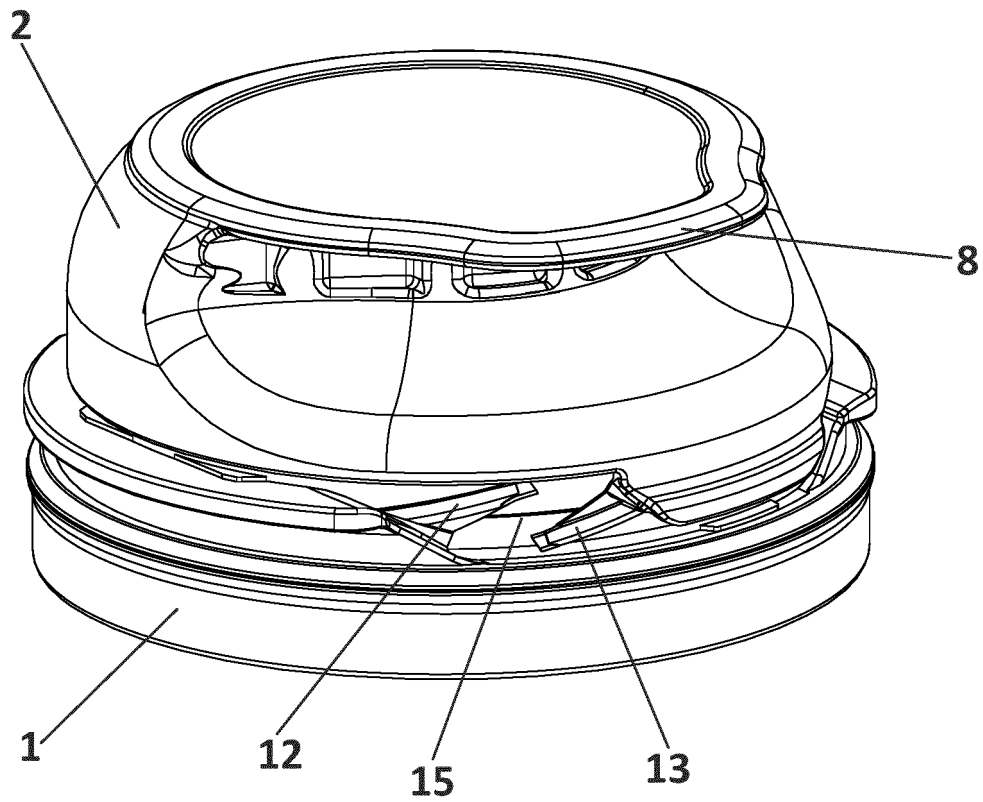

**FIG. 7**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2019110853 A [0005]
- US 2010065589 A [0006]
- ES 2084159 [0008]
- US 2005173368 A [0011]