



EUROPEAN PATENT APPLICATION

(43) Date of publication:
09.08.2023 Bulletin 2023/32

(21) Application number: **23168565.2**

(22) Date of filing: **08.12.2015**

(51) International Patent Classification (IPC):
B32B 5/26 (2006.01) **B29C 70/08** (2006.01)
B32B 5/02 (2006.01) **B64C 1/06** (2006.01)
C08J 5/00 (2006.01) **C08J 5/06** (2006.01)

(52) Cooperative Patent Classification (CPC):
B29C 70/081; B32B 5/02; B32B 5/26; B64C 1/06;
C08J 5/005; C08J 5/06; B32B 2250/02;
B32B 2250/04; B32B 2250/20; B32B 2255/02;
B32B 2255/20; B32B 2260/023; B32B 2260/046;
B32B 2262/101; B32B 2262/106; (Cont.)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **09.12.2014 GB 201421827**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
15808022.6 / 3 230 056

(71) Applicants:
• **Short Brothers Plc**
Belfast, BT3 9DZ (GB)
• **University of Surrey**
Guildford, Surrey GU1 7XH (GB)

(72) Inventors:
• **BALLOCCI, Paolo**
Belfast, BT3 9DZ (GB)

• **JENKINS, Philip**
Belfast, BT3 9DZ (GB)
• **HAMERTON, Ian**
Surrey, GU1 7XH (GB)
• **SILVA, Ravi**
Surrey, GU1 7XH (GB)
• **POZEGIC, Thomas**
Surrey, GU1 7XH (GB)

(74) Representative: **HGF**
HGF Limited
1 City Walk
Leeds LS11 9DX (GB)

Remarks:

This application was filed on 18-04-2023 as a
divisional application to the application mentioned
under INID code 62.

(54) **FIBRE-REINFORCED COMPONENTS INCLUDING NANOSTRUCTURES**

(57) Components having fibre-reinforced composite
structures are disclosed. The component comprises a
plurality of structural fibres embedded in a cured matrix

material and a plurality of nanostructures such as carbon
nanotubes extending from one or more of the structural
fibres.

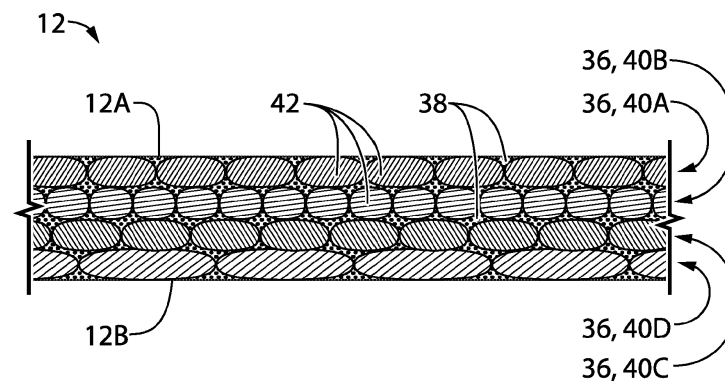


FIG. 2

(52) Cooperative Patent Classification (CPC): (Cont.)
B32B 2307/202; B32B 2307/302; B32B 2307/50;
B32B 2605/00; B32B 2605/18

Description

TECHNICAL FIELD

[0001] The disclosure relates generally to fibre-reinforced composite materials for civil aviation applications, and more particularly to composite materials comprising structural fibres having nanostructures such as carbon nanotubes extending therefrom.

BACKGROUND OF THE ART

[0002] Fibre-reinforced composite materials are becoming more widely used in the aerospace industry due mainly to their advantageous properties such as strength-to-weight ratio, fatigue resistance, reduced part count and so on. However, one important issue with fibre-reinforced composite materials is their relatively low electrical conductivity in comparison with traditional metallic materials.

[0003] When a metallic structure for air aircraft (typically made of an aluminium alloy) is manufactured, the electrical conductivity is inherently built into the component. However, this is not the case for a typical fibre-reinforced composite material. Accordingly, solutions have been implemented to increase the electrical conductivity of such components to, for example, provide adequate electro-static discharge (ESD), electro-magnetic interference (EMI) shielding and lightning strike protection (LSP). For composite wings, one typical solution to address this concern has been to add an expanded metal mesh on outside layers of fibre-reinforced composite components. However, this solution can have an adverse impact on weight, top-coat paint adhesion, manufacturing complexity and cost.

[0004] Improvement in is therefore desirable.

SUMMARY

[0005] In one aspect, the disclosure describes a civil aviation component having a fibre-reinforced composite structure. The component comprises:

a plurality of structural fibres embedded in a cured matrix material; and

a plurality of nanostructures extending from one or more of the structural fibres, a density of the nanostructures being at least about 10^7 nanostructures per cm^2 of area of a surface of the one or more structural fibres.

[0006] The density of nanostructures extending from the one or more structural fibres may be between about 10^9 and about 10^{11} nanostructures per cm^2 of surface area.

[0007] The nanostructures may comprise carbon nanotubes.

[0008] The one or more structural fibres may be free of a sizing agent.

[0009] The component may comprise an outer surface where the plurality of structural fibres may comprise an outer fibre proximal to the outer surface and an inner fibre distal from the outer surface, and the nanostructures may extend from the outer fibre but not from the inner fibre.

[0010] The one or more structural fibres may be part of a fabric ply and the nanostructures may extend only from one side of the fabric ply.

[0011] The structural fibres may comprise an outer fabric ply proximate an outer surface of the component and an inner fabric ply distal from the outer surface of the component.

[0012] The nanostructures may extend only from the outer fabric ply.

[0013] The nanostructures may extend from only an outer side of the outer fabric ply.

[0014] The nanostructures may extend from both the outer fabric ply and the inner fabric ply.

[0015] The nanostructures may be disposed between the outer fabric ply and the inner fabric ply.

[0016] The one or more structural fibres may be part of a fabric ply and the nanostructures form at least 1% of the mass of the fabric ply.

[0017] The matrix material may be doped with graphene.

[0018] The density of the nanostructures may be non-uniform along a length or width of the component.

[0019] In another aspect, the disclosure describes a civil aviation component having a fibre-reinforced composite structure. The component comprises:

a plurality of structural fibres embedded in a cured matrix material, the plurality of structural fibres comprising an outer fibre proximal to an outer surface of the component and an inner fibre distal from the outer surface; and

a plurality of nanostructures extending from the outer fibre and not from the inner fibre.

[0020] The outer fibre may be part of an outer fabric ply and the inner fibre may be part of an inner fabric ply. The nanostructures may extend from only one side of the outer fabric ply.

[0021] The nanostructures may extend from only an outer side of the outer fabric ply.

[0022] The outer fibre may have an outer side facing the outer surface of the component and an inner side opposite the outer side. The nanostructures may extend from the outer side of the outer fibre and not from the inner side of the outer fibre.

[0023] The outer fibre may be part of an outer fabric ply.

[0024] The outer fabric ply may have an outer side facing the outer surface of the component and an opposite inner side. The nanostructures may extend from the outer side of the outer fabric ply and not from the inner side of the outer fabric ply.

[0025] The outer fabric ply may have an outer side facing the outer surface of the component and an opposite inner side. The nanostructures may extend from the outer side of the outer fabric ply and from the inner side of the outer fabric ply.

[0026] The outer fibre may be free of a sizing agent.

[0027] A density of nanostructures extending from the structural fibre may be at least 10^7 nanostructures per cm^2 of surface area of structural fibre.

[0028] The nanostructures may comprise carbon nanotubes.

[0029] The outer fibre may be part of a fabric ply and the nanostructures may form at least 1 % of the mass of the fabric ply.

[0030] The matrix material may be doped with graphene.

[0031] In another aspect, the disclosure describes a civil aviation component having a fibre-reinforced composite structure. The component comprises:

a plurality of structural fibres embedded in a cured matrix material; and

a plurality of nanostructures extending from one or more of the structural fibres, the one or more structural fibres from which the nanostructures extend being free of a sizing agent.

[0032] The component may comprise an outer surface where the plurality of structural fibres may comprise an outer fibre proximal to the outer surface and an inner fibre distal from the outer surface, and the nanostructures may extend from the outer fibre but not from the inner fibre.

[0033] One or more of the structural fibres may be part of a fabric ply and the nanostructures may extend only from one side of the fabric ply.

[0034] The structural fibres may comprise an outer fabric ply proximate an outer surface of the component and an inner fabric ply distal from the outer surface of the component.

[0035] The nanostructures may extend from the outer fabric ply but not from the inner fabric ply.

[0036] The nanostructures may extend from only an outer side of the outer fabric ply.

[0037] The nanostructures may extend from the outer fabric ply and from the inner fabric ply.

[0038] The nanostructures may be disposed between the outer fabric ply and the inner fabric ply.

[0039] Each of the one or more structural fibres may have a first side and a second side opposite the first side. The nanostructures may extend from the first side and not from the second side.

[0040] The nanostructures may comprise carbon nanotubes.

[0041] A density of nanostructures extending from the one or more structural fibres may be at least 10^7 nanostructures per cm^2 of surface area of structural fibre.

[0042] The one or more structural fibres may be part of a fabric ply and the nanostructures may form at least 1 % of the mass of the fabric ply.

[0043] The matrix material may be doped with graphene.

[0044] In another aspect, the disclosure describes an aircraft comprising one or more of the components as disclosed herein.

[0045] In another aspect, the disclosure describes an aircraft wing skin comprising one or more of the components as disclosed herein. The density of the nanostructures at one location on the wing skin may be higher than in another location on the wing skin.

[0046] The invention may also be understood with reference to the following numbered clauses:

Clause 1. A civil aviation component having a fibre-reinforced composite structure, the component comprising:

a plurality of structural fibres embedded in a cured matrix material; and

a plurality of nanostructures extending from one or more of the structural fibres, a density of the nanostructures

being at least about 10^7 nanostructures per cm^2 of area of a surface of the one or more structural fibres.

Clause 2. The component as defined in clause 1, wherein the density of nanostructures extending from the one or more structural fibres is between about 10^9 and about 10^{11} nanostructures per cm^2 of surface area.

Clause 3. The component as defined in any one of clauses 1 and 2, wherein the nanostructures comprise carbon nanotubes.

Clause 4. The component as defined in any one of clauses 1 to 3, wherein the one or more structural fibres are free of a sizing agent.

Clause 5. The component as defined in any one of clauses 1 to 3, wherein:

the component comprises an outer surface;

the plurality of structural fibres comprise an outer fibre proximal to the outer surface and an inner fibre distal from the outer surface; and

the nanostructures extend from the outer fibre but not from the inner fibre.

Clause 6. The component as defined in any one of clauses 1 to 4, wherein the one or more structural fibres are part of a fabric ply and the nanostructures extend only from one side of the fabric ply.

Clause 7. The component as defined in any one of clauses 1 to 4, wherein the structural fibres comprise an outer fabric ply proximate an outer surface of the component and an inner fabric ply distal from the outer surface of the component. Clause 8. The component as defined in clause 7, wherein the nanostructures extend only from the outer fabric ply.

Clause 9. The component as defined in clause 7, wherein the nanostructures extend from only an outer side of the outer fabric ply.

Clause 10. The component as defined in clause 7, wherein the nanostructures extend from both the outer fabric ply and the inner fabric ply.

Clause 11. The component as defined in clause 10, wherein the nanostructures are disposed between the outer fabric ply and the inner fabric ply.

Clause 12. The component as defined in any one of clauses 1 to 4, wherein the one or more structural fibres are part of a fabric ply and the nanostructures form at least 1% of the mass of the fabric ply.

Clause 13. The component as defined in any one of clauses 1 to 12, wherein the matrix material is doped with graphene.

Clause 14. The component as defined in any one of clauses 1 to 13, wherein the density of the nanostructures is non-uniform along a length or width of the component.

Clause 15. An aircraft comprising the component as defined in any one of clauses 1 to 14.

Clause 16. An aircraft wing skin comprising the component as defined in any one of clauses 1 to 14.

Clause 17. The aircraft wing skin as defined in clause 16, wherein the density of the nanostructures at one location on the wing skin is higher than in another location on the wing skin.

Clause 18. A civil aviation component having a fibre-reinforced composite structure, the component comprising:

a plurality of structural fibres embedded in a cured matrix material, the plurality of structural fibres comprising an outer fibre proximal to an outer surface of the component and an inner fibre distal from the outer surface; and a plurality of nanostructures extending from the outer fibre and not from the inner fibre.

Clause 19. The component as defined in clause 18, wherein the outer fibre is part of an outer fabric ply and the inner fibre is part of an inner fabric ply, the nanostructures extending from only one side of the outer fabric ply.

Clause 20. The component as defined in clause 19, wherein the nanostructures extend from only an outer side of the outer fabric ply.

Clause 21. The component as defined in clause 18, wherein the outer fibre has an outer side facing the outer surface of the component and an inner side opposite the outer side, the nanostructures extending from the outer side of the outer fibre and not from the inner side of the outer fibre.

Clause 22. The component as defined in clause 18, wherein the outer fibre is part of an outer fabric ply.

Clause 23. The component as defined in clause 22, wherein the outer fabric ply has an outer side facing the outer surface of the component and an opposite inner side, the nanostructures extending from the outer side of the outer fabric ply and not from the inner side of the outer fabric ply.

Clause 24. The component as defined in clause 22, wherein the outer fabric ply has an outer side facing the outer surface of the component and an opposite inner side, the nanostructures extending from the outer side of the outer fabric ply and from the inner side of the outer fabric ply.

Clause 25. The component as defined in any one of clauses 18 to 24, wherein the outer fibre is free of a sizing agent.

Clause 26. The component as defined in any one of clauses 18 to 25, wherein a density of nanostructures extending from the structural fibre is at least 10^7 nanostructures per cm^2 of surface area of structural fibre.

Clause 27. The component as defined in any one of clauses 18 to 26, wherein the nanostructures comprise carbon nanotubes.

Clause 28. The component as defined in any one of clauses 18 to 27, wherein the outer fibre is part of a fabric ply and the nanostructures form at least 1% of the mass of the fabric ply.

Clause 29. The component as defined in any one of clauses 18 to 28, wherein the matrix material is doped with graphene.

Clause 30. An aircraft comprising the component as defined in any one of clauses 18 to 29.

Clause 31. An aircraft wing skin comprising the component as defined in any one of clauses 18 to 29.

Clause 32. A civil aviation component having a fibre-reinforced composite structure, the component comprising:

a plurality of structural fibres embedded in a cured matrix material; and

a plurality of nanostructures extending from one or more of the structural fibres, the one or more structural fibres from which the nanostructures extend being free of a sizing agent.

Clause 33. The component as defined in clause 32, wherein:

the component comprises an outer surface;

the plurality of structural fibres comprise an outer fibre proximal to the outer surface and an inner fibre distal from the outer surface; and

the nanostructures extend from the outer fibre but not from the inner fibre.

Clause 34. The component as defined in any one of clauses 32 and 33, wherein one or more of the structural fibres are part of a fabric ply and the nanostructures extend only from one side of the fabric ply.

Clause 35. The component as defined in any one of clauses 32 and 33, wherein the structural fibres comprise an outer fabric ply proximate an outer surface of the component and an inner fabric ply distal from the outer surface of the component.

Clause 36. The component as defined in clause 35, wherein the nanostructures extend from the outer fabric ply but not from the inner fabric ply.

Clause 37. The component as defined in any one of clauses 35 and 36, wherein the nanostructures extend from only an outer side of the outer fabric ply.

Clause 38. The component as defined in clause 35, wherein the nanostructures extend from the outer fabric ply and from the inner fabric ply.

Clause 39. The component as defined in clause 35, wherein the nanostructures are disposed between the outer fabric ply and the inner fabric ply.

Clause 40. The component as defined in clause 32, wherein each of the one or more structural fibres has a first side and a second side opposite the first side, the nanostructures extending from the first side and not from the second side.

Clause 41. The component as defined in any one of clauses 32 to 40, wherein the nanostructures comprise carbon nanotubes.

Clause 42. The component as defined in any one of clauses 32 to 41, wherein a density of nanostructures extending from the one or more structural fibres is at least 10^7 nanostructures per cm^2 of surface area of structural fibre.

Clause 43. The component as defined in any one of clauses 32 and 33, wherein the one or more structural fibres are part of a fabric ply and the nanostructures form at least 1% of the mass of the fabric ply.

Clause 44. The component as defined in any one of clauses 32 to 43, wherein the matrix material is doped with graphene.

Clause 45. An aircraft comprising the component as defined in any one of clauses 32 to 44.

Clause 46. An aircraft wing skin comprising the component as defined in any one of clauses 32 to 44.

Clause 47. Any, some, or all features of novelty described, suggested, referred to, exemplified, or shown herein, and corresponding civil aviation components, aircraft, and other devices, and associated methods.

[0047] Further details of these and other aspects of the subject matter of this application will be apparent from the detailed description and drawings included below.

DESCRIPTION OF THE DRAWINGS

[0048] Reference is now made to the accompanying drawings, in which:

FIG. 1 shows a top plan view of an exemplary aircraft comprising one or more fibre-reinforced components according to the present disclosure;

FIG. 2 is a schematic partial cross-sectional view of an exemplary component of FIG. 1;

FIG. 3 is a schematic partial axonometric view of exemplary fabric plies that are part of the component of FIG. 1;

FIG. 4A is a schematic view of an exemplary structural fibre of the component of FIG. 1 with a plurality of nanostructures extending from one side of the structural fibre;

FIG. 4B is a schematic view of another exemplary structural fibre of the component of FIG. 1 with a plurality of nanostructures extending from two sides of the structural fibre;

FIG. 5A is a schematic partial cross-sectional view of an exemplary fabric ply of the component of FIG. 1 with a plurality of nanostructures extending from one side of the fabric ply;

FIG. 5B is a schematic partial cross-sectional view of another exemplary fabric ply of the component of FIG. 1 with a plurality of nanostructures extending from two sides of the fabric ply;

FIG. 6 is an image obtained using a scanning electron microscope (SEM) of exemplary structural fibres that do not have nanostructures extending therefrom;

FIG. 7 is a schematic diagram of an exemplary photo-thermal chemical vapour deposition (PTCVD) system used to grow nanostructures on structural fibres such as those shown in FIG. 6;

FIG. 8 is a graph showing the process temperature plotted against time during a method for growing of carbon nanotubes (CNTs) on structural fibres;

FIG. 9A is an SEM image of a portion of an exemplary fabric ply having CNTs grown thereon according to the present disclosure;

FIG. 9B is a magnified SEM image of the region 9 in FIG. 9A;

FIG. 10 is an SEM image of a portion of an exemplary fabric ply having CNTs grown thereon according to the prior art;

FIG. 11 is a photograph showing two Petri dishes containing samples of carbon fabric where the sample on the left is unprocessed (sized) carbon fabric and the sample on the right is carbon fabric that has CNTs grown thereon in accordance with the present disclosure;

FIG. 12 is a schematic view of an exemplary component having Silver DAG applied thereto for measuring electrical conductivity;

FIG. 13 illustrate a plurality of configurations for obtaining electrical conductivity measurements on the component of FIG. 12;

FIG. 14 shows a graphical representation of electrical conductivity measurements obtained using the configurations shown in FIG. 13 on the component of FIG. 12 and two other baseline components; and

FIG. 15 shows a plot illustrating exemplary changes in mass of a sample of fabric ply 40 as it undergoes various steps associated with a method for growing nanostructures thereon;

FIGS. 16A and 16B are high magnification images of different regions of an exemplary fibre-reinforced component for measuring densities of CNTs;

FIG. 17 shows a plurality of a high-magnification images of different regions of an exemplary fibre-reinforced component for measuring the diameters of CNTs;

FIG. 18 is a scanning transmission electron microscopy image of a single CNT in an exemplary fibre-reinforced

component; and

FIG. 19 is a high-magnification image of a forest of CNTs in an exemplary fibre-reinforced component.

DETAILED DESCRIPTION

[0049] Aspects of various embodiments are described through reference to the drawings.

[0050] The present disclosure relates to aerospace components comprising fibre-reinforced composite materials. Such components may be suitable for use in civil aviation, military aviation, missiles, rockets and/or satellite applications. For example, the components disclosed herein may comprise or be part of aircraft components such as wing skins, fuselages, empennages, engine nacelles, horizontal stabilizers, vertical stabilizers, flight control surfaces and/or other structural and nonstructural components such as frames, stringers, ribs, spars, brackets, wing fairings or belly fairings, etc. In some embodiments, aspects of the present disclosure may contribute toward improving the electrical conductivity (and hence ESD, EMI shielding and LSP) of fibre-reinforced composite materials through the use of electrically conductive nanostructures such as carbon nanotubes (CNTs) extending from structural fibres. Accordingly, in some embodiments, components disclosed herein may include aircraft components that are susceptible to lightning strike for example. In some embodiments, the addition of nanostructures to the fibre-reinforced materials may also improve the thermal conductivity, one or more mechanical properties (e.g., toughness) and/or interfacial adhesion of the materials.

[0051] In cases where some specific electrical conductivity and thermal characteristics are achieved, such component could potentially be used in a region of an aircraft that requires de-icing or anti-icing functionalities.

[0052] In some embodiments, the improvement in electrical conductivity provided by the methods and components disclosed herein may facilitate the structural health monitoring of such components during operation. For example, such materials, may allow for their electrical resistance to be monitored during use to provide an indication of the strain (and hence stress) that is experienced by the material.

[0053] Even though the following disclosure is mainly directed toward aerospace components for civil aviation, it is understood that various aspects of the disclosure may be equally applicable to fibre-reinforced composite materials used in other applications including transport (e.g., trains, busses, ships, watercraft), automotive, defense and other applications.

[0054] FIG. 1 shows a top plan view of an exemplary aircraft 10 comprising one or more fibre-reinforced components 12 having nanostructures according to the present disclosure. Component 12 may be an aerospace component such as a civil aviation component for example. Aircraft 10 may be any aircraft such as corporate, private, commercial or any other type of aircraft including passenger aircraft suitable for civil aviation or unmanned aircraft. For example, aircraft 10 may be a narrow-body, twin-engine jet airliner. Aircraft 10 may be a fixed-wing aircraft or a rotary-wing aircraft. Component 12 may comprise or be part of any suitable part of aircraft 10 that may comprise fibre-reinforced composite material. For example, component 12 may comprise or may be part of one or more of: wing 14 (e.g., wing skin), fuselage 16, nacelle 18, horizontal stabilizer 20, vertical stabilizer 22, flap 24, aileron 26, slat 28, elevator 30, rudder 32 and spoiler 34. Component 12 may also comprise or be part of internal structural elements of aircraft 10 such as frames, stringers, ribs and spars.

[0055] FIG. 2 is an exemplary schematic cross-sectional (through-thickness) view of component 12. Component 12 may comprise a plurality of structural fibres 36 embedded in a cured matrix material 38. Structural fibres 36 may be part of one or more fabric plies 40A-40D sometimes also referred to as cloths that are overlaid inside component 12 and embedded in cured matrix material 38. Each fabric ply 40A-40D may comprise one or more tows 42 made up of structural fibres 36. In some embodiments, each tow 42 may comprise about 1,000 - 12,000 structural fibres 36. In some embodiments, fabric plies 40A-40D may comprise woven and/or non-crimp fabric. Structural fibres 36 may comprise carbon fibres or other material(s) suitable for aerospace applications and that may be electrically conductive. In some embodiments, structural fibres 36 may comprise one or more intermediate-modulus carbon fibres having a cross-sectional diameter of about 5 μm . In some embodiments, structural fibres 36 may comprise one or more high-strength carbon fibres having a cross-sectional diameter of about 7 μm . In some embodiments, structural fibres 36 may comprise one or more E-glass fibres having a cross-sectional diameter of about 12 μm .

[0056] Matrix material 38 may be of any known or other type suitable for producing fibre-reinforced structures for aerospace applications. In various embodiments, matrix material 38 may comprise polyester, vinyl-ester, epoxy, benzoxazine and/or Bismaleimide (BMI) resin systems. Some matrix materials 38 having a good fire, smoke and toxicity (FST) properties may be suitable for "in cabin" aerospace and transportation applications. For example, depending on the specific application and requirements, matrix material 38 may comprise one of the following products: product name T-PRIME 160 sold under the trade name GURIT; product number 337 sold under the trade name EPO-TEK; product name TOOLFUSION 3 sold under the trade name TYGAVAC; product name RENLAM LY120 sold under the trade name HUNTSMAN; product names ARALDITE LY1564, ARALDITE FST 40002, ARALDITE FST 40003 and ARADUR 2594 sold under the trade name HUNTSMAN; product names CYCOM 890 and CYCOM 5250-4 sold under the trade name

CYTEK; product names RTM 6 and RTM 651 sold under the trade name HEXCEL; product name EPON 862 sold under the trade name MOMENTIVE; product names LOCTITE BZ 9120 and LOCTITE BZ 9121 sold under the trade name HENKEL; and, product name BMI-1 sold under the trade name RAPTOR RESINS. In some embodiments, matrix material 38 may comprise a graphene-doped resin which may be suitable for some applications and may further improve the electrical conductivity of at least part of component 12.

[0057] Component 12 may comprise one or more surfaces 12A, 12B. For example, surface 12A may be an outer surface that may be facing or exposed to the environment outside of aircraft 10 and susceptible to lightning strike. Surface 12B may be an inner surface that may be opposite outer surface 12A and that may face the inside of aircraft 10. Accordingly, one or more of structural fibres 36 may be proximal to outer surface 12A by being part of fabric ply 40A for example. Also, one or more of structural fibres 36 may be distal to outer surface 12 by being part of fabric ply 40D for example. As explained below, one or more of structural fibres 36 may have a plurality of nanostructures 44 (shown in FIGS. 4A, 4B, 5A and 5B) extending therefrom to improve the electrical conductivity of at least part of component 12. Structural fibres 36 having such nanostructures 44 extending therefrom may also be referred to as "fuzzy" fibres.

[0058] FIG. 3 is a schematic axonometric view of exemplary dry fabric plies 40A-40C that may be part of component 12 prior to infusion with matrix material 38. As explained above, fabric plies 40A-40D may comprise non-crimp fabric. Component 12 may comprise additional or fewer fabric plies 40A-40D than those shown herein depending on the application and function of component 12. In various embodiments, tows 42 of adjacent plies 40A-40D may be disposed at different orientations as shown in FIG. 3.

[0059] FIG. 4A is a schematic view of an exemplary structural fibre 36 of component 12 with a plurality of nanostructures 44 (also referred hereinafter as "carbon nanotubes 44" or "CNTs 44") extending from one side 37A of structural fibre 36. FIG. 4B is a schematic view of another exemplary structural fibre 36 of component 12 with a plurality of nanostructures 44 extending from two sides 37A, 37B of structural fibre 36. Nanostructures 44 may be applied to or grown onto part of the circumferential surface of structural fibre 36 using methods described below. In some embodiments, nanostructures 44 may comprise carbon nanotubes or other electrically conductive nanostructures. In some embodiments, nanostructures 44 may comprise multi-walled and/or single-walled carbon nanotubes. Sides 37A, 37B of structural fibre 36 may comprise circumferential halves of the exterior surface of structural fibre 36. In some embodiments, structural fibre 36 may have a cross-sectional profile that is substantially circular. Alternatively, structural fibre 36 may have a cross-sectional profile of another suitable shape. In some embodiments, nanostructures 44 may be bonded to structural fibre 36. In some embodiments, nanostructures 44 may be in electrical contact (e.g., bonded) with structural fibre 36 so as to form an electrical path between nanostructures 44 and structural fibre 36. Accordingly, nanostructures 44 may provide electrical percolation pathways between structural fibres 36.

[0060] Depending on the specific application, nanostructures 44 may extend from one side 37A or from two sides 37A and 37B of structural fibre 36. For example, in some application, nanostructures 44 extending from the entire circumference of structural fibre 36 may not be required. For example, in the case where component 12 is a skin of wing 14 of aircraft 10, it may be more important to increase the electrical conductivity near surface 12A (see FIG. 2) of component 12. In some cases, it may be sufficient to have nanostructures 44 extending from only side 37A of structural fibre 36. In some embodiment, side 37A may be an outer side of structural fibre 36 that faces outer surface 12A of component 12 and side 37B may be an inner side of structural fibre 36 that is opposite to side 37A and that accordingly faces away from outer surface 12A of component 12. For example, in case where structural fibre 36 is part of fabric ply 40A, inner side 37B of structural fibre 36 may face toward adjacent fabric ply 40B.

[0061] Whether or not nanostructures 44 extend from one or both sides 37A, 37B of structural fibre 36, not all of structural fibres 36 in component 12 may necessarily have nanostructures 44 extending therefrom. For example, in some embodiments, structural fibres 36 that are proximal to outer surface 12A of component 12 may have nanostructures 44 extending therefrom but structural fibres 36 that are distal to surface 12B may not have nanostructures 44 extending therefrom. For example, structural fibres 36 that are part of fabric ply 40A (see FIG. 2) may have nanostructures 44 extending therefrom but structural fibres 36 that are part of fabric plies 40B, 40C and/or 40D may not have nanostructures 44 extending therefrom. In some embodiments, it may be desirable to have nanostructures 44 extending from fabric plies 40A and 40B that are disposed closer to outer surface 12A.

[0062] Alternatively, depending on the specific requirements, it may be desirable to have most or all of structural fibres 36 in component 12 or in a fabric ply 40 having nanostructures 44 extending therefrom. In some embodiments, it may be desirable to have at least some structural fibres 36 in each fabric ply 40A-40D having nanostructures 44 extending therefrom to improve through-thickness electrical conductivity.

[0063] FIG. 5A is a schematic cross-sectional view of an exemplary fabric ply 40 of component 12 with a plurality of nanostructures 44 extending from one side 41A of fabric ply 40. FIG. 5B is a schematic cross-sectional view of another exemplary fabric ply 40 of component 12 with a plurality of nanostructures 44 extending from two sides 41A, 41B of fabric ply 40. It should be understood that fabric plies 40 shown in FIGS. 5A and 5B are intended to illustrate any one of fabric plies 40A-40D since not all of fabric plies 40A-40D may necessarily have nanostructures 44 extending therefrom. The methods disclosed herein for growing nanostructures 44 onto structural fibres 36 may be used to grow nanostructures

44 onto individual structural fibres 36 or onto groups of structural fibres 36 such as fabric plies 40A-40D for example. Accordingly, one or more fabric plies 40A-40D of component 12 may have nanostructures 44 extending from one or both sides 41A, 41B thereof. As explained above, depending on the specific requirements for component 12, one or more fabric plies 40A-40D may have nanostructures 44 extending from one or more sides 41A-41B thereof.

[0064] For example, in some embodiments, one or more outer structural fibres 36 may be part of outer fabric ply 40A and one or more inner structural fibres 36 may be part of inner fabric ply 40B-40D where nanostructures 44 may extend from one or both sides 41A, 41B of outer fabric ply 40A. For example, side 41A of fabric ply 40 may face toward outer surface 12A of component 12 and opposite side 41B may face away from outer surface 12A of component 12.

[0065] The previous paragraphs explain various combinations of nanostructures 44 extending from one or more structural fibres 36 at different locations across the thickness of component 12. However, it should be noted that different amounts of nanostructures 44 could be present in different locations across the width and/or length of component 12 depending on where the material properties (i.e., increased electrical conductivity and/or increased thermal conductivity) achieved through the use of such nanostructures 44 are desired. In other words, the amount of nanostructures 44 in component 12 does not need to be substantially uniform across the thickness, width and/or length of component 12. In the case of component 12 being part of a wing 14 of aircraft 10 for example, the amount of nanostructures 44 near a fastener, a tip of wing 14, near engine nacelle 18 and/or other critical area(s) may be greater than in other locations within component 12. In some embodiments, component 12 may comprise alternating regions (e.g., bands) of high amounts of nanostructures 44 and regions (e.g., bands) of low (or no) amounts of nanostructures 44.

[0066] In some embodiments, one or more of structural fibres 36 of component 12 may be free of a sizing agent. A polymer sizing agent is typically applied to structural fibres to improve the handleability of carbon fibre fabrics. Sizing agents that are typically used on structural fibres of epoxy matrix composites may include an epoxy polymer sizing, polyhydroxyether, polyphenyleneoxide, copolymers of styrene and maleic anhydride (SMA), a block copolymer of SMA with isoprene, polysulfone, polybutadiene, silicone, a carboxy-terminated polybutadiene, and a copolymer of ethylene and acrylic acid. Sizing agents that are typically used on structural fibres of thermoplastic-matrix composites include polyimides and polyimide-PES blends. Such sizing agents, are typically substantially not electrically conductive and therefore may result in having an electrical insulator effect around structural fibres 36. The methods disclosed herein for growing electrically conductive nanostructures 44 on structural fibres 36 may also cause such sizing agent(s) to be removed (e.g., burned off) from structural fibres 36, which may be electrically conductive. As explained below, the removal of such sizing agent(s) may be conducted before the growth of nanostructures 44 on structural fibres 36. Accordingly, the lack of electrically insulating sizing agent on structural fibres 36 may improve the electrical conductivity of at least part of component 12.

[0067] Another factor that may affect the electrical conductivity of component 12 is the quality and density of nanostructures 44 that extend from structural fibres 36. For example, the quality and density of carbon nanotube forests grown in accordance with the methods disclosed herein may be superior to carbon nanotubes grown using other methods. Accordingly, the electrical conductivity and/or other material properties of at least part of component 12 may be improved. For example, in some embodiments, the density of nanostructures 44 extending from one or more structural fibres 36 may be between about 10^7 and about 10^{12} nanostructures 44 (e.g., CNTs) per cm^2 of surface area of structural fibre(s) 36. In some embodiments, the density of nanostructures 44 extending from one or more structural fibres 36 may be between about 10^9 and about 10^{11} nanostructures 44 (e.g., CNTs) per cm^2 of surface area of structural fibre(s) 36. In some embodiments, a specific surface area of structural fibre 36 may have nanostructures 44 extending therefrom where the nanostructures 44 cover at least about 50% of that specific surface area.

[0068] The size and length (i.e., aspect ratio) of nanostructures 44 may also be varied by changing one or more process parameters of the methods disclosed herein. In some embodiments, the average radius of CNTs 44 extending from structural fibres 36 may be between about 1 nm and about 300 nm. In some embodiments, the average radius of CNTs 44 extending from structural fibres 36 may be between about 10 nm and about 100 nm. In some embodiments, the average length of CNTs 44 extending from structural fibres 36 may be between about 1 μm and about 500 μm . In some embodiments, the average length of CNTs 44 extending from structural fibres 36 may be between about 10 μm to about 50 μm . In some embodiments, the average length of CNTs 44 extending from structural fibres 36 may be between about 50 μm to about 100 μm . In some embodiments, the length of one or more CNTs 44 extending from structural fibres 36 may be up to about 200 μm .

[0069] In some embodiments, nanostructures 44 grown on one fabric ply 40 in accordance with the present disclosure may form at least 1%, 2%, 3%, 4% or 5% of the mass of the fabric ply 40. In some embodiments, nanostructures 44 grown on two sides of one fabric ply 40 in accordance with the present disclosure may form about 2.5% of the mass of the fabric ply 40. In some embodiments, nanostructures 44 grown on two sides of one fabric ply 40 in accordance with the present disclosure may form about 1.5% of the mass of the fabric ply 40. As shown in FIG. 15, in some embodiments, nanostructures 44 grown on one side of one fabric ply 40 in accordance with the present disclosure may form about 1.15% of the mass of the fabric ply 40, and, nanostructures 44 grown on two sides of one fabric ply 40 in accordance with the present disclosure may form about 2.24% of the mass of the fabric ply 40.

[0070] Methods for growing nanostructures 44 on structural fibres 36 may include aspects disclosed in U.S. Patent Application Publication No. 2009/0061217 A1, which is incorporated herein by reference in its entirety. Generally, an exemplary method may comprise applying a catalyst on a first side 41A or 41B of (e.g., carbon fibre) fabric ply 40A-40D and growing one or more nanostructures 44 (e.g., carbon nanotube) therefrom. If nanostructures 44 are desired on both sides 41A and 41B of fabric ply 40A-40D, the method may comprise applying the catalyst on a second side 41A or 41B of fabric ply 40A-40D and growing one or more nanostructures 44 (e.g., carbon nanotube) therefrom. The growing of nanostructures 44 on both sides 41A and 41B may be conducted simultaneously or sequentially. The method may further comprise forming component 12 using one or more fabric plies 40A-40D having nanostructures 44 extending therefrom.

[0071] Similarly, with respect to growing nanostructures 44 onto individual structural fibres 36, the method may comprise applying a catalyst on a first side 37A or 37B of structural fibre 36 and growing one or more nanostructures 44 (e.g., CNTs) therefrom. If nanostructures 44 are desired on both sides 37A and 37B of structural fibre 36, the method may comprise applying the catalyst on a second side 37A or 37B of structural fibre 36 and growing one or more nanostructures 44 (e.g., CNTs) therefrom. The growing of nanostructures 44 on both sides 37A and 37B of structural fibre 36 may be conducted simultaneously or sequentially. The method may further comprise forming component 12 using structural fibre(s) 36 having nanostructures 44 extending therefrom.

[0072] The catalyst may be applied to structural fibre(s) 36 either by applying the catalyst directly onto fabric ply 40 or by applying the catalyst onto structural fibre(s) 36 before arranging structural fibre(s) 36 into one or more tows 42 and then into one or more fabric plies 40 onto which nanostructures 44 are subsequently grown. Similarly, the catalyst could be applied to one or more tows 42 before such tows 42 are arranged into one or more fabric plies onto which nanostructures are subsequently grown.

[0073] The catalyst may comprise a material selected from a group consisting of: copper (Cu), nickel (Ni), ruthenium (Ru), cobalt (Co), iron (Fe), rubidium (Rd), platinum (Pt), iridium (Ir), palladium (Pd), rhodium (Rh), carbides, silver (Ag), gold (Au), manganese (Mn), molybdenum (Mo), chromium (Cr), Tin (Sn), magnesium (Mg), aluminium (Al), silicon carbide (SiC), germanium (Ge), silicon (Si), diamond, steel or a composite of any two or more of the aforementioned materials.

In some embodiments, the catalyst may comprise iron (Fe). Any of these catalyst materials may be used on first side 41A and/or second side 41B of fabric ply(ies) 40A-40D, or, on first side 37A and/or second side 37B of structural fibre(s) 36. The application of the catalyst material on structural fibre(s) 36 and/or fabric ply 40A-40D may comprise sputter depositing a suitable material onto structural fibre(s) 36 and/or fabric ply 40A-40D so as to create a catalyst layer thereon. In various embodiments, the catalyst layer may be between 1 nm and 500 nm in thickness. In some embodiments, the catalyst layer may be between 1 nm and 9 nm in thickness.

[0074] The method may also comprise providing fabric ply(ies) 40A-40D (first side 41A and/or second side 41B), or, structural fibre(s) 36 (first side 37A and/or second side 37B) with a support layer before the catalyst is deposited. The support layer may comprise copper (Cu), nickel (Ni), ruthenium (Ru), cobalt (Co), iron (Fe), rubidium (Rd), platinum (Pt), iridium (Ir), palladium (Pd), rhodium (Rh), carbides, silver (Ag), gold (Au), manganese (Mn), molybdenum (Mo), chromium (Cr), Tin (Sn), magnesium (Mg), aluminium (Al), silicon carbide (SiC), germanium (Ge), silicon (Si), diamond, steel or a composite of any two or more of the aforementioned materials. In some embodiments, the support layer may comprise aluminium (Al). The application of the support layer on structural fibre(s) 36 and/or fabric ply(ies) 40A-40D may comprise sputter depositing a suitable material thereon. In various embodiments, the support layer may be between 1 nm and 500 nm in thickness. In some embodiments, the support layer may be between 10 nm and 50 nm in thickness.

[0075] As explained above, structural fibre(s) 36 and/or fabric ply(ies) 40A-40D may comprise a sizing agent which is removed before growing nanostructures 44. In some embodiments, the sizing agent is removed before the catalyst material is deposited on structural fibre(s) 36 and/or fabric ply(ies) 40A-40D. Optionally, the method may comprise annealing the support layer after it has been deposited onto the sized structural fibre(s) 36 and/or fabric ply(ies) 40A-40D. The step of annealing the support layer may comprise heating the structural fibre(s) 36 and/or fabric ply(ies) 40A-40D to a temperature which is adequate to remove the polymer sizing by burning it off. For example, the structural fibre(s) 36 and/or fabric ply(ies) 40A-40D may be heated to a temperature of between 300°C and 800°C, to a temperature of between 400°C and 700°C and/or to a temperature of between 500°C and 600°C for a suitable time. A suitable time may comprise at least 5 minutes, at least 10 minutes and/or at least 15 minutes. Any of the above temperatures may be combined with any of the above suitable times.

[0076] The growing of nanostructures 44 (e.g., CNTs) may comprise growing CNTs in a chemical vapour deposition (CVD) system. The process can be performed in any form of CVD system, including thermal CVD (TCVD), plasma enhanced CVD (PECVD) or photothermal CVD (PTCVD). Preferably, PTCVD is used in which optical energy is delivered to one or more carbon fabric plies 40 as infrared radiation, preferably from above the carbon fabric ply 40. For example, infrared (IR) lamps may be used while the carbon fabric sample is placed on a water-cooled chuck (see sample holder 46 shown in FIG. 7) as disclosed in U.S. Patent Application Publication No. 2009/0061217 A1. An upper surface of the carbon fabric ply 40 is heated to a temperature of at least 400°C, 500°C or at least 600°C. An upper surface of the carbon fabric ply 40 may be heated up to 1100°C. In some embodiments, the bulk of carbon fabric ply 40 may remain at a temperature below 600°C, 470°C or below 250°C due to heat removal by conduction or other mechanism(s) via the

water-cooled chuck. The cooling of fabric ply 40 may allow for the bulk of a structural fibre 36 to remain at a temperature that does not cause substantial degradation of structural fibre 36 while the outer surface of structural fibre 36 may be heated to a temperature sufficient to permit the growth of nanostructures 44. In other words, the cooling of structural fibre 36 may substantially prevent damage from being caused to structural fibre 36 due to exposure to the relatively high temperatures required for growing nanostructures 44.

[0077] The bulk temperature of carbon fabric ply 40 may be monitored using a pyrometer disposed towards a lower surface of carbon fabric ply 40 or a thermocouple placed alongside the sample. The temperature of carbon fabric ply 40 may be mainly controlled by the electrical power supplied to the optical lamps, the gases used and pressure of the gases in the chamber. If the power supplied to the chamber is by another means, this may need to be optimised to couple the correct energy to the system, which will be known to the skilled person. The heat capacities of the gases in the chamber may also play a role in the thermal energy kinetics. The bulk temperature of the carbon fabric ply 40 may be in the range of 250 - 500°C with an upper surface temperature of between 350 - 850°C. In various embodiments, one or more fabric plies 40 may be present in the chamber during any part of the method.

[0078] The growth of CNTs 44 may comprise treating the carbon fabric with the catalyst to a bulk temperature of below 470°C in flowing hydrogen (H₂). However, other gases such as argon (Ar), nitrogen (N₂), helium (He), ammonia (NH₃), etc., may also be used. Plasma-assisted or chemical-based catalyst treatment may also be used. In some embodiments, the flowing H₂ may be delivered at between 25 - 500 sccm (standard cubic centimetres per minute). In some embodiments, the flowing H₂ may be delivered at about 200 sccm. This step may be carried out at a pressure between 0.1 Torr and 7600 Torr. In some embodiments, this step may be carried out at a pressure of about 10 Torr. The preheating step may be maintained for about 1-60 minutes, for about 5-15 minutes. In some embodiments, the preheating step may be maintained for about 10 minutes. It will be appreciated that any of the above pressures may be combined with any of the above timings.

[0079] The growth of CNTs 44 may also comprise using a carbon feedstock such as acetylene (C₂H₂), ethylene (C₂H₄), methane (CH₄), carbon monoxide (CO), camphor, naphthalene, ferrocene, benzene, ethanol, or any other carbon feedstock. In some embodiments, the growth of CNTs may comprise using C₂H₂ as the carbon feedstock. The growth process may be maintained for about 0.1-60 minutes. In some embodiments, the growth process may be maintained for about 2-30 minutes. In some embodiments, the growth process may be maintained for about 15 minutes. The carbon feedstock may be delivered at a rate between about 5 - 500 sccm. In some embodiments, the carbon feedstock may be delivered at about 50 sccm. This step may be carried out at a pressure between 0.1 Torr and 7600 Torr. In some embodiments, this step may be carried out at a pressure of about 10 Torr. It will be appreciated that any of the above pressures may be combined with any of the above timings.

[0080] The density of nanostructures 44 grown on one or more structural fibres 36 may be controlled to some extent by varying process parameters of the methods disclosed herein. For example, adjustments to the catalyst material, reactants, flow sequences, temperature, pressure and other parameters may be used to control the density of the CNTs 44 grown. In various embodiments, the methods disclosed herein may be used to produce a dense array of closely-spaced CNTs resembling a carpet or forest.

[0081] After the growth of CNTs 44 on one or more structural fibres 36 and/or on one of more fabric plies 40, the one or more structural fibres 36 and/or the one or more fabric plies 40 may be infused with matrix material 38 so as to form component 12. For the sake of clarity, the description below refers to fabric plies 40 however, it is understood that this description is also applicable in reference to one or more structural fibres 36. For example, subsequent to growing one or more electrically conductive nanostructures 44 on one or two sides of fabric ply 40, the method of producing component 12 may comprise infusing fabric ply 40 with matrix material 38, preforming fabric ply 40 and matrix material 38 combination and then curing the matrix material 38 in order to obtain component 12.

[0082] Component 12 may comprise a plurality of fabric plies 40A-40D that may be overlaid and infused with matrix material 38 according to known or other resin infusion processes. One or more of fabric plies 40A-40D may comprise nanostructures extending therefrom. For example, the infusion of matrix material 38 into fabric ply(ies) 40A-40D may be conducted according to resin infusion processes such as resin transfer infusion (RTI), resin transfer molding (RTM), vacuum-assisted resin transfer molding (VARTM), vacuum-assisted resin infusion (VARI) and Seemann composites resin infusion molding process (SCRIMP) for example.

[0083] In some cases, the use of structural fibre(s) 36 having nanostructures 44 extending therefrom may be used for "pre-preg" (i.e., using pre-impregnated reinforcement fabrics) in autoclave and/or out-of-autoclave manufacturing processes instead of or in addition to the resin infusion processes listed above. For example, the growing of nanostructures 44 could be conducted on "dry" structural fibres 36 where the matrix material 38 may be subsequently applied to structural fibres 36 by spraying or other suitable method in order to produce pre-impregnated structural fibres 36 in preparation for further processing. The process of applying matrix material 38 in this manner may also be referred to as "prepregging". Accordingly, the growing of nanostructures 44 on structural fibres 36 may be conducted prior to prepregging. In any case, at least some of nanostructures 44 may remain bonded to structural fibres 36 even after infusion (or prepregging) and curing of matrix material 38.

[0084] It may be possible to use a range of materials to functionalise (i.e., treat the surface of) CNTs 44 grown on structural fibres 36 depending on the property that is to be enhanced. For instance, oxygen may be used to improve the adhesion between matrix material 38 and CNTs 44 as it may make the CNTs 44 and carbon fibre fabric 40 more polar. Generally, functionalization can be achieved by exposing a sample to a gas (containing the functional material of choice) under thermally elevated, chemical or plasma treatment.

[0085] Oxygen functionalizing the carbon structural fibres 36 may improve the dispersability of plastic. Accordingly, when polymer matrix material 38 is infused into the stacked carbon fabric plies 40A-40D, it may be better able to disperse through the stack to reduce the likelihood of forming voids in a composite component 12.

[0086] The process of functionalising the material (CNTs 44 grown on structural fibres 36) may be conducted by loading the material into a Plasma Asher Emitech K1050X. Oxygen may then be introduced at a flow rate of 10 sccm (10-15 sccm may be a sensible range) and the radio frequency generated plasma may be set at 30 W. The process may be carried out for 10 seconds (5 - 10 seconds may be a sensible range). To conclude, the plasma may be terminated, oxygen flow rate may be stopped and then the chamber may be vented to allow the material to be removed.

[0087] Alternatively, carbon structural fibres 36 which make up carbon fabric ply 40 may be nitrogen n-doped. Nitrogen treatment of the fuzzy fibres may improve the electrical conductivity of the n-doped material, by injecting more charge carriers. As it will also polarise the material, the hydrophilicity may also improve. Essentially, carbon atoms may be replaced with nitrogen atoms. The nitrogen atoms have an extra electron per atom - the extra electron may contribute to the conductivity of the material. The process of n-doping the material (i.e., fuzzy fibres) may be carried out by first loading the material into a Plasma Asher Emitech K1050X. Nitrogen may be introduced at a flow rate of 10 sccm (10-15 sccm may be a sensible range) and the radio frequency generated plasma may be set at 30 W. The process may be carried out for 10 seconds (5-10 seconds may be a sensible range). To conclude, the plasma may be terminated, nitrogen flow rate may be stopped and then the chamber may be vented to allow the material to be removed.

[0088] The growth of CNTs 44 may be controlled via masking of carbon fabric ply 40 prior to the catalyst deposition stage. This may permit greater flexibility in selecting where CNTs 44 or other nanostructures 44 may be grown. For instance, fabric ply 40 could be partially modified/functionalized. For instance, for components that are deemed most susceptible to charge build-up, the location(s) where CNTs 44 are grown on structural fibres 36 may be selected to provide higher electrical conductivity in some regions of component 12 than in others. Accordingly, it may be possible to select the locations of CNTs 44 within component 12 so that a desired circuit may be obtained within component 12.

[0089] By functionalising the fuzzy fibres, and thereby controlling polar(hydrophilic) and non-polar (hydrophobic) sections, it may also be possible to alter the fibre-volume ratio in particular sections of component 12.

EXAMPLE 1

[0090] The following describes an exemplary procedure for growing CNTs 44 on carbon fibre using an embodiment of the method disclosed herein.

[0091] FIG. 6 is an image obtained using a scanning electron microscope (SEM) of exemplary dry carbon fibres 36 that may be part of a carbon fabric ply 40 prior to the growth of CNTs 44 thereon.

[0092] A piece of conventional (i.e. sized) 2/2 twill carbon fabric, where a warp tow crosses two weft tows, was placed in a magnetron sputtering system (JLS MPS 500 DC) and aluminium (Al) was sputter deposited on both sides 41A, 41B of the fabric 40 to a thickness of 35 nm under argon (Ar) gas at a pressure of 2 Torr.

[0093] The sample was then placed in a sample holder 46 in a photo-thermal chemical vapour deposition (PTCVD) system 48, such as that shown in FIG. 7, and heated to 500°C under hydrogen gas (H₂), which was injected into the system 48 with a flow rate of 100 standard cubic centimetres per minute (sccm) for 15 minutes. This step caused the removal of the polymer sizing.

[0094] The sample was then returned to the magnetron sputtering system where iron (Fe) was sputter deposited on the first side 41A of the carbon fabric 40 to a thickness of 4 nm under Ar gas at a pressure of 2 Torr. The fabric 40 was then returned to the sample holder 46 in the PTCVD system 48 with the first side 41A of the carbon fabric 40 face-up. In the time interval that elapsed between the iron being sputter deposited onto the first side 41A of the carbon fabric 40 and the fabric 40 then being placed in the PTCVD system 48 some of the iron oxidised to form iron oxide.

[0095] Heating of the system 48 commenced at time t₀, as shown in FIG. 8. In this example, optical heating with a power of 4.8 kW was used with fans 50 and nitrogen gas being employed to cool the optical lamps 52. However, it will be appreciated that other methods could also be used. The system 48 was heated to a temperature of 600-650°C over a period of ten minutes. Meanwhile the sample holder 46 was water-cooled by a chiller system which maintained the water temperature at 10°C, thus ensuring that the bulk temperature of the sample was lower than the overall temperature of the system 48. During this time the pressure was maintained at 10 Torr and hydrogen gas (H₂) was injected into the system 48 with a flow rate of 200 sccm. These conditions caused the iron oxide to be reduced, leaving a layer of substantially pure iron (Fe) on the first side 41A of the fabric 40. The heating and reduction step occurred over the time period t₁, as shown in FIG. 8.

[0096] After ten minutes, the growth of CNTs 44 started. The temperature was maintained in the range of 600-650°C, the pressure was maintained at 10 Torr, the flow of H₂ also remained constant to reduce the overall temperature of the system 48, and the chiller system maintained the water temperature at 10°C. Additionally, acetylene was injected into the system 48 with a flow rate of 50 sccm. The acetylene acted as a carbon source and caused CNTs 44 to grow on the carbon fibres 36 on the first side 41A of the fabric 40. The growth stage lasted for fifteen minutes, as shown by time t₂ in FIG. 8.

[0097] The length of the CNTs 44 can be dependent upon the duration of the growth stage. In other words, a short growth time would lead to relatively short CNTs 44 and long growth times would lead to relatively long CNTs 44. Accordingly, the length of time the growth stage may be controlled to produce CNTs 44 of a desired length.

[0098] Once the growth stage was completed, the optical heating ceased and the sample was allowed to cool. The cooling stage is shown by time t₃ and lasted for about 10 minutes. Due to the water-cooling, this process is relatively short in comparison with the use of conventional TCVD systems. For example, the use of water cooling may allow for several growth processes to be carried out in the same period as required for a single growth process using a standard TCVD system.

[0099] Once the cooling stage had finished, the sample was again returned to the magnetron sputtering system where Fe was then sputter deposited on a second side 41B of the carbon fabric 40 to a thickness of 4 nm under Ar gas at a pressure of 2 Torr. The fabric was then immediately returned to the sample holder 46 in the photothermal chemical vapour deposition (PTCVD) system 48 such that the second side 41B of the carbon fabric 40 was face-up. CNTs 44 were then grown on the second side 41B of the fabric 40 using the same process as set out above.

[0100] SEM images showed that the CNTs 44 which grew on the carbon fabric 40 were dense, long and aligned, as can be seen in FIGS. 9A and 9B. Figure 9B is a magnified SEM image of the region 9 in FIG. 9A. Unlike in the prior art CNTs 44 shown in the SEM image of FIG. 10, the carbon fibres 36 in FIG. 9B are barely visible under the forest of CNTs 44. The left hand side of FIG. 9B shows an area where CNTs 44 have not grown on carbon fibres 36 which form part of tow 42B. The lack of CNTs 44 on the left part of the fibres 36 in FIG. 9B is a result of the warp tow 42A masking the weft tow 42B and emphasises how dense and long the CNTs 44 are which have grown on the rest of the fabric 40 and which are seen on the right hand side of FIG. 9B.

[0101] The growth of CNTs 44 resulted in a 5.7% increase in the mass of the carbon fibre fabric 40. Accordingly, it will be understood that the CNTs 44 grown according to the parameters of this example comprise about 5.4% of the total mass of the carbon fabric composite (i.e., component 12).

[0102] The presence of these CNTs 44 may also provide the carbon fabric 40 structural integrity. The sample on the left of FIG. 11 is a standard carbon fabric 40 without CNTs 44 grown thereon and the sample on the right of FIG. 11 is a fuzzy carbon fabric 40 with CNTs 44 grown thereon in accordance with the above method. It is noted that, unlike the standard carbon fabric 40 on the left, the fuzzy carbon fabric 40+44 retains its shape with the tows 42 running orthogonal/parallel to each other.

[0103] Additionally, individual tows 42 were removed from the fabric 40+44 and the fibres 36 remained held in the complete tow 42. This is typically not possible with a sized tow 42 removed from carbon fabric 40. The improved structural integrity may be due to the high density of CNTs 44 grown on the carbon fabric 40. The growth of CNTs 44 also caused the fabric 40 to curl as a result of the van der Waals forces between the CNTs 44.

[0104] Additionally, the removal of the epoxy size from the fibres 36 also eliminates one element of the composite which contributes to a reduced glass transition temperature (T_g) in the final composite, potentially a weakening of the thermal stability of the fibre/matrix interface. Additionally, the quality of CNTs 44 grown vastly surpasses the quality that was obtainable using prior art methods. This resulted in more confidence in batch to batch quality, reduction of structural irregularities. This also resulted in more consistent properties for the fuzzy carbon fibre reinforced plastics produced using the methods disclosed herein. The removal (i.e., burning out) of the sizing agent also did not significantly compromise the adhesion of the epoxy resin 38 to structural fibres 36.

EXAMPLE 2

[0105] The following describes exemplary electrical conductivity measurements obtained from component 12, produced in accordance with Example 1 above.

[0106] Four pieces of fuzzy carbon fabric 40 made according to the method explained in Example 1 were stacked to make a four-ply structure. The four-ply structure was then infused with a polymer matrix material 38 using a vacuum assisted resin transfer moulding (VARTM) system to make component 12 in accordance with the present disclosure (see CNTs 44 shown in FIG. 9B). Two other baseline components were produced for comparison with component 12 (referred to as "w/ present CNTs"). The first baseline component (referred to a "w/o CNTs") was produced similarly but using carbon fabric without any CNTs grown thereon. The second baseline component (referred to as "w/ prior art CNTs") was also produced similarly but using carbon fabric having CNTs grown thereon according to a prior art method (see CNTs shown in FIG. 10).

[0107] An electrically conductive paint, sometimes referred to as "Silver DAG" was applied to 10 mm-wide end portions on the first side and on the second, opposite side of each sample 120 to provide electrical contact points for the purpose of measuring electrical conductivity. A view of one first side of a sample 120 with Silver DAG applied thereon is shown in FIG. 12. The different configurations for obtaining electrical conductivity measurements are shown in FIG. 13.

[0108] The electrical conductivity of the surface, volume and thickness of each sample 120 was then measured by attaching a Keithley 4200 parameter analyser with two needle probes to the areas where the Silver DAG had been applied, as shown in FIG. 13. The numerical values for electrical conductivity of the surface, volume and thickness are represented in the graph of FIG. 14 and are listed in the table below.

Measurement Type	w/o CNTs	w/ prior art CNTs	w/ present CNTs
In-Plane	0.61 S cm ⁻¹	2 S cm ⁻¹	167 S cm ⁻¹
Out-of-Plane (Thickness)	0.0014 S cm ⁻¹	0.007 S cm ⁻¹	0.763 S cm ⁻¹
Out-of-Plane (Volume)	0.0014 S cm ⁻¹	0.0069 S cm ⁻¹	0.496 S cm ⁻¹

[0109] Given the greatly improved conductivity of the sample having CNTs 44 grown according to the present disclosure (i.e., "w/ present CNTs"), the only way that the data could be meaningfully compared to the baseline samples (i.e., "w/o CNTs" and "w/ prior art CNTs") was by plotting the values on a graph with a logarithmic scale. It is observed that the electrical conductivity of the sample having CNTs grown according to the present disclosure (i.e., "w/ present CNTs") is over one hundred times more electrically conductive than the baseline sample without any CNTs (i.e., "w/o CNTs") and nearly one hundred times more conductive than the prior art sample containing CNTs grown according to the prior art (i.e., "w/ prior art CNTs") for all three measurement configurations.

[0110] The baseline samples (i.e., "w/o CNTs" and "w/ prior art CNTs") only really have any degree of electrical conductivity across the surface (i.e., in-plane). Accordingly, these materials can be described as two-dimensional anisotropic materials. However, the sample having CNTs 44 grown according to the present disclosure (i.e., "w/ present CNTs") not only exhibits enhanced electrical conductivity across its surface but also exhibits electrical conductivity across its thickness and volume. Accordingly, CNTs 44 grown according to the present disclosure caused the material of component 12 to become more isotropic where the CNTs 44 formed electrical percolation pathways between carbon structural fibres 36.

[0111] FIG. 15 shows a plot illustrating exemplary changes in mass of a sample of fabric ply 40 as it undergoes the various steps described above. In the specific example represented in FIG. 15, the growth of CNTs 44 on one side of fabric ply 40 resulted in a 1.15% increase in mass and the growth of CNTs 44 on both sides of fabric ply 40 is estimated to represent a 2.24% increase in mass.

[0112] The methods described above or parts thereof may also be used for growing CNT forests onto substrates other than structural fibres 36. For example, the methods described above may be used to grow CNT forests on: copper mesh of different aerial weight like those typically used in aerospace applications; mesh or sheets of aggregated CNTs sometime referred to as "Buckypaper"; silver and silver coated meshes; veils, meshes, grids and perforated sheets made of thermoplastics having relatively high melting temperatures; non-woven veils made of the materials mentioned above or other materials; and non-crimp fabrics which have been stitched with yarns (e.g. carbon, fiberglass, metal wires) that can withstand relatively high temperatures.

[0113] For example, some fibre-reinforced composite components that are used for aerospace applications may comprise heavy copper mesh to increase electrical conductivity in some areas of such components. For the case of aircraft wing skins, such heavy copper mesh may be disposed near fasteners for example. In some cases the methods disclose herein may be used to incorporate electrically nanostructures 44 in fibre-reinforced composite components for aerospace applications to potentially eliminate or reduced the amounts of such heavy copper mesh required in such components.

EXAMPLE 3

[0114] The following describes measurements of density of CNTs 44 in an exemplary component 12 produced in accordance with Example 1 above.

[0115] FIGS. 16A and 16B are high-magnification images of different regions of component 12 which permitted CNTs 44 to be resolved. Lines 54A and 54B were drawn substantially perpendicular to the lengths of the CNTs 44 and the CNTs 44 crossing lines 54A and 54B were counted. The length of lines 54A and 54B and the number of CNTs 44 crossing lines 54A and 54B allowed the density of CNTs 44 to be estimated in each micrograph. Using line 54A in FIG. 16A, the density of CNTs 44 was estimated to be about 1.7×10^{10} CNTs/cm². Using line 54B in FIG. 16B, the density of CNTs 44 was estimated to be about 1.8×10^{10} CNTs/cm². The density of CNTs 44 in these particular regions of component

12 ranged from about 1×10^{10} CNTs/cm² to about 2×10^{10} CNTs/cm².

EXAMPLE 4

[0116] The following describes measurements of diameters of CNTs 44 in an exemplary component 12 produced in accordance with Example 1 above.

[0117] FIG. 17 shows a plurality of a high-magnification images of different regions of component 12 obtained using a scanning electron microscope (SEM) where individual CNTs 44 could be resolved. There was some "edge effect" visible in these images due to the emission of secondary electrons being elevated. Nevertheless, the diameters of CNTs 44 in these particular regions of component 12 ranged between about 18 nm to about 29 nm.

[0118] FIG. 18 shows a scanning transmission electron microscopy image of a single CNT 44 from component 12. The axial length of CNT 44 has been extrapolated above and below the image for clarity. The diameter of CNT 44 measured using this image was about 12.5 nm. The images shown in FIGS. 17 and 18 suggest that the diameters of CNTs 44 are between about 10 nm to about 30 nm.

EXAMPLE 5

[0119] The following describes measurements of lengths of CNTs 44 in an exemplary component 12 produced in accordance with Example 1 above.

[0120] FIG. 19 shows a high-magnification image of an exemplary region of component 12 obtained using a scanning electron microscope (SEM) where a forest of CNTs 44 could be resolved. The image shows that CNTs 44 may grow to a length of up to about 200 μ m in some cases. The image also shows that CNTs 44 may generally have a length of about 10 μ m to about 50 μ m.

[0121] The above description is meant to be exemplary only, and one skilled in the relevant arts will recognize that changes may be made to the embodiments described without departing from the scope of the invention disclosed. The present disclosure may be embodied in other specific forms without departing from the subject matter of the claims. Also, one skilled in the relevant arts will appreciate that while the components and methods disclosed and shown herein may comprise a specific number of elements, the components and methods disclosed could be modified to include additional or fewer of such elements. The present disclosure is also intended to cover and embrace all suitable changes in technology. Modifications which fall within the scope of the present invention will be apparent to those skilled in the art, in light of a review of this disclosure, and such modifications are intended to fall within the appended claims. Also, the scope of the claims should not be limited by the preferred embodiments set forth in the examples, but should be given the broadest interpretation consistent with the description as a whole.

Claims

1. A civil aviation component having a fibre-reinforced composite structure, the component comprising:

a plurality of structural fibres embedded in a cured matrix material, the plurality of structural fibres comprising an outer fibre proximal to an outer surface of the component and an inner fibre distal from the outer surface; and a plurality of nanostructures extending from the outer fibre and not from the inner fibre.

2. The component as defined in claim 1, wherein the outer fibre is part of an outer fabric ply and the inner fibre is part of an inner fabric ply, the nanostructures extending from only one side of the outer fabric ply.

3. The component as defined in claim 2, wherein the nanostructures extend from only an outer side of the outer fabric ply.

4. The component as defined in claim 1, wherein the outer fibre has an outer side facing the outer surface of the component and an inner side opposite the outer side, the nanostructures extending from the outer side of the outer fibre and not from the inner side of the outer fibre.

5. The component as defined in claim 1, wherein the outer fibre is part of an outer fabric ply.

6. The component as defined in claim 5, wherein the outer fabric ply has an outer side facing the outer surface of the component and an opposite inner side, the nanostructures extending from the outer side of the outer fabric ply and not from the inner side of the outer fabric ply.

7. The component as defined in claim 5, wherein the outer fabric ply has an outer side facing the outer surface of the component and an opposite inner side, the nanostructures extending from the outer side of the outer fabric ply and from the inner side of the outer fabric ply.

5 8. The component as defined in any one of claims 1 to 7, wherein the outer fibre is free of a sizing agent.

9. The component as defined in any one of claims 1 to 8, wherein a density of nanostructures extending from the structural fibre is at least 10^7 nanostructures per cm^2 of surface area of structural fibre.

10 10. The component as defined in any one of claims 1 to 9, wherein the nanostructures comprise carbon nanotubes.

11. The component as defined in any one of claims 1 to 10, wherein the outer fibre is part of a fabric ply and the nanostructures form at least 1% of the mass of the fabric ply.

15 12. The component as defined in any one of claims 1 to 11, wherein the matrix material is doped with graphene.

13. An aircraft comprising the component as defined in any one of claims 1 to 12.

14. An aircraft wing skin comprising the component as defined in any one of claims 1 to 13.

20

25

30

35

40

45

50

55

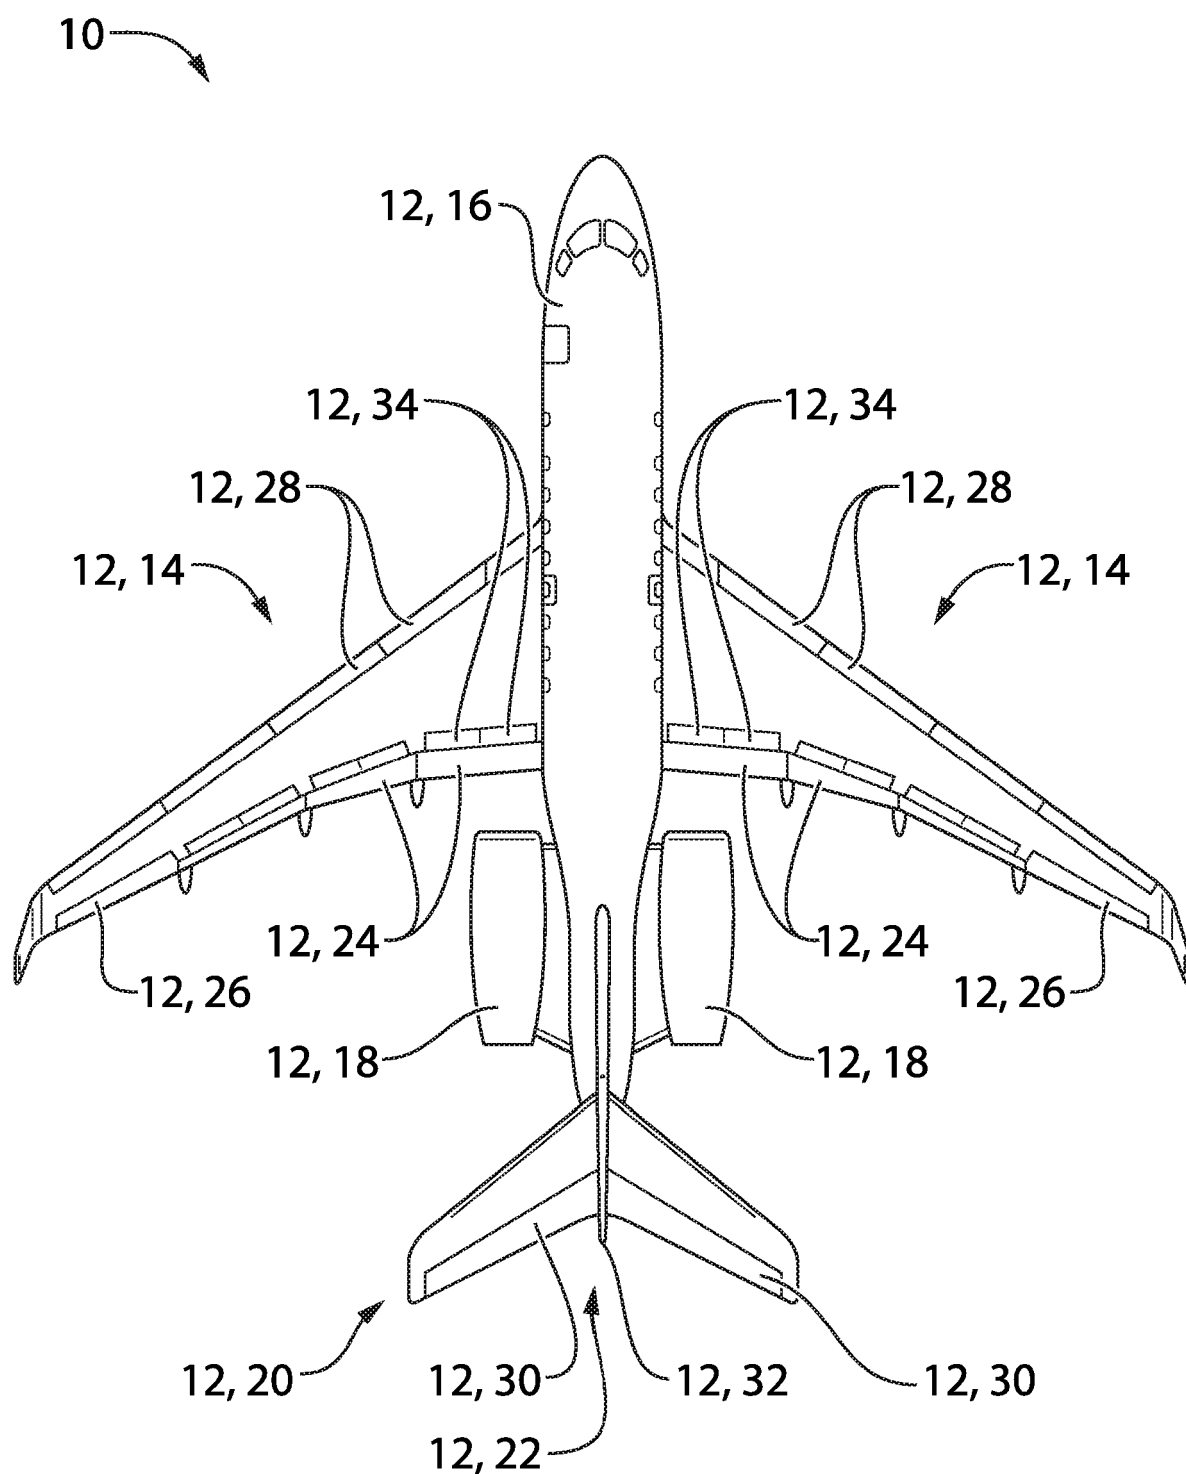


FIG. 1

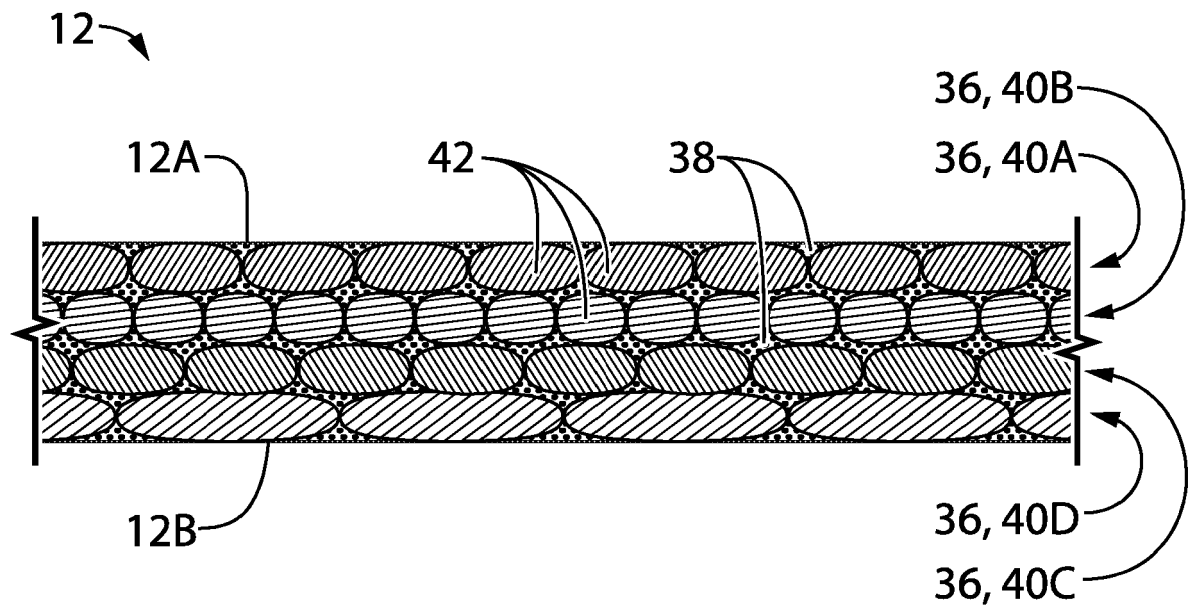


FIG. 2

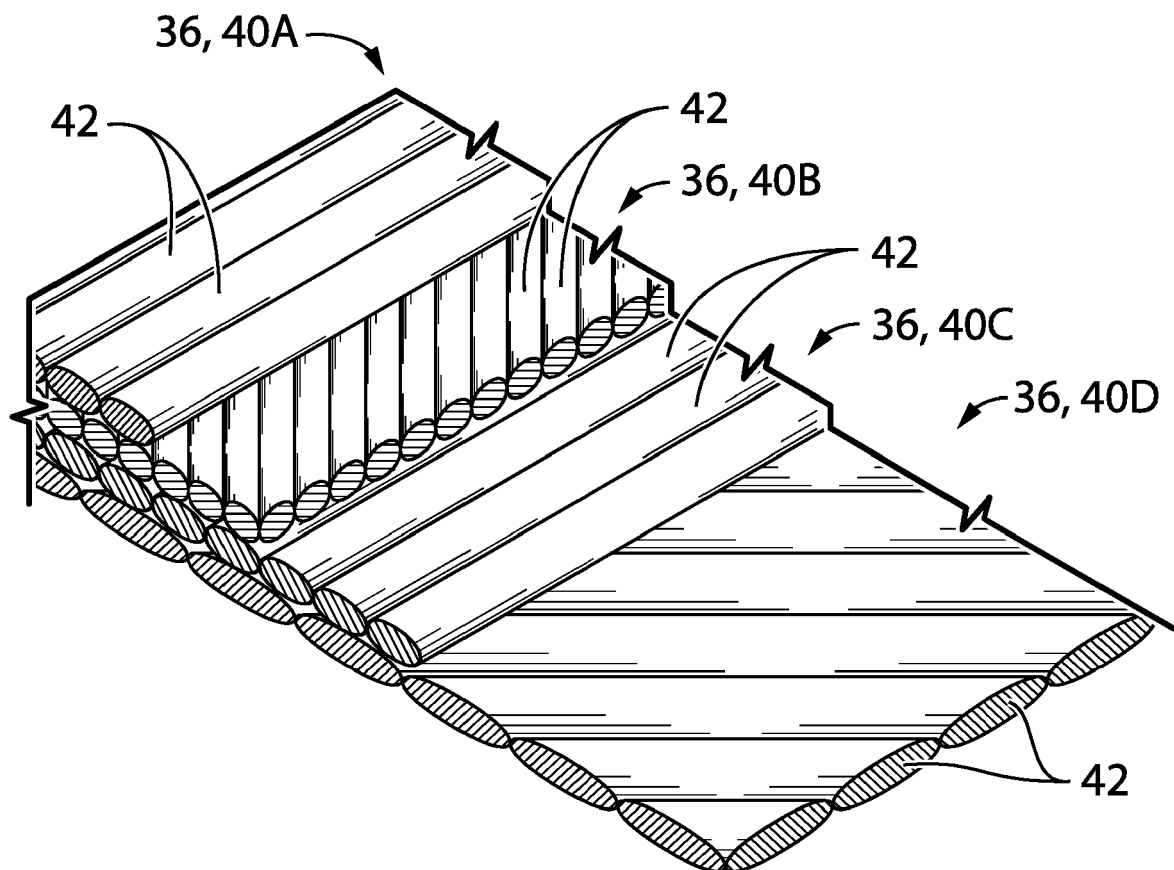


FIG. 3

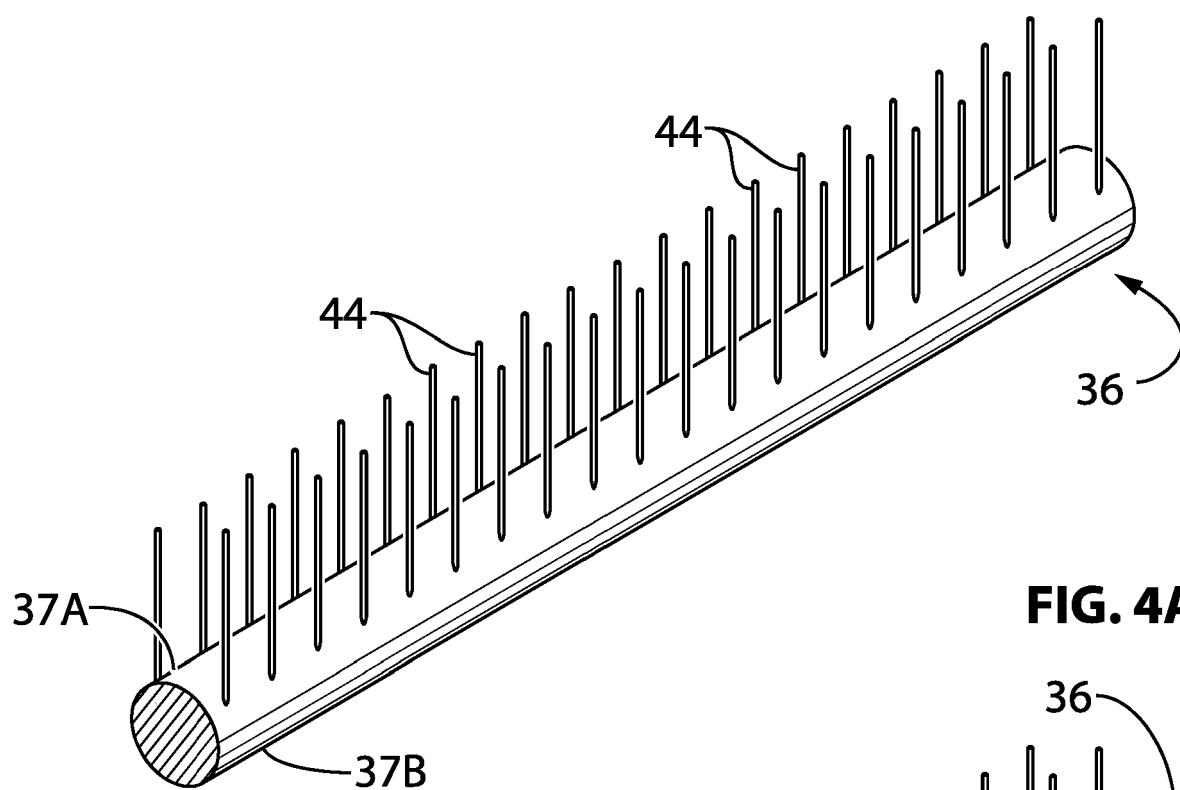


FIG. 4A

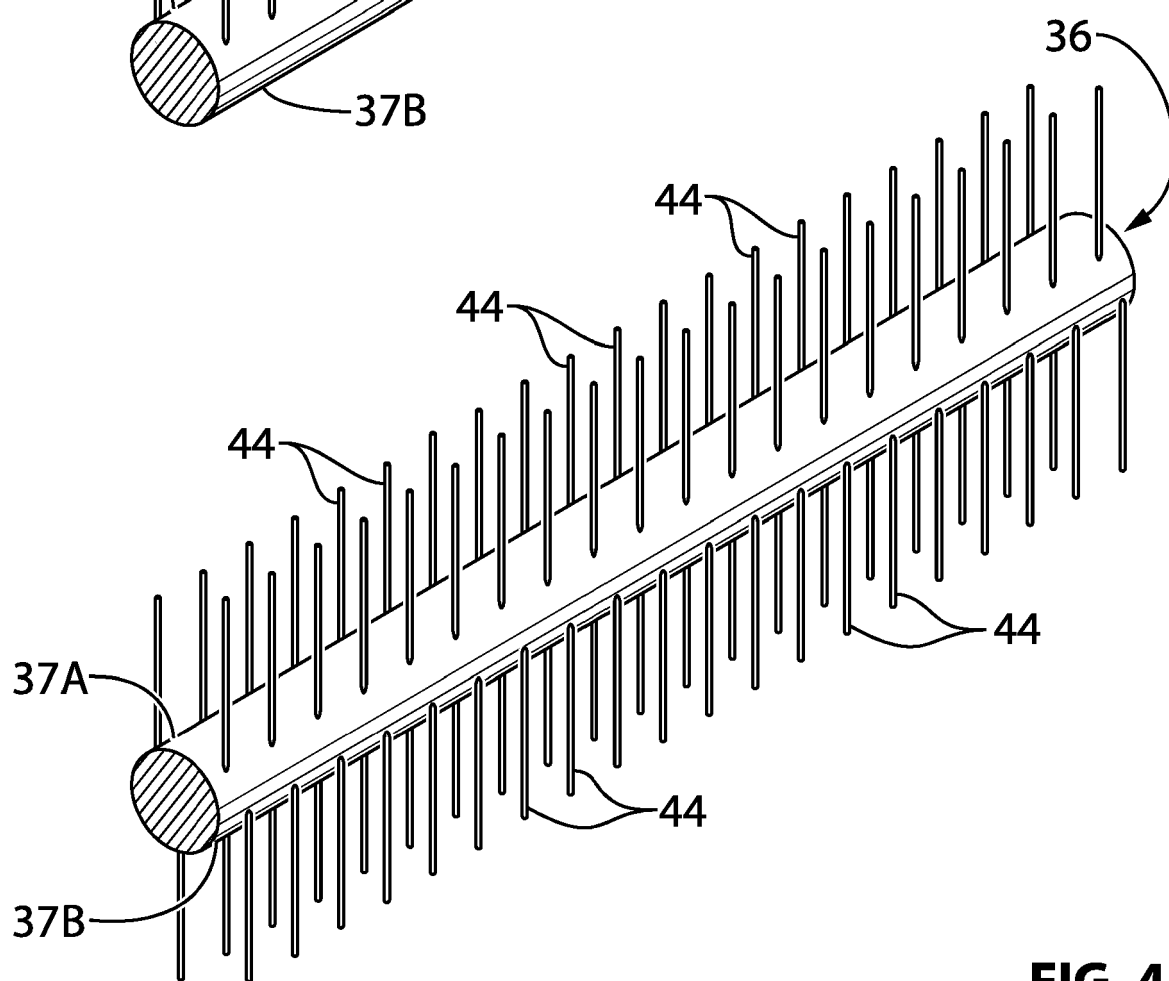


FIG. 4B

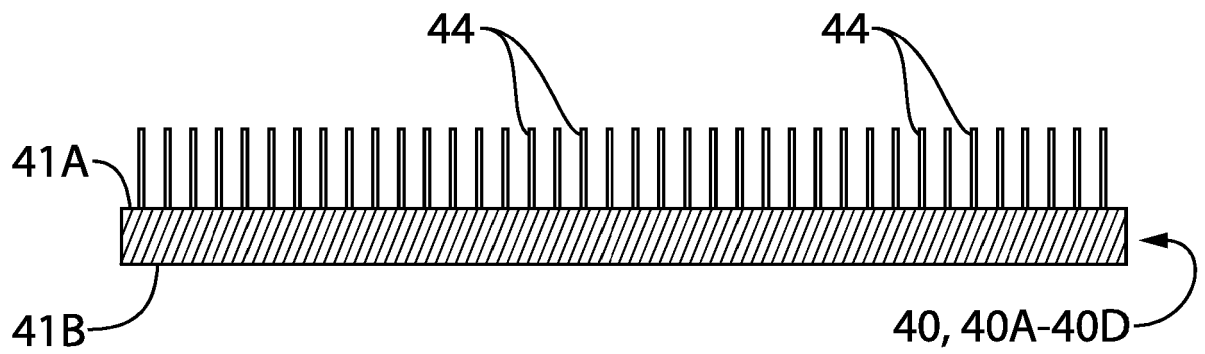


FIG. 5A

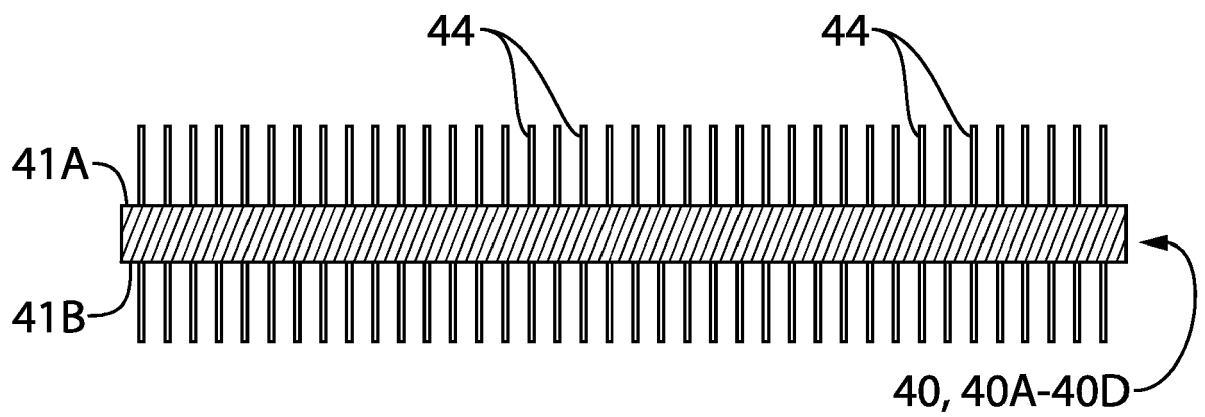


FIG. 5B

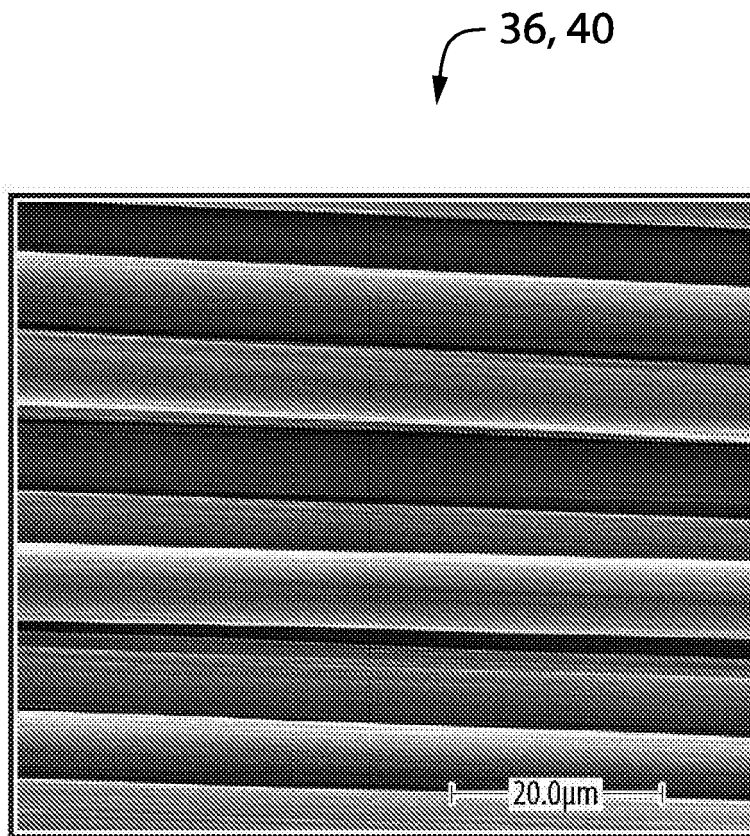
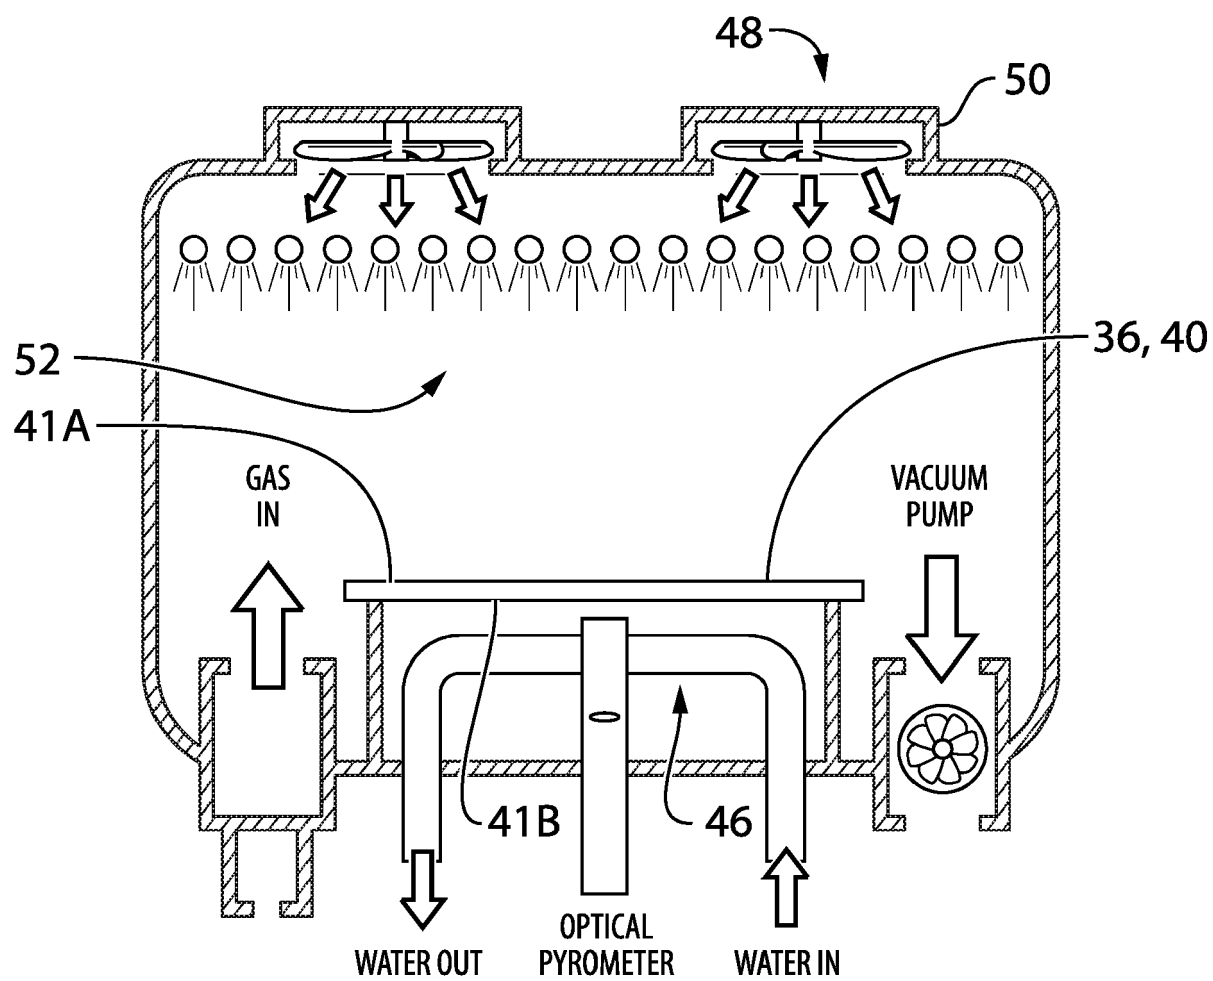
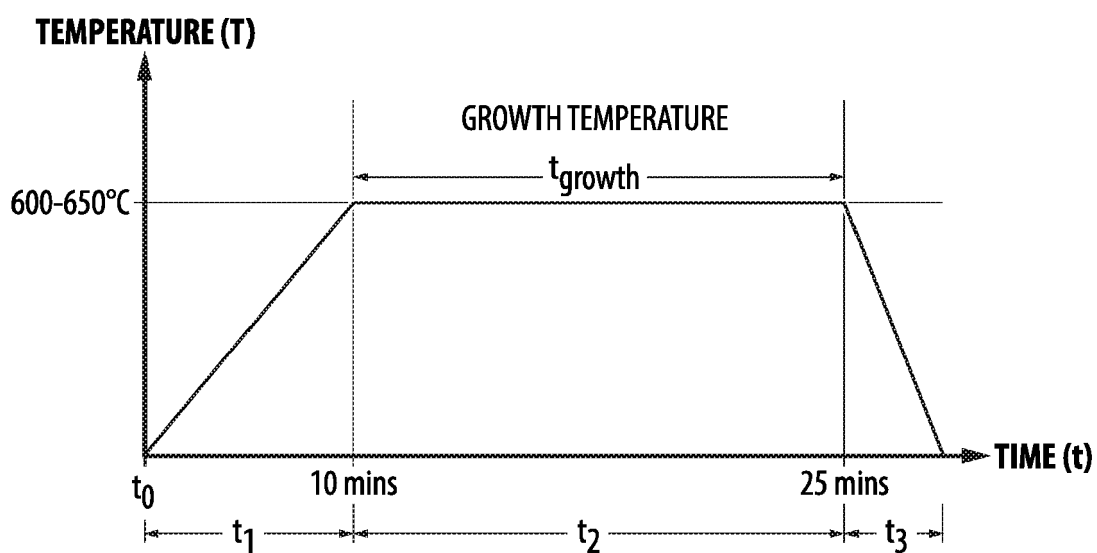


FIG. 6

**FIG. 7****FIG. 8**

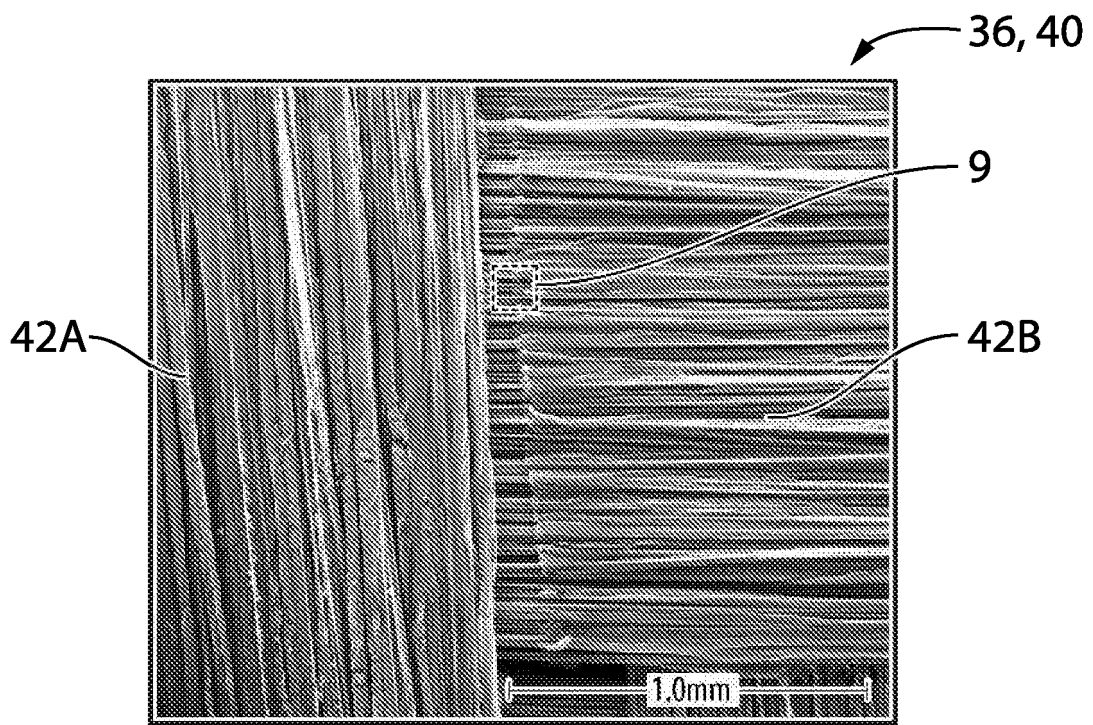


FIG. 9A

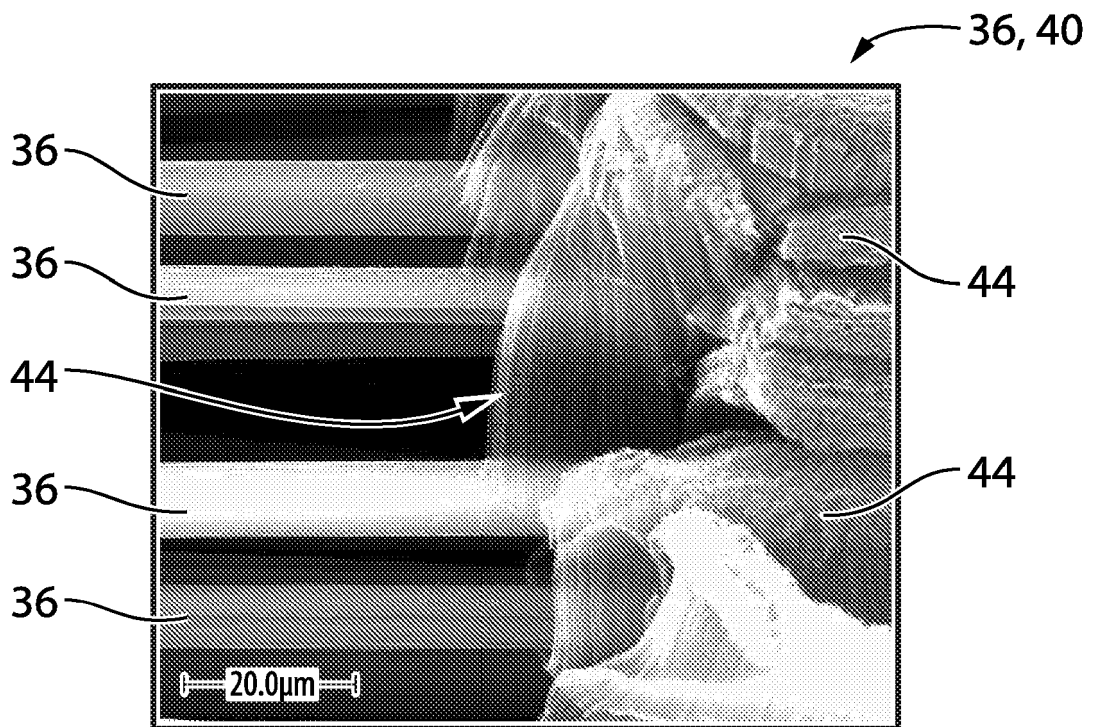


FIG. 9B

36, 44

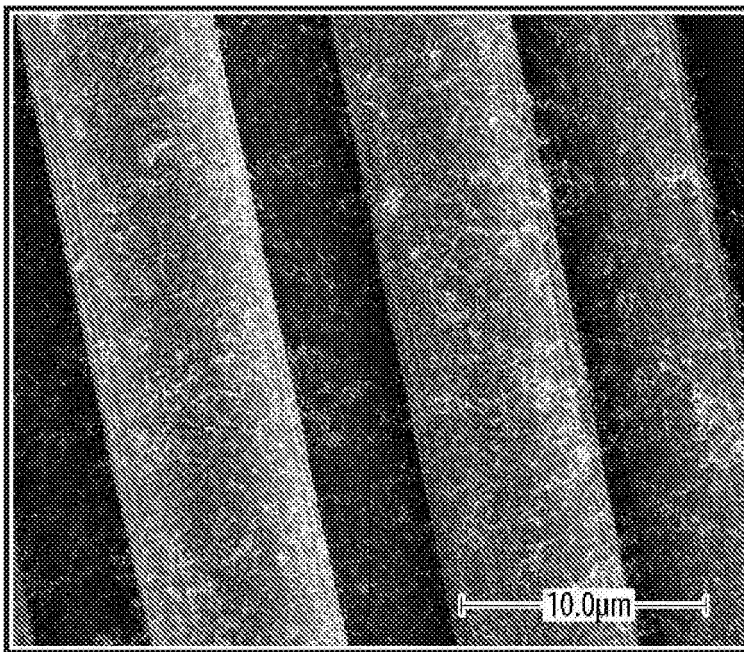


FIG. 10

(PRIOR ART)

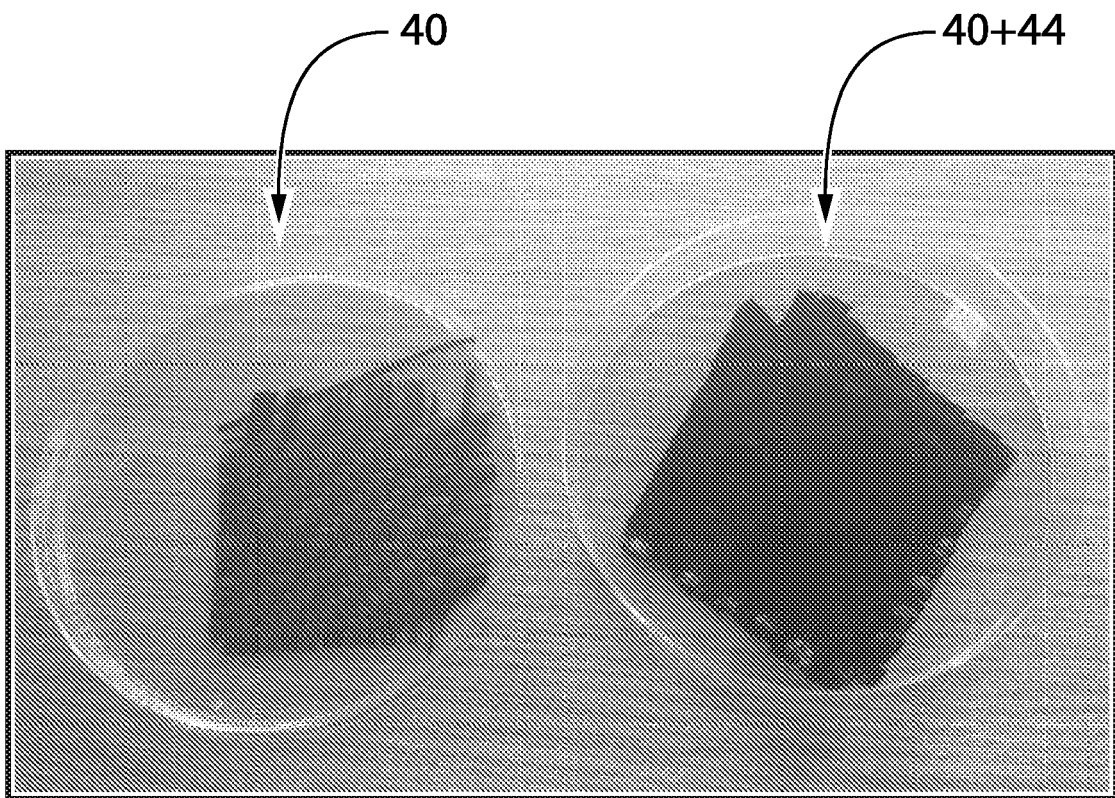


FIG. 11

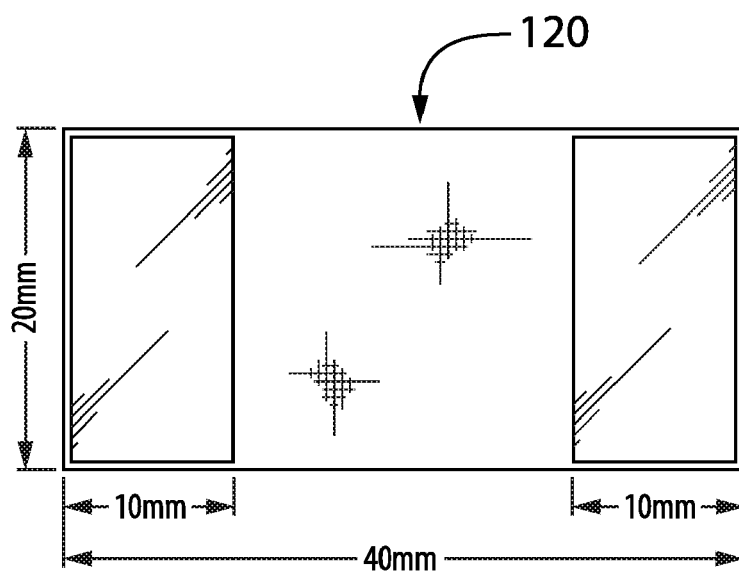


FIG. 12

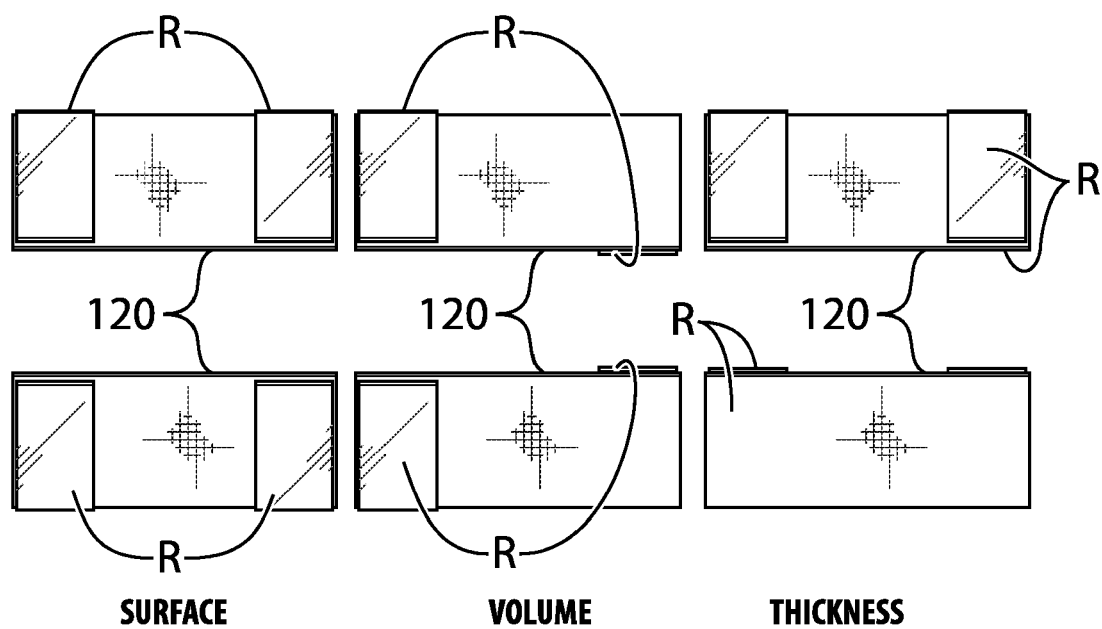
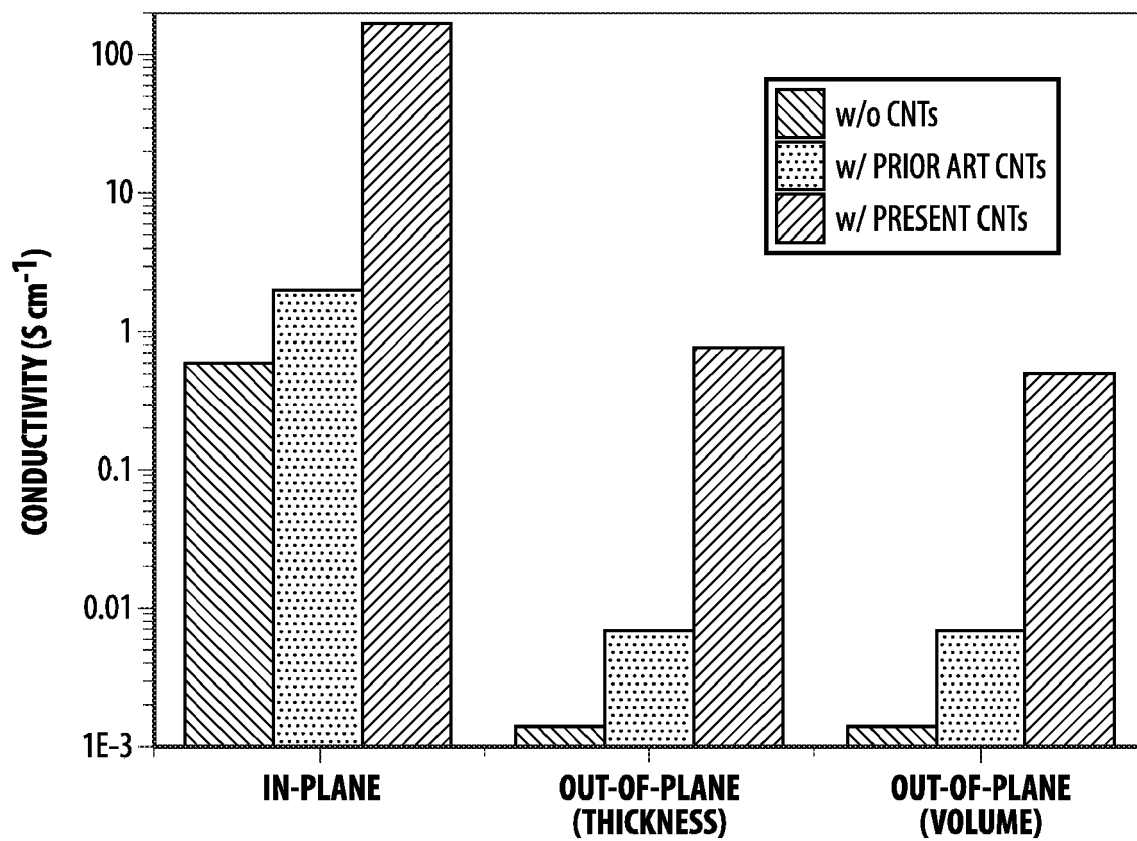


FIG. 13

**FIG. 14**

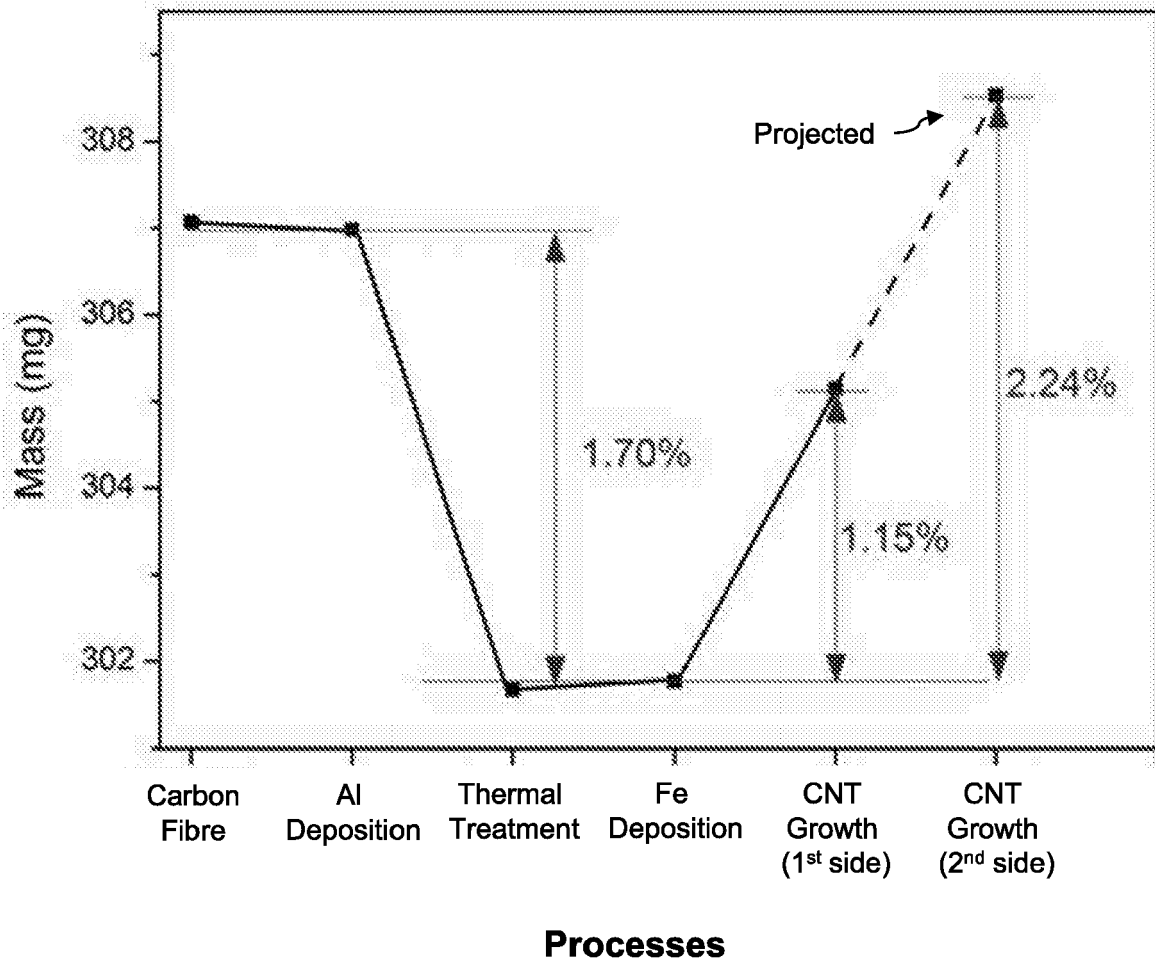


FIG. 15

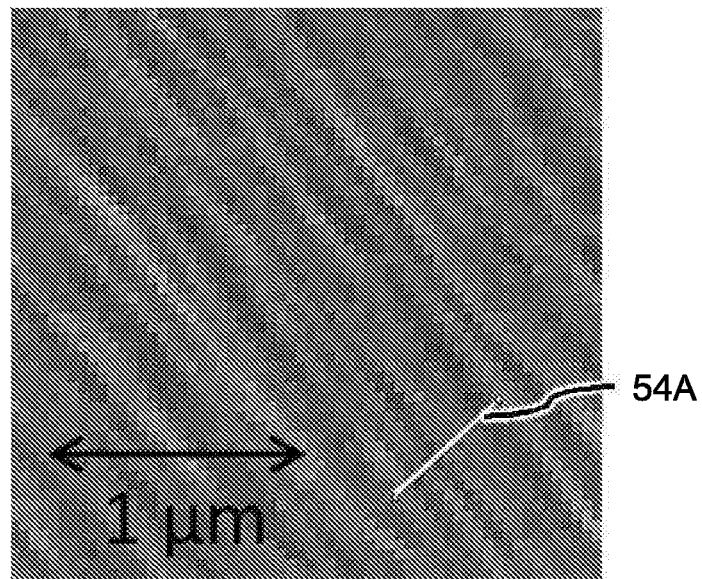


FIG. 16A

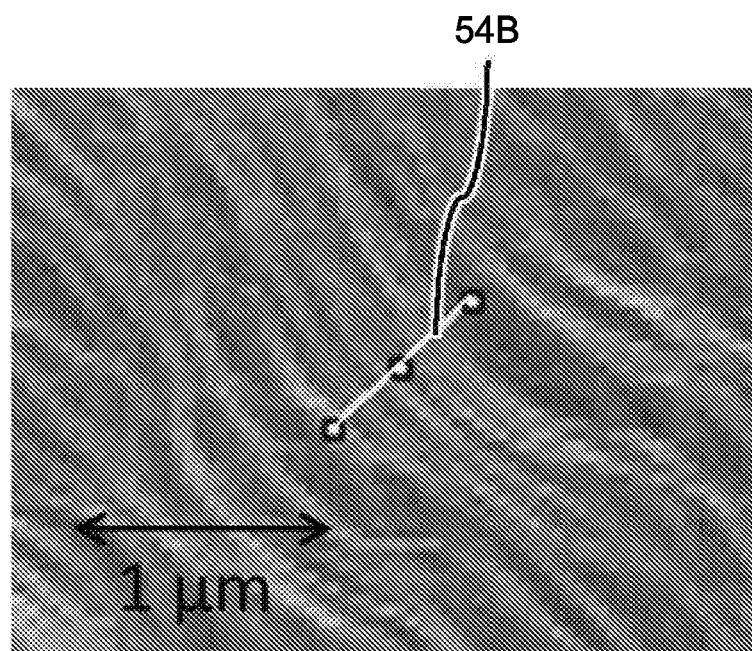


FIG. 16B

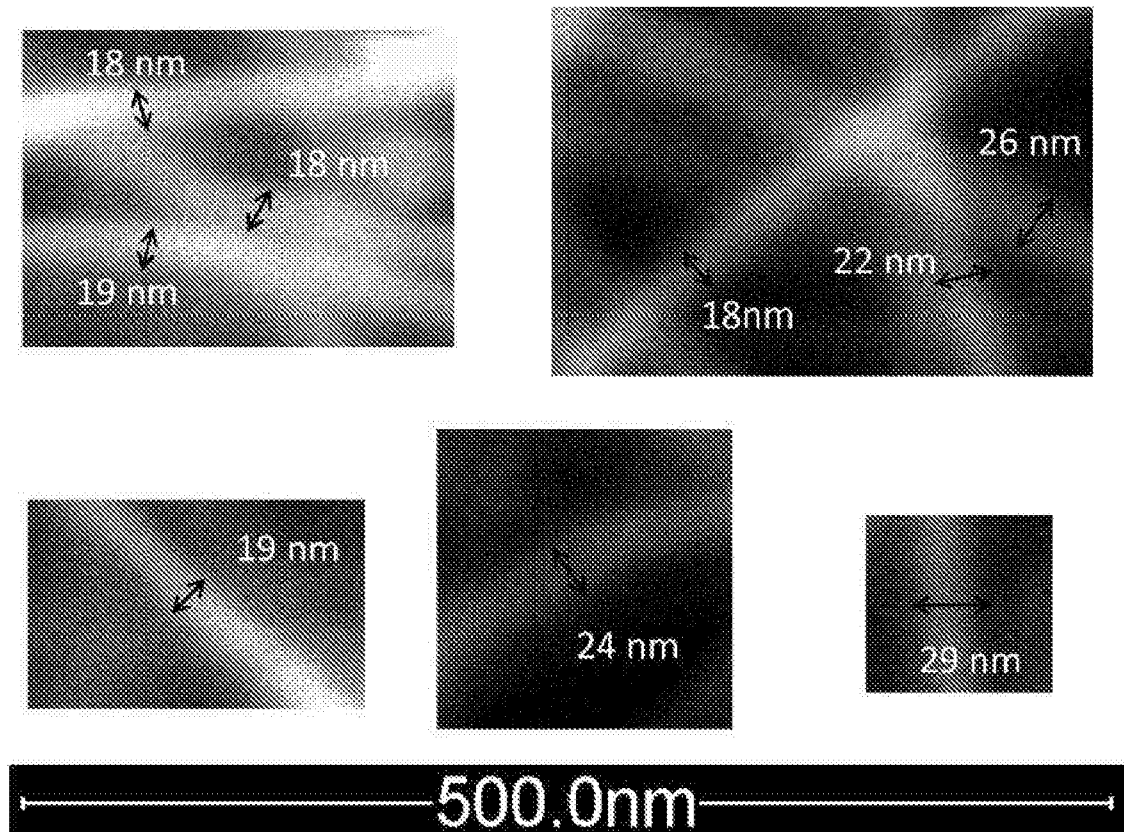


FIG. 17

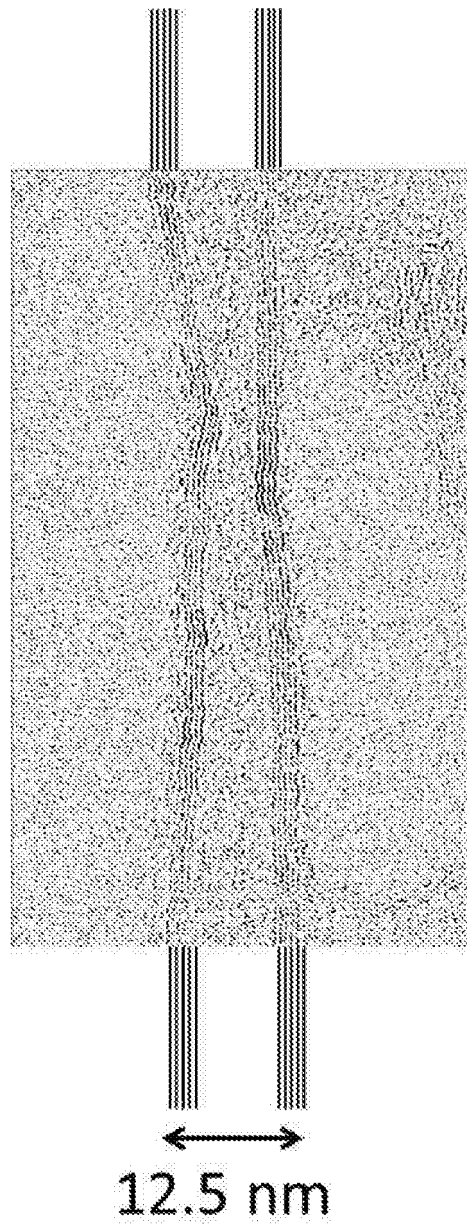


FIG. 18

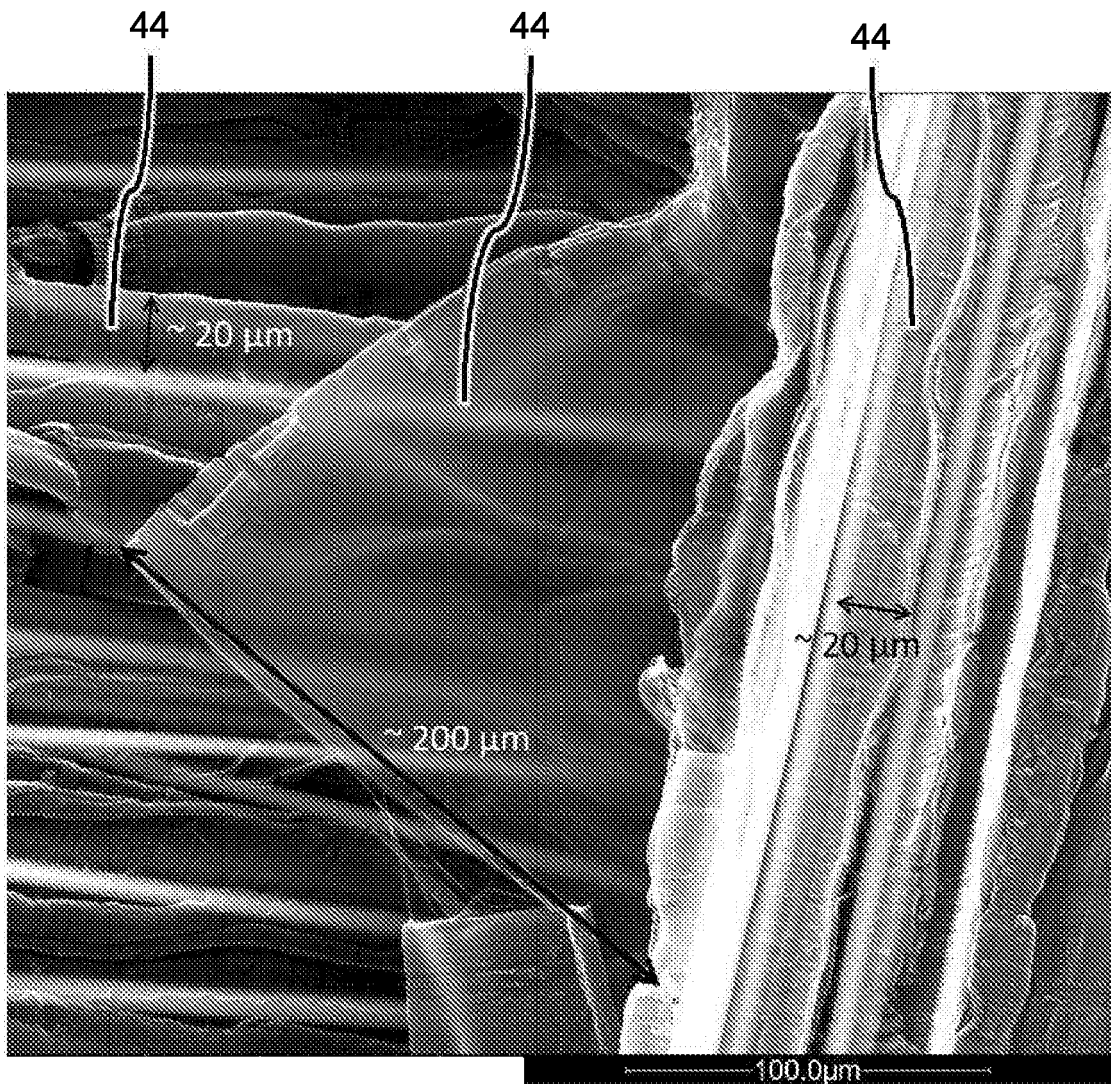


FIG. 19



EUROPEAN SEARCH REPORT

Application Number

EP 23 16 8565

5

10

15

20

25

30

35

40

45

50

55

2

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2013/028744 A1 (NORDIN PONTUS [SE] ET AL) 31 January 2013 (2013-01-31)	1-6, 8, 10, 13, 14	INV. B32B5/26
Y	* claims 1-3, 9 * * figures 1, 5 * * paragraphs [0002], [0046], [0066] - [0071], [0087], [0098] *	7, 9, 11, 12	B29C70/08 B32B5/02 B64C1/06 C08J5/00 C08J5/06
A	WO 2014/065718 A1 (SAAB AB [SE]) 1 May 2014 (2014-05-01) * claims 1, 5-7, 10 *	1-14	
Y	US 2014/356613 A1 (WEISENBERGER MATTHEW COLLINS [US] ET AL) 4 December 2014 (2014-12-04) * claim 1 * * figures 1, 2 * * paragraphs [0003], [0021], [0022], [0027] *	7	
A	US 2007/128960 A1 (GHASEMI NEJHAD MOHAMMAD N [US] ET AL) 7 June 2007 (2007-06-07) * claims 1, 4, 8 * * figure 1 *	1-14	TECHNICAL FIELDS SEARCHED (IPC) B29C B32B B64C C08J
Y	US 2011/186775 A1 (SHAH TUSHAR K [US] ET AL) 4 August 2011 (2011-08-04) * claim 1 * * figure 4 * * paragraphs [0010], [0071], [0093] - [0110] *	9	
Y	US 2011/124253 A1 (SHAH TUSHAR K [US] ET AL) 26 May 2011 (2011-05-26) * claims 1, 4, 7, 8, 13 * * figure 4 * * paragraphs [0026], [0050], [0051], [0064], [0118] *	9, 11, 12	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 4 July 2023	Examiner Nowak, René
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 23 16 8565

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-07-2023

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013028744 A1	31-01-2013	BR 112012017242 A2	22-03-2016
		CA 2786836 A1	21-07-2011
		EP 2523851 A1	21-11-2012
		US 2013028744 A1	31-01-2013
		WO 2011087411 A1	21-07-2011
WO 2014065718 A1	01-05-2014	EP 2909009 A1	26-08-2015
		WO 2014065718 A1	01-05-2014
US 2014356613 A1	04-12-2014	NONE	
US 2007128960 A1	07-06-2007	AT 444329 T	15-10-2009
		AU 2006350255 A1	08-05-2008
		CA 2632202 A1	08-05-2008
		CN 101365740 A	11-02-2009
		DK 1966286 T3	11-01-2010
		EP 1966286 A2	10-09-2008
		ES 2334165 T3	05-03-2010
		HK 1122054 A1	08-05-2009
		JP 5037518 B2	26-09-2012
		JP 2009517531 A	30-04-2009
		KR 20080094891 A	27-10-2008
		MY 143396 A	13-05-2011
		PL 1966286 T3	31-03-2010
		US 2007128960 A1	07-06-2007
		WO 2008054409 A2	08-05-2008
US 2011186775 A1	04-08-2011	AU 2011256789 A1	12-07-2012
		BR 112012018244 A2	03-05-2016
		CA 2785803 A1	24-11-2011
		CN 102741465 A	17-10-2012
		EP 2531558 A2	12-12-2012
		JP 5830471 B2	09-12-2015
		JP 2013518791 A	23-05-2013
		KR 20120114396 A	16-10-2012
		US 2011186775 A1	04-08-2011
		WO 2011146151 A2	24-11-2011
US 2011124253 A1	26-05-2011	AU 2010321762 A1	05-04-2012
		BR 112012007628 A2	23-08-2016
		CA 2774403 A1	26-05-2011
		CN 102598875 A	18-07-2012
		EP 2478749 A1	25-07-2012
		JP 2013511465 A	04-04-2013
		KR 20120101639 A	14-09-2012
		US 2011124253 A1	26-05-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 23 16 8565

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-07-2023

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
			WO 2011063298 A1	26-05-2011
15	-----			
20				
25				
30				
35				
40				
45				
50				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20090061217 A1 [0070] [0076]