

(19)



(11)

EP 4 265 514 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

04.06.2025 Bulletin 2025/23

(51) International Patent Classification (IPC):

B63B 79/40 (2020.01) **B63H 21/21** (2006.01)

(21) Application number: **23168455.6**

(52) Cooperative Patent Classification (CPC):

B63H 21/21; B63B 79/40

(22) Date of filing: **18.04.2023**

(54) **SPEED CONTROL METHOD FOR MARINE VESSEL, AND MARINE VESSEL**

GESCHWINDIGKEITSSTEUERUNGSVERFAHREN FÜR EIN WASSERFAHRZEUG UND WASSERFAHRZEUG

PROCÉDÉ DE COMMANDE DE VITESSE POUR NAVIRE, ET NAVIRE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **21.04.2022 JP 2022070085**

(43) Date of publication of application:

25.10.2023 Bulletin 2023/43

(73) Proprietor: **Yamaha Hatsudoki Kabushiki Kaisha Iwata-shi, Shizuoka 438-8501 (JP)**

(72) Inventor: **Tsurumi, Nao Iwata-shi (JP)**

(74) Representative: **Grünecker Patent- und Rechtsanwälte PartG mbB Leopoldstraße 4 80802 München (DE)**

(56) References cited:

WO-A1-2020/235689 JP-A- 2004 291 688 US-A1- 2009 298 359 US-A1- 2021 394 877

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a speed control method for a marine vessel according to the preamble of the independent claim 1, and a marine vessel. Such a speed control method can be taken from the prior art document US 2009/298359 A1.

[0002] In the case that a relatively small marine vessel is navigating in ocean waves, when a marine vessel speed of the marine vessel is increased, a hull of the marine vessel may be subjected to impacts caused by the marine vessel colliding with a wave or the marine vessel landing on the water after riding over the wave. Also, in the case that the marine vessel rides over the wave, the marine vessel speed decreases when the marine vessel rises toward the wave crest, and the marine vessel speed increases when the marine vessel descends toward the trough of the wave. Therefore, the riding comfort of the marine vessel is deteriorated.

[0003] Accordingly, techniques for controlling the marine vessel speed in response to a parameter that indicates the behavior of the marine vessel in the ocean waves have been proposed. For example, in a technique described in JP H06-211190 A, the marine vessel speed is controlled based on an acceleration of the hull in a vertical direction. Specifically, in the case that the acceleration of the hull in the vertical direction exceeds a limit value, a deceleration command is transmitted to a main engine, and the marine vessel speed is reduced to a predetermined value at which the marine vessel will not be damaged. Furthermore, in a technique described in JP 2004-291688 A, the marine vessel speed is controlled based on a pitching angular velocity. Specifically, when the pitching angular velocity is positive, since the hull is decelerated in response to the height of the wave, an engine control to accelerate the hull is performed.

[0004] However, in the technique described in JP H06-211190 A, in the case of using a relatively inexpensive acceleration sensor whose data update cycle (whose data obtaining cycle) is not so short, it is not possible to accurately measure a transient characteristic of an acceleration in the vertical direction when an impact has occurred on the hull, and as a result, the marine vessel speed is controlled based on a vertical acceleration that deviates from an actual situation, and the impact may not be appropriately reduced. Furthermore, in the technique described in JP 2004-291688 A, when the marine vessel rides over the wave, since a damping motion around a pitch axis occurs in the hull, for example, since the damping motion around the pitch axis occurs in the hull even though the marine vessel is descending from the wave crest, the bow may lift, and as a result, the pitching angular velocity may become positive and the hull may be accelerated. That is, the marine vessel that naturally accelerates as it descends from the wave crest may accelerate further. Therefore, there is still room for improvement in the riding comfort of the marine vessel when navigating in the ocean waves.

[0005] It is the object of the present invention to provide a speed control method for marine vessels and a marine vessel that are each able to further improve the riding comfort of a marine vessel navigating in ocean waves.

[0006] According to the present invention said object is solved by speed control method for a marine vessel having the features of independent claim 1. Moreover said object is solved by a marine vessel according to claim 8. Preferred embodiments are laid down in the dependent claims.

[0007] According to a preferred embodiment, a speed control method for a marine vessel includes applying a subtraction processing to a throttle opening of a power source of the marine vessel based on a vertical speed of a hull of the marine vessel.

[0008] According to another preferred embodiment, a marine vessel includes a controller configured or programmed to control a marine vessel speed of the marine vessel. The controller is configured or programmed to apply a subtraction processing to a throttle opening of a power source of the marine vessel based on a vertical speed of a hull of the marine vessel.

[0009] According to the preferred embodiments, the subtraction processing is applied to the throttle opening or the throttle opening is controlled based on the vertical speed of the hull instead of the acceleration of the hull in the vertical direction. Since the vertical speed of the hull is equivalent to the integral of the vertical acceleration of the hull (the acceleration of the hull in the vertical direction), the vertical speed of the hull is easier to be measured than the vertical acceleration of the hull, and it is also possible to accurately measure its transient characteristic. In addition, the vertical speed of the hull will not be reversed when the marine vessel descends from the wave crest. Therefore, since it is possible to accurately understand the behavior of the marine vessel riding over the wave by using the vertical speed of the hull, it is possible to appropriately control the throttle opening so as to suppress the inappropriate behavior of the marine vessel, and as a result, it is possible to further improve the riding comfort of the marine vessel navigating in the ocean waves.

[0010] The above and other elements, features, steps, characteristics and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

FIG. 1 is a side view of a marine vessel to which a speed control method for a marine vessel according to a preferred embodiment is applied.

FIG. 2 is a block diagram for schematically explaining a configuration of a marine vessel propulsion control system mounted on the marine vessel shown in FIG. 1.

FIG. 3 is a diagram for explaining how a vertical acceleration of a hull varies.

FIG. 4 is a block diagram of a posture control controller that is implemented by the speed control method for the marine vessel according to the preferred embodiment.

FIGs. 5A, 5B, and 5C are diagrams for explaining how a posture control is performed in the preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] Hereinafter, preferred embodiments will be described with reference to the drawings.

[0013] FIG. 1 is a side view of a marine vessel 10 to which a speed control method for a marine vessel according to a preferred embodiment is applied. In FIG. 1, the marine vessel 10 is, for example, a relatively small planing boat, and includes a hull 11 and at least one, for example, two outboard motors 12 that function as propulsion devices and are attached to a stern of the hull 11. Each of the outboard motors 12 generates a propulsive force of the marine vessel 10 by rotating a propeller. In addition, a cabin 13 that also serves as a cockpit is provided on the hull 11.

[0014] FIG. 2 is a block diagram for schematically explaining a configuration of a marine vessel propulsion control system 14 mounted on the marine vessel 10 shown in FIG. 1. As shown in FIG. 2, the marine vessel propulsion control system 14 includes the outboard motors 12, a boat control unit (BCU) 15 (functioning as a controller), a multi-function display (MFD) 16, a global positioning system (GPS) 17, an inertial measurement unit (IMU) 18, a compass 19, a remote control unit 20, a joystick 21, a steering mechanism 22, a marine vessel maneuvering panel 23, remote control engine control units (remote control ECUs) 24, a main operation unit 25, and steering control units (SCUs) 26. Respective components of the marine vessel propulsion control system 14 are communicably connected to each other.

[0015] The GPS 17 obtains a current position of the marine vessel 10 and transmits the current position of the marine vessel 10 to the BCU 15. The IMU 18 measures the behavior of the hull 11 and transmits the measurement result to the BCU 15. The compass 19 obtains an azimuth of the marine vessel 10 and transmits the azimuth of the marine vessel 10 to the BCU 15.

[0016] The remote control unit 20 includes levers 20a corresponding to the respective outboard motors 12. By operating each lever 20a, a marine vessel user is able to switch an acting direction of the propulsive force generated by the corresponding outboard motor 12 between a forward moving direction and a backward moving direction, and adjust the magnitude of the output of the corresponding outboard motor 12 so as to adjust a marine vessel speed of the marine vessel 10. At this time, the remote control unit 20 transmits a signal to control the outboard motor 12 to the BCU 15 and the remote control ECUs 24 in response to the operation of the lever 20a. The joystick 21, which is a control stick to maneuver the marine vessel 10, transmits a signal to move the marine vessel 10 in a tilting direction of the joystick 21 to the BCU 15 and the remote control ECUs 24. The steering mechanism 22 enables the marine vessel user to determine the course of the marine vessel 10. The marine vessel user is able to turn the marine vessel 10 to the left or right by rotatably operating a steering wheel 22a of the steering mechanism 22 leftward or rightward. At this time, the steering mechanism 22 transmits a steering angle corresponding to the rotation operation of the steering wheel 22a to the remote control ECUs 24 and the SCUs 26.

[0017] The main operation unit 25 includes a main switch 25a and an engine shutoff switch 25b. The main switch 25a is an operator to collectively start and stop engines 27 which are power sources of the respective outboard motors 12, and the engine shutoff switch 25b is a switch to emergency-stop the engines 27 of the respective outboard motors 12. The MFD 16 includes, for example, a color LCD display, and functions as a display to display various kinds of information and also functions as a touch panel to accept inputs from the marine vessel user. The marine vessel maneuvering panel 23 includes switches (not shown) corresponding to various kinds of marine vessel maneuvering modes. By operating the corresponding switch, the marine vessel user shifts the marine vessel 10 to a desired marine vessel maneuvering mode. Each of the SCUs 26 is provided corresponding to each of the outboard motors 12, and controls a steering unit (not shown), which horizontally turns the corresponding outboard motor 12 with respect to the hull 11 of the marine vessel 10, to change the acting direction of the propulsive force of each of the outboard motors 12.

[0018] The BCU 15 obtains the situation of the marine vessel 10 based on signals transmitted from the respective components of the marine vessel propulsion control system 14, determines the magnitude of the propulsive force to be generated by each of the outboard motors 12 and the acting direction of the propulsive force to be taken, and transmits the result of the determination to each of the remote control ECUs 24. One remote control ECU 24 is provided corresponding to each of the outboard motors 12. In response to signals transmitted from the BCU 15, the steering mechanism 22, the remote control unit 20, the joystick 21, etc., each of the remote control ECUs 24 transmits signals to control the engine 27 of each of the outboard motors 12 and the steering unit to an engine ECU 28 of each of the outboard motors 12 and the SCU 26, and adjusts the magnitude and the acting direction of the propulsive force of each of the outboard motors 12.

[0019] The engine ECU 28 of each of the outboard motors 12 adjusts an opening of a throttle valve 29 of the engine 27 based on a throttle opening command value, which is one of the signals transmitted from the remote control ECU 24. It should be noted that the BCU 15 executes the speed control method for the marine vessel according to the preferred embodiment.

[0020] In the speed control method for the marine vessel according to the preferred embodiment, since the main purpose is to reduce the impact caused by the marine vessel 10 landing on the water after riding over the wave, the marine vessel speed of the marine vessel 10 is decreased when the marine vessel 10 rides over the wave. In addition, since the behavior of the marine vessel 10 changes when the marine vessel 10 rides over the wave, in order to appropriately perform the impact reduction at the time of landing on the water due to the decrease in the marine vessel speed (deceleration), it is necessary to accurately obtain the behavior of the marine vessel 10 in the ocean waves.

[0021] As a parameter that indicates the behavior of the marine vessel 10 in the ocean waves, an acceleration in a vertical direction of the hull 11 (hereinafter, referred to as "a vertical acceleration"), a pitching angular velocity of the hull 11, or a speed in the vertical direction of the hull 11 (hereinafter, referred to as "a vertical speed") can be considered. However, when the marine vessel 10 rides over the wave, since a damping motion around a pitch axis occurs in the hull 11, the pitching angular velocity is affected not only by a posture change of the hull 11 directly caused by the wave, but also by the damping motion around the pitch axis. For example, the bow may lift due to the damping motion around the pitch axis during descent from the wave crest where the pitching angular velocity should normally be negative, and as a result, the pitching angular velocity may become positive. Therefore, it cannot be said that the pitching angular velocity is optimal as the parameter that indicates the behavior of the marine vessel 10 in the ocean waves.

[0022] In addition, since the impact at the time of landing on the water is represented by a multiple of the acceleration, in a control to reduce the impact applied to the hull 11 (hereinafter, referred to as "a posture control"), it is considered natural to use the vertical acceleration of the hull 11 as a physical quantity.

[0023] However, for the relatively small marine vessel 10, since the vertical acceleration of the hull 11 finely varies in a very fast cycle, it is difficult for the IMU 18 to accurately measure the vertical acceleration of the hull 11. For example, FIG. 3 shows a measurement result of the vertical acceleration in the case that the vertical acceleration of the hull 11 of the marine vessel 10 navigating in the ocean waves is sampled at a cycle of 0.1 seconds (indicated by a solid line), and a measurement result of the vertical acceleration in the case that the same vertical acceleration is sampled at a cycle of 0.01 seconds (indicated by a broken line). Comparing these measurement results with each other, it can be seen that a steep change in the vertical acceleration, which is measurable in the case that sampling is performed at the cycle of 0.01 seconds, becomes unmeasurable in the case that sampling is performed at the cycle of 0.1 seconds. In addition, since a sampling rate of the IMU 18 is generally 0.05 seconds, it is not possible for the IMU 18 to accurately measure a steep change in the vertical acceleration of the hull 11. Therefore, in the case of using the vertical acceleration of the hull 11 measured by the IMU 18, the posture control will be performed based on the vertical acceleration that deviates from the actual situation, and there is a possibility that it is not possible to appropriately perform the impact reduction at the time of landing on the water.

[0024] On the other hand, since the vertical speed of the hull 11 is equivalent to the integral of the vertical acceleration of the hull 11, unlike the vertical acceleration of the hull 11, a steep change in the vertical speed of the hull 11 does not occur, and it is possible to accurately measure the change in the vertical speed of the hull 11 even by the IMU 18. In addition, since the vertical speed of the hull 11 is obtained by integrating the vertical acceleration of the hull 11, as a result, the vertical speed of the hull 11 will reflect the steep change in the vertical acceleration. Therefore, in the case of using the vertical speed of the hull 11, it is possible to perform the posture control based on a parameter that does not deviate from the actual situation. Therefore, in the preferred embodiment, the posture control is performed by using the vertical speed of the hull 11, which functions as an index of the impact applied to the hull 11, instead of the vertical acceleration of the hull 11.

[0025] FIG. 4 shows a block diagram of a posture control controller 40 that is implemented by the speed control method for the marine vessel according to the preferred embodiment. In the preferred embodiment, the posture control controller 40 shown in FIG. 4 controls the opening of the throttle valve 29 (hereinafter, simply referred to as "a throttle opening") based on the vertical speed of the marine vessel 10 (the vertical speed of the hull 11).

[0026] As shown in FIG. 4, the posture control controller 40 includes an upper limit throttle opening block 41, a Kalman filter 42, a vertical speed block 43, a coefficient multiplier 44, a gain multiplier 45, a subtractor 46, and a throttle opening command value block 47. It should be noted that the posture control controller 40 is implemented in the BCU 15.

[0027] In the posture control controller 40, first, based on the signal transmitted from the remote control unit 20, the upper limit throttle opening block 41 sets the throttle opening (value) designated by the marine vessel user using the lever 20a as an upper limit throttle opening (value). In addition, the upper limit throttle opening block 41 transmits the upper limit throttle opening to the coefficient multiplier 44 and the subtractor 46.

[0028] The Kalman filter 42 estimates the vertical speed (value) of the marine vessel 10 based on the measurement results of the behavior of the marine vessel 10 transmitted from the IMU 18 and the GPS 17, and the vertical speed block 43 transmits the estimated vertical speed (value) to the gain multiplier 45. The coefficient multiplier 44 calculates a vertical speed gain (a predetermined gain) by multiplying the upper limit throttle opening (value) by a vertical speed gain coefficient, and transmits the calculated vertical speed gain to the gain multiplier 45. It should be noted that in the

preferred embodiment, "-K", which is a negative value, is set as the vertical speed gain coefficient with reference to a return amount of the throttle opening at the time of riding over the wave of the marine vessel performed by a veteran marine vessel user. However, the vertical speed gain coefficient is not limited to this value "-K", and may be changed in response to the specifications of the marine vessel 10, the sea conditions, and/or the marine vessel user's preference.

[0029] The gain multiplier 45 calculates a subtraction throttle opening (value) by multiplying the vertical speed (value) by the vertical speed gain, and transmits the calculated subtraction throttle opening (value) to the subtractor 46. The subtractor 46 calculates the throttle opening command value by subtracting the subtraction throttle opening (value) from the upper limit throttle opening (value), and the throttle opening command value block 47 transmits the calculated throttle opening command value to the engine ECU 28 of each of the outboard motors 12. Each engine ECU 28 controls the opening of the throttle valve 29 based on the throttle opening command value to adjust the marine vessel speed of the marine vessel 10.

[0030] That is, in the posture control controller 40, although the opening of the throttle valve 29 is controlled based on the throttle opening command value, which is obtained by applying a subtraction processing to the upper limit throttle opening by using the subtraction throttle opening, since the subtraction throttle opening is obtained by multiplying the vertical speed by the vertical speed gain, for example, as the marine vessel 10 rides over a large wave and the vertical speed of the hull 11 increases, the subtraction throttle opening increases and, as a result, the throttle opening command value decreases. That is, as the vertical speed of the hull 11 increases, the throttle opening command value decreases and the opening of the throttle valve 29 decreases, so the marine vessel speed of the marine vessel 10 decreases. As a result, it is possible to reduce the impact caused by the marine vessel 10 landing on the water after riding over the wave.

[0031] Generally, in a motion coordinate system of the marine vessel 10, since the downward direction is positive with respect to the vertical direction, when the marine vessel 10 rides over the wave, the vertical speed becomes a negative value. Furthermore, as in the preferred embodiment, in the case that a negative value is set as the vertical speed gain coefficient, when the marine vessel 10 rides over the wave, the subtraction throttle opening obtained by multiplying the vertical speed by the vertical speed gain coefficient becomes a positive value. In addition, in the preferred embodiment, since the throttle opening command value is calculated by subtracting the subtraction throttle opening, which is a positive value, from the upper limit throttle opening, in the case that the marine vessel 10 rides over the wave, the throttle opening command value becomes smaller than the upper limit throttle opening. As a result, the opening of the throttle valve 29 is decreased, and the marine vessel speed of the marine vessel 10 decreases.

[0032] On the other hand, when the marine vessel 10 descends from the wave crest, the vertical speed becomes a positive value. Therefore, when the marine vessel 10 descends from the wave crest, the subtraction throttle opening obtained by multiplying the vertical speed by the vertical speed gain coefficient becomes a negative value. In addition, since the throttle opening command value is calculated by subtracting the subtraction throttle opening, which is a negative value, from the upper limit throttle opening, when the marine vessel 10 descends from the wave crest, the throttle opening command value becomes larger than the upper limit throttle opening. As a result, the opening of the throttle valve 29 is increased, and the marine vessel speed of the marine vessel 10 increases. That is, in the preferred embodiment, since the marine vessel speed of the marine vessel 10 increases when the marine vessel 10 descends from the wave crest, it is possible to recover the marine vessel speed that has been reduced in order to reduce the impact caused by landing on the water, and it is possible to prevent a delay in arrival at the destination of the marine vessel 10.

[0033] In addition, in the case of obtaining the throttle opening command value, when the subtraction throttle opening is constant, the marine vessel 10 is excessively decelerated when the marine vessel speed is low while the marine vessel 10 cannot be sufficiently decelerated when the marine vessel speed is high. In particular, in the latter case, it is not possible to sufficiently reduce the impact caused by the marine vessel 10 landing on the water after riding over the wave.

[0034] Therefore, in the preferred embodiment, the vertical speed gain for obtaining the subtraction throttle opening is calculated by multiplying the upper limit throttle opening by the vertical speed gain coefficient. As a result, the subtraction throttle opening changes in response to the upper limit throttle opening. Specifically, when the upper limit throttle opening is large (that is, when the marine vessel speed is high), since the subtraction throttle opening becomes large and the throttle opening command value is largely subtracted, the marine vessel 10 is sufficiently decelerated. As a result, it is possible to sufficiently reduce the impact caused by the marine vessel 10 landing on the water after riding over the wave. Moreover, when the upper limit throttle opening is small (that is, when the marine vessel speed is low), the subtraction throttle opening becomes small, and excessive deceleration of the marine vessel 10 is suppressed. As a result, it is possible to prevent a significant delay in arrival at the destination of the marine vessel 10.

[0035] Even in the case that the vertical speed gain is calculated by multiplying the marine vessel speed by the vertical speed gain coefficient instead of the upper limit throttle opening, when the marine vessel speed is high, it is possible to sufficiently decelerate the marine vessel 10 by increasing the subtraction throttle opening. Therefore, it is also conceivable to calculate the vertical speed gain by using the marine vessel speed instead of the upper limit throttle opening. However, since the marine vessel speed changes as a result when the posture control is executed and the marine vessel speed changes even if an external disturbance is applied to the marine vessel 10, the deceleration gain calculated by using the marine vessel speed becomes unstable, and as a result, there is a possibility that the posture control is unstable.

[0036] Therefore, in the preferred embodiment, as described above, the vertical speed gain is calculated by using the upper limit throttle opening instead of the marine vessel speed. For example, even in the case that the posture control is executed or in the case that an external disturbance is applied to the marine vessel 10, in principle, since the marine vessel user does not change the operation amount of the lever 20a, the deceleration gain calculated by using the upper limit throttle opening is stable, and as a result, it is possible to stabilize the posture control. Moreover, since the vertical speed gain is calculated by multiplying the upper limit throttle opening by the vertical speed gain coefficient, the vertical speed gain is proportional to the upper limit throttle opening.

[0037] In addition, in the case that regardless of the magnitude of the vertical speed of the hull 11, when the marine vessel 10 rides over the wave, the subtraction throttle opening is subtracted from the upper limit throttle opening, the acceleration and deceleration of the marine vessel 10 are repeated each time the marine vessel 10 encounters a wave, which is not preferable from the viewpoint of improving the riding comfort. Furthermore, there is a possibility that the average marine vessel speed will unnecessarily decrease and the arrival of the marine vessel 10 at its destination will be delayed.

[0038] Therefore, in the posture control controller 40, when the vertical speed of the hull 11 is equal to or lower than a vertical speed threshold (a predetermined vertical speed value), the vertical speed block 43 sets the vertical speed to 0 regardless of the estimation performed by the Kalman filter 42. As an example, the predetermined vertical speed value is within 0.1 to 0.5 [m/s]. As a result, the subtraction throttle opening becomes 0, the upper limit throttle opening is not subtracted, and the marine vessel speed of the marine vessel 10 does not change. As a result, repetition of the acceleration and deceleration of the marine vessel 10 is suppressed to further improve the riding comfort, and it is possible to prevent the delay in arrival at the destination of the marine vessel 10 by suppressing the average marine vessel speed from decreasing unnecessarily.

[0039] Moreover, when the vertical speed of the hull 11 is higher than the vertical speed threshold, since the vertical speed block 43 transmits the vertical speed estimated by the Kalman filter 42 to the gain multiplier 45, the subtraction throttle opening does not become 0, the upper limit throttle opening is subtracted, and the marine vessel speed of the marine vessel 10 decreases.

[0040] In addition, although not applying the subtraction processing to the upper limit throttle opening when the vertical speed of the hull 11 is equal to or lower than the vertical speed threshold, is nothing other than tolerating the impact caused by landing on the water to some extent, impact tolerance varies by the marine vessel user. Therefore, the marine vessel 10 may be configured so that the vertical speed threshold is able to be arbitrarily set in response to the preference of the marine vessel user. In this case, for example, the MFD 16 may be configured so that the marine vessel user is able to input an arbitrary vertical speed threshold, or the MFD 16 may be configured to display a plurality of options for the vertical speed threshold so that the marine vessel user is able to select a desired vertical speed threshold. In the case that the marine vessel user prioritizes suppressing a decrease in the average marine vessel speed over improving the riding comfort, the vertical speed threshold is set high, and on the other hand, in the case that the marine vessel user prioritizes improving the riding comfort over suppressing a decrease in the average marine vessel speed, the vertical speed threshold is set low.

[0041] Moreover, in the case that the vertical speed is denoted as V_z , the vertical speed threshold is denoted as V_z threshold, and the vertical speed gain is denoted as V_z gain, the posture control controller 40, for which the vertical speed threshold is set, can be expressed programmatically as the following Expression 1.

[Expression 1]

$$V_z \text{ gain} = (-K) \times \text{upper limit throttle opening}(\text{deg})$$

if V_z threshold < V_z then

$V_z := 0$

end if

$$\text{throttle opening command value}(\text{deg}) = \max[\text{upper limit throttle opening}(\text{deg}) - \max[V_z \text{ gain} \times V_z(\text{m/s}), 0], 0]$$

[0042] FIGs. 5A, 5B, and 5C are diagrams for explaining how the posture control is performed in the preferred embodiment. As shown in FIG. 5A, when the marine vessel 10 is not riding over the wave, since the vertical speed V_z of the hull 11 is approximately 0, in the posture control controller 40, the subtraction throttle opening is also approximately 0, and the upper limit throttle opening is not subtracted. As a result, since the throttle opening command value is maintained at the upper limit throttle opening and the throttle opening does not decrease, a marine vessel speed V , which is the speed in the traveling direction of the marine vessel 10, is also maintained.

[0043] On the other hand, as shown in FIG. 5B, when the marine vessel 10 rides over a relatively large wave and the vertical speed V_z of the hull 11 becomes larger than the vertical speed threshold, in the posture control controller 40, the subtraction throttle opening becomes a magnitude corresponding to the vertical speed V_z , and the upper limit throttle

opening is subtracted. As a result, since the throttle opening command value decreases from the upper limit throttle opening and the throttle opening also decreases, the marine vessel speed V of the marine vessel 10 also decreases. As a result, it is possible to sufficiently reduce the impact caused by the marine vessel 10 landing on the water after riding over the wave.

[0044] Further, as shown in FIG. 5C, when the marine vessel 10 rides over a relatively small wave and the vertical speed V_z of the hull 11 remains equal to or lower than the vertical speed threshold, as described above, since the vertical speed block 43 sets the vertical speed to 0, the subtraction throttle opening becomes 0, and the upper limit throttle opening is not subtracted. As a result, since the throttle opening command value is maintained at the upper limit throttle opening and the throttle opening does not decrease, the marine vessel speed V , which is the speed in the traveling direction of the marine vessel 10, is also maintained.

[0045] According to the preferred embodiment, in the posture control, the subtraction throttle opening, which is calculated based on the vertical speed of the hull 11 instead of the vertical acceleration of the hull 11, is subtracted from the upper limit throttle opening. Since the vertical speed of the hull 11 is equivalent to the integral of the vertical acceleration of the hull 11, the vertical speed of the hull 11 is easier to be measured than the vertical acceleration of the hull 11, and it is also possible to accurately measure its transient characteristic such as a steep change. In addition, the vertical speed of the hull 11 will not be reversed when the marine vessel 10 descends from the wave crest. Therefore, since it is possible to accurately understand the behavior of the marine vessel 10 riding over the wave by using the vertical speed of the hull 11, it is possible to appropriately control the throttle opening so as to suppress the inappropriate behavior of the marine vessel 10, and as a result, it is possible to further improve the riding comfort of the marine vessel 10 navigating in the ocean waves.

[0046] In addition, in the preferred embodiment, since the subtraction throttle opening changes in response to both the vertical speed of the hull 11 and the upper limit throttle opening, for example, even in the case that the marine vessel speed of the marine vessel 10 is low, but the marine vessel 10 rides over a relatively large wave and the vertical speed of the hull 11 increases, or in the case that the marine vessel 10 rides over a wave, which is not so large, and the vertical speed of the hull 11 is not so large, but the marine vessel speed of the marine vessel 10 is high, it is possible to appropriately lower the throttle opening command value, and it is possible to reliably improve the riding comfort of the marine vessel 10.

[0047] In addition, in the preferred embodiment, when the marine vessel 10 rides over the wave, since the posture control controller 40 decreases the throttle opening command value to reduce the marine vessel speed V of the marine vessel 10 even if the marine vessel user does not move the lever 20a of the remote control unit 20, even if the marine vessel user is a beginner and is not accustomed to operating the lever 20a when the marine vessel 10 rides over the wave, it is possible to sufficiently reduce the impact caused by landing on the water.

[0048] When determining the throttle opening command value in the posture control, referencing many parameters may cause the control to become complicated and diverge. On the other hand, in the posture control of the preferred embodiment, since only the vertical speed of the marine vessel 10 and the upper limit throttle opening are used as parameters, the control is simple, and it is possible to suppress the divergence of the control.

[0049] According to the preferred embodiment, the marine vessel 10, to which the speed control method for the marine vessel according to the preferred embodiment is applied, is a relatively small planing boat, but the speed control method for the marine vessel according to the preferred embodiment may be applied to a relatively small displacement type marine vessel or a hydrofoil marine vessel. In addition, although the power source of the outboard motor 12 is the engine, the outboard motor 12 may include an electric motor as the power source instead of the engine, or may include both the engine and the electric motor. Furthermore, in the case that the outboard motor 12 includes an electric motor as the power source, the posture control controller 40 applies the subtraction processing on command values of a voltage applied to the electric motor and a current flowing in instead of the throttle opening. Moreover, although the marine vessel 10 includes the outboard motors 12, the marine vessel 10 may include inboard motors or inboard/outboard motors instead of the outboard motors 12.

Claims

1. A speed control method for a marine vessel (10) comprising:
processing to a throttle opening of a power source (12) of the marine vessel (10) based on a vertical motion of a hull (11) of the marine vessel (10), **characterized by** applying a subtraction processing to the throttle opening of the power source (12) of the marine vessel (10) based on a vertical speed of a hull (11) of the marine vessel (10).
2. The speed control method for the marine vessel (10) according to claim 1, **characterized in that** in the subtraction processing, a value, which is obtained by multiplying a vertical speed value of the hull (11) by a predetermined gain, is subtracted from a throttle opening value designated by a marine vessel user.
3. The speed control method for the marine vessel (10) according to claim 2, **characterized by**:

obtaining the throttle opening value designated by the marine vessel user,
obtaining the vertical speed value of a hull (11) of the marine vessel (10), wherein in the subtraction processing,
the value, which is obtained by multiplying the vertical speed value of the hull (11) by the predetermined gain, is
subtracted from the throttle opening value designated by the marine vessel user to obtain a throttle opening
command value to control the throttle opening of the power source (12) of the marine vessel (10).

4. The speed control method for the marine vessel (10) according to claim 2 or 3, **characterized in that** the predetermined gain is proportional to the throttle opening value designated by the marine vessel user.

5. The speed control method for the marine vessel (10) according to at least one of the claims 1 to 4, **characterized in that**, when the vertical speed value of the hull (11) is equal to or lower than a predetermined vertical speed value, the subtraction processing is not applied to the throttle opening value.

6. The speed control method for the marine vessel (10) according to claim 5, **characterized in that** the predetermined vertical speed value is able to be arbitrarily set by a marine vessel user.

7. The speed control method for the marine vessel (10) according to at least one of the claims 1 to 6, **characterized by**: estimating the vertical speed value of the hull (11) by using a Kalman filter based on a behavior of the hull (11).

8. A marine vessel (10) comprising:

a controller (15) configured or programmed to control a marine vessel speed of the marine vessel (10), and wherein the controller (15) is configured or programmed to perform the speed control method for the marine vessel (10) according to at least one of the claims 1 to 7.

Patentansprüche

1. Ein Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10), das umfasst:

Verarbeitung einer Drosselöffnung einer Energiequelle (12) des Wasserfahrzeugs (10) auf der Grundlage einer vertikalen Bewegung eines Rumpfes (11) des Wasserfahrzeugs (10), **gekennzeichnet durch**
Anwendung einer Subtraktionsverarbeitung auf die Drosselöffnung der Energiequelle (12) des Wasserfahrzeugs (10) auf der Grundlage einer vertikalen Geschwindigkeit eines Rumpfes (11) des Wasserfahrzeugs (10).

2. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** bei der Subtraktionsverarbeitung ein Wert, der durch Multiplikation eines vertikalen Geschwindigkeitswerts des Rumpfes (11) mit einer vorbestimmten Verstärkung erhalten wird, von einem Drosselöffnungswert, der von einem Benutzer des Wasserfahrzeugs angegeben ist, subtrahiert wird.

3. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß Anspruch 2, **gekennzeichnet durch**:

Erhalten des Drosselöffnungswerts, der vom Benutzer des Wasserfahrzeugs angegeben ist,
Erhalten des vertikalen Geschwindigkeitswertes eines Rumpfes (11) des Wasserfahrzeugs (10), wobei in der Subtraktionsverarbeitung der Wert, der durch Multiplizieren des vertikalen Geschwindigkeitswertes des Rumpfes (11) mit der vorbestimmten Verstärkung erhalten wird, von dem Drosselöffnungswert subtrahiert wird, der von dem Benutzer des Wasserfahrzeugs angegeben wird, um einen Drosselöffnungsbefehlswert zu erhalten, um die Drosselöffnung der Energiequelle (12) des Wasserfahrzeugs (10) zu steuern.

4. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß Anspruch 2 oder 3, **dadurch gekennzeichnet, dass** die vorgegebene Verstärkung proportional zu dem Drosselöffnungswert ist, der vom Benutzer des Wasserfahrzeugs angegeben ist.

5. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß zumindest einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass**, wenn der vertikale Geschwindigkeitswert des Rumpfes (11) gleich oder kleiner als ein vorbestimmter vertikaler Geschwindigkeitswert ist, die Subtraktionsverarbeitung nicht auf den Drosselöffnungswert angewendet wird.

6. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß Anspruch 5, **dadurch gekennzeichnet, dass** der vorgegebene vertikale Geschwindigkeitswert von einem Benutzer des Wasserfahrzeugs beliebig eingestellt werden kann.

7. Das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß zumindest einem der Ansprüche 1 bis 6, **gekennzeichnet durch:**
Schätzen des vertikalen Geschwindigkeitswertes des Rumpfes (11) mit Hilfe eines Kalman-Filters, der auf dem Verhalten des Rumpfes (11) basiert.

8. Ein Wasserfahrzeug (10), das umfasst:

eine Steuerung (15), die konfiguriert oder programmiert ist, um die Wasserfahrzeuggeschwindigkeit des Wasserfahrzeuges (10) zu steuern, und

wobei die Steuerung (15) konfiguriert oder programmiert ist, um das Geschwindigkeitssteuerverfahren für ein Wasserfahrzeug (10) gemäß zumindest einem der Ansprüche 1 bis 7 durchzuführen.

Revendications

1. Procédé de commande de vitesse pour un navire (10) comprenant :

le traitement d'une ouverture de papillon des gaz d'une source d'alimentation (12) du navire (10) sur la base d'un mouvement vertical de la coque (11) du navire (10), **caractérisé par**

l'application d'un traitement de soustraction à l'ouverture de papillon des gaz de la source d'alimentation (12) du navire (10) sur la base d'une vitesse verticale de la coque (11) du navire (10).

2. Procédé de commande de vitesse pour le navire (10) selon la revendication 1, **caractérisé en ce que**, lors du traitement de soustraction, une valeur, qui est obtenue en multipliant la valeur de vitesse verticale de la coque (11) par un gain prédéterminé, est soustraite d'une valeur d'ouverture de papillon des gaz indiquée par un utilisateur du navire.

3. Procédé de commande de vitesse pour le navire (10) selon la revendication 2, **caractérisé par :**

l'obtention de la valeur d'ouverture de papillon des gaz indiquée par l'utilisateur du navire ;

l'obtention de la valeur de vitesse verticale de la coque (11) du navire (10), dans lequel, lors du traitement de soustraction, la valeur, qui est obtenue en multipliant la valeur de vitesse verticale de la coque (11) par le gain prédéterminé, est soustraite de la valeur d'ouverture de papillon des gaz indiquée par l'utilisateur du navire pour obtenir une valeur d'instruction d'ouverture de papillon des gaz pour commander l'ouverture de papillon des gaz de la source d'alimentation (12) du navire (10).

4. Procédé de commande de vitesse pour le navire (10) selon la revendication 2 ou 3, **caractérisé en ce que** le gain prédéterminé est proportionnel à la valeur d'ouverture de papillon des gaz indiquée par l'utilisateur du navire.

5. Procédé de commande de vitesse pour le navire (10) selon au moins l'une des revendications 1 à 4, **caractérisé en ce que**, lorsque la valeur de vitesse verticale de la coque (11) est inférieure ou égale à une valeur prédéterminée de vitesse verticale, le traitement de soustraction n'est pas appliqué à la valeur d'ouverture de papillon des gaz.

6. Procédé de commande de vitesse pour le navire (10) selon la revendication 5, **caractérisé en ce que** la valeur prédéterminée de vitesse verticale peut être définie arbitrairement par l'utilisateur du navire.

7. Procédé de commande de vitesse pour le navire (10) selon au moins l'une des revendications 1 à 6, **caractérisé par :** l'estimation de la valeur de vitesse verticale de la coque (11) en utilisant un filtre de Kalman sur la base d'un comportement de la coque (11).

8. Navire (10) comprenant :

un dispositif de commande (15) configuré ou programmé pour commander la vitesse de navire du navire (10), et dans lequel le dispositif de commande (15) est configuré ou programmé pour effectuer le procédé de commande de vitesse pour le navire (10) selon au moins l'une des revendications 1 à 7.

FIG. 1

10

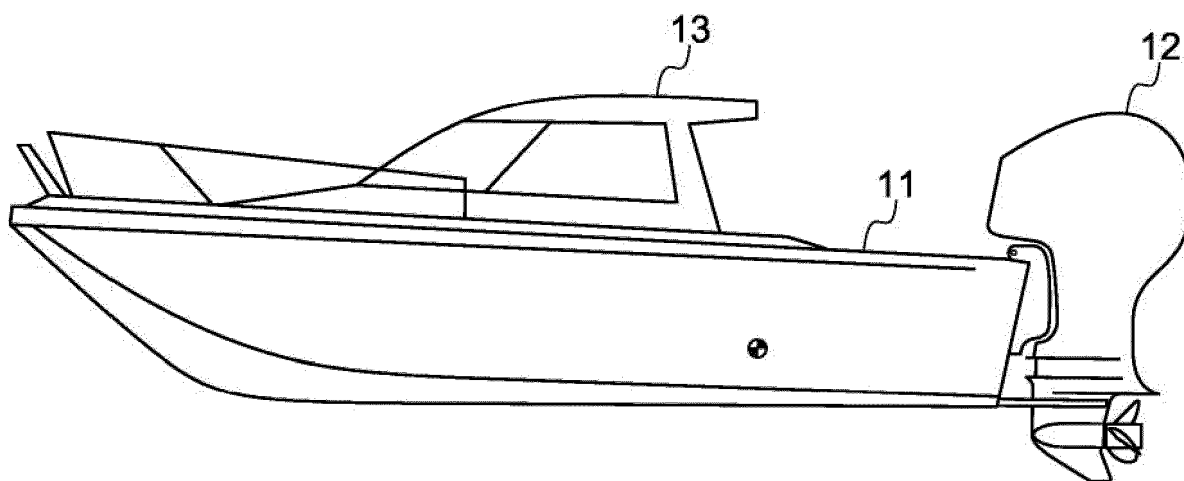


FIG. 2

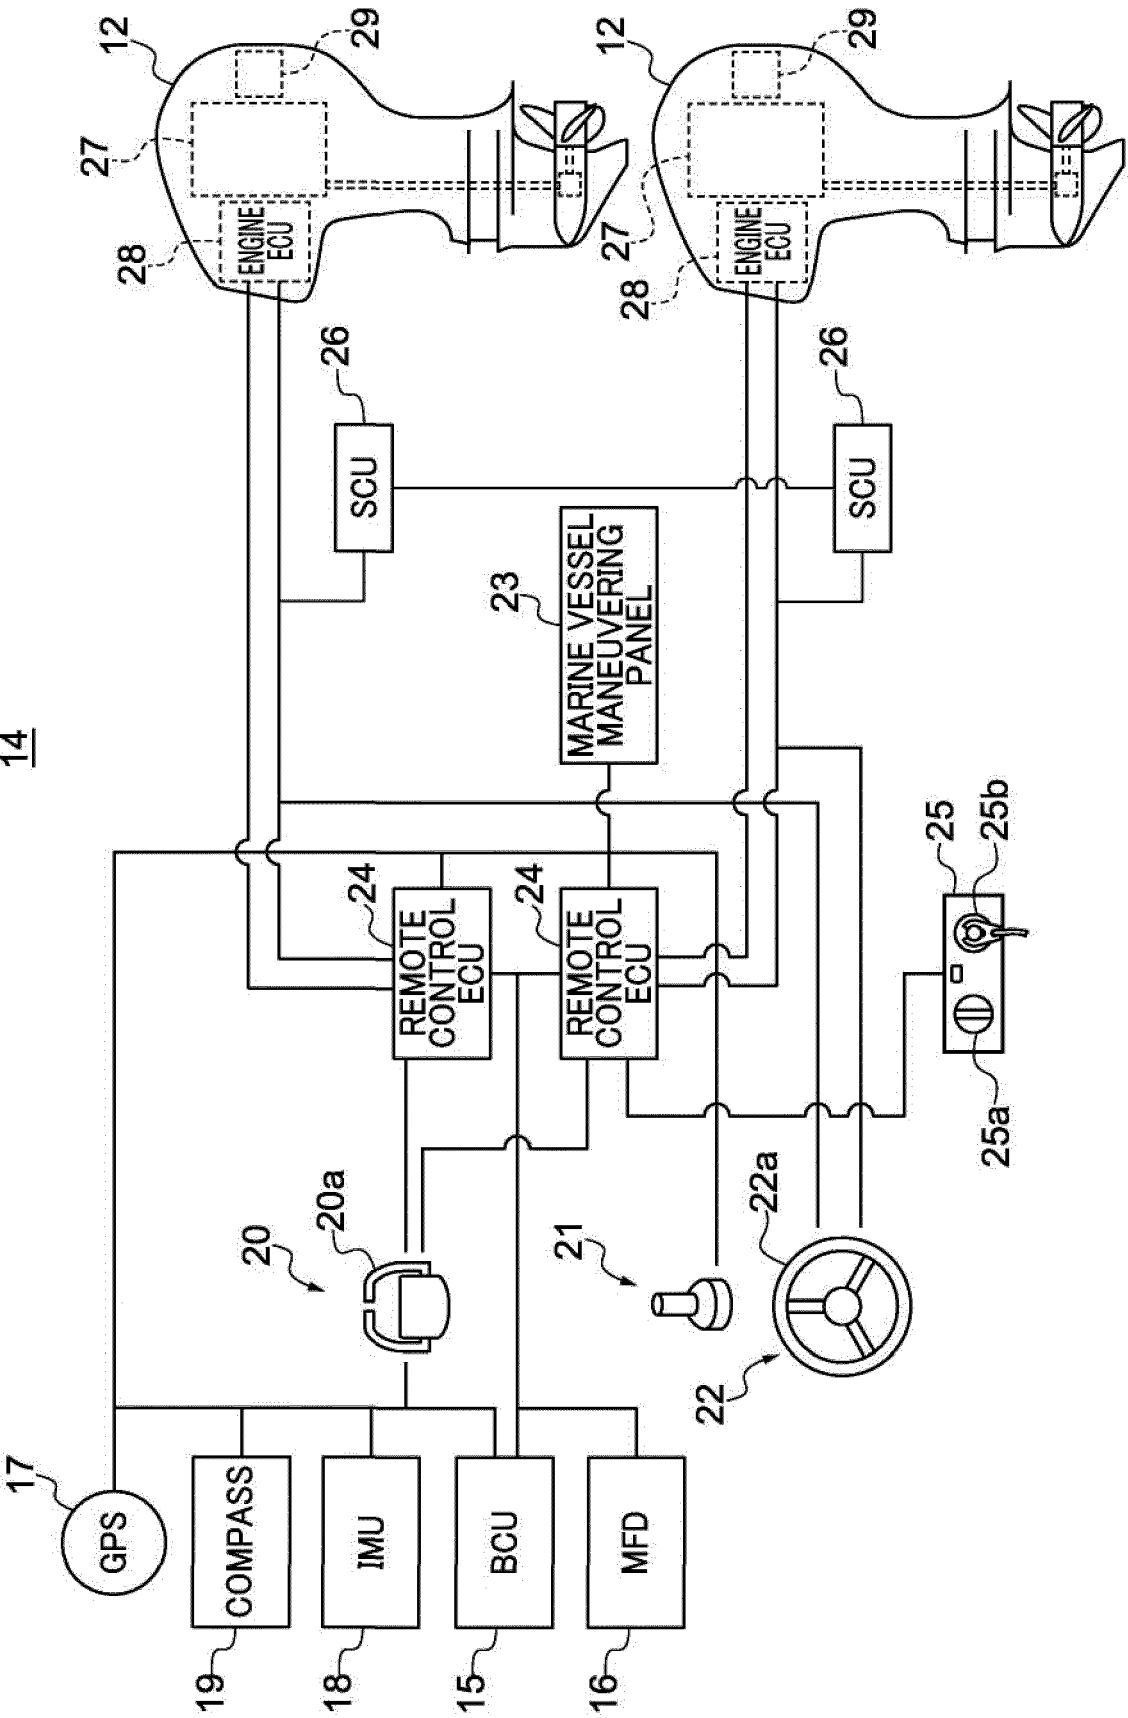


FIG. 3

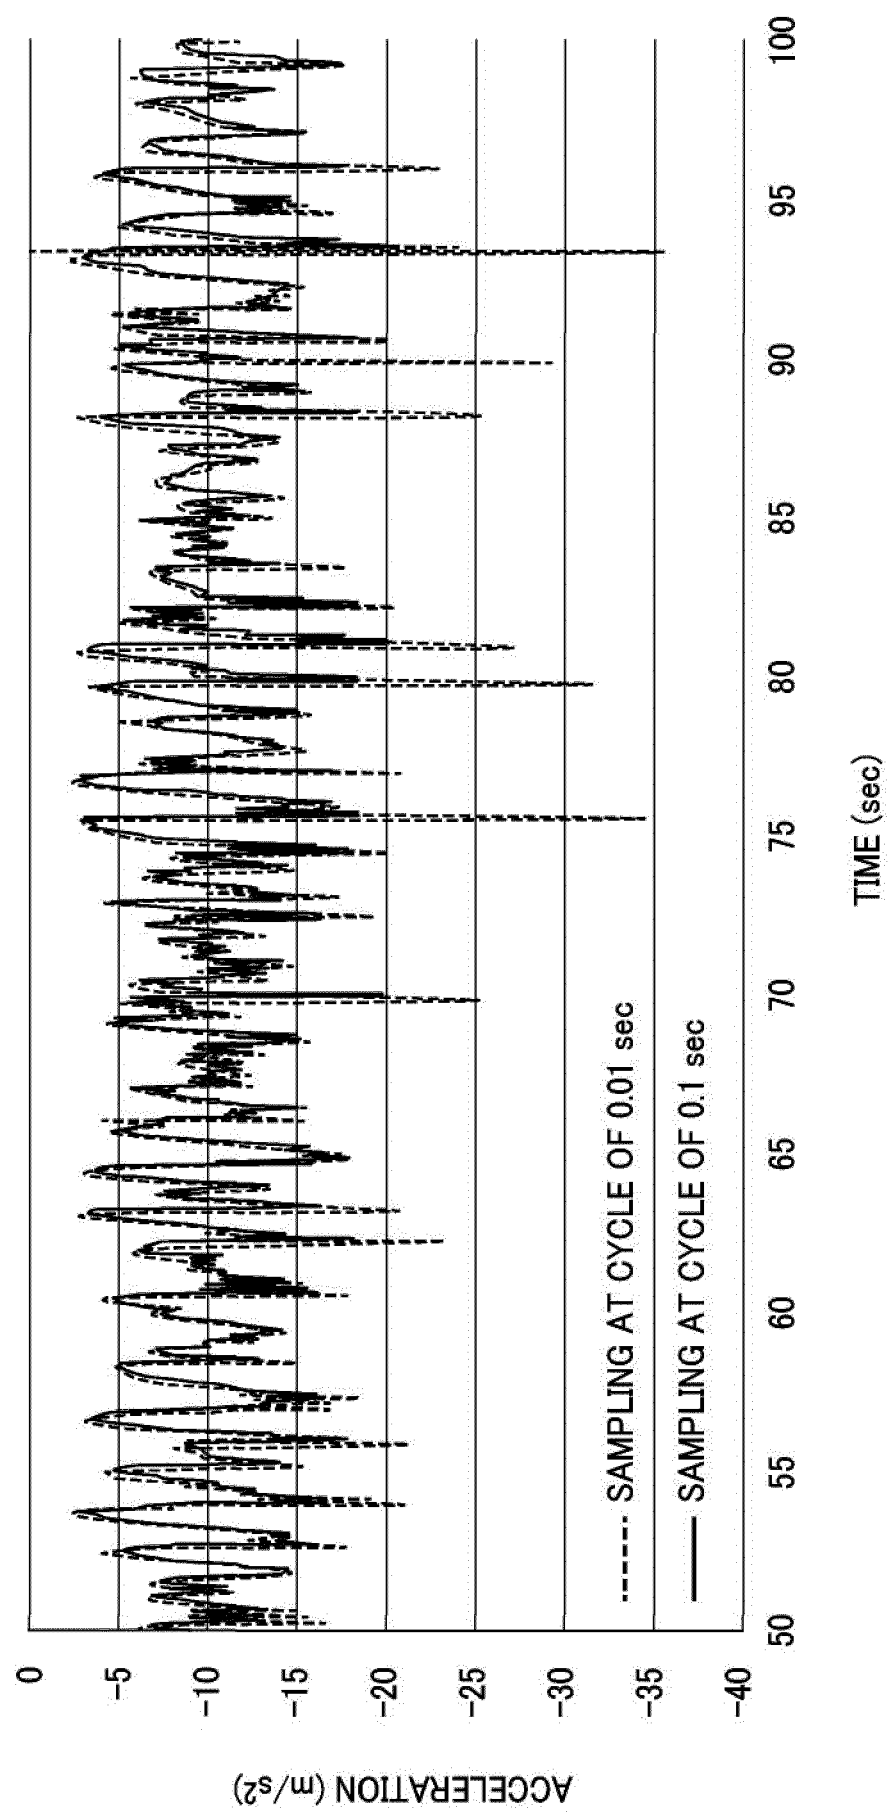


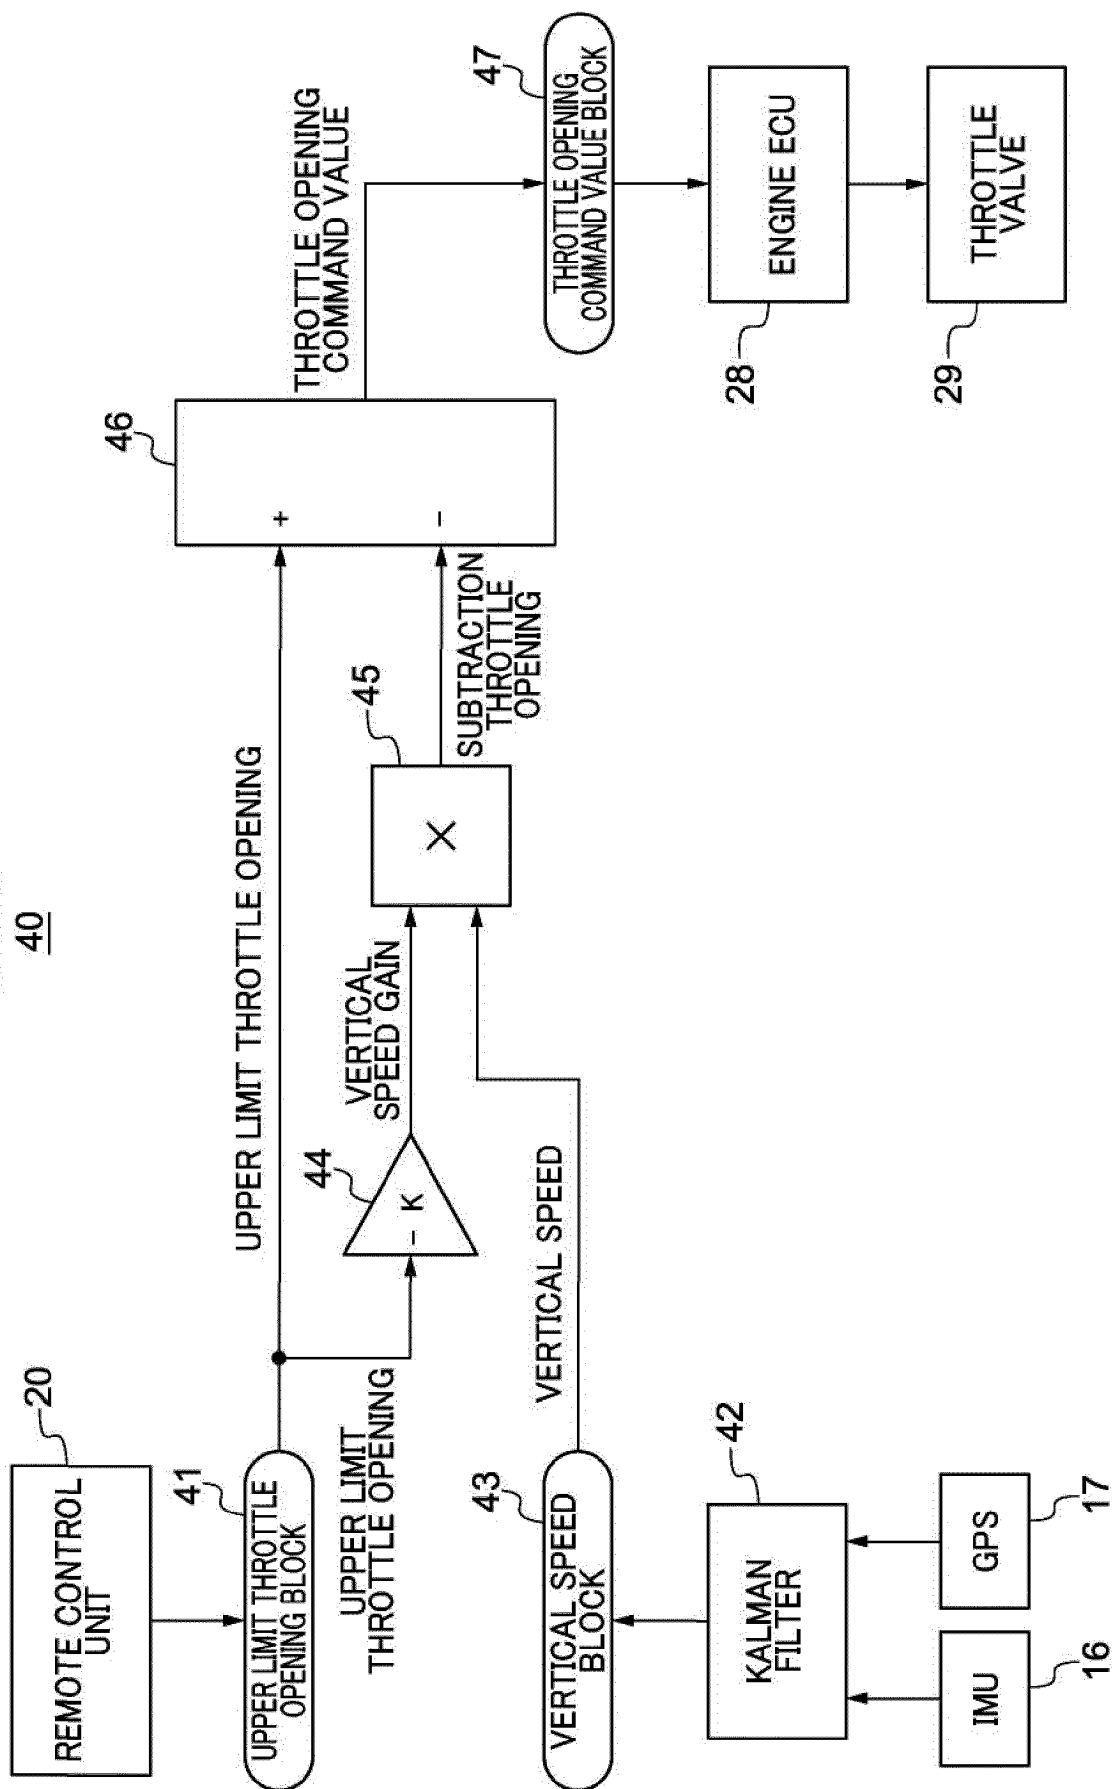
FIG. 4

FIG. 5A

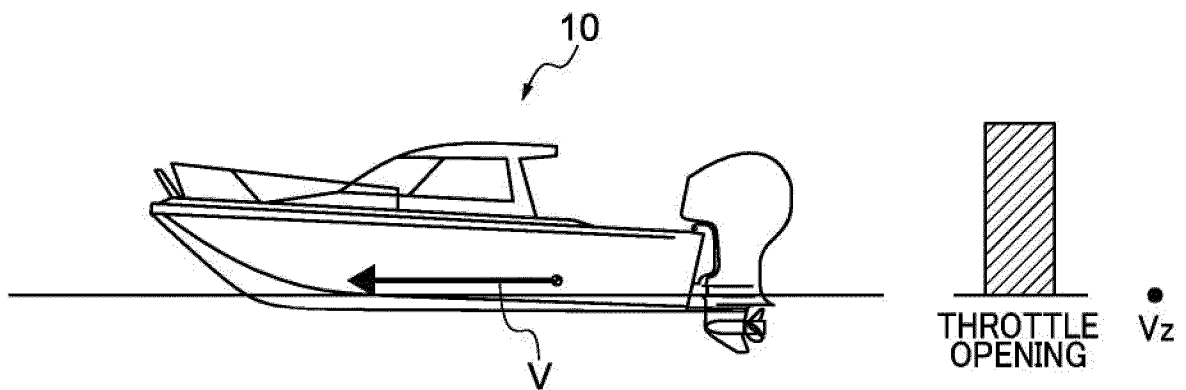


FIG. 5B

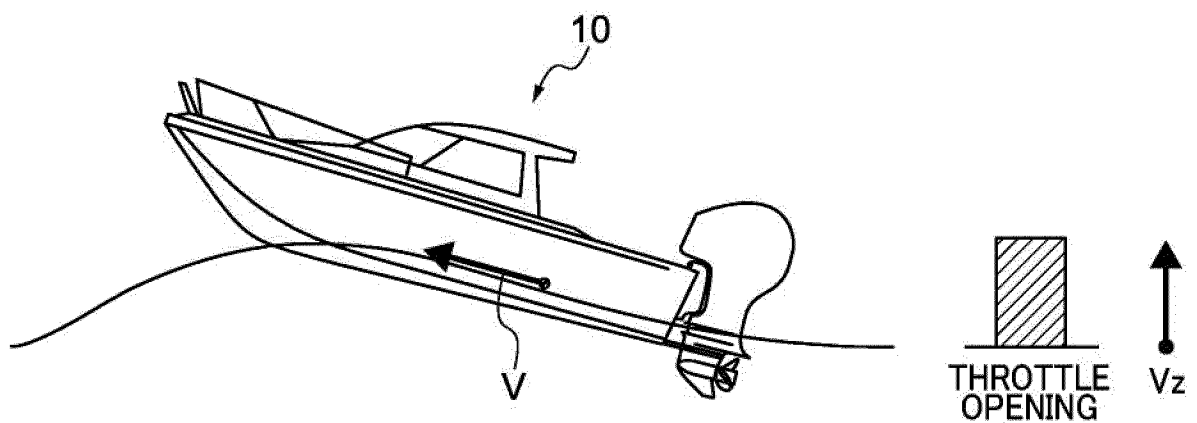
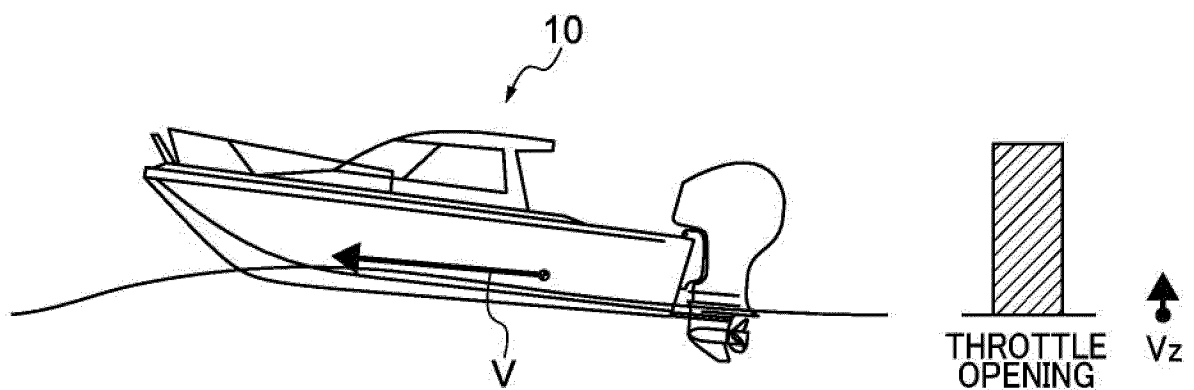


FIG. 5C



REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2009298359 A1 [0001]
- JP H06211190 A [0003] [0004]
- JP 2004291688 A [0003] [0004]