

(19)



(11)

EP 4 309 749 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.01.2024 Bulletin 2024/04

(51) International Patent Classification (IPC):
A63B 22/02^(2006.01)

(21) Application number: **22186035.6**

(52) Cooperative Patent Classification (CPC):
A63B 22/0285; A63B 2022/0278

(22) Date of filing: **20.07.2022**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
KH MA MD TN

(71) Applicant: **Fu An Wellness Technology, Inc.**
Tapei City 112, Taiwan (R.O.C) (TW)

(72) Inventor: **TSAI, SHIH-YING**
TAIPEI CITY (TW)

(74) Representative: **Reich, Jochen**
Herrnstraße 15
80539 München (DE)

(54) **BOUNCE TREADMILL**

(57) A bounce treadmill is disclosed, with the main feature in that an annular running belt composed of a plurality of running belt units is arranged on a base, and each running belt unit at least comprises: a fixed seat, an elastic element and a running belt piece; wherein, two opposite ends of the fixed seat are respectively fixed to a pair of transmission elements arranged on the base, two ends of the elastic element are respectively fixed to

the opposite ends of the fixed seat, two ends of the running belt piece are respectively fixed to the two opposite ends of the fixed seat, and the elastic element is connected to the bottom of the running belt piece, whereby when the running belt piece is bent and deformed under the weight to create a downward force, absorbed by the elastic element and an upward elastic force is provided.

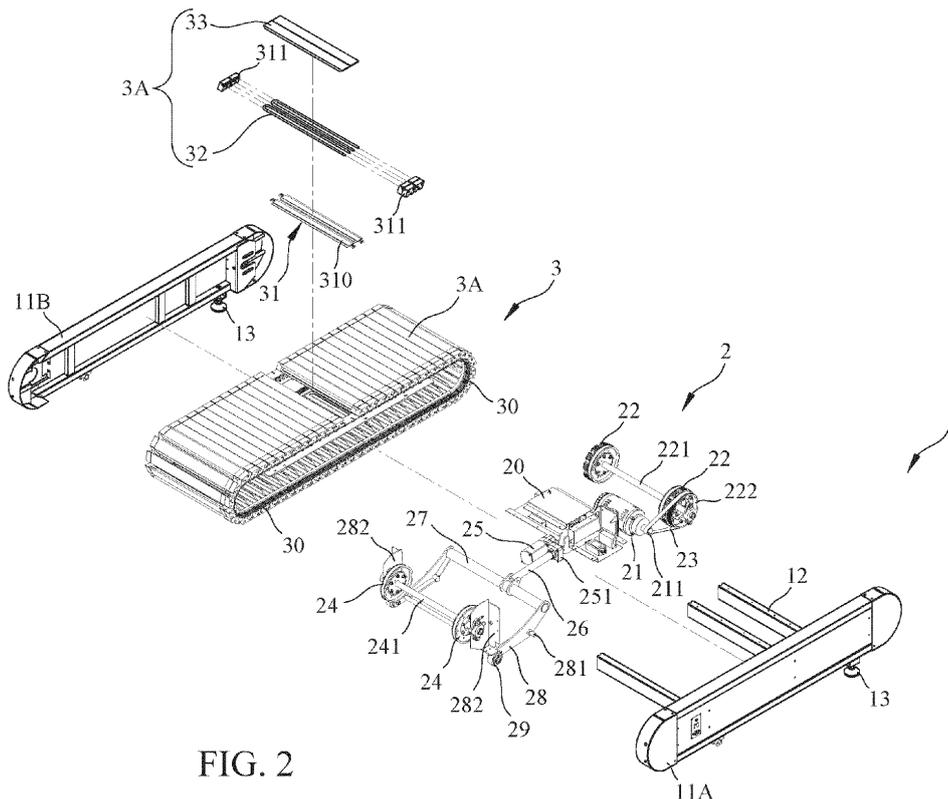


FIG. 2

EP 4 309 749 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates generally to a sports and fitness equipment, and more particularly, to a bounce treadmill with a bouncing function while running.

2. The Prior Arts

[0002] For those who like to exercise and practice fitness, treadmills are generally popular because they are not affected by the outdoor environment and climate. The traditional treadmill is mainly equipped with a set of driving wheels and a set of driven wheels at both ends of the base, and then a running belt is passed around the driving wheels and the driven wheels to form a loop, and the upper side of the loop-shaped running belt is located above the platform of the base. The body weight acting on the upper side of the running belt is supported by the platform; the driving wheel is driven by a motor, so as to operate with the driven wheel to drive the running belt to rotate cyclically.

[0003] Since the running belt of the traditional treadmill is relatively rigid, in order to improve the comfort of running on the treadmill, Taiwan Patent No. M583310 provides a treadmill with a cushioning effect, which includes a base, a cushioning set and a treadmill, and the base has a fixed part and a force-receiving part arranged at intervals. The cushioning set includes an elastic cushioning block, a fixed seat, a rotating seat and a support plate. The elastic cushioning block is arranged on the force-receiving part, the fixed seat is fixed on the fixed part, and the rotating seat is fixed on one end of the treadmill. The two ends of the support plate are respectively pivoted on the fixed seat and the rotating seat. The treadmill rotates relative to the support plate with the rotating seat, and keeps the support plate in contact with the elastic cushioning block, so that the treadmill can switch between a folded position and a use position relative to the base, thereby, providing a cushioning effect when the user runs on the treadmill.

SUMMARY OF THE INVENTION

[0004] The object of the present invention is to provide a bounce treadmill that allows a user to step on the running belt of the treadmill and run while having a bouncing function.

[0005] The present invention provides a bounce treadmill, comprising: a base with a drive mechanism disposed between opposite two side walls, the drive mechanism being driven by a motor to drive a pair of transmission elements to rotate cyclically in the longitudinal direction of the base; and a plurality of running belt units, connect-

ed between the pair of transmission elements, and the plurality of running belt units being disposed along surrounding direction of the transmission elements and separated from each other, wherein each of the running belt units at least including: a fixed seat, with two opposite ends being respectively fixed to the pair of transmission elements; at least one elastic element, with two ends being respectively fixed to the two opposite ends of the fixed seat; and a running belt piece, with two ends being respectively fixed to the two opposite ends of the fixed seat and a lower surface of the running belt piece being connected with the elastic element. With the bounce treadmill, when a user steps on the running belt piece to deform the running belt piece, the elastic element provides an upward elastic force to form a buffering effect, so that the running belt has a bouncing function at the same time.

[0006] Preferably, the elastic element is an elastic cable or a flat elastic strip, and so on; the running belt piece is supported in the longitudinal direction by the elastic cable or the flat elastic strip, so as to support the running belt piece to bend and deform downward in the longitudinal direction.

[0007] Preferably, at least one limiting structure is formed on the lower surface of the running belt piece, and the elastic cable or the flat elastic strip is limited by the limiting structure. Thereby, the cable supporting under the running belt piece will not be displaced from the running belt piece.

[0008] In an embodiment, the limiting structure is a groove formed on the lower surface of the running belt piece, and the elastic cable or the flat elastic strip is accommodated in the groove; thereby the groove limits the lateral displacement of the elastic cable or the flat elastic strap.

[0009] In an embodiment, the limiting structure is formed as a through hole penetrating opposite sides of the running belt piece, and the elastic cable or the flat elastic strip passes through the through hole; thereby the through hole limits the displacement of the elastic cable or the flat elastic strap in all directions.

[0010] Preferably, the fixing seat has a beam frame, and two ends of the beam frame are respectively provided with a convex seat, upper surfaces of the convex seats are higher than upper surface of the beam frame, and the two ends of the elastic element are respectively fixed to the convex seats to keep a space between the lower surface of the elastic element and the upper surface of the beam frame. With this space, when the running belt piece is subjected to a stepping force, the deformation amount of the elastic element being bent and deformed downward can be accommodated.

[0011] Preferably, along the surrounding direction of the transmission element, corresponding sides of two adjacent running belt pieces are respectively formed with surfaces of complementary shapes. With the surfaces of the corresponding sides of the two adjacent running belt pieces having complementary shapes, the two running

belt pieces can support each other to avoid a gap when the two running belt pieces are simultaneously subjected to a downward force, thereby preventing the user's foot from sinking into between the two running belt pieces.

[0012] In an embodiment, the surfaces of the complementary shapes of the corresponding sides of the two adjacent running belt pieces are inclined surfaces.

[0013] In another embodiment, the surfaces of the complementary shapes of the corresponding sides of the two adjacent running belt pieces are step surfaces.

[0014] Preferably, the driving mechanism further comprises a pair of driving wheels and a pair of driven wheels, the pair of driving wheels being disposed between two opposite side walls at one end of the base, and the pair of driven wheels being disposed on the opposite sides of the base between two opposite side walls at the other end, the transmission element surrounding the pair of driving wheels and the pair of driven wheels, and the driving wheels being connected to the driving motor.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The present invention will be apparent to those skilled in the art by reading the following detailed description of a preferred embodiment thereof, with reference to the attached drawings, in which:

FIG. 1 is a schematic perspective view showing the appearance of the present invention;

FIG. 2 is a perspective exploded view showing the assembly relationship of the key components of the present invention;

FIG. 3 is a planar cross-sectional view along the section line 3-3 of FIG. 1;

FIG. 3A is a partial enlarged view of the area 3A of FIG. 3;

FIG. 4 is a planar cross-sectional view along the section line 4-4 of FIG. 1;

FIG. 4A is a partial enlarged view of the area 4A of FIG. 4;

FIG. 5 is a schematic view showing the state of deformation when two adjacent running belt pieces shown in FIG. 3A are subjected to a downward force; FIG. 6 is the partial planar enlarged view showing that the corresponding sides of the two adjacent running belt pieces of the present invention have complementary shapes; and

FIG. 6A is a schematic view showing the state of deformation when two adjacent running belt pieces shown in FIG. 6 are subjected to a downward force.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0016] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention

and, together with the description, serve to explain the principles of the invention.

[0017] As shown in FIGS. 1 to 4, the bounce treadmill provided by the present invention comprises: a base 1, a drive mechanism 2, and a running belt 3 composed of a plurality of running belt units 3A; wherein, the base 1 has a first side wall 11A and a second side wall 11B disposed on opposite sides. A plurality of beams 12 are disposed between the first and second side walls 11A and 11B to connect the two side walls. The connection method preferably uses mechanical elements such as screws or bolts for locking to form a stable base 1. Wherein, the bottom of the first side wall 11A and the second side wall 11B are also provided with feet 13 for supporting the base 1, so that the bottom of the base 1 and the ground maintain a proper space.

[0018] The drive mechanism 2 is disposed between the first and second side walls 11A, 11B of the base 1, and includes at least a control unit 20, a pair of driving wheels 22, a pair of driven wheels 24, and a first motor 21. As shown in FIG. 2, the pair of driving wheels 22 are coaxially connected by a driving shaft 221 and are arranged between the first and second side walls 11A and 11B at one end of the base 1; the pair of driven wheels 24 are coaxially connected by a driven shaft 241 disposed between the first and second side walls 11A and 11B at the opposite end of the base 1. A preferred embodiment of the driving wheels 22 and the driven wheels 24 in the present invention are timing wheels, but the present invention is not limited thereto.

[0019] The drive mechanism 2 further comprises a first motor 21, and the first motor 21 is electrically connected to the control unit 20; a main shaft of the first motor 21 is provided with a driving pulley 211, and one of the pair of driving wheels 22 is coaxially disposed with a driven pulley 222. The driving pulley 211 and the driven pulley 222 are connected by a belt 23. Therefore, the user can control the operation of the first motor 21 by operating the control unit 20, so as to control the driving wheels 22 to rotate through the driving pulley 211, the belt 23, and the driven pulley 222.

[0020] Moreover, the drive mechanism 2 further comprises a second motor 25, which is mechanically connected to a reducer 251, which is mechanically connected to a connecting rod 26. One end of the connecting rod 26 is pivotally connected to a shaft rod 27, and the opposite two ends of the shaft rod 27 are respectively disposed with one end of a swing arm 28 fixedly attached. A roller 29 is movably disposed at the opposite end of the swing arm 28. Between the two ends of each swing arm 28, a rotating shaft 281 is rotatably connected to the first side wall 11A and the second side wall 11B. As such, when the second motor 25 is controlled to run in the forward direction by the control unit 20, the connecting rod 26 can be controlled to extend, so as to drive the swing arm 28 to swing upward through the shaft rod 27, or when the second motor 25 is controlled to run in the reverse direction, the connecting rod 26 can be controlled to be

shortened, so as to drive the swing arm 28 to swing downward through the shaft rod 27. When the end of the connecting shaft 27 with the swing arm 28 swings upward, the end with the roller 29 swings downward. Since the feet 13 are supported by the ground, the entire base is supported by the ground when the roller 29 swings downward to lift up to adjust and expand the inclination angle of the base 1. Conversely, when the end of the connecting shaft 27 with the swing arm 28 swings downward, the end with the roller 29 swings upward to adjust and reduce the inclination angle of the entire base 1. In the preferred embodiment of the present invention, the aforementioned pair of driven wheels 24 are disposed and fixed between the vertical plates 282 of the two swing arms 28, therefore, when the swing arms 28 swing up or down, they can drive the pair of driven wheels 24 to move up or down.

[0021] The running belt 3 is an element that provides the contact to the sole of the feet of the user to run. In the present invention, the running belt 3 is composed of a plurality of running belt units 3A and a pair of closed annular transmission elements 30. The plurality of running belt units 3A are arranged along the surrounding direction of the transmission element 30 and are separated from each other. Specifically, the transmission element 30s are used to match the timing belt connecting the driving wheel 22 and the driven wheel 24.

[0022] The running belt unit 3A includes a fixed seat 31, at least one elastic element 32 and a running belt piece 33; wherein, the fixed seat 31 is formed to have a beam frame 310, and two opposite ends of the beam frame 310 are respectively disposed with a convex seat 311, and the upper surface of the convex seat 311 is higher than the upper surface of the beam frame 310, in other words, a concave space is formed above the beam frame 310 between the two convex seats 311. The upper surfaces of the two convex seats 311 are respectively fixed to the two transmission elements 30. Both ends of the elastic element 32 are respectively fixed to the convex seats 311 at opposite ends of the fixed base 31. The two opposite ends of the running belt piece 33 are also respectively fixed to the convex seats 311 at the opposite ends of the fixed base 31, and the lower surface of the running belt piece 33 is connected to the elastic element 32. Specifically, the elastic element 32 can be an elastic cable or a flat elastic strip. When both ends of the elastic cable or flat elastic strip are fixed to the convex seats 311 at both ends, the elastic cable is suspended between the two convex seats 311 above the beam frame 310; and, in order to prevent relative displacement when the elastic element 32 in the form of a cable or a strip contacts the lower surface of the running belt piece 33, the present invention preferably forms at least a groove 331 on the lower surface of the running belt piece 33, and the elastic cable is accommodated in the groove 331, as shown in FIG. 3A. Alternatively, a transverse through hole can be formed in the running belt piece 33, and the elastic element 32 in the form of a cable or a strip can pass through

the through hole. Then, both ends of the elastic element 32 are fixed to the convex seats 311, as shown in FIG. 4. In the embodiment shown in FIG. 2, the elastic element 32 can bend a cable into a U shape and then fix the open end and the closed end of the U-shaped cable to the convex seat 311 respectively.

[0023] The running belt 3 formed by the aforementioned running belt unit 3A and the transmission element 30 can surround the driving wheel 22 and the driven wheel 24 when mounted on the base 1 and matched with the driving mechanism 2 to be driven for circular rotation. When the user steps on the running belt piece 3, the weight of the human body will cause the running belt piece 33 to bend downward and deform, as shown in FIG. 5. The downward force of the running belt piece 3 is absorbed by the elastic element 32 and a downward elasticity is provided by the elastic element 32, so that the running belt piece 3 has a bouncing effect.

[0024] On the other hand, in order to prevent a gap from occurring between the two adjacent running belt pieces 33 when the user from stepping on the running belt piece 33 and causing the foot to sink into the gap, the present invention preferably will from surfaces of complementary shapes on the corresponding sides of each other of two adjacent running belt pieces 33 along the surrounding circumferential direction of the transmission element 30. For example, the surface of the complementary shape can be an inclined surface 332, as shown in FIG. 5. When the user steps on the running belt piece 33 to cause the two adjacent running belt pieces 33 to bend and sag downward, the corresponding sides of the two adjacent running belt pieces 33 can be mutually supported by the inclined surface 332 to avoid a gap, as shown in FIG. 5. Alternatively, the surface of the complementary shape may be a step surface 333, as shown in FIG. 6. When the user steps on the running belt piece 33 to cause the adjacent two running belt pieces 33 to bend and sag downward, the corresponding sides of the two running belt pieces 33 can be mutually supported by the step surface 333 to avoid gaps, as shown in FIG. 6A.

[0025] The present invention, by the bounce treadmill of the aforementioned structure, not only has the function of a treadmill, but also provides a bouncing function while running, so that the exercise modes and effects are more diverse.

[0026] Although the present invention has been described with reference to the preferred embodiments thereof, it is apparent to those skilled in the art that a variety of modifications and changes may be made without departing from the scope of the present invention which is intended to be defined by the appended claims.

Claims

1. A bounce treadmill, comprising:

a base, with a drive mechanism disposed be-

tween opposite two side walls, the drive mechanism being driven by a motor to drive a pair of transmission elements to rotate cyclically in the longitudinal direction of the base;

a plurality of running belt units, connected between the pair of transmission elements, and the plurality of running belt units being disposed along surrounding direction of the transmission elements and separated from each other, wherein each of the running belt units at least including:

a fixed seat, with two opposite ends being respectively fixed to the pair of transmission elements;

at least one elastic element, with two ends being respectively fixed to the two opposite ends of the fixed seat; and

a running belt piece, with two ends being respectively fixed to the two opposite ends of the fixed seat and a lower surface of the running belt piece being connected with the elastic element.

2. The bounce treadmill according to claim 1, wherein the elastic element is an elastic cable or a flat elastic strip.

3. The bounce treadmill according to claim 2, wherein at least one limiting structure is formed on the lower surface of the running belt piece, and the elastic cable or the flat elastic strip is limited by the limiting structure.

4. The bounce treadmill according to claim 3, wherein the limiting structure is a groove formed on the lower surface of the running belt piece, and the elastic cable or the flat elastic strip is accommodated in the groove.

5. The bounce treadmill according to claim 3, wherein the limiting structure is formed as a through hole penetrating opposite sides of the running belt piece, and the elastic cable or the flat elastic strip passes through the through hole.

6. The bounce treadmill according to any one of the preceding claims, wherein the fixing seat has a beam frame, and two ends of the beam frame are respectively provided with a convex seat, upper surfaces of the convex seats are higher than upper surface of the beam frame, and the two ends of the elastic element are respectively fixed to the convex seats to keep a space between the lower surface of the elastic element and the upper surface of the beam frame.

7. The bounce treadmill according to any one of the

5

10

15

20

25

30

35

40

45

50

55

preceding claims, wherein corresponding sides of two adjacent running belt pieces along the surrounding direction of the transmission element are respectively formed with surfaces of complementary shapes.

8. The bounce treadmill according to claim 7, wherein the surfaces of the complementary shapes of the corresponding sides of the two adjacent running belt pieces are inclined surfaces.

9. The bounce treadmill according to claim 7, wherein the surfaces of the complementary shapes of the corresponding sides of the two adjacent running belt pieces are step surfaces.

10. The bounce treadmill according to any one of the preceding claims, wherein the driving mechanism further comprises a pair of driving wheels and a pair of driven wheels, the pair of driving wheels being disposed between two opposite side walls at one end of the base, and the pair of driven wheels being disposed on the opposite sides of the base between two opposite side walls at the other end, the transmission element surrounding the pair of driving wheels and the pair of driven wheels, and the driving wheels being connected to the driving motor.

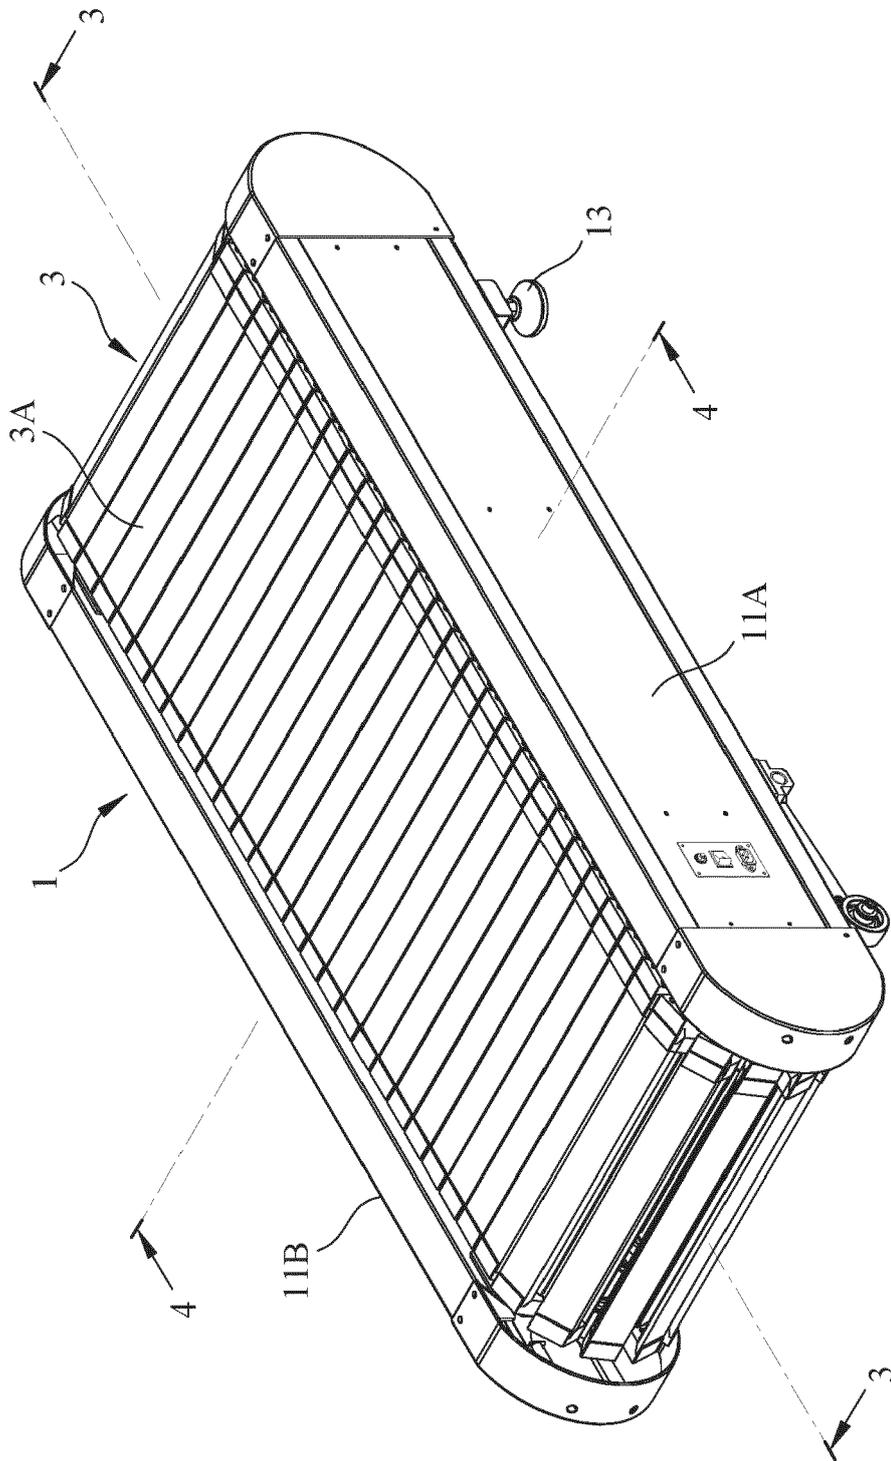


FIG. 1

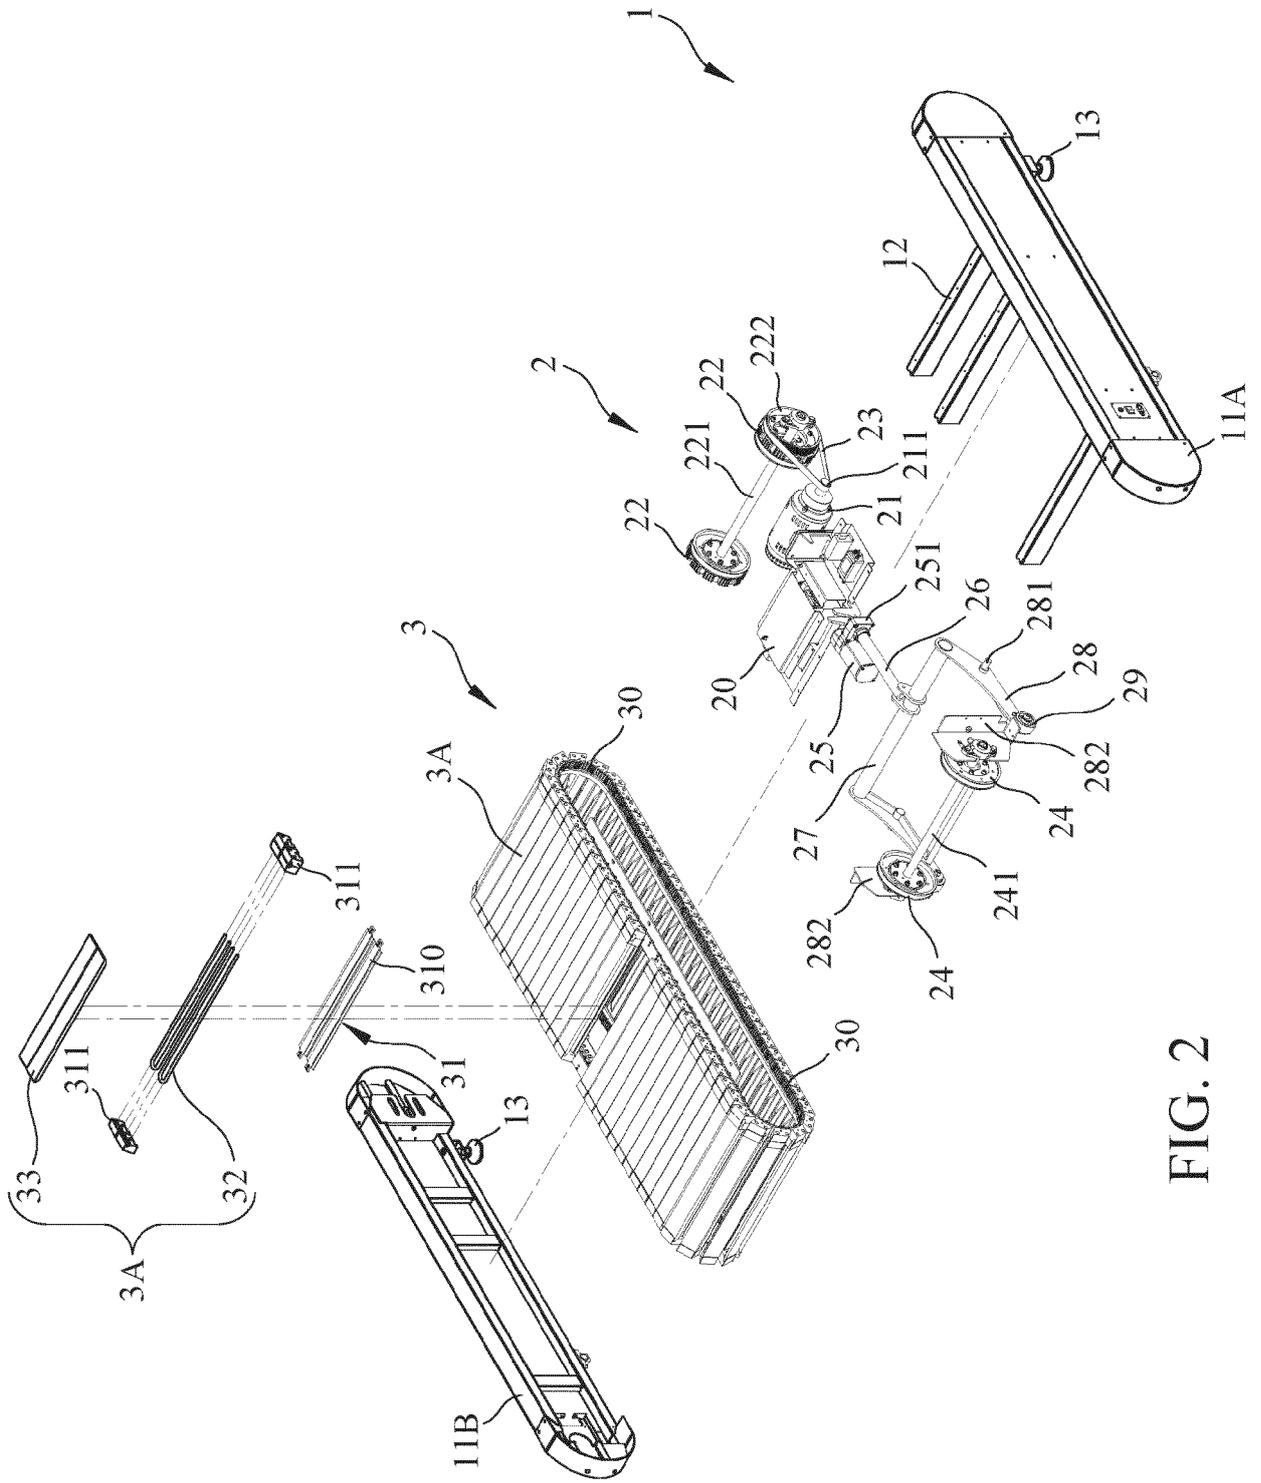


FIG. 2

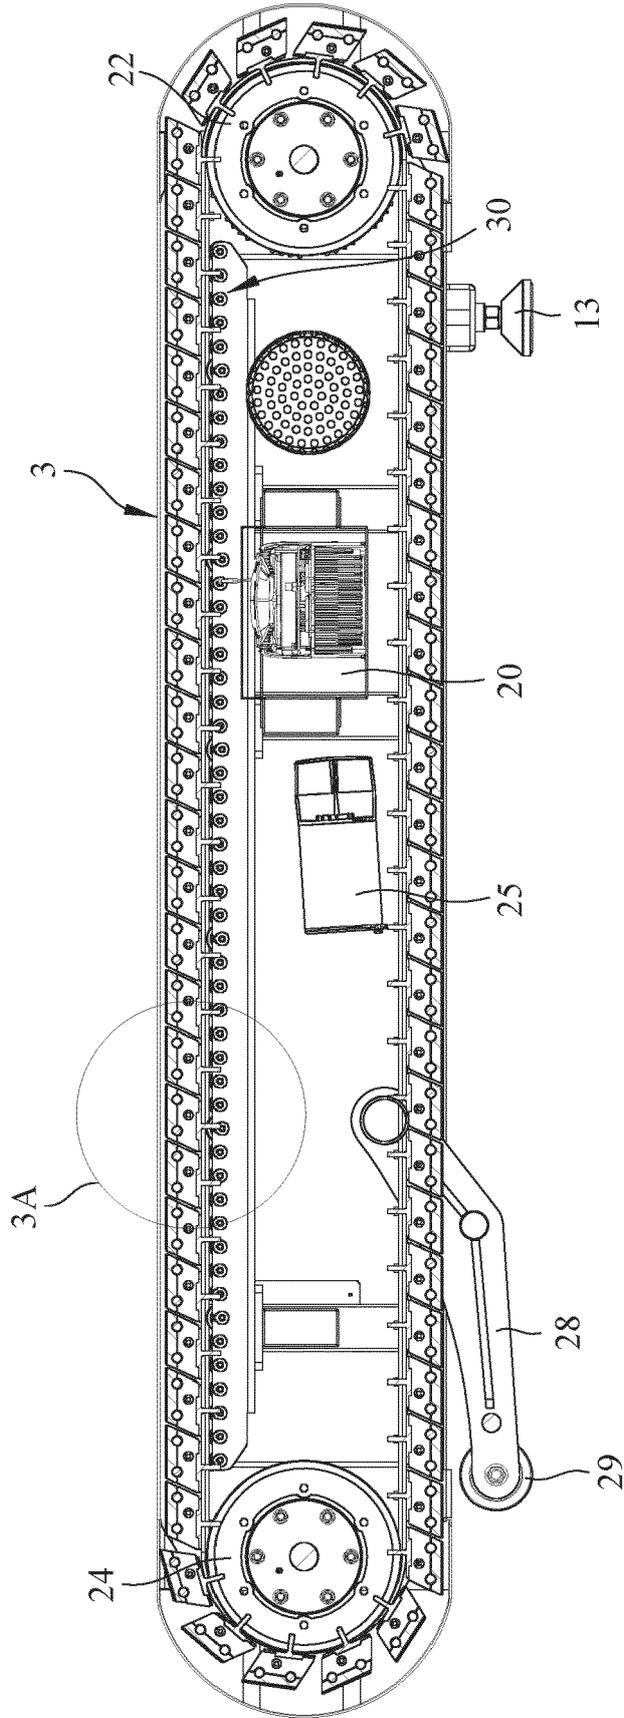


FIG. 3

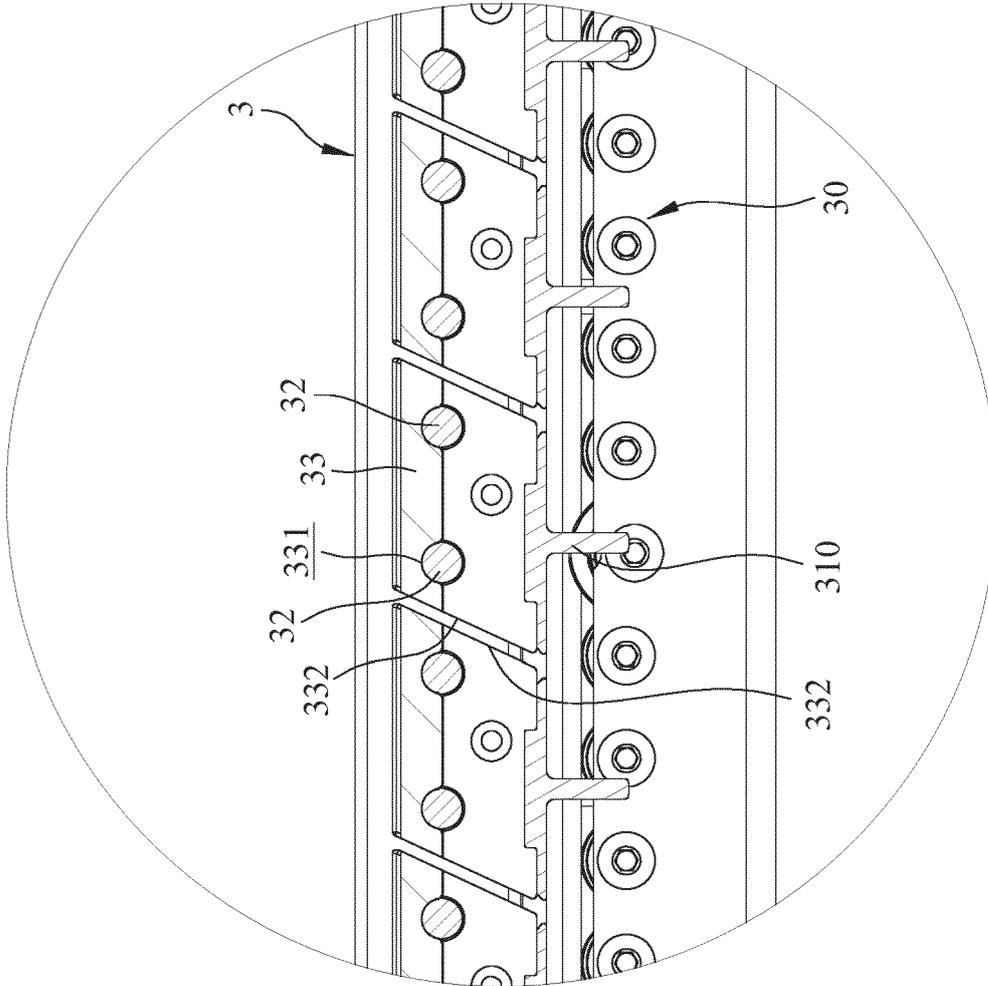


FIG. 3A

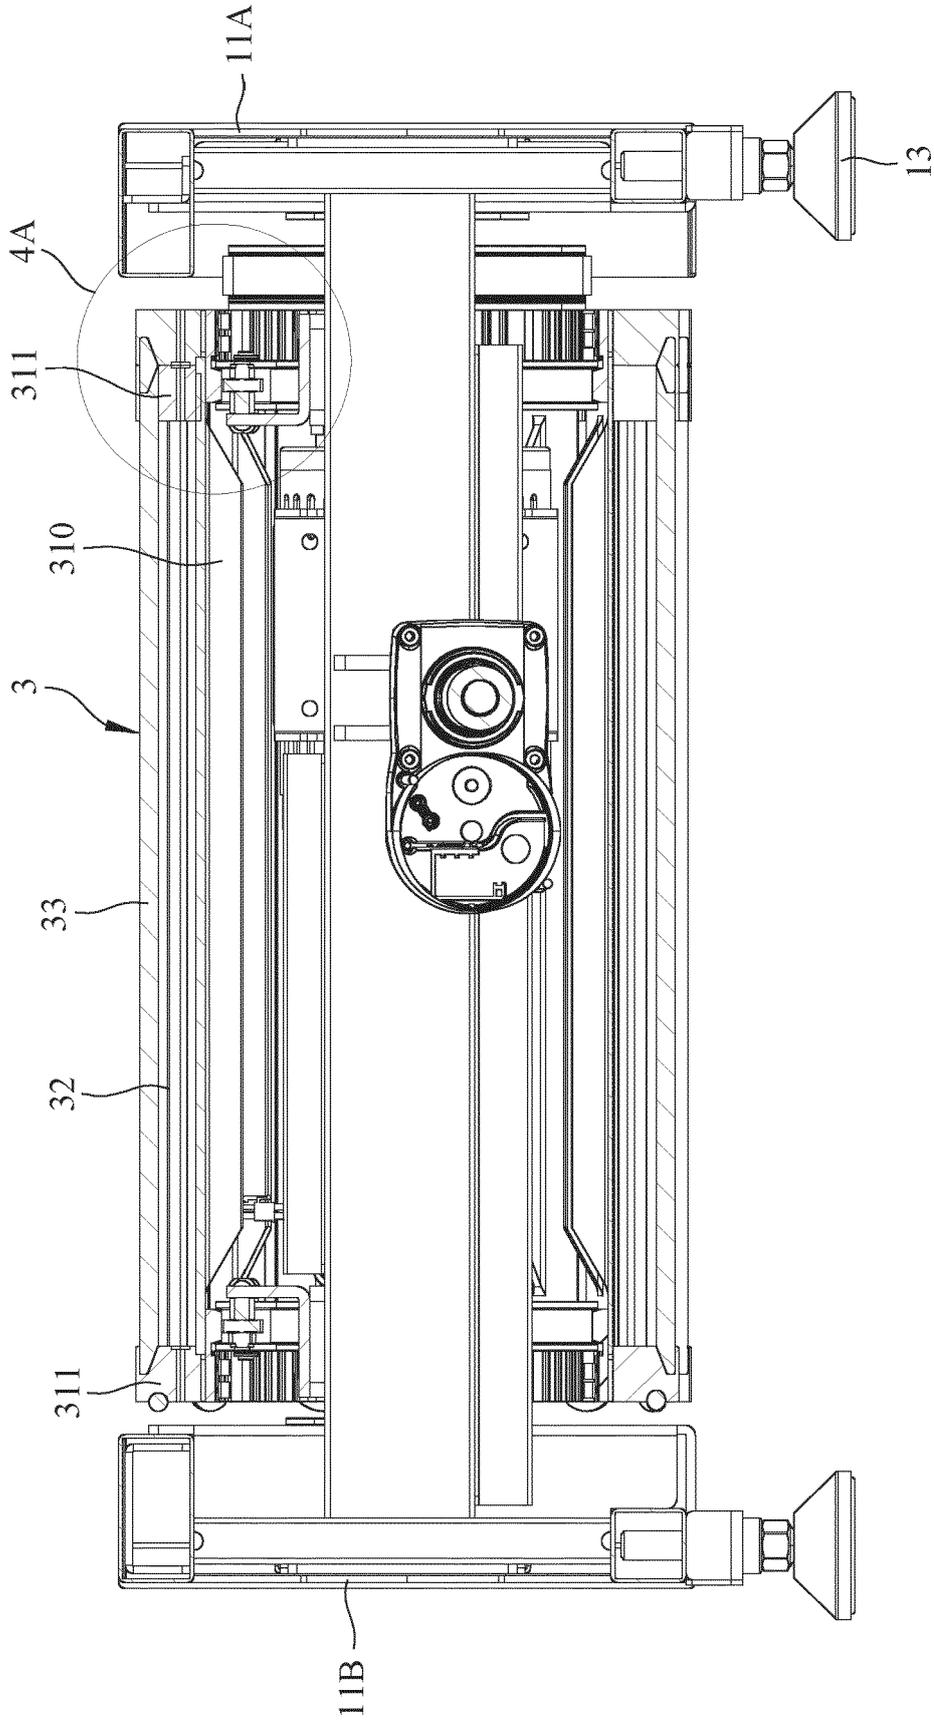


FIG. 4

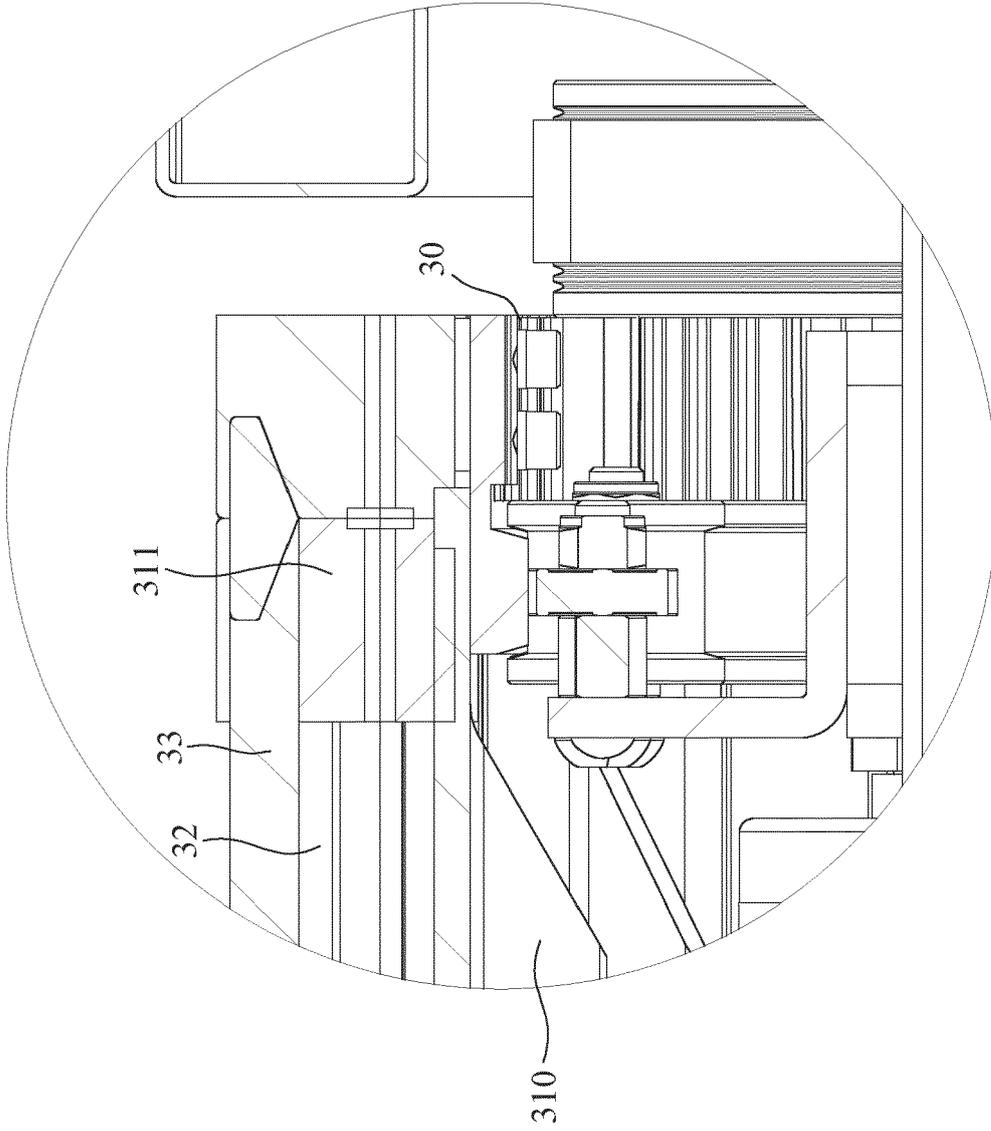


FIG. 4A

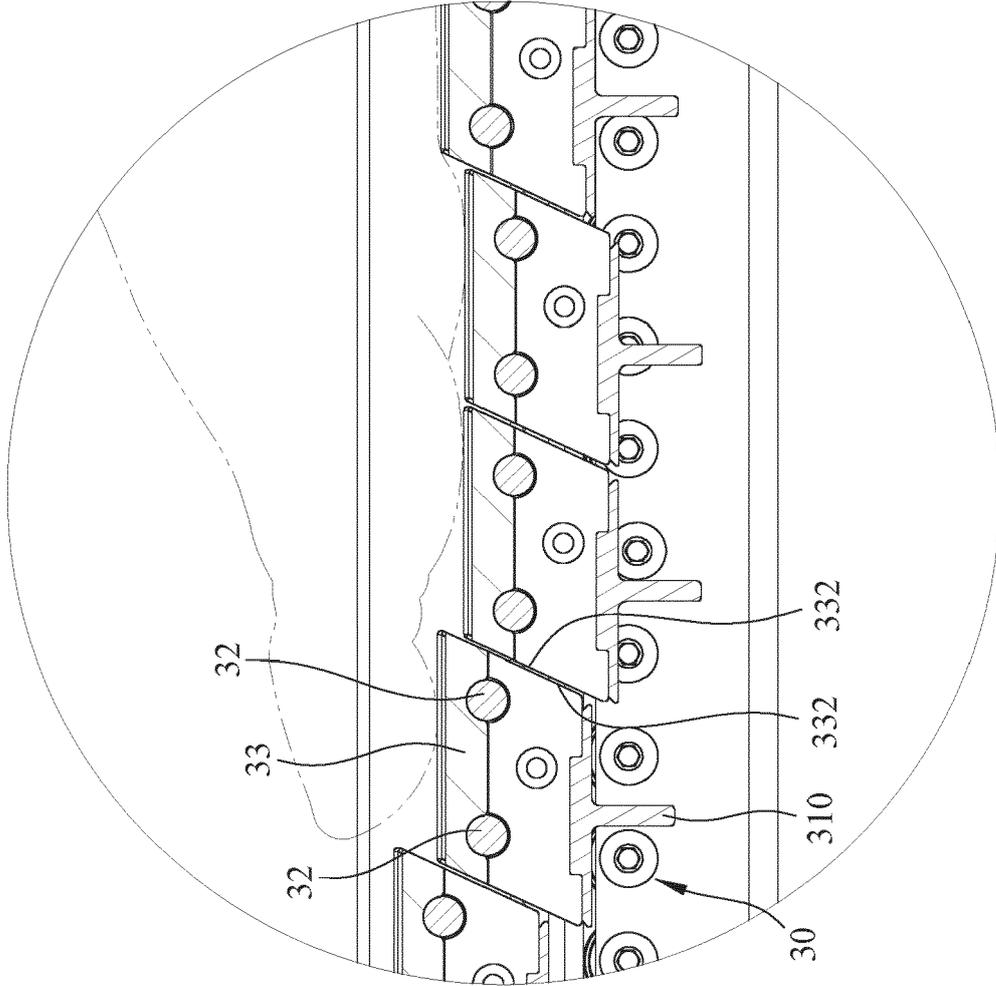


FIG. 5

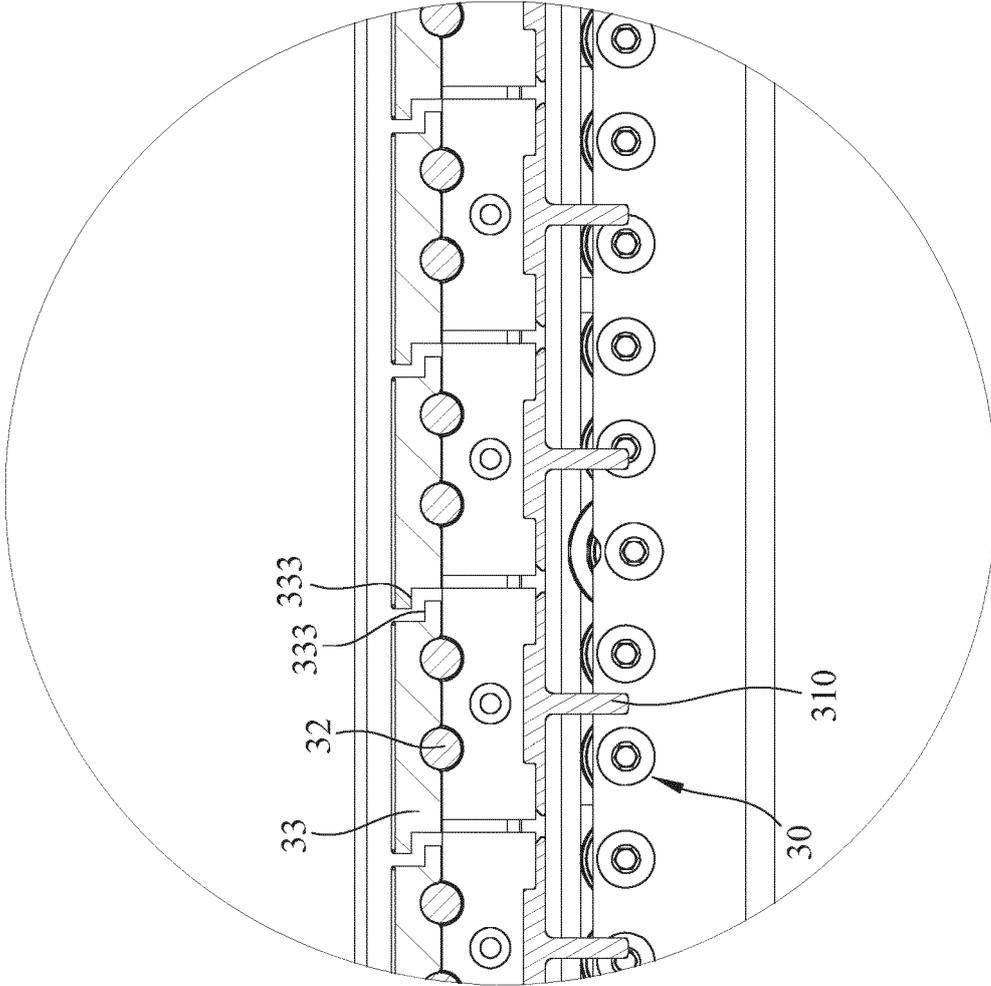


FIG. 6

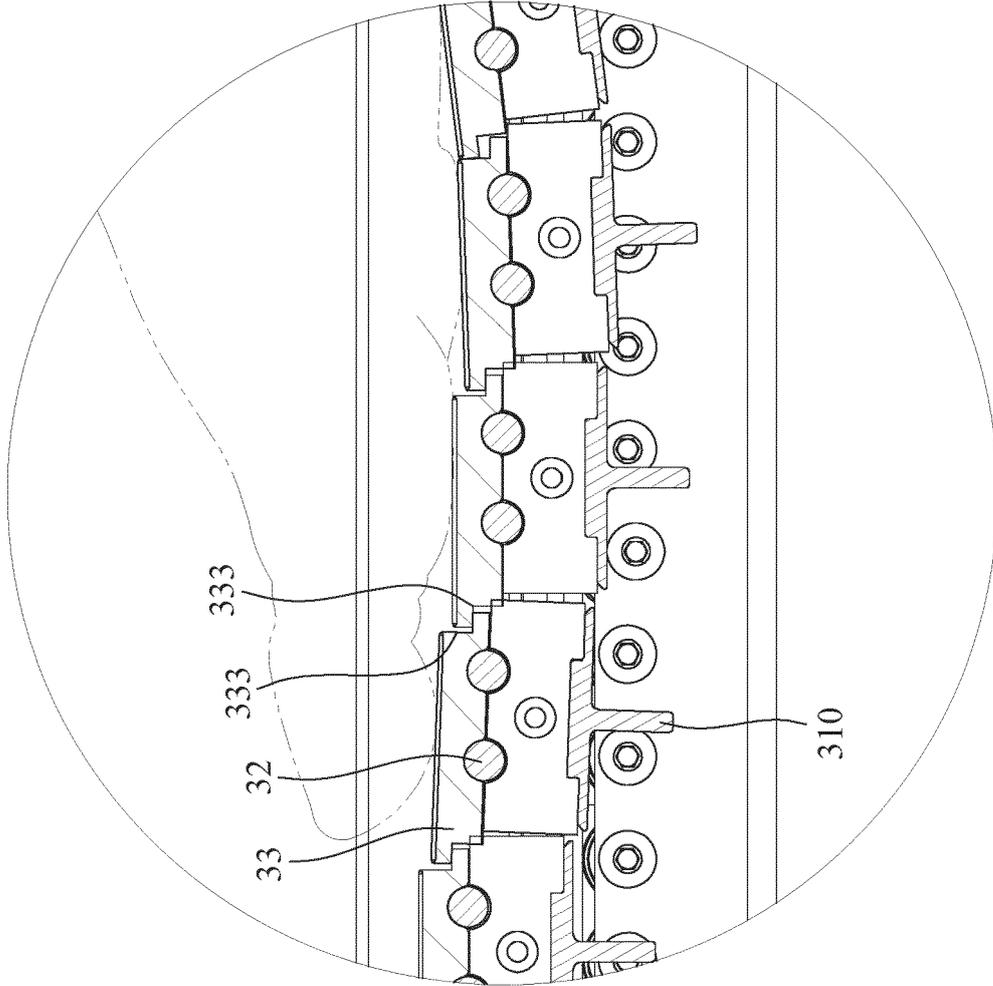


FIG. 6A



EUROPEAN SEARCH REPORT

Application Number

EP 22 18 6035

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2018/264315 A1 (CHEN CHIH LIANG [TW]) 20 September 2018 (2018-09-20) * paragraph [0027] - paragraph [0037]; figures 1-6 *	1-3, 7-10	INV. A63B22/02
A	US 4 334 676 A (SCHOENENBERGER ROLF) 15 June 1982 (1982-06-15) * column 4, line 3 - column 13, line 50; figures 1-23 *	1-10	
A	EP 3 865 189 A1 (TECHNOGYM SPA [IT]) 18 August 2021 (2021-08-18) * paragraph [0023] - paragraph [0062]; figures 1-16 *	1-10	
A	CN 107 080 920 A (GUANGDONG OMA FITNESS EQUIPMENT CO LTD) 22 August 2017 (2017-08-22) * paragraph [0004] - paragraph [0108]; figures 1-13 *	1-10	
A	US 2022/096894 A1 (ASTILEAN ALEX [US] ET AL) 31 March 2022 (2022-03-31) * paragraph [0116] - paragraph [0206]; figures 1-29 *	1-10	TECHNICAL FIELDS SEARCHED (IPC) A63B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 15 December 2022	Examiner Jekabsons, Armands
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03:82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 18 6035

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-12-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2018264315 A1	20-09-2018	NONE	
US 4334676 A	15-06-1982	NONE	
EP 3865189 A1	18-08-2021	EP 3865189 A1 IT 202000003010 A1	18-08-2021 14-08-2021
CN 107080920 A	22-08-2017	NONE	
US 2022096894 A1	31-03-2022	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- TW 583310 M [0003]