



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(48) Corrigendum issued on:
31.07.2024 Bulletin 2024/31

(43) Date of publication:
28.02.2024 Bulletin 2024/09

(21) Application number: **22827588.9**

(22) Date of filing: **22.06.2022**

(51) International Patent Classification (IPC):
H04W 36/14 (2009.01)

(52) Cooperative Patent Classification (CPC):
H04L 41/16; H04L 41/0806; H04L 41/14;
H04L 41/0853; H04W 36/00835; H04W 36/008375;
H04W 36/142

(86) International application number:
PCT/CN2022/100282

(87) International publication number:
WO 2022/268095 (29.12.2022 Gazette 2022/52)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(30) Priority: **23.06.2021 CN 202110698914**

(71) Applicant: **Huawei Technologies Co., Ltd.**
Shenzhen, Guangdong 518129 (CN)

(72) Inventors:
• **HUANG, Xietian**
Shenzhen, Guangdong 518129 (CN)
• **CAO, Longyu**
Shenzhen, Guangdong 518129 (CN)
• **WANG, Yaoguang**
Shenzhen, Guangdong 518129 (CN)
• **YU, Yijun**
Shenzhen, Guangdong 518129 (CN)

(74) Representative: **Maiwald GmbH**
Engineering
Elisenhof
Elisenstrasse 3
80335 München (DE)

(54) **INFORMATION TRANSMISSION METHOD AND APPARATUS**

(57) This application provides an information transmission method and an apparatus. The information transmission method includes: A first network device sends a first type of feedback information to a second network device, where the first type includes one or more of the following: a model evaluation indicator, operation indication information, and a network performance indicator. The model evaluation indicator indicates performance of a model, the operation indication information indicates an operation to be performed based on an analytics result of the model, the network performance indicator indicates a network indicator obtained based on the analytics result of the model, and the first type is used to request the feedback information. The first network device receives the feedback information from the second network device. The first network device determines the performance of the model based on the feedback information. According to the information transmission method provided in this application, the first network device can con-

figure a type of the feedback information according to a requirement of the first network device and a capability of the second network device, thereby improving flexibility of feedback.

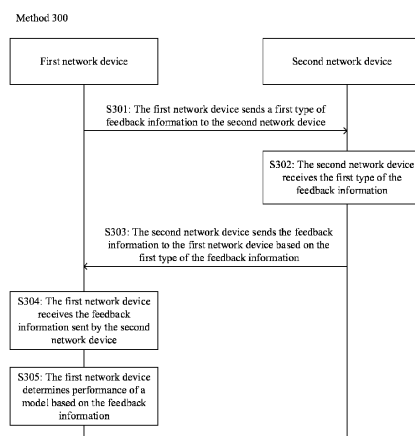


FIG. 3